

FCC PART 15.247 TEST REPORT

For

ZIONCOM ELECTRONICS (SHENZHEN) LTD.

Building A1-A2, Lantian Science and Technology Park, Xinyu Road, Xinqiao Henggang Block Shajing Street, Baoan District, Shenzhen, Guangdong, China

FCC ID: X7DWX009

Report Type: Product Name:

Original Report AC1200 Dual Band Wi-Fi Range

Extender

Report Number: RDG170930001-00B

Report Date: 2017-11-06

Reviewed By: Jerry Zhang EMC Manager

Bay Area Compliance Laboratories Corp. (Dongguan)

Test Laboratory: No.69 Pulongcun, Puxinhu Industry Area,

Tangxia, Dongguan, Guangdong, China

Jerry Zhang

Tel: +86-769-8685888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

Report No.: RDG170930001-00B

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
MEASUREMENT UNCERTAINTY	
TEST FACILITY	
SYSTEM TEST CONFIGURATION	
DESCRIPTION OF TEST CONFIGURATION	
EQUIPMENT MODIFICATIONS	
EUT Exercise Software Local Support Equipment List and Details	
SUPPORT CABLE LIST AND DETAILS	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	11
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	12
APPLICABLE STANDARD	
FCC §15.203 - ANTENNA REQUIREMENT	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	
EUT Setup	
EMI Test Receiver Setup	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST DATA	
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	
APPLICABLE STANDARD	
EUT SETUP	
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER	
APPLICABLE STANDARD	
TEST PROCEDURE TEST EQUIPMENT LIST AND DETAILS	

TABLE OF CONTENTS

Report No.: RDG170930001-00B

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The **ZIONCOM ELECTRONICS** (**SHENZHEN**) **LTD.**'s product, model number: **EX1200M** (**FCC ID: X7DWX009**) (the "EUT") in this report was an **AC1200 Dual Band Wi-Fi Range Extender**, which was measured approximately: 11.7cm(L)*6.6cm(W)*4.8cm(H) without antenna, 11.7cm(L)*6.6cm(W)*22.1cm(H) with antenna, rated power: AC 100V~240V / 50~60Hz 0.1A.

Report No.: RDG170930001-00B

Note: The EUT have two type of antenna, the two type of antenna is only appearance difference. The series product, model EX1200M, WX009 are electrically identical, the difference between them is model name, we selected EX1200M for testing, the detail was explained in the attached declaration letter.

*All measurement and test data in this report was gathered from production sample serial number: 170930001 (Assigned by BACL,Dongguan). The EUT was received on 2017-10-09.

Objective

This report is prepared on behalf of **ZIONCOM ELECTRONICS** (SHENZHEN) LTD. in accordance with Part 2, Subpart J, Part 15, Subparts A, and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15E NII submissions with FCC ID: X7DWX009.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and KDB 558074 D01 DTS Meas Guidance v04.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
W	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical
Unwanted Emissions, radiated	200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 ℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

FCC Part 15.247 Page 4 of 107

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

Report No.: RDG170930001-00B

Bay Area Compliance Laboratories Corp. (Dongguan) has been accredited to ISO/IEC 17025 by CNAS(Lab code: L5662). And accredited to ISO/IEC 17025 by NVLAP(Test Laboratory Accreditation Certificate Number 500069-0), the FCC Designation No. CN5002 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Dongguan) was registered with ISED Canada under ISED Canada Registration Number 3062D.

FCC Part 15.247 Page 5 of 107

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

Report No.: RDG170930001-00B

The device has 2 external antennas for 2.4GHz and 5GHz. For 2.4GHz band, 11 channels are provided:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were test with channel 1,6,11.

For 802.11n ht40 mode was test with channel 3,6, 9.

The device supports SISO and MIMO mode at 802.11n ht20 and 802.11n ht40 mode, per pre-test, MIMO mode was the worst and reported.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The software "QATool_Dbg" was used for testing, which was provided by manufacturer. The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all date rates bandwidths, and modulations. The maximum power was configured as below table, that provided by the manufacturer:

Test Mode	Test Software Version	QATool_Dbg				
	Test Frequency	2412MHz	2437MHz	2462MHz		
802.11b	Data Rate	1Mbps	1Mbps	1Mbps		
002.110	Power Level Setting Chain 0&1	20	20	20		
	Test Frequency	2412MHz	2437MHz	2462MHz		
802.11g	Data Rate	6Mbps	6Mbps	6Mbps		
602.11g	Power Level Setting Chain 0&1	1A	1A	1A		
Test Frequency		2412MHz	2437MHz	2462MHz		
802.11n ht20	Data Rate	MCS8	MCS8	MCS8		
802.11fi fit20	Power Level Setting Chain 0&1	1B	1B	1B		
	Test Frequency		2437MHz	2452MHz		
802.11n ht40	Data Rate	MCS8	MCS8	MCS8		
002.11ff fft40	Power Level Setting Chain 0&1	1A	1A	1A		


FCC Part 15.247 Page 6 of 107

The duty cycle as below:


Mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	8.497	8.537	99.5
802.11g	1.407	1.439	97.8
802.11n ht20	1.323	1.469	90.1
802.11n ht40	0.657	0.810	81.1

Report No.: RDG170930001-00B


802.11b

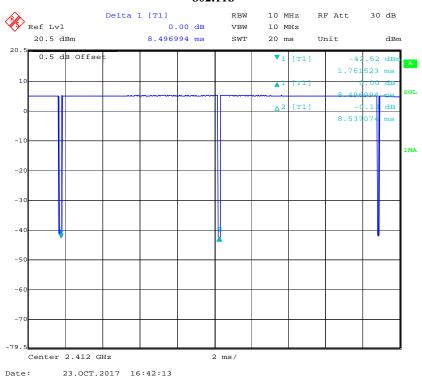


FCC Part 15.247 Page 7 of 107

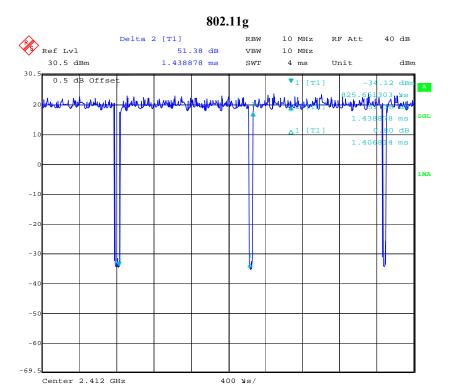

Date: 23.OCT.2017 16:47:52

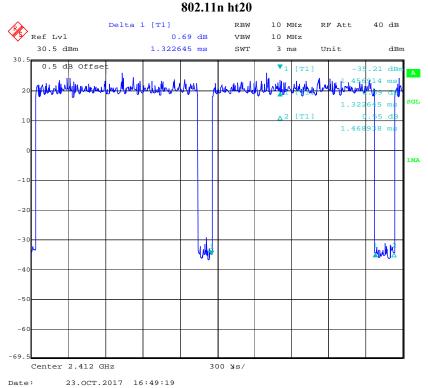

FCC Part 15.247 Page 8 of 107

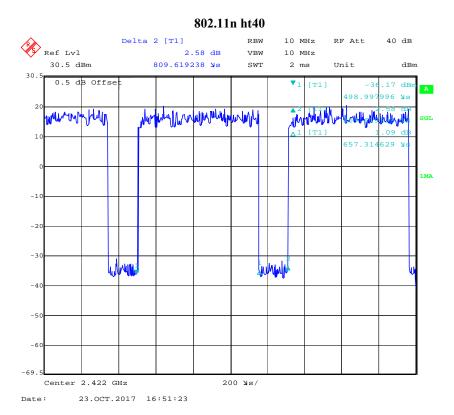

Local Support Equipment List and Details


Manufacturer	Manufacturer Description		Serial Number	
DELL	Laptop	PP11L	QDS-BRCM1017	

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	То
RJ45 Cable	yes	No	10.0	RJ45 Port of Laptop	EUT

FCC Part 15.247 Page 9 of 107

Block Diagram of Test Setup

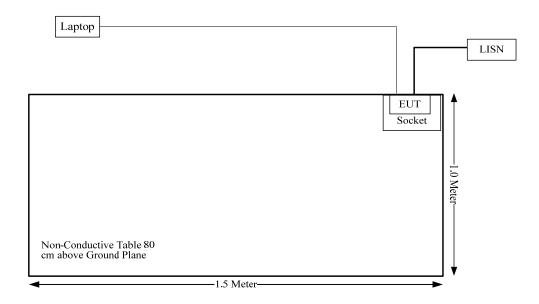

FCC Part 15.247 Page 10 of 107

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC \$15.247 (i) & \$1.1310 & \$2.1091	Maximum Permissable Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum conducted output power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

Report No.: RDG170930001-00B

FCC Part 15.247 Page 11 of 107

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i)and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Report No.: RDG170930001-00B

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure						
Frequency Range (MHz)	Averaging Time (minutes)					
0.3-1.34	614	1.63	*(100)	30		
1.34–30	824/f	2.19/f	*(180/f²)	30		
30–300	27.5	0.073	0.2	30		
300–1500	/	/	f/1500	30		
1500-100,000	/	/	1.0	30		

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

 $S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_{i} \frac{S_{i}}{S_{Limit,i}} \le 1$$

FCC Part 15.247 Page 12 of 107

Frequency (MHz)	Antenna Gain		Conducted output power including Tune- up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm²)
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2462	5	3.16	27	501.19	20.00	0.3155	1.0
5150-5250 & 5725-5850	5	3.16	16	39.81	20.00	0.0251	1.0

Report No.: RDG170930001-00B

The 2.4GHz band and 5GHz band can transmit simultaneously:

$$\sum_{i} \frac{S_{i}}{S_{Limit,i}}$$

$$=S_{2.4}/S_{limit-2.4} + S_5/S_{limit-5}$$

$$=0.3405$$

Result: The device meet FCC MPE at 20 cm distance

FCC Part 15.247 Page 13 of 107

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

Report No.: RDG170930001-00B

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT have 2 external antennas for 2.4G and 5GHz band, which was permanently attached to the Unit, both antenna gains are 5dBi in 2.4G and 5GHz range. Please refer to the EUT photo.

Result: Compliance.


FCC Part 15.247 Page 14 of 107

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

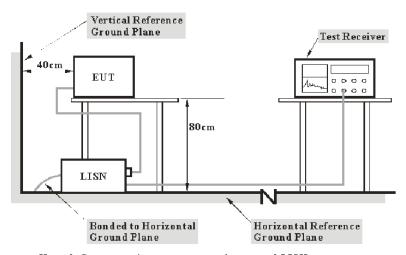

Report No.: RDG170930001-00B

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the

Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The EUT was connected to the main lisn with AC 120 V/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W	
150 kHz – 30 MHz	9 kHz	

FCC Part 15.247 Page 15 of 107

Test Procedure

During the conducted emission test, the EUT was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$
$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R: reading voltage amplitude A_c: attenuation caused by cable loss VDF: voltage division factor of AMN

C_f: Correction Factor

The "Margin" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Report No.: RDG170930001-00B

Margin = Limit – Corrected Amplitude

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2016-12-08	2017-12-08
R&S	L.I.S.N	ESH2-Z5	892107/021	2017-09-01	2018-09-01
R&S	Two-line V-network	ENV 216	3560.6550.12	2016-12-08	2017-12-08
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
N/A	Coaxial Cable	2m	C0200/01	2017-09-05	2018-09-05

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

FCC Part 15.247 Page 16 of 107

Test Data


Environmental Conditions

Temperature:	27.6 °C
Relative Humidity:	50 %
ATM Pressure:	100.6kPa

The testing was performed by Alex You on 2017-10-12.

Test Mode: Transmitting

AC120 V, 60 Hz, Line:

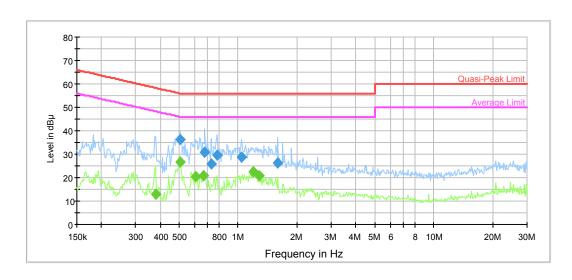


Report No.: RDG170930001-00B

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.507637	36.3	9.000	L1	9.9	19.7	56.0	Compliance
0.676289	31.0	9.000	L1	9.8	25.0	56.0	Compliance
0.726569	25.7	9.000	L1	9.8	30.3	56.0	Compliance
0.780588	29.4	9.000	L1	9.8	26.6	56.0	Compliance
1.039922	28.7	9.000	L1	9.8	27.3	56.0	Compliance
1.599078	26.1	9.000	L1	9.7	29.9	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.378019	12.8	9.000	L1	10.0	35.5	48.3	Compliance
0.503608	26.7	9.000	L1	9.9	19.3	46.0	Compliance
0.609741	20.5	9.000	L1	9.8	25.5	46.0	Compliance
0.665597	20.8	9.000	L1	9.8	25.2	46.0	Compliance
1.190776	22.5	9.000	L1	9.8	23.5	46.0	Compliance
1.279307	20.8	9.000	L1	9.8	25.2	46.0	Compliance

FCC Part 15.247 Page 17 of 107

AC120 V, 60 Hz, Neutral:

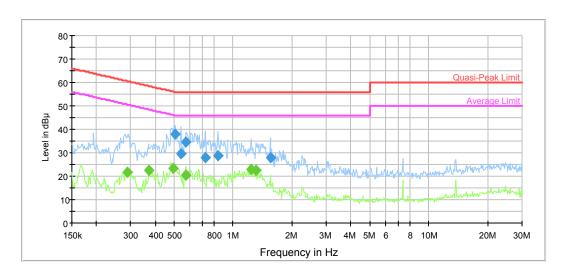

Report No.: RDG170930001-00B

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.507637	38.0	9.000	N	9.9	18.0	56.0	Compliance
0.541050	29.7	9.000	N	9.9	26.3	56.0	Compliance
0.576662	34.8	9.000	N	9.8	21.2	56.0	Compliance
0.720803	27.9	9.000	N	9.8	28.1	56.0	Compliance
0.838622	28.8	9.000	N	9.8	27.2	56.0	Compliance
1.548915	27.8	9.000	N	9.7	28.2	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.288307	21.7	9.000	N	10.2	28.9	50.6	Compliance
0.372042	22.5	9.000	N	10.0	26.0	48.5	Compliance
0.495646	23.3	9.000	N	9.9	22.8	46.1	Compliance
0.572086	20.5	9.000	N	9.8	25.5	46.0	Compliance
1.239175	23.1	9.000	N	9.8	22.9	46.0	Compliance
1.310256	22.5	9.000	N	9.8	23.5	46.0	Compliance

FCC Part 15.247 Page 18 of 107


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;


EUT Setup

Below 1GHz:

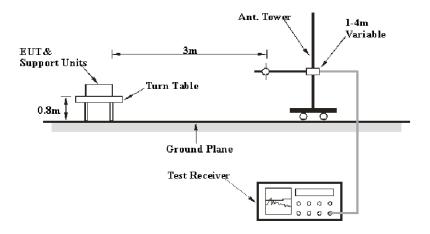

Report No.: RDG170930001-00B

Above 1GHz:

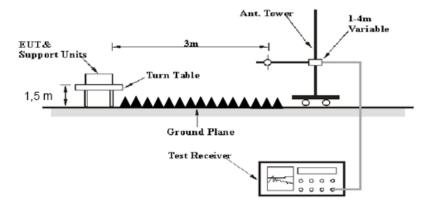

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

FCC Part 15.247 Page 19 of 107

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

Report No.: RDG170930001-00B

1GHz-25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Arro	>98%	1MHz	10 Hz
Ave.	<98%	1MHz	1/T

Note: T is minimum transmission duration

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit –Corrected Amplitude

FCC Part 15.247 Page 20 of 107

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-09-01	2018-09-01
Sunol Sciences	Antenna	JB3	A060611-1	2014-11-06	2017-11-06
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
Agilent	Signal Generator	E8247C	MY43321350	2016-09-23	2018-09-23
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2017-09-05	2018-09-05
TDK RF	Horn Antenna	HRN-0118	130 084	2016-01-05	2019-01-05
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2016-12-08	2017-12-08
HP	Signal Generator	1026	320408	2016-12-08	2017-12-08
Ducommun Technolagies	Horn Antenna	ARH-4223-02	1007726-02 1304	2016-11-18	2019-11-18
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2017-06-27	2018-06-27
R&S	Spectrum Analyzer	FSP 38	100478	2016-12-08	2017-12-08
Unknown	Coaxial Cable	Chamber A-1	4m	2017-09-05	2018-09-05
Unknown	Unknown Coaxial Cable		0.75m	2017-09-05	2018-09-05
Unknown	Coaxial Cable	Chamber A-2	10m	2017-09-05	2018-09-05
Unknown	Coaxial Cable	Chamber B-2	8m	2017-09-05	2018-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

Report No.: RDG170930001-00B

Test Data

Environmental Conditions

Temperature:	25.1~25.3 °C
Relative Humidity:	27~38 %
ATM Pressure:	101~101.4 kPa

^{*} The testing was performed by Sunny Cen from 2017-10-23 to 2017-10-27.


Test Mode: Transmitting

FCC Part 15.247 Page 21 of 107

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

1) Below 1GHz(802.11n ht20 mode middle channel was the worst):

Horizontal

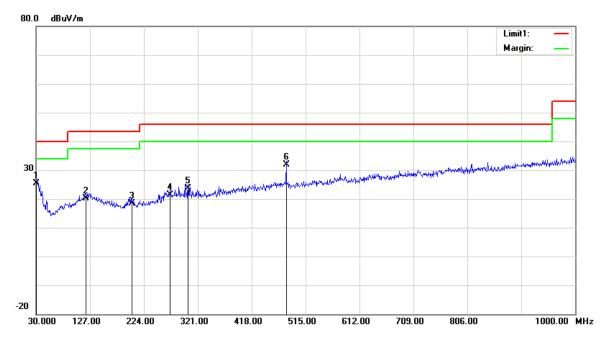


Report No.: RDG170930001-00B

Frequency (MHz)	Receiver Reading (dBµV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBµV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	24.22	QP	1.08	25.30	40.00	14.70
120.2100	25.04	QP	-4.94	20.10	43.50	23.40
202.6600	24.58	QP	-6.28	18.30	43.50	25.20
271.5300	25.28	QP	-3.88	21.40	46.00	24.60
303.5400	28.03	QP	-4.43	23.60	46.00	22.40
480.0800	32.91	QP	-1.01	31.90	46.00	14.10

FCC Part 15.247 Page 22 of 107

Vertical

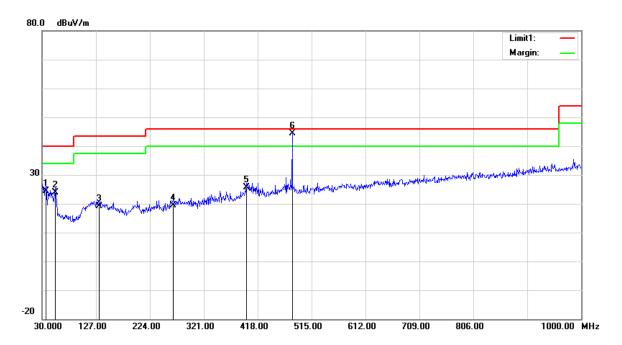

Report No.: RDG170930001-00B


Frequency (MHz)	Receiver Reading (dBµV)	Detector	Correction Cord. Factor Amp. (dB/m) (dBµV/m)		Limit (dBμV/m)	Margin (dB)
36.7900	28.13	QP	-3.83	24.30	40.00	15.70
54.2500	36.17	QP	-12.37	23.80	40.00	16.20
132.8200	24.53	QP	-5.33	19.20	43.50	24.30
265.7100	23.76	QP	-4.36	19.40	46.00	26.60
397.6300	27.84	QP	-2.24	25.60	46.00	20.40
480.0800	45.31	QP	-1.01	44.30	46.00	1.70

FCC Part 15.247 Page 23 of 107

802.11b(Chain 0 was the worst)

Low Channel


Horizontal

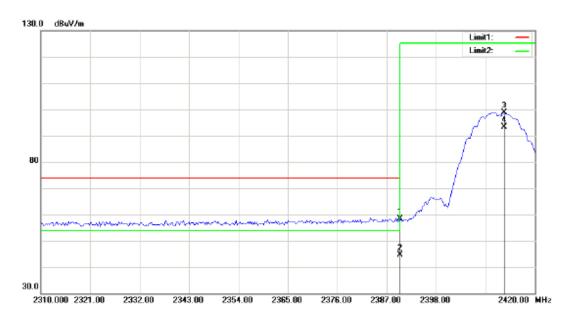

Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	2390.000	28.62	peak	29.87	58.49	74.00	152	224	15.51	
*	2	2390.000	14.67	AVG	29.87	44.54	54.00	152	224	9.46	
	3	2413.166	69.00	peak	29.94	98.94	125.20	152	224	26.26	Fundamental
	4	2413.166	63.52	AVG	29.94	93.46	125.20	152	224	31.74	Fundamental


FCC Part 15.247 Page 24 of 107

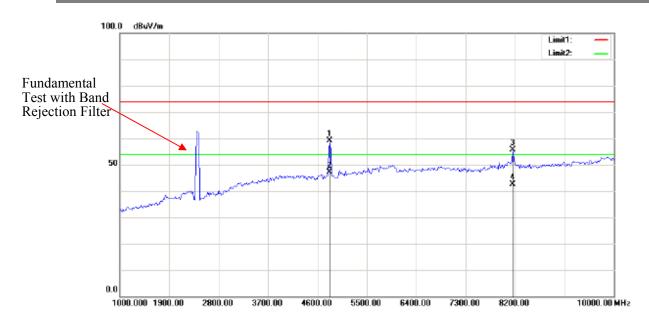


Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4823.647	60.28	peak	-1.06	59.22	74.00	153	226	14.78	
*	2	4823.647	48.25	AVG	-1.06	47.19	54.00	153	226	6.81	
	3	8160.321	50.49	peak	5.03	55.52	74.00	153	226	18.48	
	4	8160.321	37.64	AVG	5.03	42.67	54.00	153	226	11.33	

FCC Part 15.247 Page 25 of 107

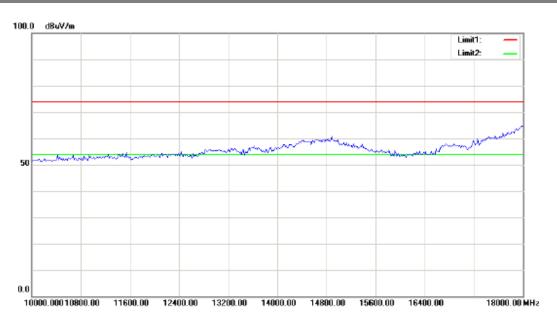


Report No.: RDG170930001-00B

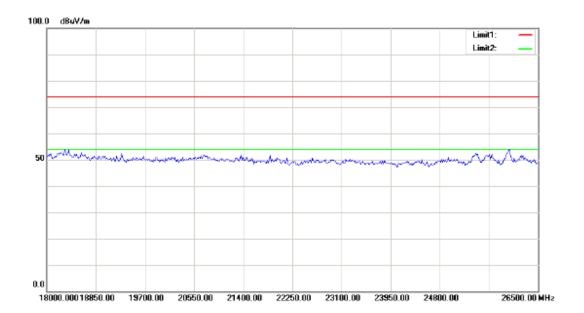

FCC Part 15.247 Page 26 of 107


Vertical

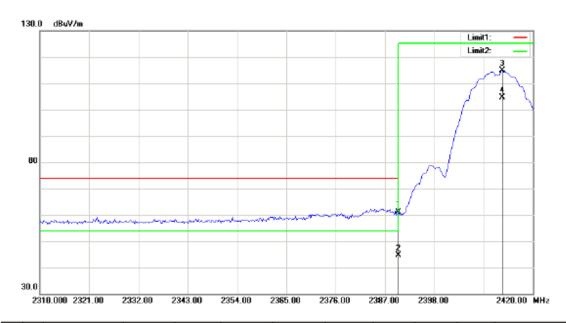

Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	2390.000	31.18	peak	29.88	61.06	74.00	147	224	12.94	
*	2	2390.000	14.84	AVG	29.88	44.72	54.00	147	224	9.28	
	3	2413.166	84.87	peak	29.94	114.81	125.20	147	224	10.39	Fundamental
	4	2413.166	74.62	AVG	29.94	104.56	125.20	147	224	20.64	Fundamental


FCC Part 15.247 Page 27 of 107

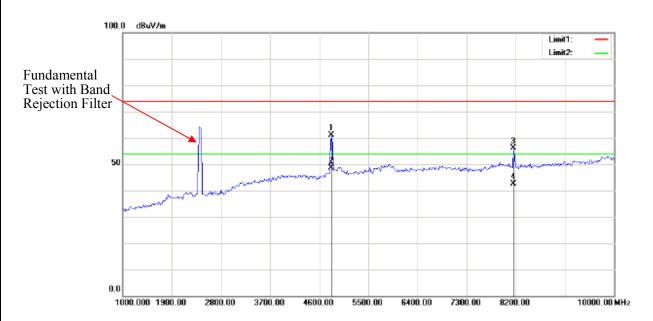


Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4823.647	62.28	peak	-1.06	61.22	74.00	145	166	12.78	
*	2	4823.647	49.63	AVG	-1.06	48.57	54.00	145	166	5.43	
	3	8160.321	50.99	peak	5.03	56.02	74.00	145	166	17.98	
	4	8160.321	37.52	AVG	5.03	42.55	54.00	145	166	11.45	

FCC Part 15.247 Page 28 of 107

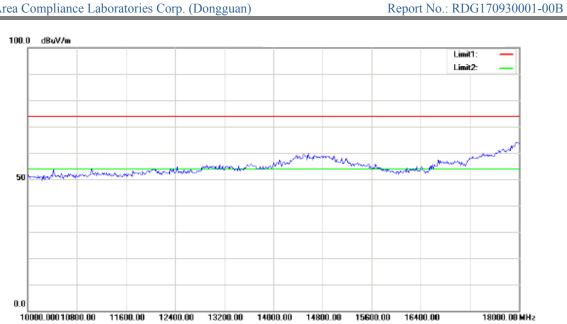


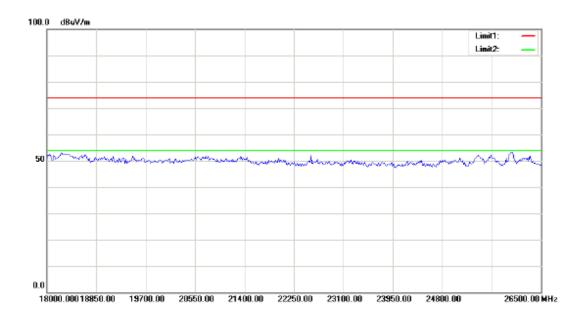

FCC Part 15.247 Page 29 of 107

Middle Channel


Horizontal

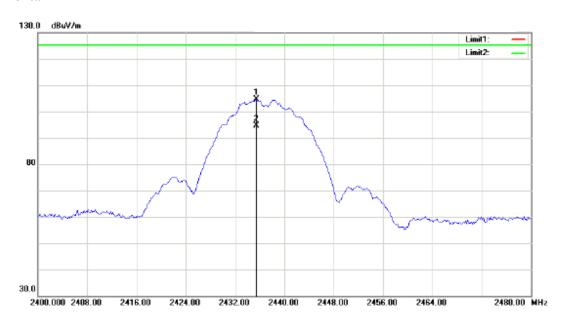

Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)		Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1	2435.431	74.69	peak	29.99	104.68	125.20	148	155	20.52	Fundamental
	2	2435.431	64.58	AVG	29.99	94.57	125.20	148	155	30.63	Fundamental

FCC Part 15.247 Page 30 of 107

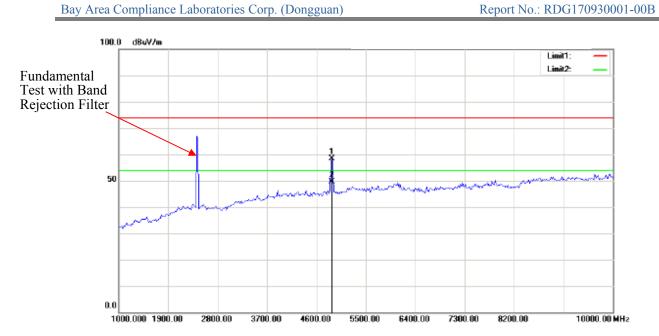


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4877.756	59.17	peak	-0.88	58.29	74.00	152	227	15.71	
*	2	4877.756	50.43	AVG	-0.88	49.55	54.00	152	227	4.45	

Note: No emission was detected in the range 10-25GHz.

FCC Part 15.247 Page 31 of 107


Vertical

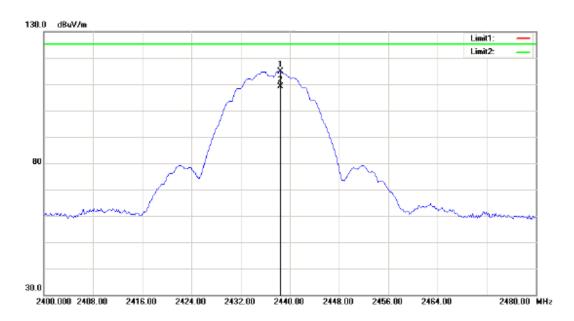

Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)		Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1	2438.477	84.83	peak	30.00	114.83	125.20	168	95	10.37	Fundamental
	2	2438.477	79.25	AVG	30.00	109.25	125.20	168	95	15.95	Fundamental

FCC Part 15.247 Page 32 of 107

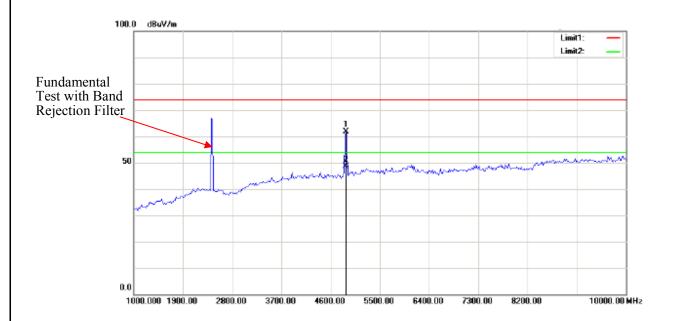

Report No.: RDG170930001-00B


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)		Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4877.756	62.67	peak	-0.88	61.79	74.00	158	37	12.21	
*	2	4877.756	49.62	AVG	-0.88	48.74	54.00	158	37	5.26	

Note: No emission was detected in the range 10-25GHz.

FCC Part 15.247 Page 33 of 107

High Channel


Horizontal

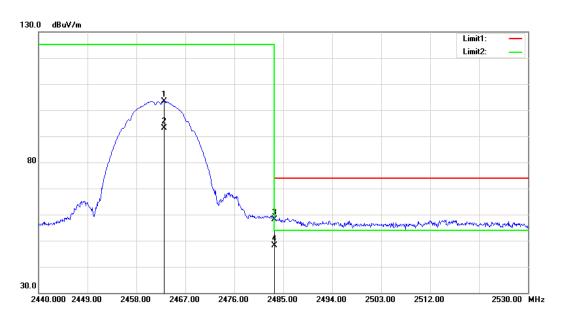

Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	2463.130	73.34	peak	30.06	103.40	125.20	159	88	21.80	Fundamental
	2	2463.130	63.19	AVG	30.06	93.25	125.20	159	88	31.95	Fundamental
	3	2483.500	27.98	peak	30.11	58.09	74.00	159	88	15.91	
*	4	2483.500	17.95	AVG	30.11	48.06	54.00	159	88	5.94	

FCC Part 15.247 Page 34 of 107

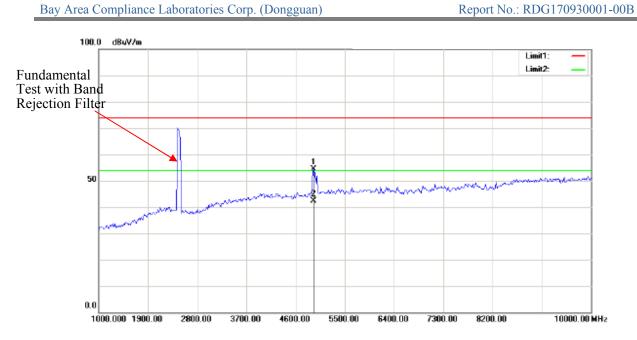


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4931.864	55.12	peak	-0.81	54.31	74.00	158	79	19.69	
*	2	4931.864	43.26	AVG	-0.81	42.45	54.00	158	79	11.55	

Note: No emission was detected in the range 10-25GHz.

FCC Part 15.247 Page 35 of 107

Vertical




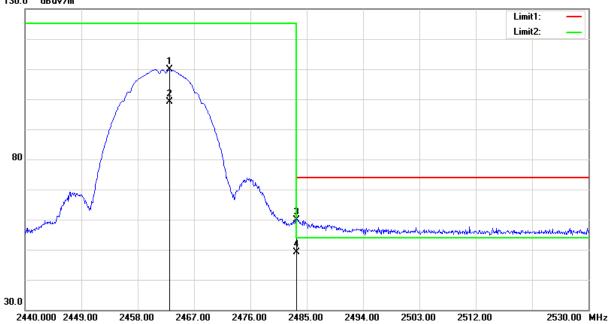

Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	2463.130	79.74	peak	30.06	109.80	125.20	148	88	15.40	Fundamental
	2	2463.130	69.10	AVG	30.06	99.16	125.20	148	88	26.04	Fundamental
	3	2483.500	29.67	peak	30.11	59.78	74.00	148	88	14.22	
*	4	2483.500	19.14	AVG	30.11	49.25	54.00	148	88	4.75	

FCC Part 15.247 Page 36 of 107

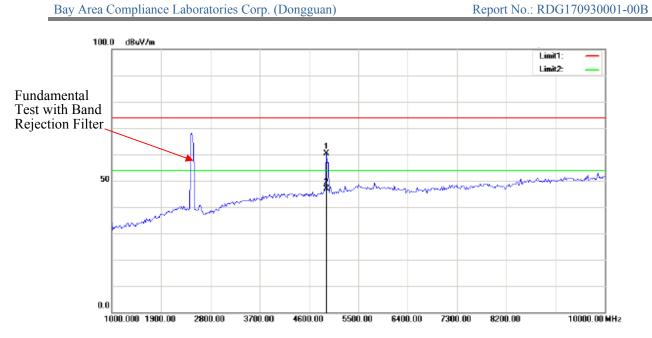


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4913.828	61.29	peak	-0.81	60.48	74.00	185	334	13.52	
*	2	4913.828	47.65	AVG	-0.81	46.84	54.00	185	334	7.16	

FCC Part 15.247 Page 37 of 107

802.11g(Chain 0 was the worst)

Low Channel


Horizontal

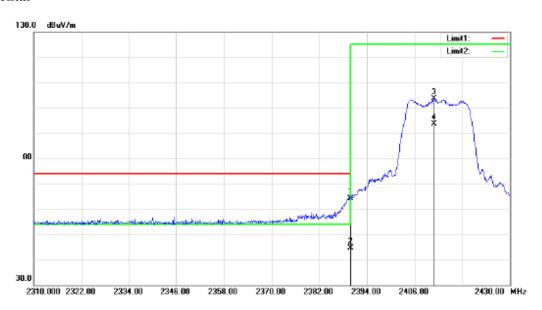

Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	2390.000	34.23	peak	29.87	64.10	74.00	156	153	9.90	
*	2	2390.000	14.75	AVG	29.87	44.62	54.00	156	153	9.38	
	3	2410.920	73.73	peak	29.93	103.66	125.20	156	153		Fundamental
	4	2410.920	63.58	AVG	29.93	93.51	125.20	156	153	31.69	Fundamental


FCC Part 15.247 Page 38 of 107

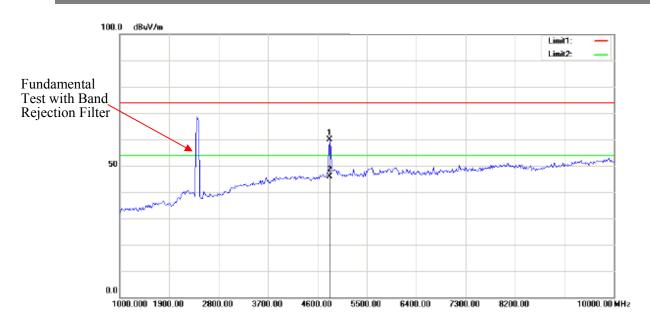

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4823.647	60.87	peak	-1.06	59.81	74.00	144	25	14.19	
*	2	4823.647	46.93	AVG	-1.06	45.87	54.00	144	25	8.13	

Note: No emission was detected in the range 10-25GHz.


FCC Part 15.247 Page 39 of 107

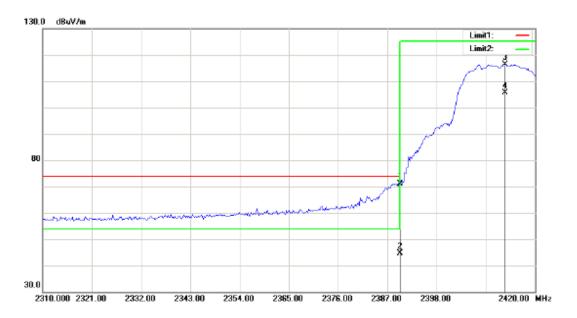

Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1	2390.000	41.32	peak	29.88	71.20	74.00	153	22	2.80	
	2	2390.000	14.68	AVG	29.88	44.56	54.00	153	22	9.44	
	3	2413.387	86.41	peak	29.94	116.35	125.20	153	22	8.85	Fundamental
	4	2413.387	75.68	AVG	29.94	105.62	125.20	153	22	19.58	Fundamental

FCC Part 15.247 Page 40 of 107

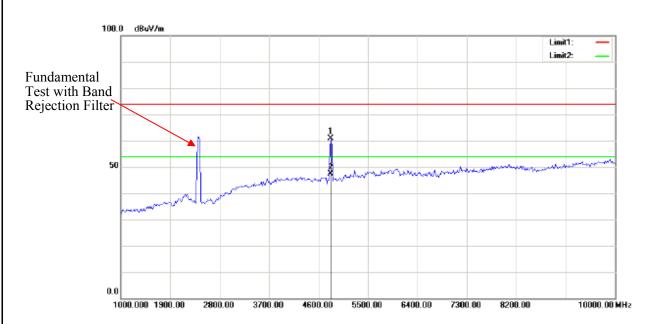


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4823.647	61.87	peak	-1.06	60.81	74.00	166	223	13.19	
*	2	4823.647	48.35	AVG	-1.06	47.29	54.00	166	223	6.71	

Note: No emission was detected in the range 10-25GHz.

FCC Part 15.247 Page 41 of 107

Middle Channel


Horizontal

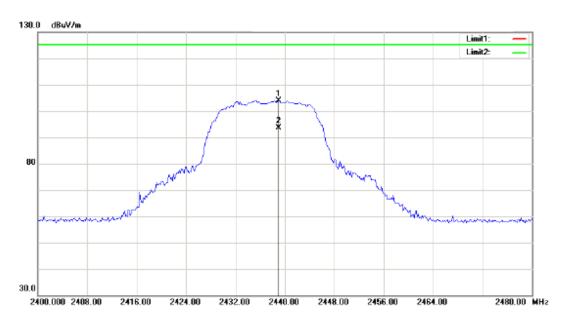

Report No.: RDG170930001-00B


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1	2438.958	73.89	peak	30.00	103.89	125.20	157	46	21.31	Fundamental
	2	2438.958	63.57	AVG	30.00	93.57	125.20	157	46	31.63	fundamental

FCC Part 15.247 Page 42 of 107

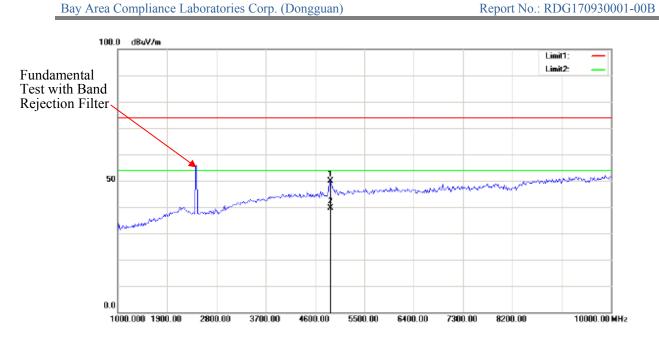

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)		Limit (dBuV/m)		Tab.Pos (deg.)	Margin (dB)	Comment
	1	4877.756	50.75	peak	-0.88	49.87	74.00	169	34	24.13	
*	2	4877.756	40.62	AVG	-0.88	39.74	54.00	169	34	14.26	


FCC Part 15.247 Page 43 of 107

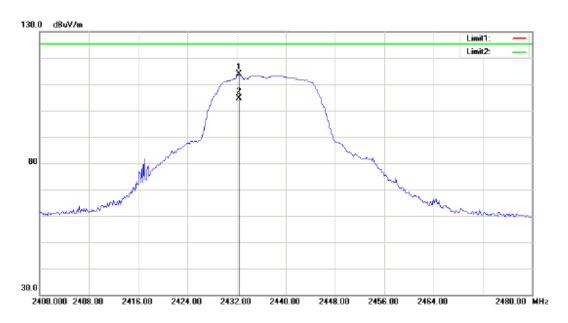

Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1	2432.385	83.82	peak	29.98	113.80	125.20	152	336	11.40	Fundamental
	2	2432.385	74.53	AVG	29.98	104.51	125.20	152	336	20.69	Fundamental

FCC Part 15.247 Page 44 of 107

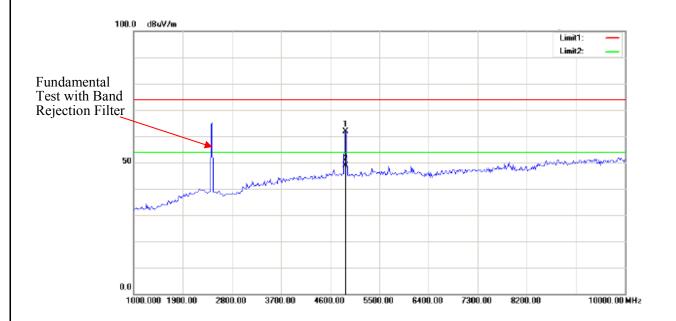


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)		Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4877.756	62.87	peak	-0.88	61.99	74.00	148	76	12.01	
*	2	4877.756	49.86	AVG	-0.88	48.98	54.00	148	76	5.02	

Note: No emission was detected in the range 10-25GHz.

FCC Part 15.247 Page 45 of 107

High Channel


Horizontal

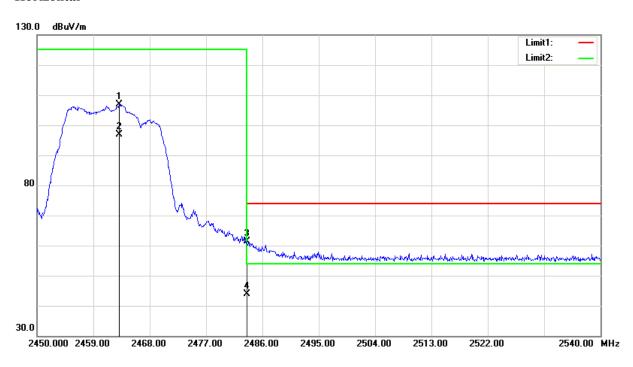

Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	2463.185	76.72	peak	30.06	106.78	125.20	156	87	18.42	Fundamental
	2	2463.185	66.84	AVG	30.06	96.90	125.20	156	87	28.30	Fundamental
	3	2483.500	31.33	peak	30.11	61.44	74.00	156	87	12.56	
*	4	2483.500	13.86	AVG	30.11	43.97	54.00	156	87	10.03	


FCC Part 15.247 Page 46 of 107

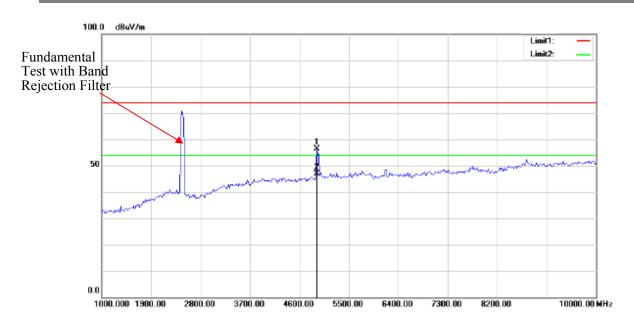

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)		Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4913.828	57.28	peak	-0.81	56.47	74.00	138	45	17.53	
*	2	4913.828	47.68	AVG	-0.81	46.87	54.00	138	45	7.13	

Note: No emission was detected in the range 10-25GHz.


FCC Part 15.247 Page 47 of 107

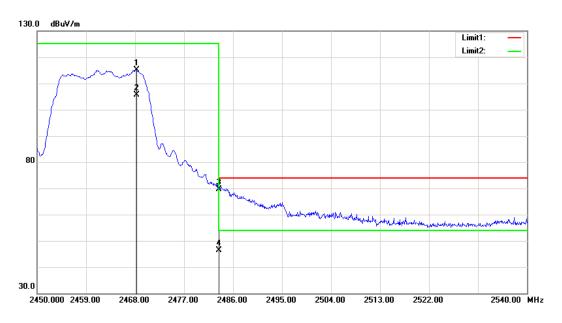

Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	2468.270	85.18	peak	30.07	115.25	125.20	149	153	9.95	Fundamental
	2	2468.270	75.49	AVG	30.07	105.56	125.20	149	153	19.64	Fundamental
*	3	2483.500	39.61	peak	30.11	69.72	74.00	149	153	4.28	
	4	2483.500	16.38	AVG	30.11	46.49	54.00	149	153	7.51	

FCC Part 15.247 Page 48 of 107

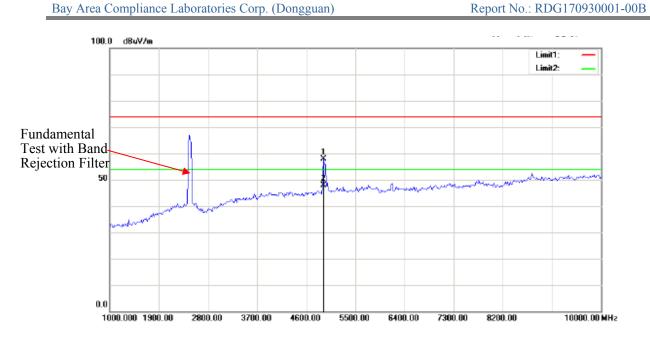


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4913.828	58.78	peak	-0.81	57.97	74.00	147	55	16.03	
*	2	4913.828	48.59	AVG	-0.81	47.78	54.00	147	55	6.22	

FCC Part 15.247 Page 49 of 107

802.11n ht20(2TX was the worst)

Low Channel


Horizontal

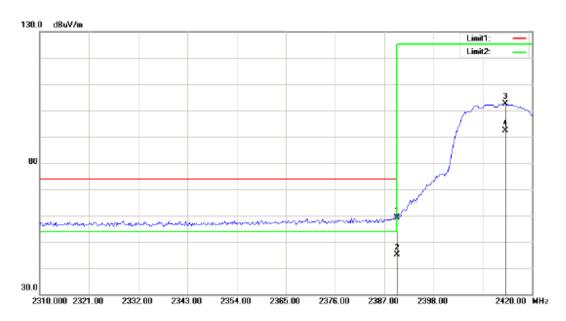

Report No.: RDG170930001-00B


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	2390.000	29.16	peak	29.88	59.04	74.00	153	45	14.96	
*	2	2390.000	15.25	AVG	29.88	45.13	54.00	153	45	8.87	
	3	2414.048	72.73	peak	29.94	102.67	125.20	153	45	22.53	undamental
	4	2414.048	62.37	AVG	29.94	92.31	125.20	153	45	32.89 I	fundamental

FCC Part 15.247 Page 50 of 107

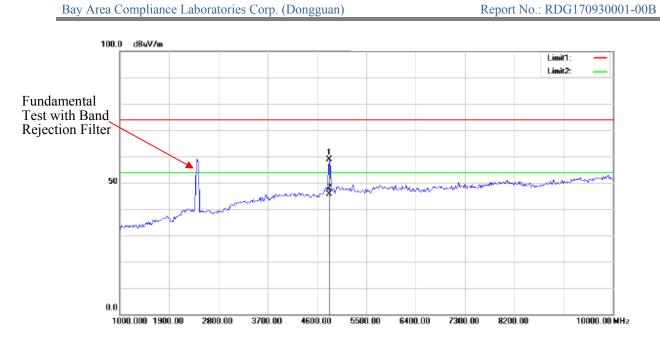

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)		Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4823.647	59.87	peak	-1.06	58.81	74.00	151	163	15.19	
*	2	4823.647	46.59	AVG	-1.06	45.53	54.00	151	163	8.47	


FCC Part 15.247 Page 51 of 107

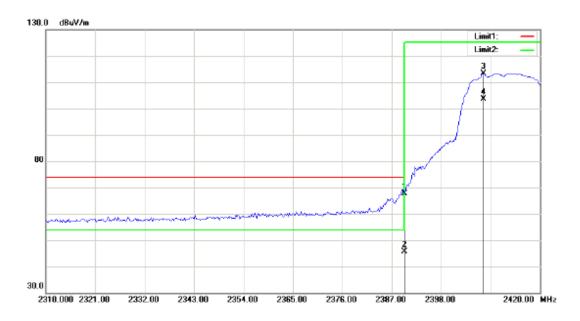

Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1	2390.000	37.77	peak	29.88	67.65	74.00	165	223	6.35	
	2	2390.000	15.66	AVG	29.88	45.54	54.00	165	223	8.46	
	3	2407.435	83.58	peak	29.91	113.49	125.20	165	223	11.71	Fundamental
	4	2407.435	73.62	AVG	29.91	103.53	125.20	165	223	21.67	Fundamental

FCC Part 15.247 Page 52 of 107

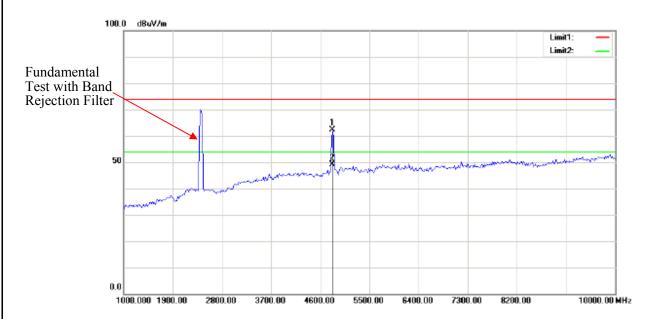


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4823.647	63.37	peak	-1.06	62.31	74.00	133	166	11.69	
*	2	4823.647	50.24	AVG	-1.06	49.18	54.00	133	166	4.82	

Note: No emission was detected in the range 10-25GHz.

FCC Part 15.247 Page 53 of 107

Middle Channel


Horizontal

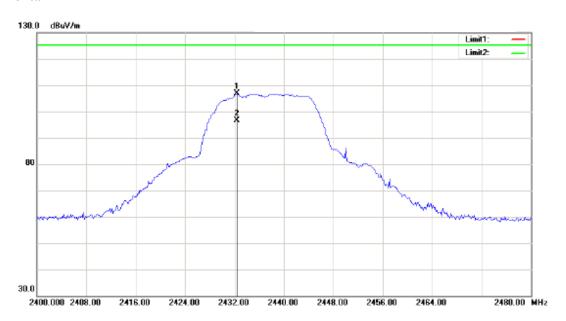

Report No.: RDG170930001-00B


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1	2432.385	76.80	peak	29.98	106.78	125.20	145	55	18.42 F	Fundamental
	2	2432.385	66.59	AVG	29.98	96.57	125.20	145	55	28.63 I	Fundamental

FCC Part 15.247 Page 54 of 107

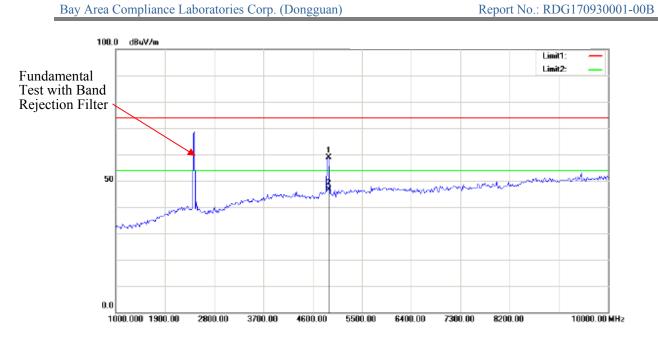

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4895.792	59.80	peak	-0.83	58.97	74.00	153	266	15.03	
*	2	4895.792	47.52	AVG	-0.83	46.69	54.00	153	266	7.31	


FCC Part 15.247 Page 55 of 107

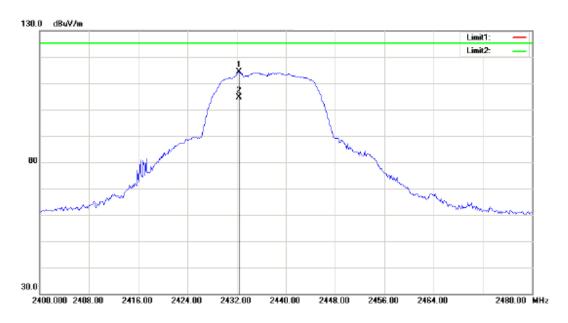

Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1	2432.385	84.39	peak	29.98	114.37	125.20	135	224	10.83	Fundamental
	2	2432.385	74.65	AVG	29.98	104.63	125.20	135	224	20.57	Fundamental

FCC Part 15.247 Page 56 of 107

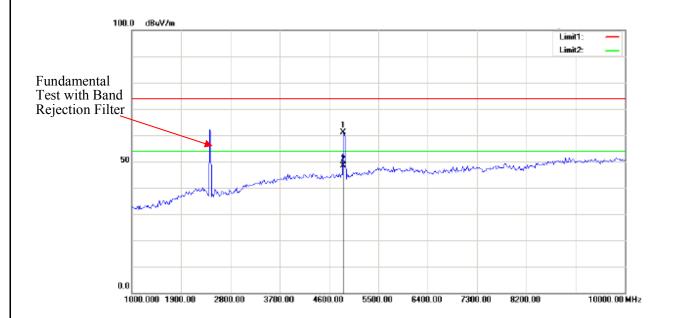


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)		Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4859.719	62.05	peak	-0.95	61.10	74.00	154	28	12.90	
*	2	4859.719	49.34	AVG	-0.95	48.39	54.00	154	28	5.61	

Note: No emission was detected in the range 10-25GHz.

FCC Part 15.247 Page 57 of 107

High Channel


Horizontal

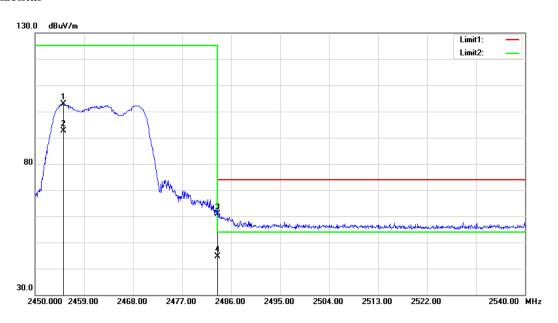

Report No.: RDG170930001-00B


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	2455.265	72.74	peak	30.04	102.78	125.20	145	223	22.42	Fundamental
	2	2455.265	62.53	AVG	30.04	92.57	125.20	145	223	32.63	Fundamental
	3	2483.500	30.79	peak	30.11	60.90	74.00	145	223	13.10	
*	4	2483.500	14.56	AVG	30.11	44.67	54.00	145	223	9.33	

FCC Part 15.247 Page 58 of 107

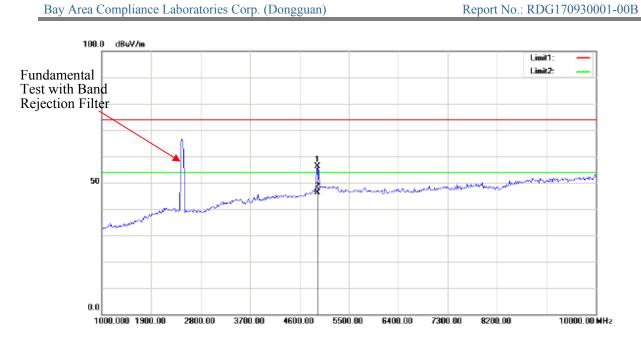

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4931.864	56.86	peak	-0.81	56.05	74.00	158	64	17.95	
*	2	4931.864	46.87	AVG	-0.81	46.06	54.00	158	64	7.94	


FCC Part 15.247 Page 59 of 107

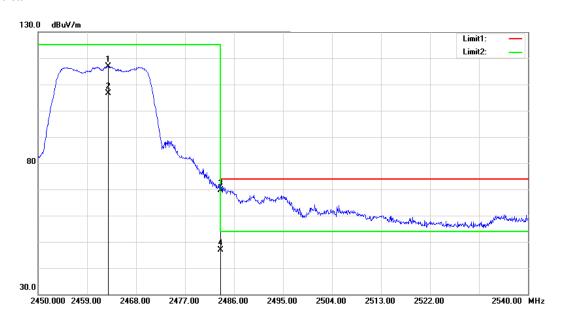

Report No.: RDG170930001-00B

Mk	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	2462.870	86.89	peak	30.06	116.95	125.20	148	153	8.25	Fundamental
	2	2462.870	76.58	AVG	30.06	106.64	125.20	148	153	18.56	Fundamental
*	3	2483.500	39.50	peak	30.11	69.61	74.00	148	153	4.39	
	4	2483.500	16.84	AVG	30.11	46.95	54.00	148	153	7.05	

FCC Part 15.247 Page 60 of 107

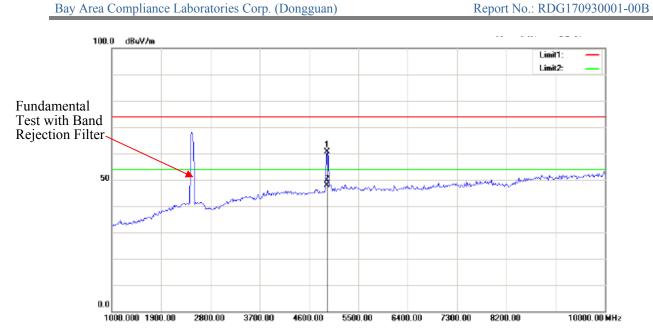


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)		Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4931.864	61.36	peak	-0.81	60.55	74.00	157	48	13.45	
*	2	4931.864	48.62	AVG	-0.81	47.81	54.00	157	48	6.19	

FCC Part 15.247 Page 61 of 107

802.11n ht40(2TX was the worst)

Low Channel


Horizontal

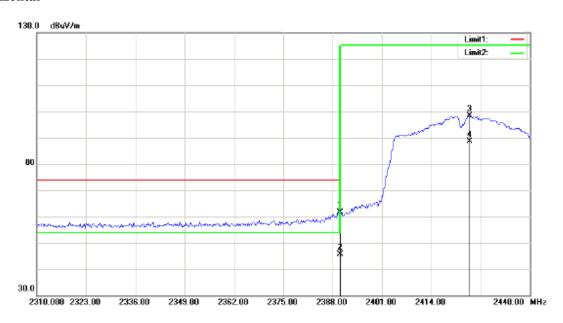

Report No.: RDG170930001-00B

Mk	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	2390.000	31.84	peak	29.88	61.72	74.00	158	26	12.28	
*	2	2390.000	15.66	AVG	29.88	45.54	54.00	158	26	8.46	
	3	2424.108	68.38	peak	29.96	98.34	125.20	158	26	26.86	Fundamental
	4	2424.108	58.69	AVG	29.96	88.65	125.20	158	26	36.55	Fundamental


FCC Part 15.247 Page 62 of 107

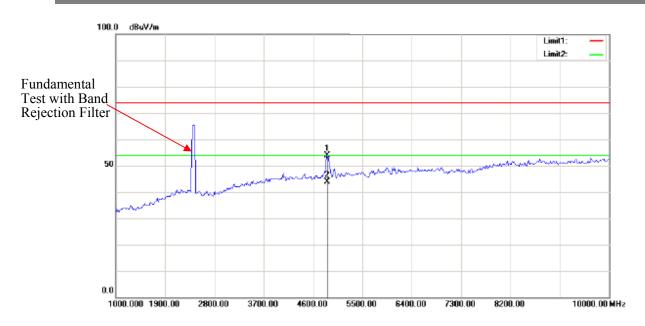

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)		Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4859.719	54.95	peak	-0.95	54.00	74.00	152	334	20.00	
*	2	4859.719	44.86	AVG	-0.95	43.91	54.00	152	334	10.09	

Note: No emission was detected in the range 10-25GHz.


FCC Part 15.247 Page 63 of 107

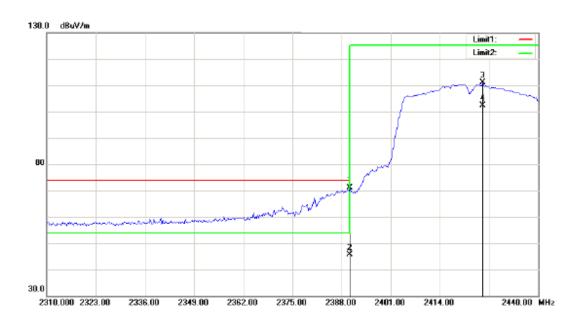

Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1	2390.000	41.20	peak	29.88	71.08	74.00	154	228	2.92	
	2	2390.000	15.82	AVG	29.88	45.70	54.00	154	228	8.30	
	3	2425.411	81.11	peak	29.96	111.07	125.20	154	228	14.13	Fundamental
	4	2425.411	72.49	AVG	29.96	102.45	125.20	154	228	22.75	Fundamental

FCC Part 15.247 Page 64 of 107

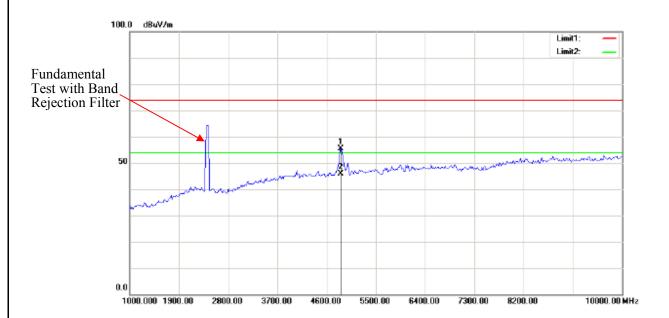


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4859.719	56.45	peak	-0.95	55.50	74.00	153	154	18.50	
*	2	4859.719	46.83	AVG	-0.95	45.88	54.00	153	154	8.12	

Note: No emission was detected in the range 10-25GHz.

FCC Part 15.247 Page 65 of 107

Middle Channel


Horizontal

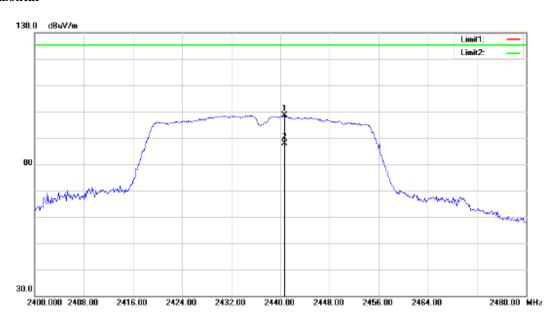

Report No.: RDG170930001-00B


Mk	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1	2440.721	68.59	peak	30.00	98.59	125.20	153	149	26.61	Fundamental
	2	2440.721	57.94	AVG	30.00	87.94	125.20	153	149	37.26	Fundamental

FCC Part 15.247 Page 66 of 107

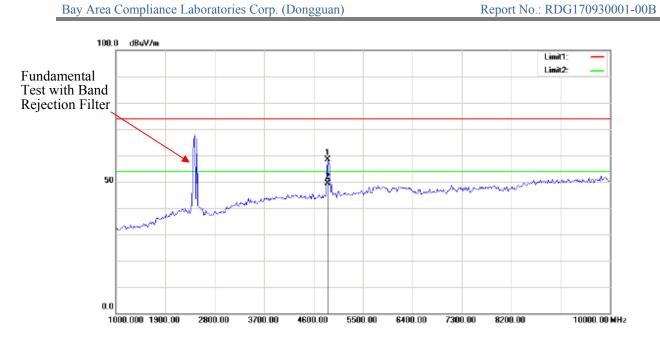

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4859.719	59.39	peak	-0.95	58.44	74.00	146	25	15.56	
*	2	4859.719	50.34	AVG	-0.95	49.39	54.00	146	25	4.61	


FCC Part 15.247 Page 67 of 107

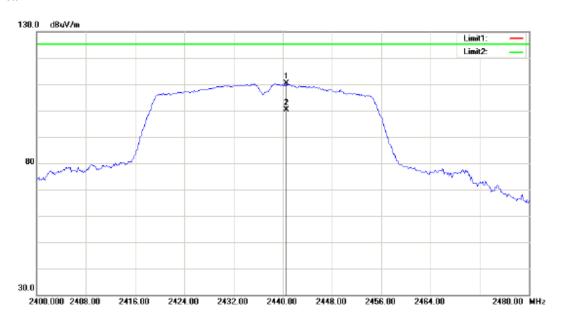

Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1	2440.561	80.35	peak	30.00	110.35	125.20	152	334	14.85 J	Fundamental
	2	2440.561	70.38	AVG	30.00	100.38	125.20	152	334	24.82 ł	Fundamental

FCC Part 15.247 Page 68 of 107

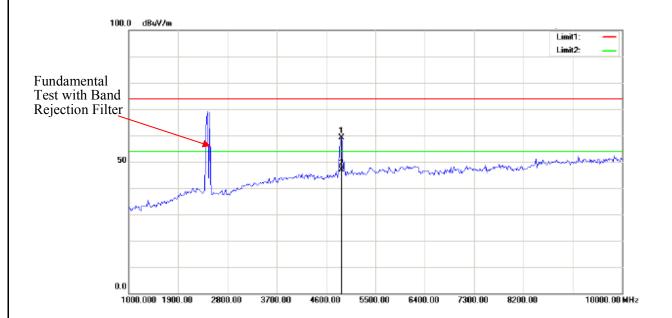


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4877.756	60.10	peak	-0.88	59.22	74.00	156	58	14.78	
*	2	4877.756	47.68	AVG	-0.88	46.80	54.00	156	58	7.20	

Note: No emission was detected in the range 10-25GHz.

FCC Part 15.247 Page 69 of 107

High Channel


Horizontal

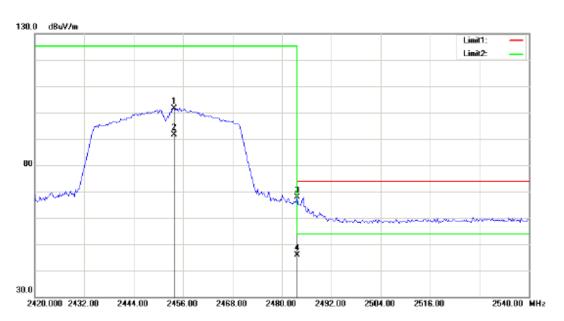

Report No.: RDG170930001-00B


Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	2453.908	71.61	peak	30.04	101.65	125.20	158	46	23.55	
	2	2453.908	61.59	AVG	30.04	91.63	125.20	158	46	33.57	
*	3	2483.500	37.67	peak	30.11	67.78	74.00	158	46	6.22	undamental
	4	2483.500	15.84	AVG	30.11	45.95	54.00	158	46	8.05 h	fundamental

FCC Part 15.247 Page 70 of 107

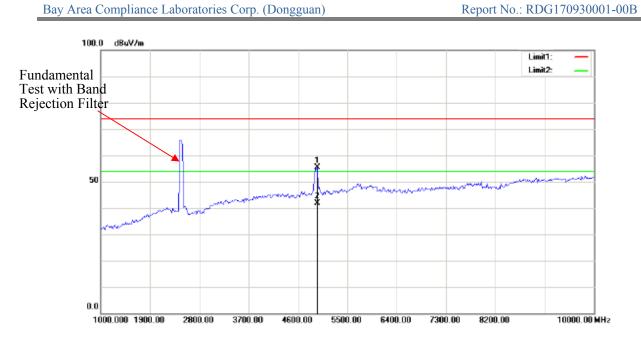

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4949.900	56.24	peak	-0.80	55.44	74.00	157	64	18.56	
*	2	4949.900	42.58	AVG	-0.80	41.78	54.00	157	64	12.22	


FCC Part 15.247 Page 71 of 107

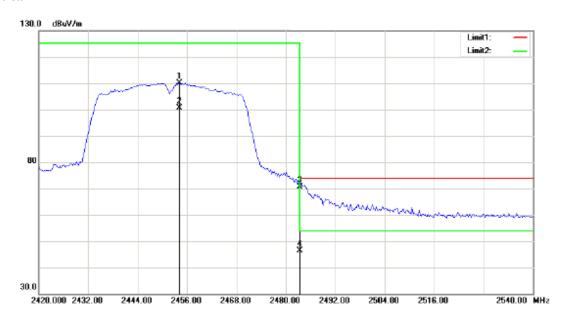

Report No.: RDG170930001-00B

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	2454.148	80.18	peak	30.04	110.22	125.20	151			undamental
	2	2454.148	70.54	AVG	30.04	100.58	125.20	151	112	24.62	undamental
*	3	2483.500	40.61	peak	30.11	70.72	74.00	151	112	3.28	
	4	2483.500	16.24	AVG	30.11	46.35	54.00	151	112	7.65	

FCC Part 15.247 Page 72 of 107

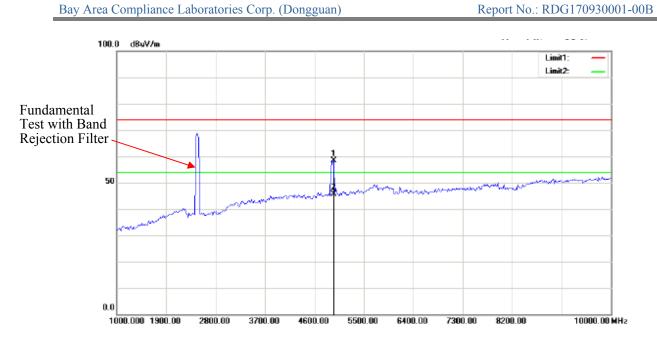

Mk.	No.	Frequency (MHz)	Reading (dBµV)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1	4949.900	59.24	peak	-0.80	58.44	74.00	165	46	15.56	
*	2	4949.900	46.52	AVG	-0.80	45.72	54.00	165	46	8.28	

Note: No emission was detected in the range 10-25GHz.

FCC Part 15.247 Page 73 of 107

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Report No.: RDG170930001-00B

Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times RBW$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer Description		Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSIQ	831929/005	2017-08-31	2018-08-31
Unknown	RF Cable	Unknown	C-4	Each Time	/

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.6 °C
Relative Humidity:	47 %
ATM Pressure:	101 kPa

^{*} The testing was performed by Kami Zhou on 2017-10-23.

FCC Part 15.247 Page 74 of 107

Test Mode: Transmitting


Test Result: Compliant

Test performed at chain 0, please refer to the following table and plots.

Test mode	Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
	Low	2412	10.1	≥0.5
802.11b	Middle	2437	10.1	≥0.5
	High	2462	10.1	≥0.5
	Low	2412	15.23	≥0.5
802.11g	Middle	2437	15.23	≥0.5
	High	2462	15.15	≥0.5
	Low	2412	15.23	≥0.5
802.11n ht20	Middle	2437	15.23	≥0.5
	High	2462	15.15	≥0.5
	Low	2422	35.11	≥0.5
802.11n ht40	Middle	2437	33.83	≥0.5
	High	2452	35.27	≥0.5


Report No.: RDG170930001-00B

802.11b Low Channel

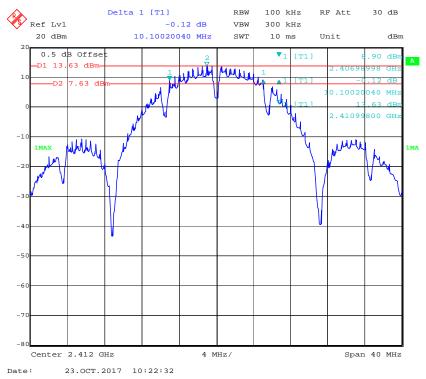


FCC Part 15.247 Page 75 of 107

802.11b Middle Channel

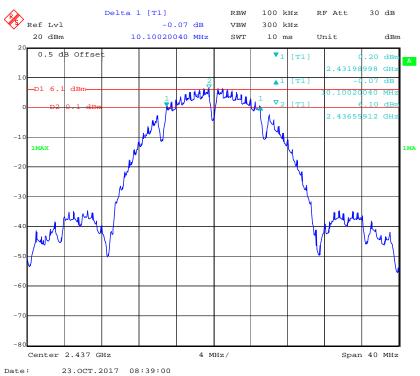


002 111 111 1 61

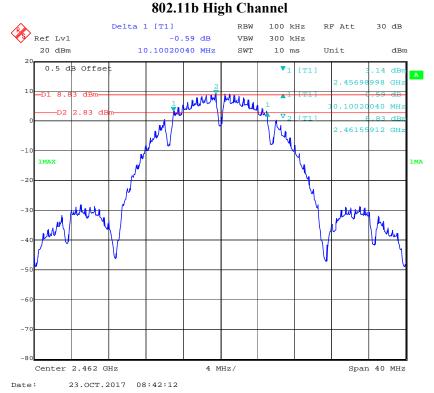

FCC Part 15.247 Page 76 of 107





802.11g Middle Channel

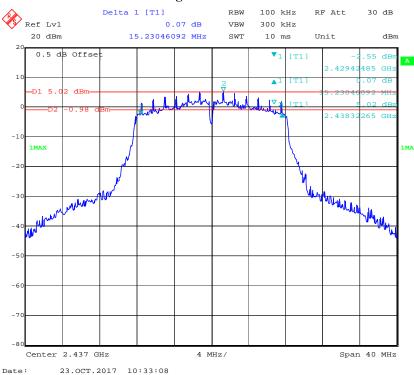

FCC Part 15.247 Page 77 of 107


802.11g High Channel

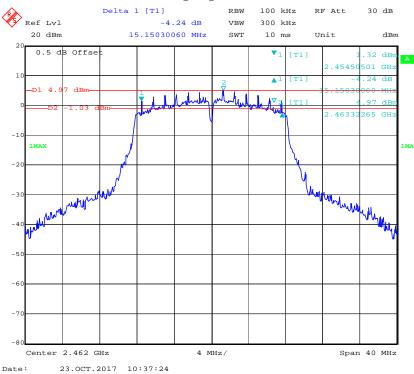

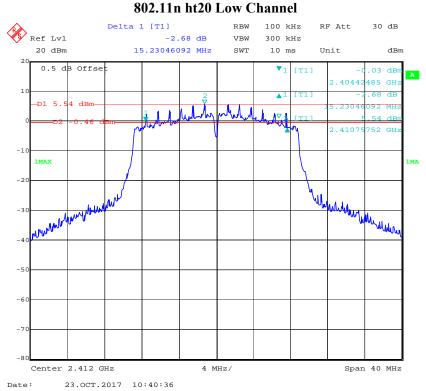


FCC Part 15.247 Page 78 of 107

802.11n ht20 Middle Channel

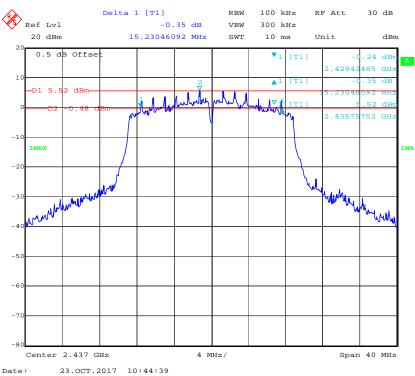


802.11n ht20 High Channel

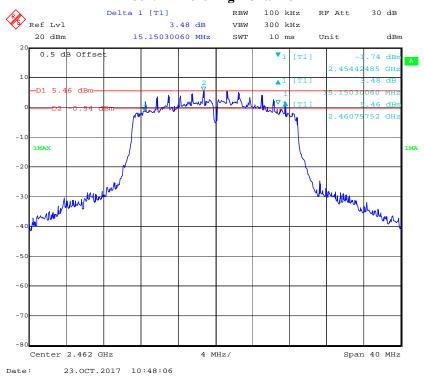


FCC Part 15.247 Page 79 of 107

802.11n ht40 Low Channel

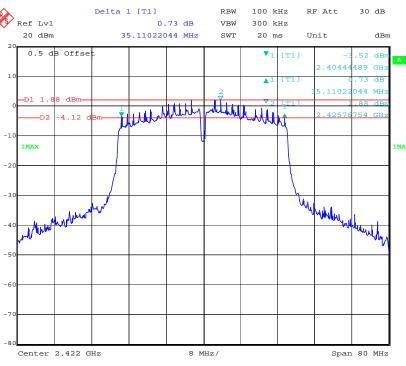


Date: 23.OCT.2017 10:51:38

802.11n ht40 Middle Channel

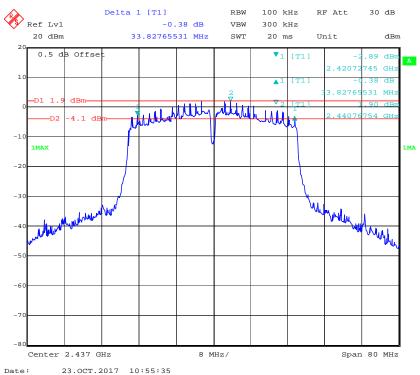

FCC Part 15.247 Page 80 of 107

802.11n ht40 High Channel

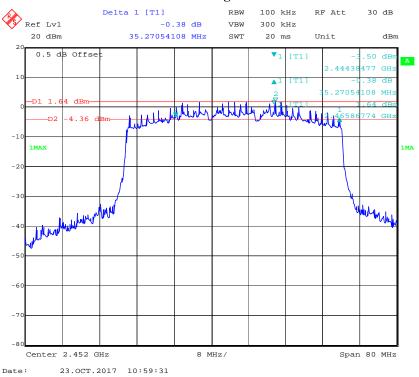

FCC Part 15.247 Page 81 of 107

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Report No.: RDG170930001-00B

Test Procedure

- 1. Place the EUT on a bench and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
- 3. Add a correction factor to the display.
- 4. Set the power Meter to test Peak output power, record the result as peak power.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2016-11-03	2017-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2016-11-03	2017-11-03
Unknown	RF Cable	Unknown	C-4	Each Time	/

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

FCC Part 15.247 Page 82 of 107

Test Data

Environmental Conditions

Temperature:	26.6 °C
Relative Humidity:	47 %
ATM Pressure:	101 kPa

^{*} The testing was performed by Kami Zhou on 2017-10-23.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Test mode	Channel	Frequency (MHz)	Max Peak C	Limit (dBm)		
		(MIIZ)	Chain 0	Chain 1	Total	(ubiii)
	Low	2412	21.89	21.72	/	30
802.11b	Middle	2437	18.67	21.71	/	30
	High	2462	21.4	21.46	/	30
	Low	2412	23.12	23.1	/	30
802.11g	Middle	2437	22.99	23.03	/	30
	High	2462	22.96	22.78	/	30
002.11	Low	2412	23.28	23.62	26.46	30
802.11n ht20	Middle	2437	23.31	23.69	26.51	30
11120	High	2462	23.18	23.54	26.37	30
002.11	Low	2422	22.47	22.84	25.67	30
802.11n ht40	Middle	2437	22.43	22.76	25.61	30
11140	High	2452	22.53	22.6	25.58	30

Report No.: RDG170930001-00B

Note: the maximum antenna gain is 5 dBi, the device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for NANT \leq 4;

So:

Directional gain = G_{ANT} + Array Gain = 5dBi < 6dBi

FCC Part 15.247 Page 83 of 107

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Report No.: RDG170930001-00B

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Manufacturer Description		Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSIQ	831929/005	2017-08-31	2018-08-31
Unknown	RF Cable	Unknown	C-4	Each Time	/

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

FCC Part 15.247 Page 84 of 107

Test Data

Environmental Conditions

Temperature:	26.6 °C
Relative Humidity:	47 %
ATM Pressure:	101 kPa

^{*} The testing was performed by Kami Zhou on 2017-10-23.


Test mode: Transmitting

Test Result: Compliant. Please refer to following plots.

Chain 0:


802.11b: Band Edge, Left Side

Report No.: RDG170930001-00B

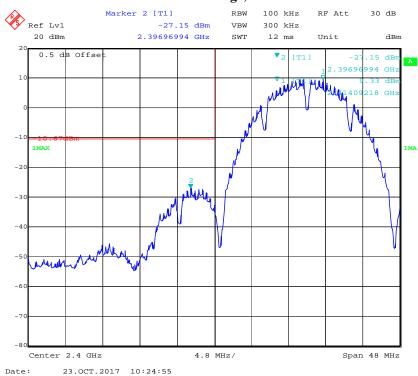


FCC Part 15.247 Page 85 of 107

802.11b: Band Edge, Right Side

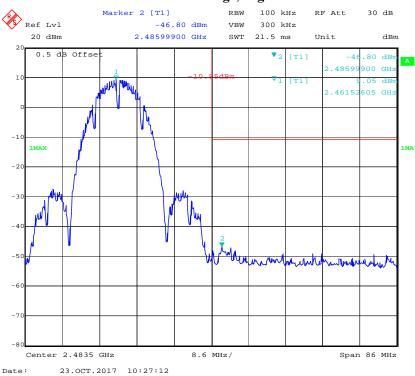


802.11g: Band Edge, Left Side

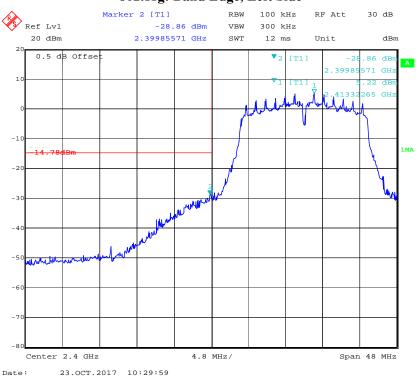


FCC Part 15.247 Page 86 of 107

802.11g: Band Edge, Right Side

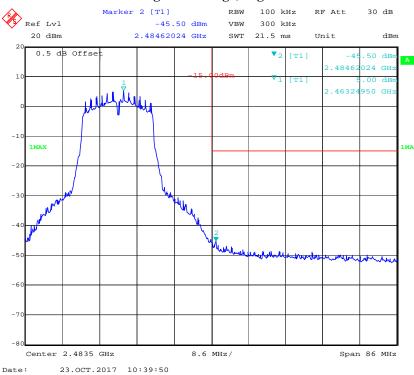


802.11n ht20 Band Edge, Left Side

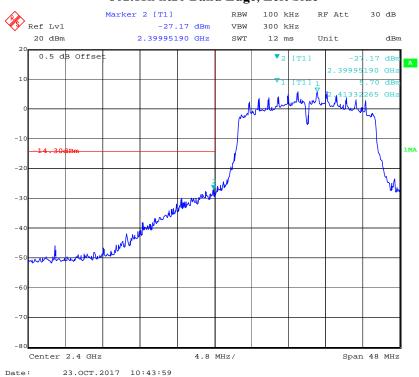

FCC Part 15.247 Page 87 of 107

802.11n ht20 Band Edge, Right Side

Report No.: RDG170930001-00B

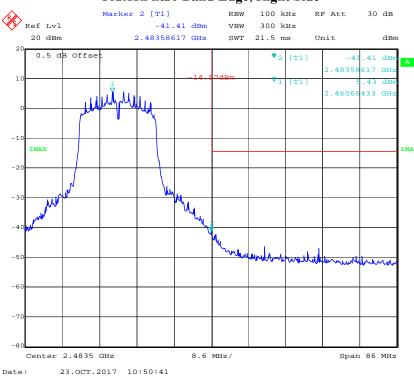


000 11 1 10 D 1 D 1




FCC Part 15.247 Page 88 of 107

802.11n ht40 Band Edge, Right Side

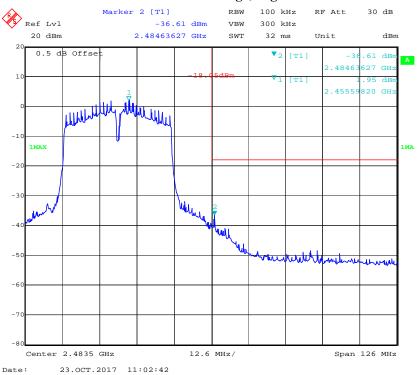


Chain 1:

802.11b: Band Edge, Left Side

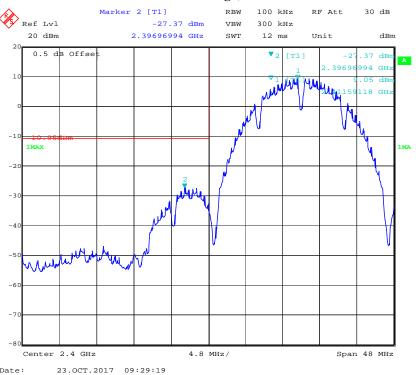


FCC Part 15.247 Page 89 of 107

802.11b: Band Edge, Right Side

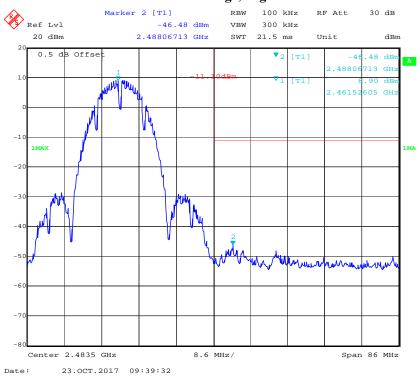


802.11g: Band Edge, Left Side

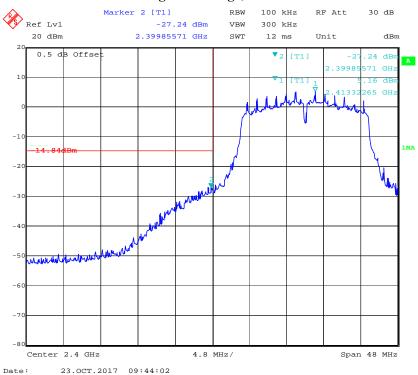


FCC Part 15.247 Page 90 of 107

802.11g: Band Edge, Right Side

Report No.: RDG170930001-00B

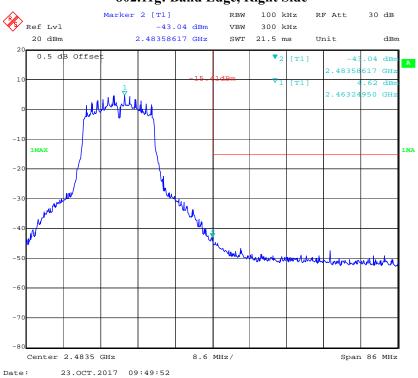


802.11n ht20 Band Edge, Left Side

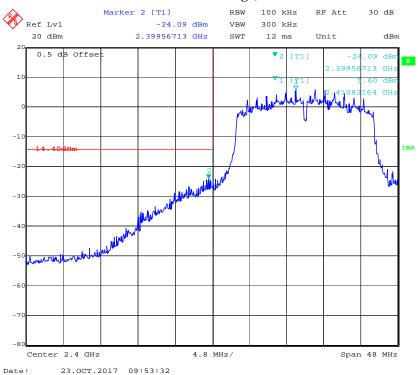


FCC Part 15.247 Page 91 of 107

Report No.: RDG170930001-00B

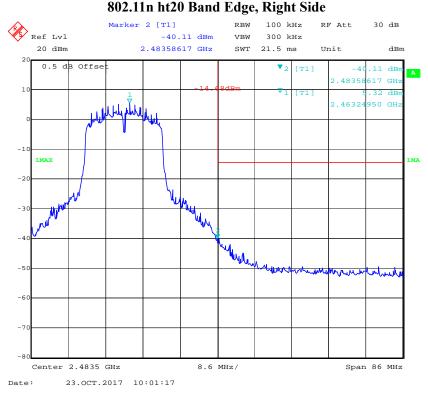


802.11n ht40 Band Edge, Left Side

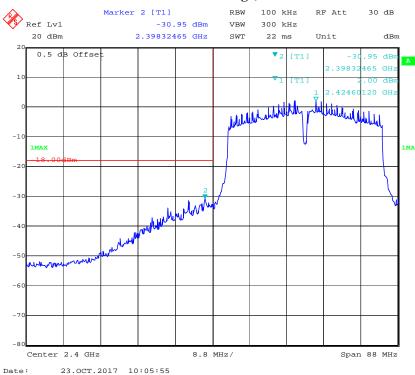

FCC Part 15.247 Page 92 of 107

802.11n ht40 Band Edge, Right Side

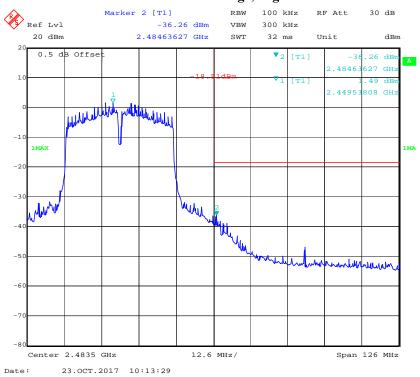

FCC Part 15.247 Page 93 of 107

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Report No.: RDG170930001-00B

Test Procedure

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \le \text{RBW} \le 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times RBW$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSIQ	831929/005	2017-08-31	2018-08-31
Unknown	RF Cable	Unknown	C-4	Each Time	/

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.6~27.5 °C
Relative Humidity:	42~47 %
ATM Pressure:	101~101.9 kPa

^{*} The testing was performed by Kami Zhou on 2017-10-23.

FCC Part 15.247 Page 94 of 107

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots

Test mode	Channel	Frequency	PSD (dBn	n/3kHz)	Total	Limit
		(MHz)	Chain 0	Chain 1	(dBm/3kHz)	(dBm/3kHz)
	Low	2412	-6.7	-6.59	/	≤8
802.11b	Middle	2437	-6.81	-6.88	/	≤8
	High	2462	-6.43	-6.62	/	≤8
	Low	2412	-11.08	-11.22	/	≤8
802.11g	Middle	2437	-10.74	-10.1	/	≤8
	High	2462	-11.97	-10.74	/	≤8
	Low	2412	-10.26	-10.05	-7.14	≤6
802.11n ht20	Middle	2437	-9.54	-10.4	-6.94	≤6
	High	2462	-10.6	-10	-7.28	≤6
	Low	2422	-14.03	-13.95	-10.98	≤6
802.11n ht40	Middle	2437	-13.76	-14.54	-11.12	≤6
	High	2452	-13.35	-14.26	-10.77	≤6

Report No.: RDG170930001-00B

Note: the maximum antenna gain is 5 dBi, the device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

Array Gain = $10 \log(N_{ANT}/N_{SS}) dB$.

So:

Directional gain = GANT + Array Gain = 5+10*log(2) =8 dBi

The limit should be reduced by 2dB.

FCC Part 15.247 Page 95 of 107

Chain 0:

Power Spectral Density, 802.11b, Low Channel

Report No.: RDG170930001-00B



Power Spectral Density, 802.11b, Middle Channel




FCC Part 15.247 Page 96 of 107

Power Spectral Density, 802.11b, High Channel

Report No.: RDG170930001-00B




Power Spectral Density, 802.11g, Low Channel

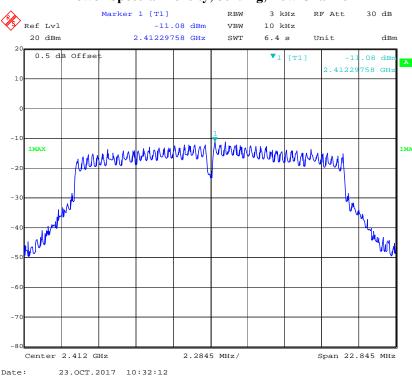


FCC Part 15.247 Page 97 of 107

Power Spectral Density, 802.11g, Middle Channel

Report No.: RDG170930001-00B

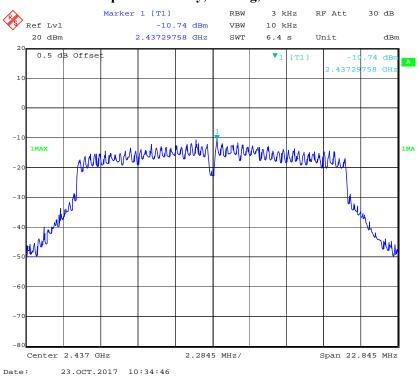


Power Spectral Density, 802.11g, High Channel

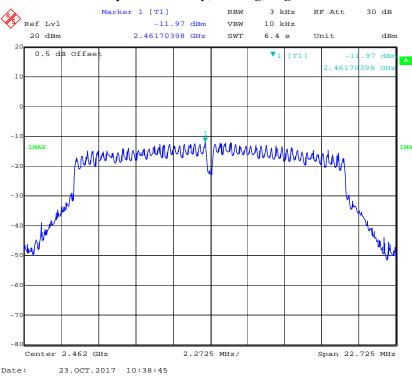


FCC Part 15.247 Page 98 of 107

Power Spectral Density, 802.11n ht20, Low Channel

Report No.: RDG170930001-00B

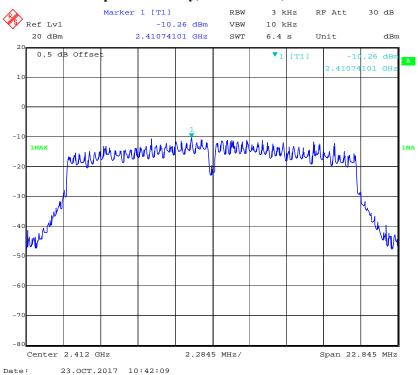


Power Spectral Density, 802.11n ht20, Middle Channel

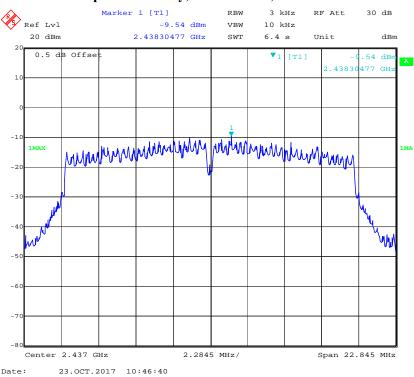


FCC Part 15.247 Page 99 of 107

Power Spectral Density, 802.11n ht20, High Channel

Report No.: RDG170930001-00B

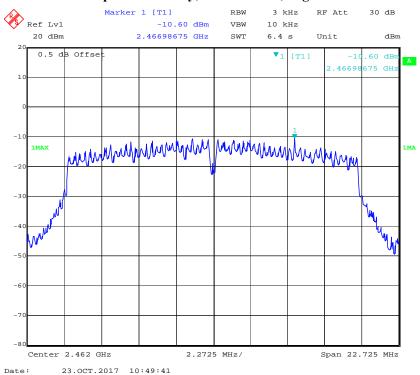


Power Spectral Density, 802.11n ht40 Low Channel

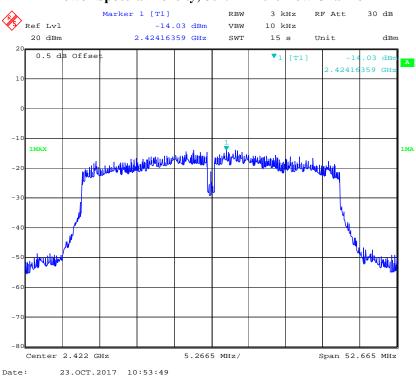


FCC Part 15.247 Page 100 of 107

Power Spectral Density, 802.11n ht40 Middle Channel

Report No.: RDG170930001-00B

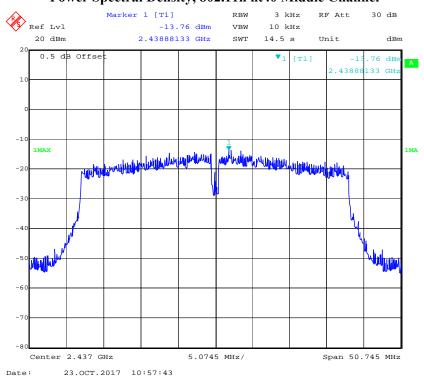

Power Spectral Density, 802.11n ht40 High Channel

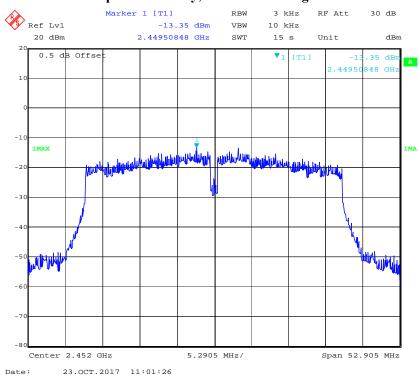

FCC Part 15.247 Page 101 of 107

Chain 1:

Power Spectral Density, 802.11b, Low Channel

Report No.: RDG170930001-00B




Power Spectral Density, 802.11b, Middle Channel




FCC Part 15.247 Page 102 of 107

Power Spectral Density, 802.11b, High Channel

Report No.: RDG170930001-00B

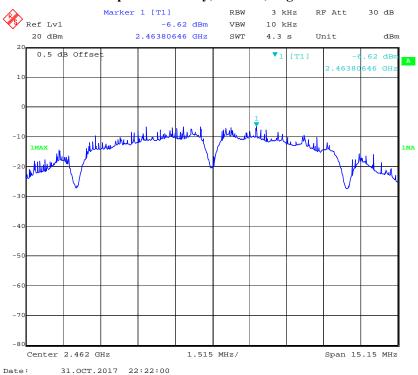


Power Spectral Density, 802.11g, Low Channel

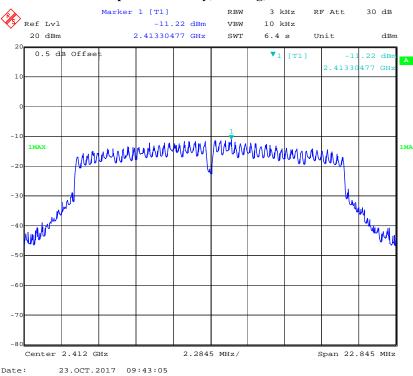


FCC Part 15.247 Page 103 of 107

Power Spectral Density, 802.11g, Middle Channel

Report No.: RDG170930001-00B

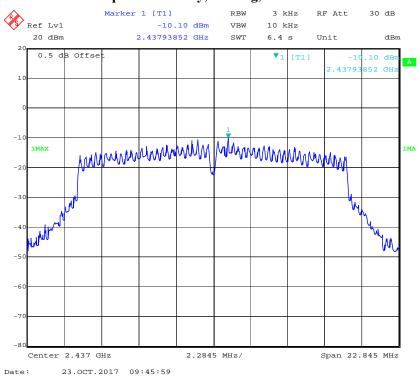


Power Spectral Density, 802.11g, High Channel

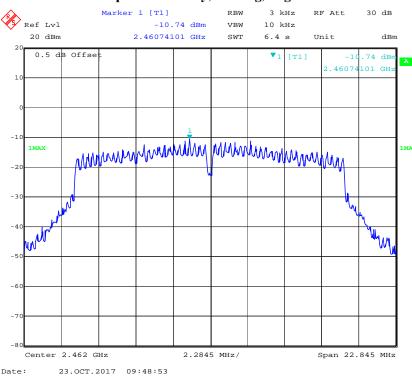


FCC Part 15.247 Page 104 of 107

Power Spectral Density, 802.11n ht20, Low Channel

Report No.: RDG170930001-00B

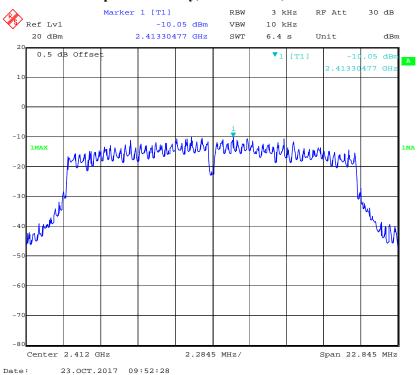


Power Spectral Density, 802.11n ht20, Middle Channel

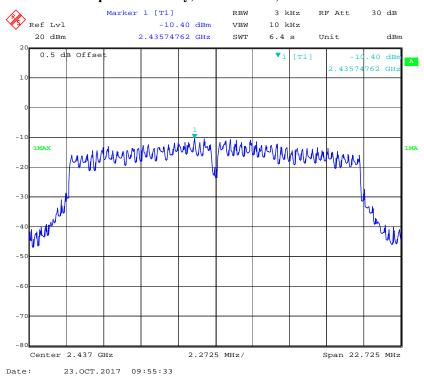


FCC Part 15.247 Page 105 of 107

Power Spectral Density, 802.11n ht20, High Channel

Report No.: RDG170930001-00B

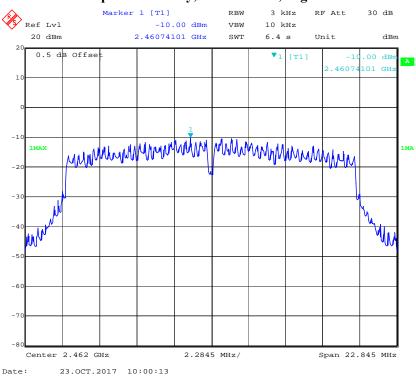


Power Spectral Density, 802.11n ht40 Low Channel

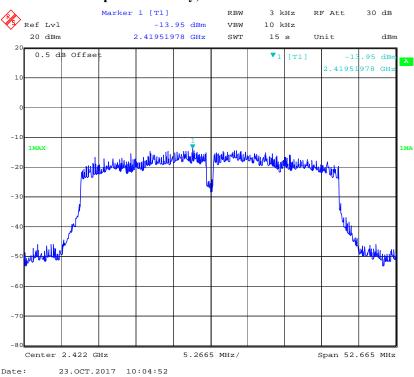


FCC Part 15.247 Page 106 of 107

Power Spectral Density, 802.11n ht40 Middle Channel

Report No.: RDG170930001-00B

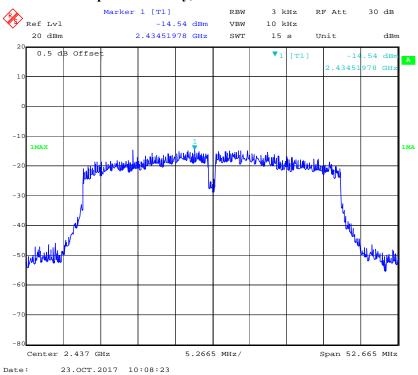

Power Spectral Density, 802.11n ht40 High Channel

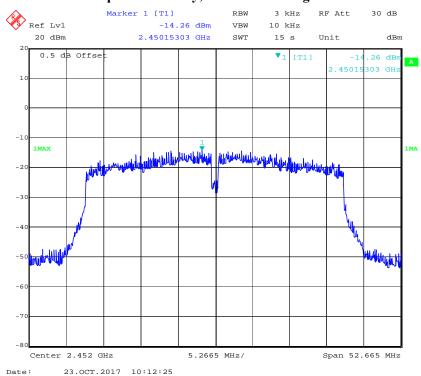

***** END OF REPORT *****

FCC Part 15.247 Page 107 of 107