



Prüfbericht - Nr.: 15036843 001		Seite 1 von 32 Page 1 of 32	
<i>Test Report No.:</i>			
Auftraggeber: <i>Client:</i>	Lineage Power (Shanghai) Co., Ltd. 1-2F, Building #58, No. 461 Hongcao Road, Caohejing Hi-Tech Park Shanghai 200233, P.R. China		
Gegenstand der Prüfung: <i>Test item:</i>	Electronic Ballast for Fluorescent Lamp		
Bezeichnung: <i>Identification:</i>	SP758-Y01A AJA-LINEAGE-WJY-QB7C SP759-Y01A AJA-LINEAGE-WJY-QB7C	Serien-Nr.: <i>Serial No.:</i>	N/A
Wareneingangs-Nr.: <i>Receipt No.:</i>	153133695	Eingangsdatum: <i>Date of receipt:</i>	10.12.2009
Prüfört: <i>Testing location:</i>	Refer to section 1.1		
Prüfgrundlage: <i>Test specification:</i>	FCC Part 18:2008		
Prüfergebnis: <i>Test Result:</i>	Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n). The test item passed the test specification(s).		
Prüflaboratorium: <i>Testing Laboratory:</i>	TÜV Rheinland (Shanghai) Co., Ltd.		
geprüft/ tested by:		kontrolliert/ reviewed by:	
07.04.2010 Gu Weikang/PE 		07.04.2010 Zhou Jiayi/TC 	
<i>Datum</i> Date	<i>Name/Stellung</i> Name/Position	<i>Unterschrift</i> Signature	<i>Unterschrift</i> Signature
Sonstiges/ Other Aspects: FCC ID: X82-BLST-SPXXX The above models are almost the same in electrical characteristics except for input EMI filter's parameters and instantaneous high-voltage output level for lighting. In this report, all the tests were performed on both models SP758-Y01A AJA-LINEAGE-WJY-QB7C (SP758 for short) and SP759-Y01A AJA-LINEAGE-WJY-QB7C (SP759 for short) respectively.			
Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet		Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested	
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>			

Prüfbericht - Nr.: 15036843 001
Test Report No.:**Seite 2 von 32**
Page 2 of 32

TEST SUMMARY

4.1.1 CONDUCTED EMISSION ON AC POWER PORT

*Result:**Passed*

4.1.2 RADIATED EMISSION UP TO 30MHZ

*Result:**Passed*

4.2.1 RADIATED EMISSION ABOVE 30MHZ

*Result:**Passed*

Contents

1	TEST SITES	4
1.1	TEST FACILITIES	4
1.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	4
2	GENERAL PRODUCT INFORMATION	5
2.1	PRODUCT FUNCTION AND INTENDED USE.....	5
2.2	RATINGS AND SYSTEM DETAILS	5
2.3	INDEPENDENT OPERATION MODES	5
2.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	5
2.5	SUBMITTED DOCUMENTS.....	5
3	TEST SET-UP AND OPERATION MODES	6
3.1	PRINCIPLE OF CONFIGURATION SELECTION	6
3.2	PHYSICAL CONFIGURATION FOR TESTING	6
3.3	TEST OPERATION AND TEST SOFTWARE	6
3.4	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	6
3.5	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	6
4	TEST RESULTS EMISSION	7
4.1	EMISSION IN THE FREQUENCY RANGE UP TO 30 MHz	7
4.1.1	Conducted Emission on AC power port	7
4.1.2	Radiated Emission up to 30MHz.....	16
4.2	EMISSION IN THE FREQUENCY RANGE ABOVE 30 MHz.....	21
4.2.1	Radiated Emission above 30MHz.....	21
5	PHOTOGRAPHS OF THE TEST SET-UP	30
6	LIST OF TABLES.....	32
7	LIST OF FIGURES.....	32
8	LIST OF PHOTOGRAPHS	32

1 Test Sites

1.1 Test Facilities

Laboratory: TÜV Rheinland (Shanghai) Co., Ltd.
Address: 10-15/F, Huatsing Building, No. 88, Lane 777, West Guangzhong Road,
Zhabei District, Shanghai 200072, P.R. China
(FCC registration No.: 657274)

The used test equipment is in accordance with CISPR 16-1 series standards for measurement of radio interference.

1.2 List of Test and Measurement Instruments

Table 1: List of test and measurement equipment

No.	Equipment	Model	Serial no.	Cal. due date
1.	3m modified semi-anechoic chamber	SAC	N/A	25.04.2011
2.	HF loop antenna	HLA6120	22137	18.01.2011
3.	Broadband antenna	BTA-H	040005H	20.03.2010
4.	EMI test receiver	ESCI	100280	26.11.2010
5.	EMI test receiver	ESIB26	100227	10.06.2010
6.	Artificial mains network	NNB 42	04/10048	25.02.2010
7.	Frequency variable power source	APW-150N	930376	04.11.2010

2 General Product Information

2.1 Product Function and Intended Use

The EUT (equipment under test) is electronic ballast for fluorescent lamp for lighting and similar use. For the further information, refer to the user's manual.

2.2 Ratings and System Details

System input voltage	: AC 120-277V
Frequency	: 50/60Hz
Rated wattage for lamp	: 80W (SP758) 100-120W (SP759)
Rated current	: 0.63 (SP758) 0.56-0.68A (SP759)
Protection class	: I

2.3 Independent Operation Modes

The basic operation modes are: "On", "Off".

2.4 Noise Generating and Noise Suppressing Parts

Refer to circuit diagram for further information.

2.5 Submitted Documents

Circuit diagram and label.

3 Test Set-up and Operation Modes

3.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible emission level. The test conditions were adapted accordingly in reference to the instructions for use.

Refer to the related paragraph of this report.

3.2 Physical Configuration for Testing

Refer to the related paragraph of this report.

3.3 Test Operation and Test Software

Refer to the related paragraph of this report.

3.4 Special Accessories and Auxiliary Equipment

Following lamps were used during all the tests,
Manufacturer: Shanghai Aoshang Lighting Technology Co., Ltd.;
Type: AJA-WJY-80W-5000K-J (for SP758), AJA-WJY-120W-5000K-J (for SP759).

3.5 Countermeasures to achieve EMC Compliance

The tested sample contained noise suppression capacitor, inductor and common mode choke as described in the circuit diagram. No special measure is employed to achieve the requirement.

4 Test Results EMISSION

4.1 Emission in the Frequency Range up to 30 MHz

4.1.1 Conducted Emission on AC power port

Result:	Passed
----------------	---------------

Date of testing	: 23.12.2009 - 28.12.2009
Test procedure	: MP-5 specified by FCC Part 18:2008
Frequency range	: 450kHz - 30MHz
Kind of test site	: Shielded room
Limit	: 15.307(c) of FCC Part 18:2008: 48dB μ V (0.45-2.51MHz); 69.5dB μ V (2.51-3MHz); 48dB μ V (3-30MHz)
Ambient condition	: Temperature: 22°C; Relative humidity: 42%

Test Setup

Supply voltage	: AC 120V, 60Hz & AC 277V, 60Hz
Operational mode	: Continuous operation with lighting
Earthing	: Through power cord (as class I equipment)

The measurement setup was made in a shielded room. The tested object was operated under its rated voltage and rated frequency. Prior to the measurements the test object operated about 15 minutes (warm-up) in order to stabilize its operating conditions and to ensure reliable measurement values.


Furthermore an internal calibration with the test receiver was conducted prior to each measurement.

The tested object was set-up on a 0.4m wooden table. The EUT was set 0.8m away from the AMN. The cord longer than necessary to be connected to the AMN was folded forth and back parallel so as to form a bundle with a length between 0.3m and 0.4m.

The disturbance voltage was determined by measuring the line and neutral conductor by turns.

The following figures and tables were those measured by an automatic measuring system. Quasi-peak values were measured and listed where they had a maximum in previous scanning survey. In the figures, "×" means Quasi-peak value which was measured in final measurement.


Figure 1: Spectral diagram, Conducted Emission, L (SP758, 120V)

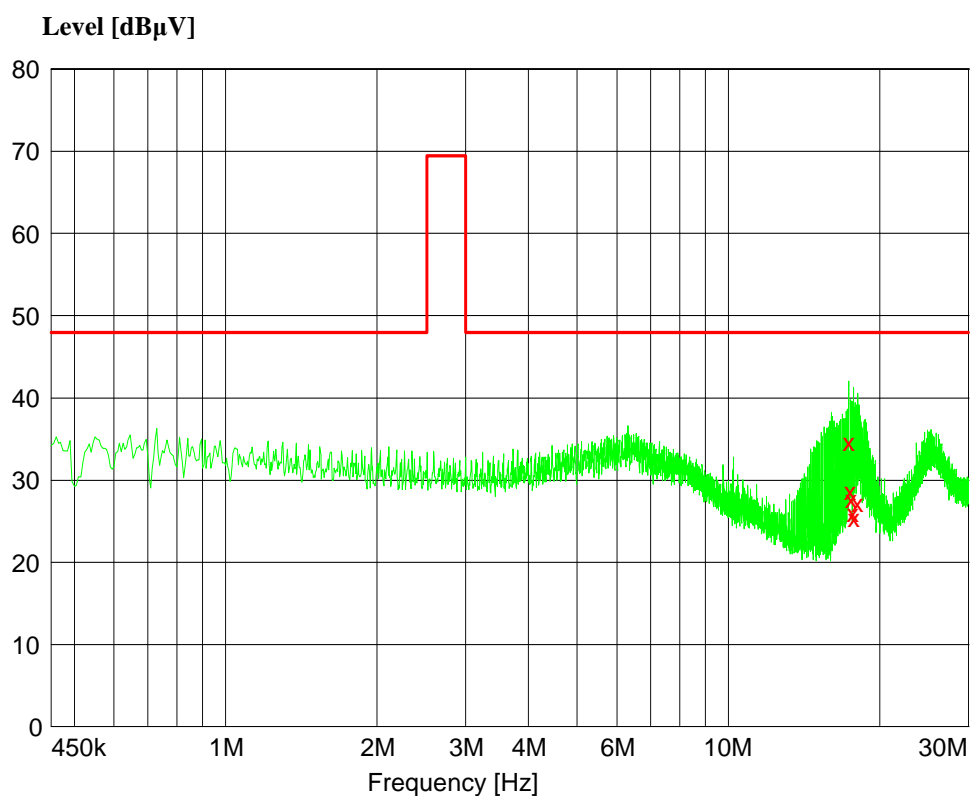

Final quasi-peak measurement results:

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line
17.340000	34.60	21.1	48.0	13.3	L1
17.445000	28.70	21.2	48.0	19.2	L1
17.545000	27.70	21.2	48.0	20.3	L1
17.650000	26.00	21.2	48.0	22.0	L1
17.750000	25.40	21.2	48.0	22.5	L1
18.060000	27.20	21.2	48.0	20.8	L1


Figure 2: Spectral diagram, Conducted Emission, N (SP758, 120V)

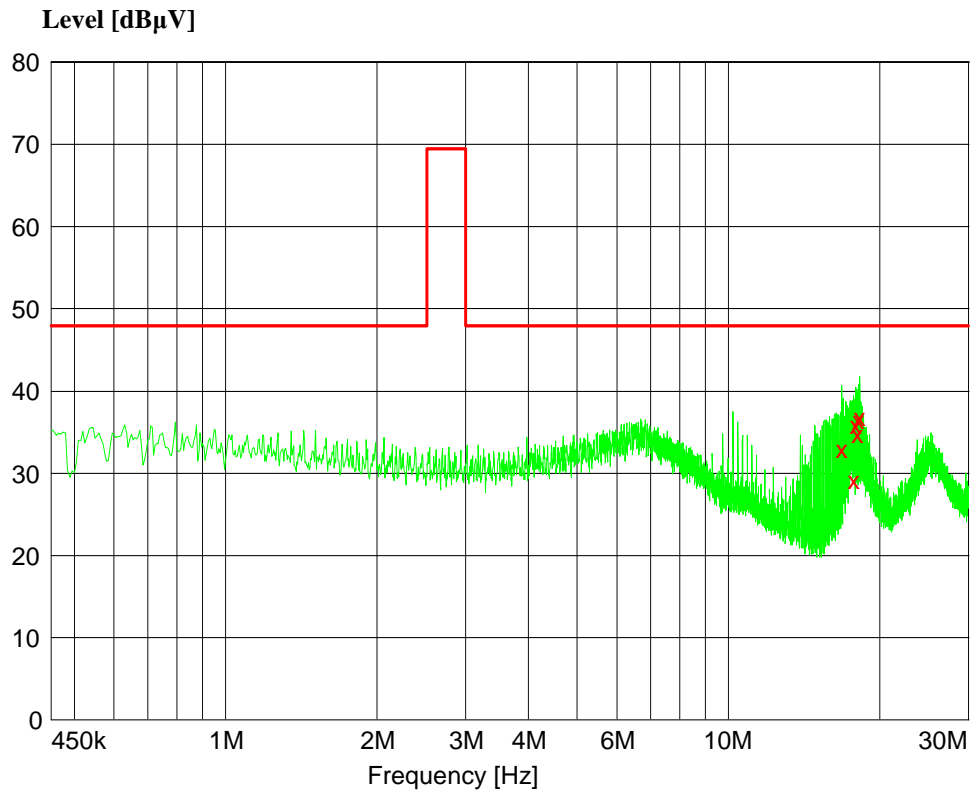

Final quasi-peak measurement results:

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line
16.790000	33.00	21.0	48.0	14.9	N
17.715000	29.20	21.2	48.0	18.7	N
17.900000	35.90	21.2	48.0	12.1	N
18.010000	34.80	21.3	48.0	13.2	N
18.130000	36.50	21.2	48.0	11.4	N
18.235000	36.80	21.2	48.0	11.2	N


Figure 3: Spectral diagram, Conducted Emission, L (SP758, 277V)

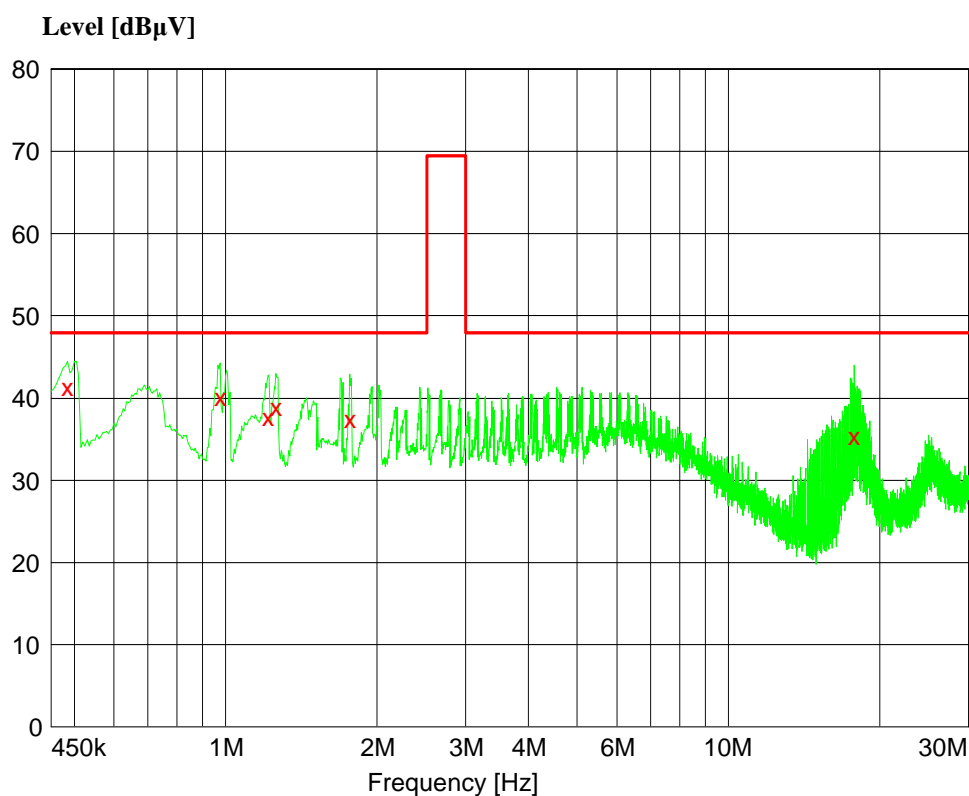

Final quasi-peak measurement results:

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line
0.485000	41.40	20.3	48.0	6.6	L1
0.975000	40.10	20.1	48.0	7.8	L1
1.215000	37.70	20.2	48.0	10.2	L1
1.260000	38.90	20.2	48.0	9.0	L1
1.765000	37.40	20.3	48.0	10.6	L1
17.765000	35.40	21.2	48.0	12.5	L1


Figure 4: Spectral diagram, Conducted Emission, N (SP758, 277V)

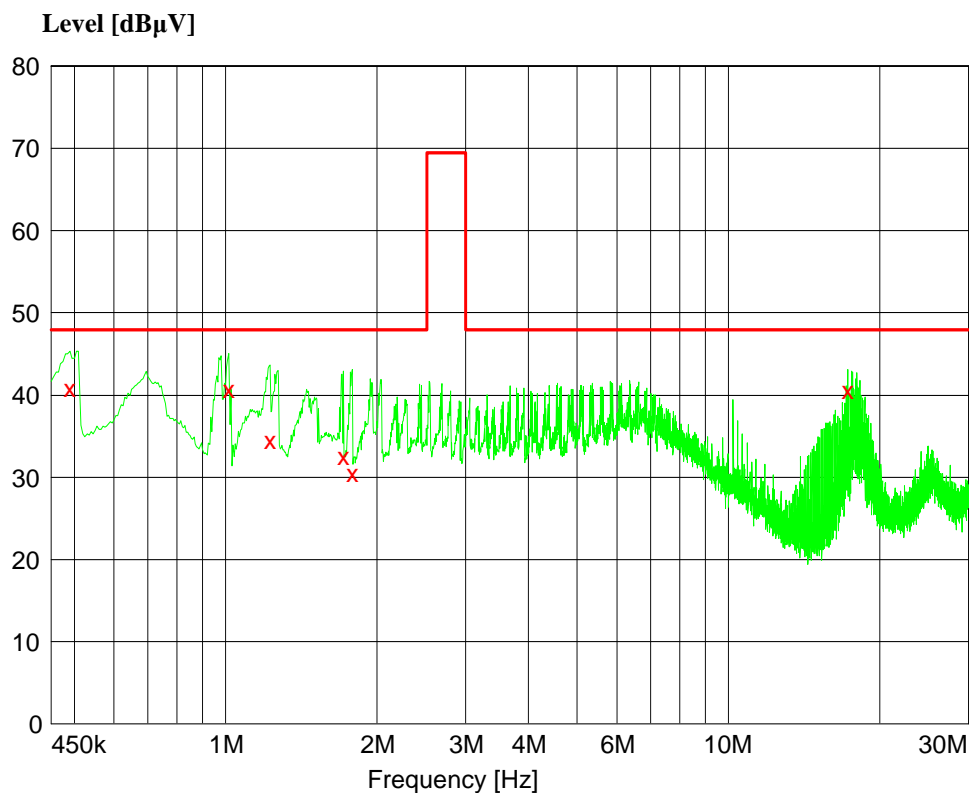

Final quasi-peak measurement results:

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line
0.490000	40.90	20.3	48.0	7.1	N
1.015000	40.80	20.1	48.0	7.2	N
1.225000	34.60	20.2	48.0	13.3	N
1.715000	32.60	20.3	48.0	15.3	N
1.785000	30.50	20.3	48.0	17.5	N
17.240000	40.60	21.1	48.0	7.4	N


Figure 5: Spectral diagram, Conducted Emission, L (SP759, 120V)

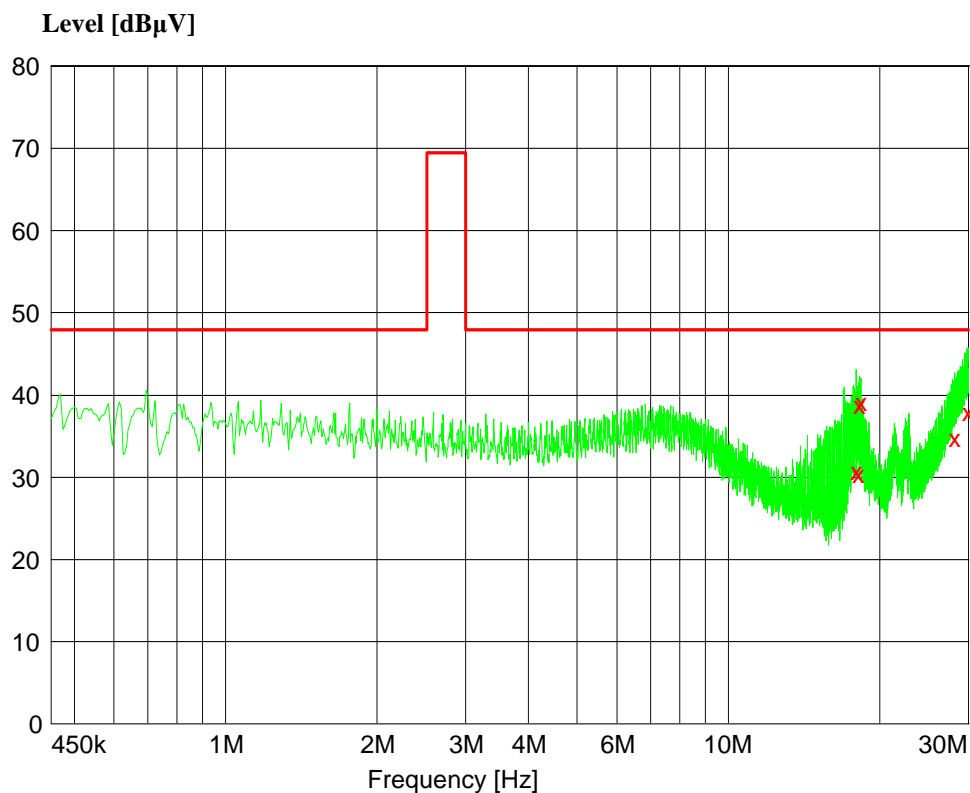

Final quasi-peak measurement results:

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line
17.930000	30.80	21.2	48.0	17.1	L1
18.135000	30.40	21.2	48.0	17.6	L1
18.230000	38.80	21.2	48.0	9.2	L1
18.340000	39.10	21.2	48.0	8.9	L1
28.160000	34.80	21.0	48.0	13.2	L1
29.900000	37.90	21.1	48.0	10.1	L1


Figure 6: Spectral diagram, Conducted Emission, N (SP759, 120V)

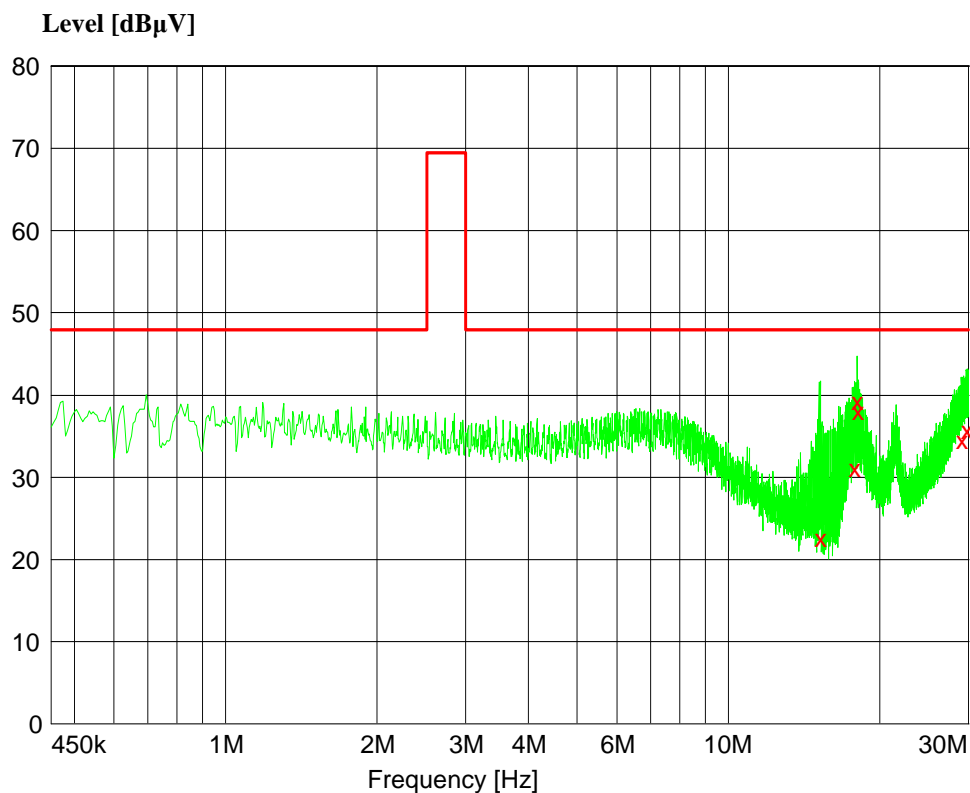

Final quasi-peak measurement results:


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line
15.230000	22.60	20.9	48.0	25.3	N
17.805000	31.10	21.2	48.0	16.8	N
18.010000	39.30	21.3	48.0	8.6	N
18.115000	38.10	21.2	48.0	9.8	N
29.120000	34.60	21.0	48.0	13.4	N
29.805000	35.80	21.0	48.0	12.1	N

Figure 7: Spectral diagram, Conducted Emission, L (SP759, 277V)

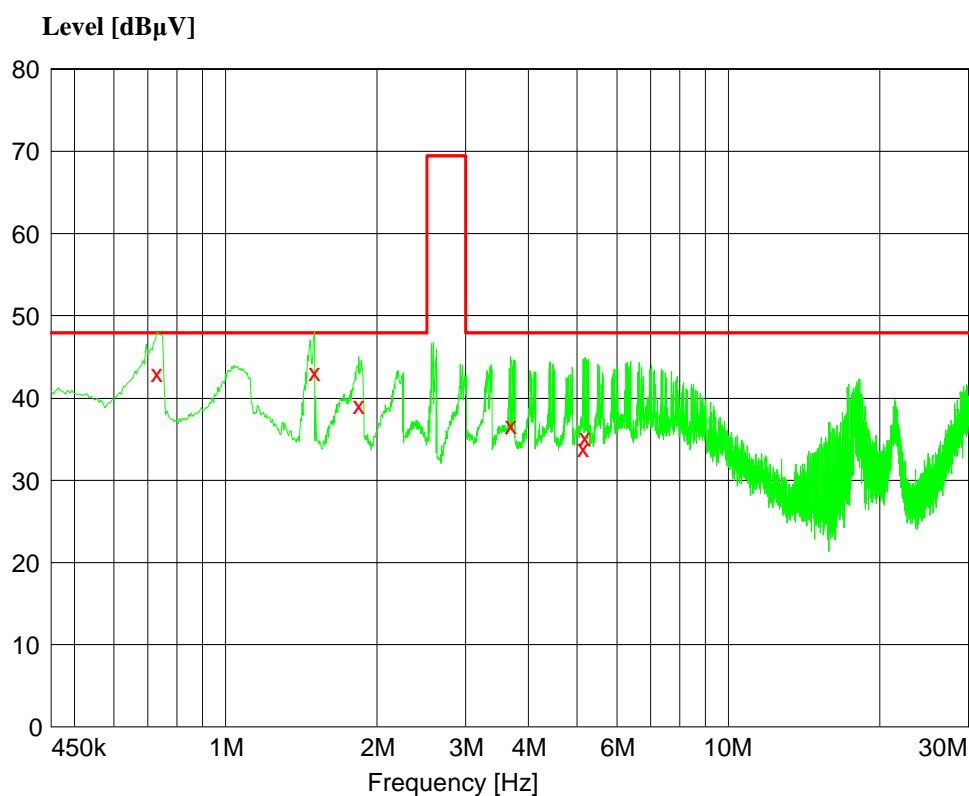

Final quasi-peak measurement results:

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line
0.730000	43.00	20.4	48.0	4.9	L1
1.500000	43.10	20.3	48.0	4.9	L1
1.840000	39.10	20.4	48.0	8.8	L1
3.690000	36.70	20.5	48.0	11.3	L1
5.135000	33.90	20.6	48.0	14.1	L1
5.180000	35.20	20.6	48.0	12.8	L1

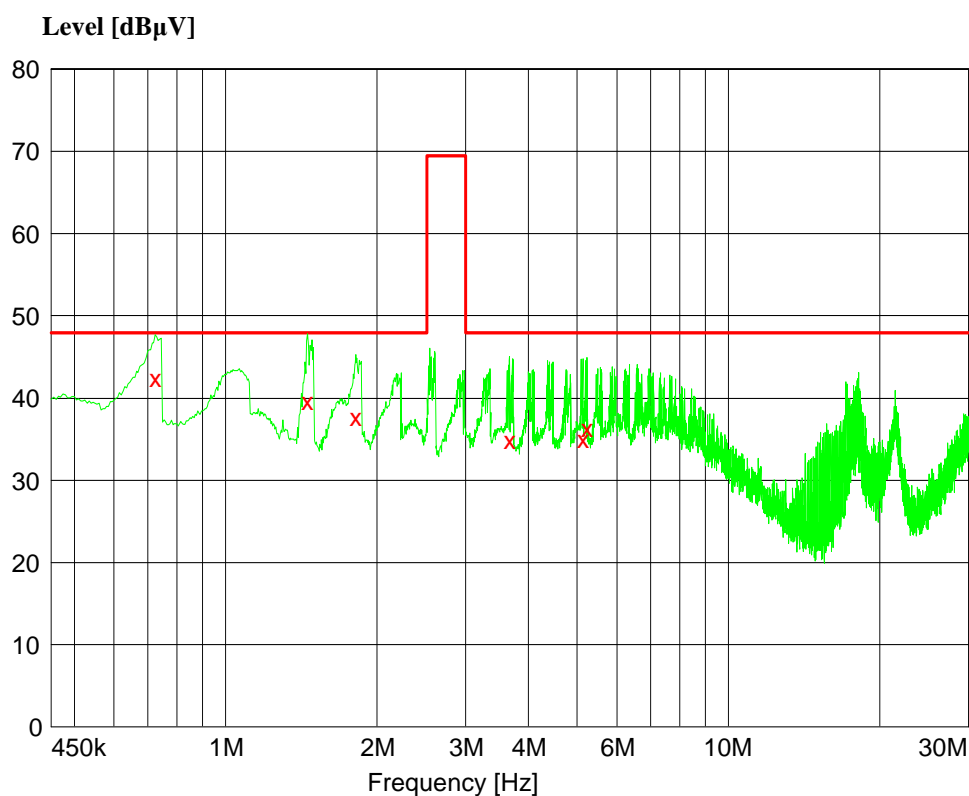Figure 8: Spectral diagram, Conducted Emission, N (SP759, 277V)


Final quasi-peak measurement results:

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line
0.725000	42.50	20.4	48.0	5.5	N
1.455000	39.60	20.3	48.0	8.4	N
1.815000	37.70	20.3	48.0	10.3	N
3.670000	34.90	20.5	48.0	13.1	N
5.135000	35.10	20.6	48.0	12.9	N
5.230000	36.40	20.6	48.0	11.5	N

4.1.2 Radiated Emission up to 30MHz

Result:
Passed

Date of testing	: 23.12.2009
Test procedure	: MP-5 specified by FCC Part 18:2008
Frequency range	: 9kHz - 30MHz
Kind of test site	: Semi anechoic chamber
Measurement distance	: 3m
Limit	: No limit
Detector	: Quasi-peak
Measurement BW	: 200Hz (9-150kHz) 9kHz (150kHz-30MHz)
Supply voltage	: AC 120V, 60Hz & AC 277V, 60Hz
Ambient condition	: Temperature: 22°C; Relative humidity: 60%

The radiated emission measurement was made at 3m. The EUT was placed on a wooden table 1m above the ground plane. The loop antenna height was set at 2m. The spectrum was examined from 9kHz - 30MHz. At each frequency, the EUT was rotated 360° in order to determine the emission's maximum level. Measurements were taken using 3 antenna polarizations.

The following figures and tables were those measured by an automatic measurement system. A preview test was firstly performed with Peak detector. The final test was performed with Quasi-peak detector at those critical frequencies during the preview test.

The field strength level was established by adding the meter reading of the EMI test receiver to the factors associated with antenna correction factor & cable loss.

The equation is expressed as follows:

$$FS = R + AF + CF$$


Where FS = Field strength level in dBμV/m;

R = Reading of EMI test receiver in dBμV;

AF = Antenna factor in dB/m;

CF = Cable attenuation factor in dB.


Figure 9: Spectral diagram, Radiated Emission, 9kHz - 30MHz (SP758, 120V)

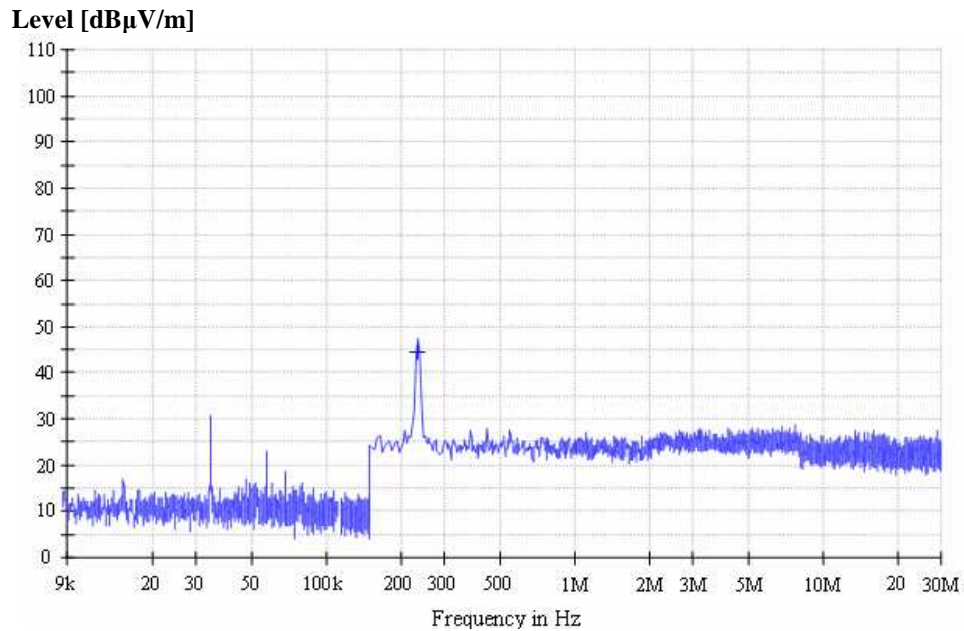

Final quasi-peak measurement results:

Frequency (MHz)	Quasi-Peak (dBμV/m)	Corr. (dB)	Limit (dBμV/m)	Margin (dB)	Antenna height (cm)	Angle (degr)
0.235000	44.2	10.0	N/A	N/A	200.0	0.0


Figure 10: Spectral diagram, Radiated Emission, 9kHz - 30MHz (SP758, 277V)

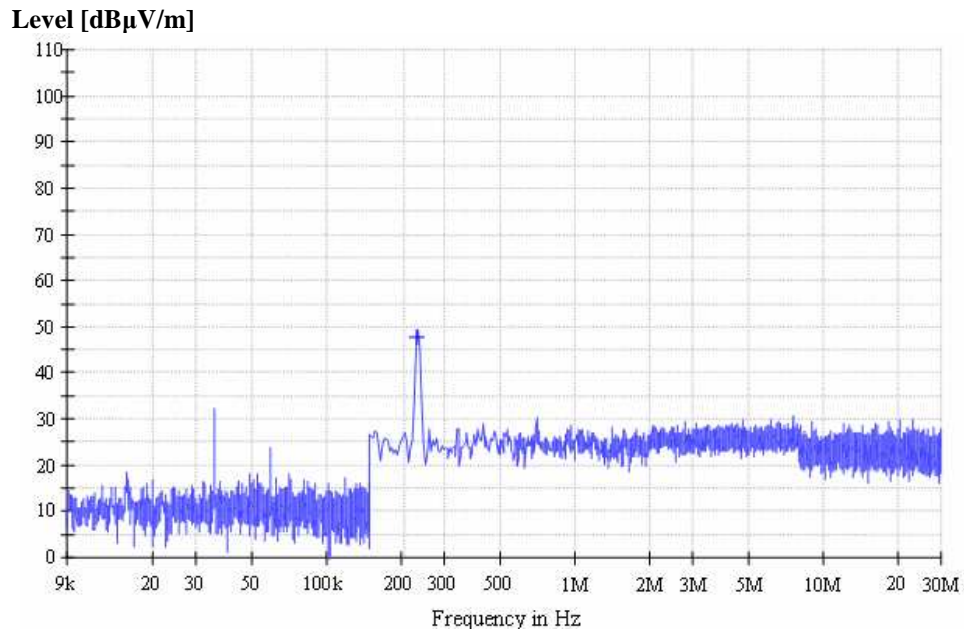

Final quasi-peak measurement results:

Frequency (MHz)	Quasi-Peak (dBμV/m)	Corr. (dB)	Limit (dBμV/m)	Margin (dB)	Antenna height (cm)	Angle (degr)
0.235000	48.3	10.0	N/A	N/A	200.0	0.0


Figure 11: Spectral diagram, Radiated Emission, 9kHz - 30MHz (SP759, 120V)

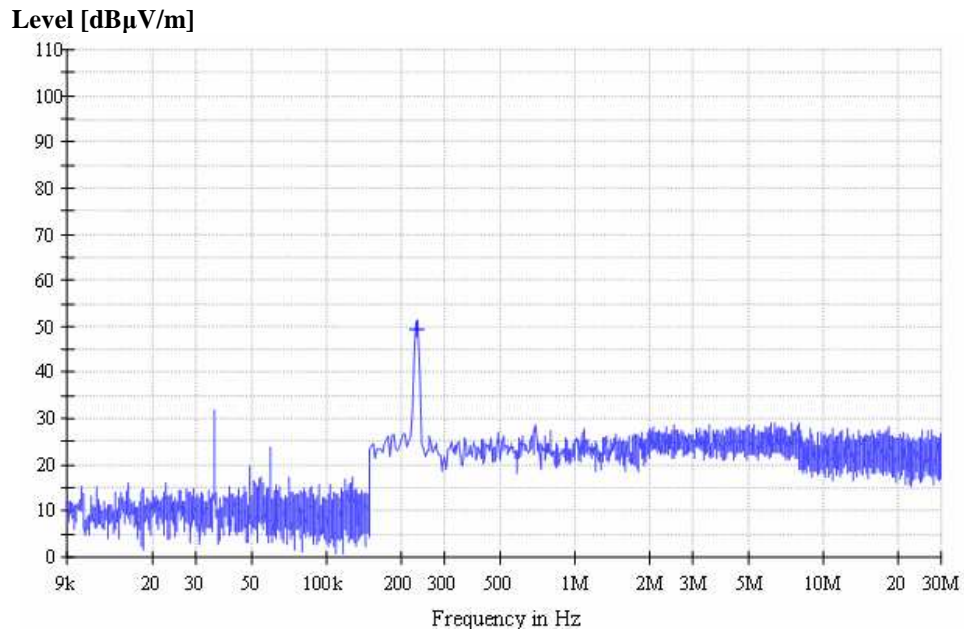

Final quasi-peak measurement results:

Frequency (MHz)	Quasi-Peak (dBμV/m)	Corr. (dB)	Limit (dBμV/m)	Margin (dB)	Antenna height (cm)	Angle (degr)
0.235000	49.1	10.0	N/A	N/A	200.0	0.0

Figure 12: Spectral diagram, Radiated Emission, 9kHz - 30MHz (SP759, 277V)

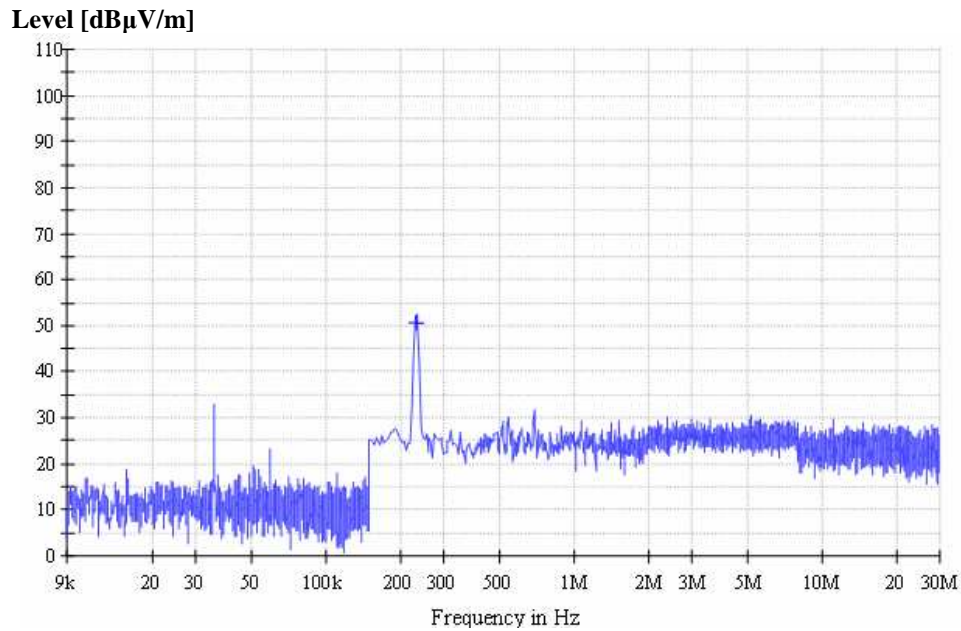

Final quasi-peak measurement results:

Frequency (MHz)	Quasi-Peak (dBμV/m)	Corr. (dB)	Limit (dBμV/m)	Margin (dB)	Antenna height (cm)	Angle (degr)
0.235000	50.1	10.0	N/A	N/A	200.0	0.0

4.2 Emission in the Frequency Range above 30 MHz

4.2.1 Radiated Emission above 30MHz

Result:	Passed
----------------	---------------

Date of testing	: 23.12.2009
Test procedure	: MP-5 specified by FCC Part 18:2008
Frequency range	: 30 - 1000MHz
Detector	: Quasi-peak
Bandwidth	: 120kHz
Kind of test site	: Semi-anechoic chamber
Limit	: 18.305(c) of FCC Part 18:2008 at 30m, consumer equipment: 10µV/m (30-88MHz); 15µV/m (88-216MHz); 20µV/m (216-1000MHz)
Measuring distance	: 3m
Supply voltage	: AC 120V, 60Hz & AC 277V, 60Hz
Ambient condition	: Temperature: 22°C; Relative humidity: 60%

Measuring configuration and description

The radiated disturbance test was carried out in a semi-anechoic chamber. The test distance from the receiving antenna to the EUT is 3m. The normalized site attenuation of the semi-anechoic chamber is regularly calibrated to ensure the radiated disturbance test results are valid. During the test, the EUT was placed on a wooden table, which is 1m high. The wooden table was rotated 360° around, and the antenna was varied from 1m to 4m to find the maximum disturbance. The test was performed with the antenna both in its horizontal and vertical polarizations.

The following figures and tables were those measured by an automatic measurement system. A preview test was firstly performed with Peak detector. The final test was performed with Quasi-peak detector at those critical frequencies during the preview test.

The field strength level was established by adding the meter reading of the EMI test receiver to the factors associated with antenna correction factor & cable loss.

The equation is expressed as follows:


$$FS = R + AF + CF$$

Where FS = Field strength level in dBµV/m;

R = Reading of EMI test receiver in dBµV;

AF = Antenna factor in dB/m;


CF = Cable attenuation factor in dB.

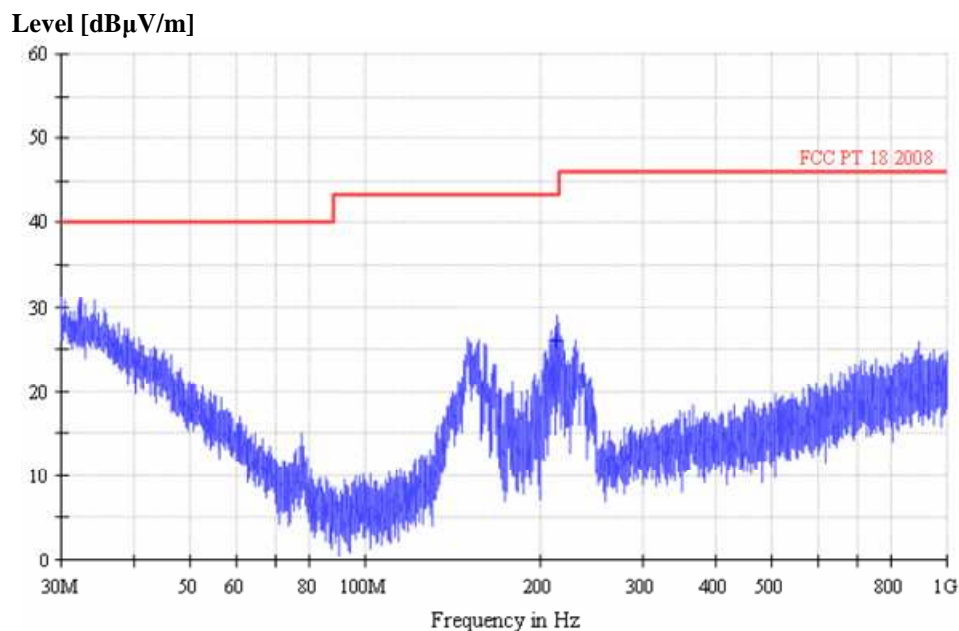Figure 13: Spectral diagram, Radiated Emission, 30-1000MHz, Horizontal (SP758, 120V)


Final quasi-peak measurement results:

Frequency (MHz)	Quasi-Peak (dBμV/m)	Corr. (dB)	Limit (dBμV/m)	Margin (dB)	Antenna height (cm)	Angle (degr)	Polarization
214.546000	26.8	15.6	43.5	16.7	100.0	0.0	H


Figure 14: Spectral diagram, Radiated Emission, 30-1000MHz, Vertical (SP758, 120V)

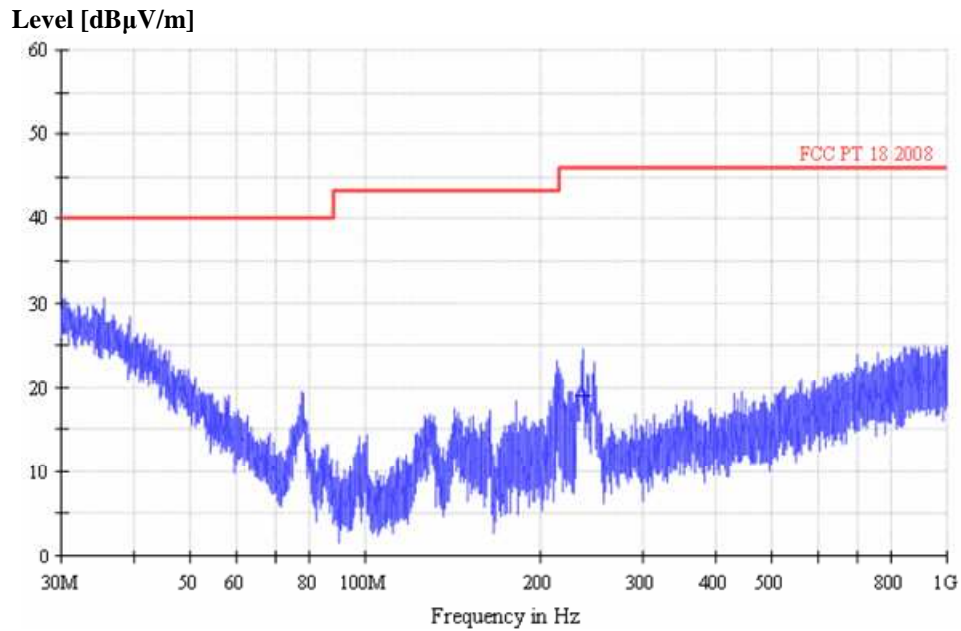

Final quasi-peak measurement results:


Frequency (MHz)	Quasi-Peak (dBμV/m)	Corr. (dB)	Limit (dBμV/m)	Margin (dB)	Antenna height (cm)	Angle (degr)	Polarization
234.134000	18.2	12.5	46.0	27.8	100.0	0.0	V

Figure 15: Spectral diagram, Radiated Emission, 30-1000MHz, Horizontal (SP758, 277V)

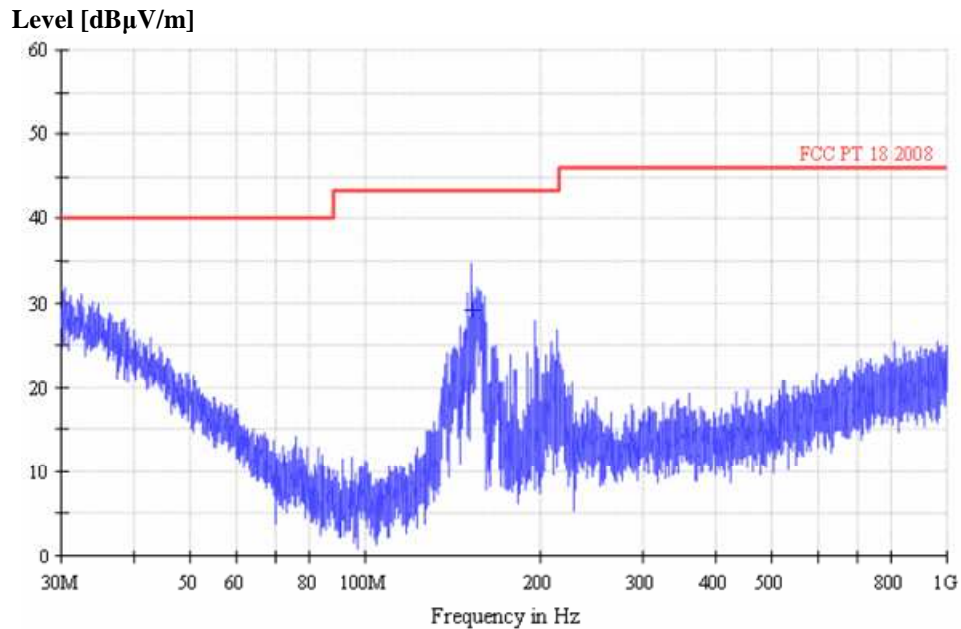

Final quasi-peak measurement results:


Frequency (MHz)	Quasi-Peak (dBμV/m)	Corr. (dB)	Limit (dBμV/m)	Margin (dB)	Antenna height (cm)	Angle (degr)	Polarization
163.459000	29.1	11.2	43.5	14.4	100.0	0.0	H

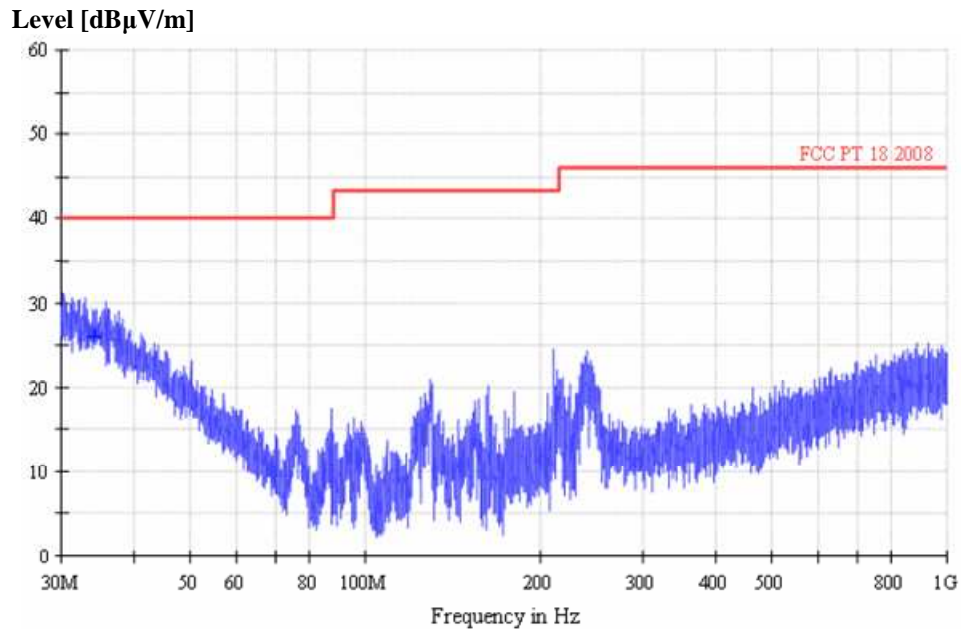Figure 16: Spectral diagram, Radiated Emission, 30-1000MHz, Vertical (SP758, 277V)


Final quasi-peak measurement results:

Frequency (MHz)	Quasi-Peak (dBμV/m)	Corr. (dB)	Limit (dBμV/m)	Margin (dB)	Antenna height (cm)	Angle (degr)	Polarization
34.567000	26.7	19.4	40.0	13.3	100.0	0.0	V


Figure 17: Spectral diagram, Radiated Emission, 30-1000MHz, Horizontal (SP759, 120V)

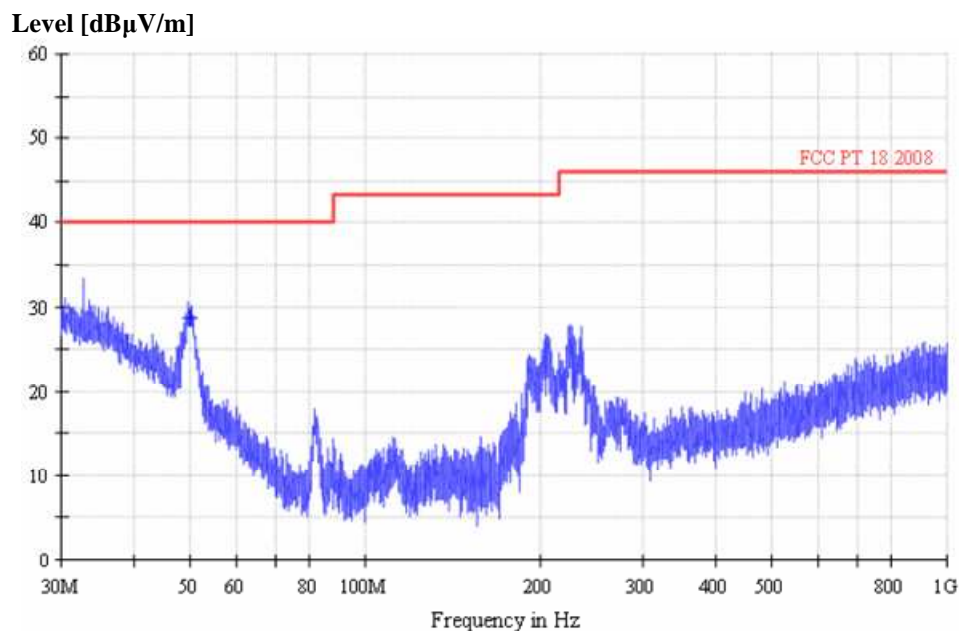

Final quasi-peak measurement results:

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Corr. (dB)	Limit (dB μ V/m)	Margin (dB)	Antenna height (cm)	Angle (degr)	Polarization
50.234000	28.3	18.2	40.0	11.7	100.0	0.0	H


Figure 18: Spectral diagram, Radiated Emission, 30-1000MHz, Vertical (SP759, 120V)

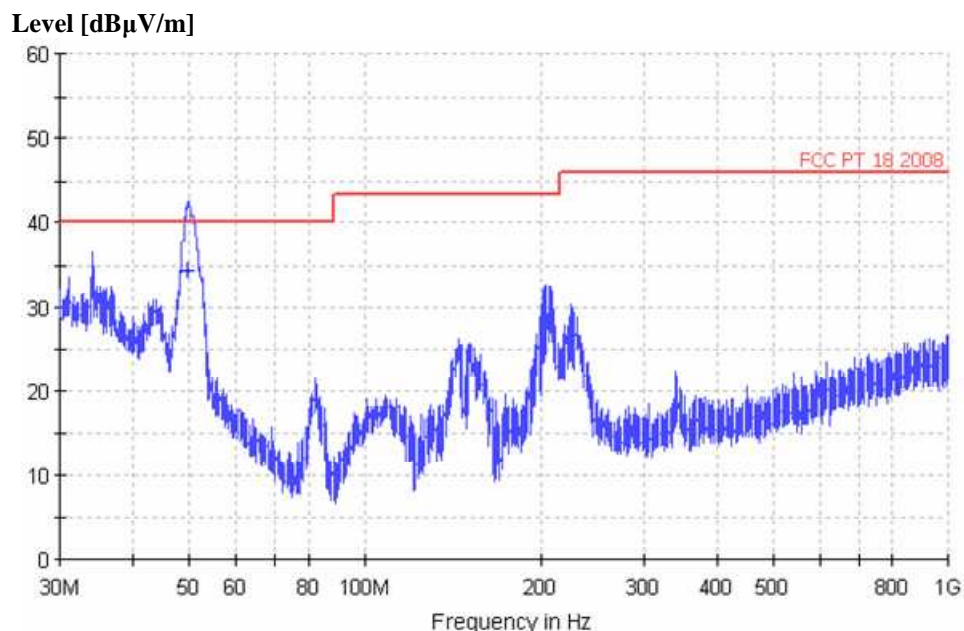

Final quasi-peak measurement results:


Frequency (MHz)	Quasi-Peak (dB μ V/m)	Corr. (dB)	Limit (dB μ V/m)	Margin (dB)	Antenna height (cm)	Angle (degr)	Polarization
49.600000	34.4	18.7	40.0	5.6	280.0	0.0	V

Figure 19: Spectral diagram, Radiated Emission, 30-1000MHz, Horizontal (SP759, 277V)

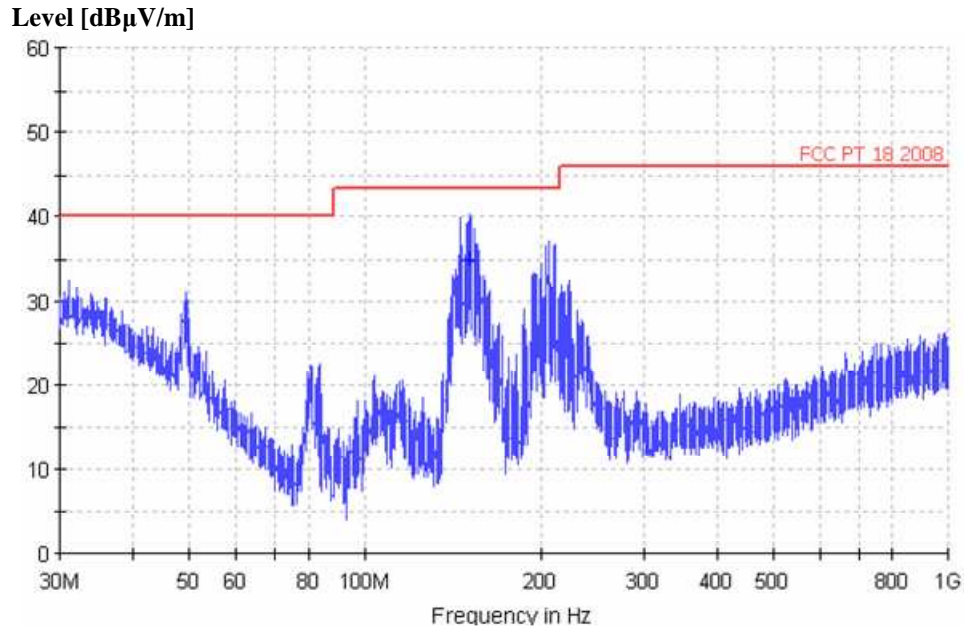

Final quasi-peak measurement results:

Frequency (MHz)	Quasi-Peak (dBμV/m)	Corr. (dB)	Limit (dBμV/m)	Margin (dB)	Antenna height (cm)	Angle (degr)	Polarization
150.925000	34.9	8.8	43.5	8.6	200.0	0.0	H

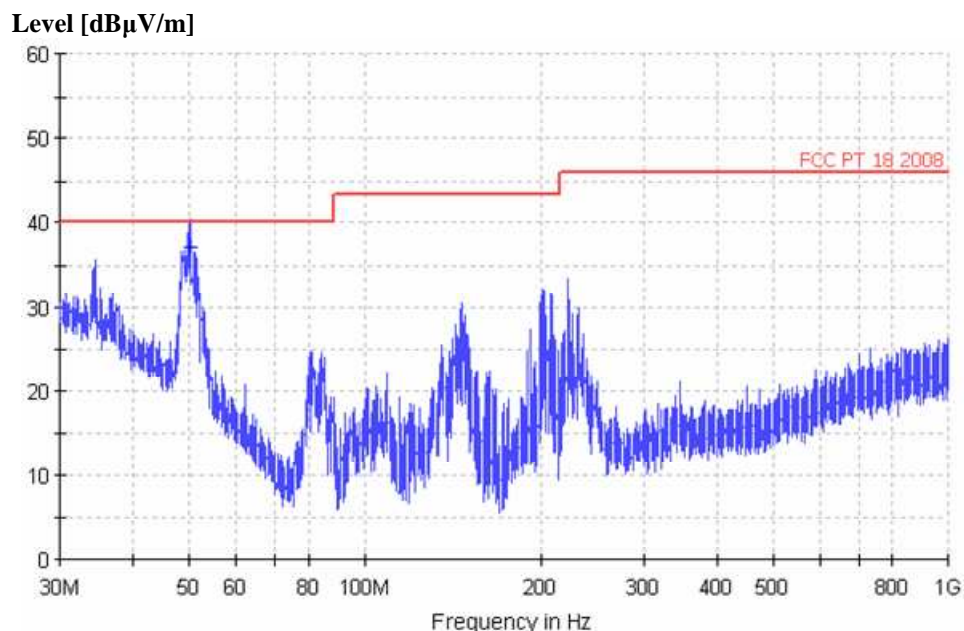Figure 20: Spectral diagram, Radiated Emission, 30-1000MHz, Vertical (SP759, 277V)


Final quasi-peak measurement results:


Frequency (MHz)	Quasi-Peak (dB μ V/m)	Corr. (dB)	Limit (dB μ V/m)	Margin (dB)	Antenna height (cm)	Angle (degr)	Polarization
50.175000	37.2	18.4	40.0	2.8	100.0	0.0	V

5 Photographs of the Test Set-Up

Photograph 1: Set-up for conducted emission



Photograph 2: Set-up for radiated emission

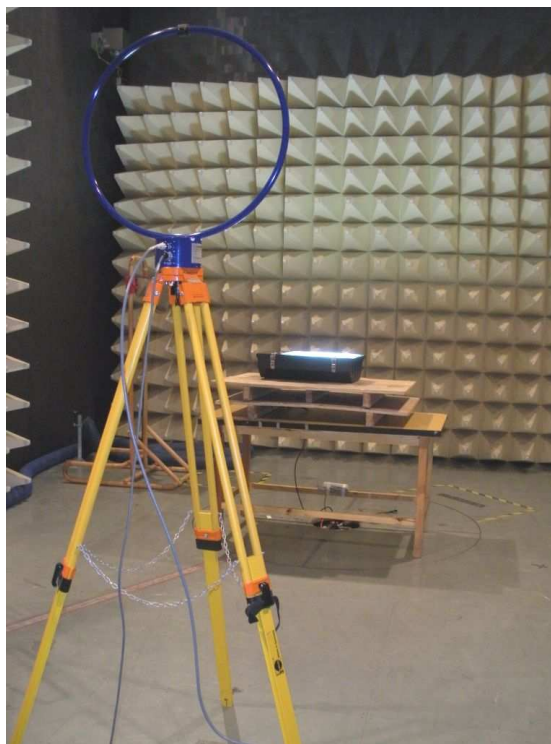

9kHz-30MHz



30-1000MHz

6 List of Tables

Table 1: List of test and measurement equipment.....	4
--	---

7 List of Figures

Figure 1: Spectral diagram, Conducted Emission, L (SP758, 120V).....	8
Figure 2: Spectral diagram, Conducted Emission, N (SP758, 120V)	9
Figure 3: Spectral diagram, Conducted Emission, L (SP758, 277V).....	10
Figure 4: Spectral diagram, Conducted Emission, N (SP758, 277V)	11
Figure 5: Spectral diagram, Conducted Emission, L (SP759, 120V).....	12
Figure 6: Spectral diagram, Conducted Emission, N (SP759, 120V)	13
Figure 7: Spectral diagram, Conducted Emission, L (SP759, 277V).....	14
Figure 8: Spectral diagram, Conducted Emission, N (SP759, 277V)	15
Figure 9: Spectral diagram, Radiated Emission, 9kHz - 30MHz (SP758, 120V)	17
Figure 10: Spectral diagram, Radiated Emission, 9kHz - 30MHz (SP758, 277V)	18
Figure 11: Spectral diagram, Radiated Emission, 9kHz - 30MHz (SP759, 120V)	19
Figure 12: Spectral diagram, Radiated Emission, 9kHz - 30MHz (SP759, 277V)	20
Figure 13: Spectral diagram, Radiated Emission, 30-1000MHz, Horizontal (SP758, 120V)	22
Figure 14: Spectral diagram, Radiated Emission, 30-1000MHz, Vertical (SP758, 120V)	23
Figure 15: Spectral diagram, Radiated Emission, 30-1000MHz, Horizontal (SP758, 277V)	24
Figure 16: Spectral diagram, Radiated Emission, 30-1000MHz, Vertical (SP758, 277V)	25
Figure 17: Spectral diagram, Radiated Emission, 30-1000MHz, Horizontal (SP759, 120V)	26
Figure 18: Spectral diagram, Radiated Emission, 30-1000MHz, Vertical (SP759, 120V)	27
Figure 19: Spectral diagram, Radiated Emission, 30-1000MHz, Horizontal (SP759, 277V)	28
Figure 20: Spectral diagram, Radiated Emission, 30-1000MHz, Vertical (SP759, 277V)	29

8 List of Photographs

Photograph 1: Set-up for conducted emission.....	30
Photograph 2: Set-up for radiated emission	31