

FCC TEST REPORT

REPORT NO.: RF980402L11

MODEL NO.: AT-iMG616W (refer to item 3.1 for more details)

RECEIVED: Apr. 13, 2009

TESTED: Apr. 22 ~ May 04, 2009

ISSUED: May 14, 2009

APPLICANT: Allied Telesis Labs Raleigh

ADDRESS: 900 Main Campus Drive, Suite 301, Raleigh,
NC, 27606 USA

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 74 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	9
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	13
3.4	DESCRIPTION OF SUPPORT UNITS	13
4.	TEST TYPES AND RESULTS	14
4.1	RADIATED EMISSION MEASUREMENT	14
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.1.2	TEST INSTRUMENTS	15
4.1.3	TEST PROCEDURES	16
4.1.4	DEVIATION FROM TEST STANDARD	16
4.1.5	TEST SETUP	17
4.1.6	EUT OPERATING CONDITIONS	18
4.1.7	TEST RESULTS	19
4.2	CONDUCTED EMISSION MEASUREMENT	32
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	32
4.2.2	TEST INSTRUMENTS	32
4.2.3	TEST PROCEDURES	33
4.2.4	DEVIATION FROM TEST STANDARD	33
4.2.5	TEST SETUP	34
4.2.6	EUT OPERATING CONDITIONS	34
4.2.7	TEST RESULTS	35
4.3	6dB BANDWIDTH MEASUREMENT	47
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	47
4.3.2	TEST INSTRUMENTS	47
4.3.3	TEST PROCEDURE	47
4.3.4	DEVIATION FROM TEST STANDARD	47
4.3.5	TEST SETUP	48



4.3.6	EUT OPERATING CONDITIONS.....	48
4.3.7	TEST RESULTS	49
4.4	MAXIMUM PEAK OUTPUT POWER	53
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	53
4.4.2	INSTRUMENTS	53
4.4.3	TEST PROCEDURES.....	53
4.4.4	DEVIATION FROM TEST STANDARD	53
4.4.5	TEST SETUP	54
4.4.6	EUT OPERATING CONDITIONS.....	54
4.4.7	TEST RESULTS	55
4.5	POWER SPECTRAL DENSITY MEASUREMENT	56
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	56
4.5.2	TEST INSTRUMENTS	56
4.5.3	TEST PROCEDURE	56
4.5.4	DEVIATION FROM TEST STANDARD	56
4.5.5	TEST SETUP	57
4.5.6	EUT OPERATING CONDITION	57
4.5.7	TEST RESULTS	58
4.6	BAND EDGES MEASUREMENT	62
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	62
4.6.2	TEST INSTRUMENTS	62
4.6.3	TEST PROCEDURE	62
4.6.4	DEVIATION FROM TEST STANDARD	62
4.6.5	EUT OPERATING CONDITION	62
4.6.6	TEST RESULTS	63
4.7	ANTENNA REQUIREMENT	71
4.7.1	STANDARD APPLICABLE	71
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	71
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	72
6.	INFORMATION ON THE TESTING LABORATORIES.....	73
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	74

1. CERTIFICATION

PRODUCT: Multiservice Gateway

MODEL: AT-iMG616W (refer to item 3.1 for more details)

BRAND: Allied Telesis

APPLICANT: Allied Telesis Labs Raleigh

TESTED: Apr. 22 ~ May 04, 2009

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

The above equipment (model: AT-iMG616W) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Polly Chien , **DATE** : May 14, 2009
Polly Chien / Specialist

TECHNICAL ACCEPTANCE : Long Chen , **DATE** : May 14, 2009
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , **DATE** : May 14, 2009
Gary Chang / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.64dB at 0.170MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.02dB at 2490.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Multiservice Gateway
MODEL NO.	AT-IMG616W (refer to NOTE 1 for more details)
FCC ID	XA5-IMG616W
POWER SUPPLY	12Vdc from AC adapter 13.5Vdc from UPS (AC mode) 12Vdc from UPS (Battery mode)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps
OPERATING FREQUENCY	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
MAXIMUM OUTPUT POWER	271.644mW
ANTENNA TYPE	Dipole antenna with 2dBi gain
DATA CABLE	2m non-shielded console cable without core
I/O PORTS	Please refer to user's manual
ACCESSORY DEVICES	Adapter, UPS

NOTE:

1. The following models are provided to this EUT.

BRAND	MODEL	REMARK
Allied Telesis	AT-iMG616W	without CATV port
	AT-iMG616WCRF	with CATV port

2. The EUT was powered by the following adapters:

Adapter 1	
BRAND:	DVE
MODEL:	DSA-20P-10 US 120180
INPUT:	100-240Vac, 50/60Hz, 0.7A
OUTPUT:	12Vdc, 1.5A
POWER LINE:	DC:1.8 m non-shielded cable without core

Adapter 2	
BRAND:	ELEMENTECH
MODEL:	AU1241203u
INPUT:	100-240Vac, 50/60Hz, 0.6A
OUTPUT:	12Vdc, 2A
POWER LINE:	DC:1.8m non-shielded cable without core

3. The EUT was powered by the following UPS:

UPS	
BRAND:	Delta
MODEL:	DUPS-1232GI
INPUT:	100-240Vac, 50/60Hz, 1A
OUTPUT:	13.5Vdc(AC mode),12Vdc(battery mode), 2.7A MAX, 32W
POWER LINE:	DC:0.8 m non-shielded cable without core AC:2.4 m non-shielded cable without core

4. The UPS was operated with following battery.

BRAND:	RITAR
MODEL:	RT1270
CHARGE VOLTAGE:	13.6Vdc
DISCHARGE VOLTAGE:	12Vdc, 7Ah

5. The EUT, operates in the 2.4GHz frequency range, lets you connect IEEE 802.11g or IEEE 802.11b devices to the network. With its high-speed data transmissions up to 54Mbps.
6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES


Eleven channels are provided to this EUT:

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		


3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

For Model name: AT-IMG616W

Test Mode A & B:

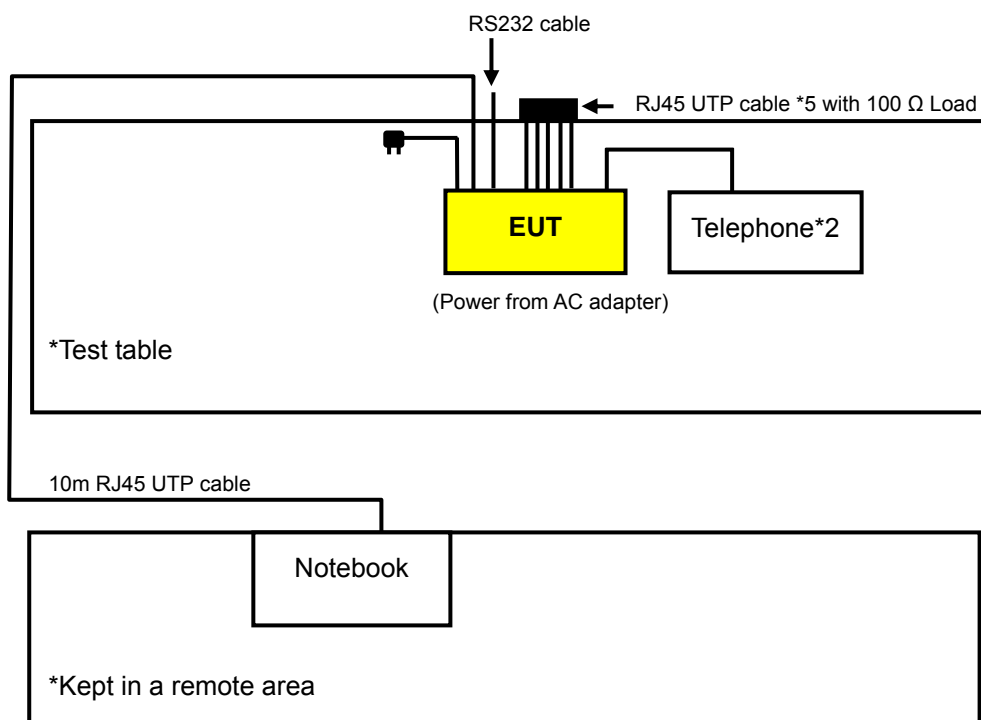


Test Mode C:

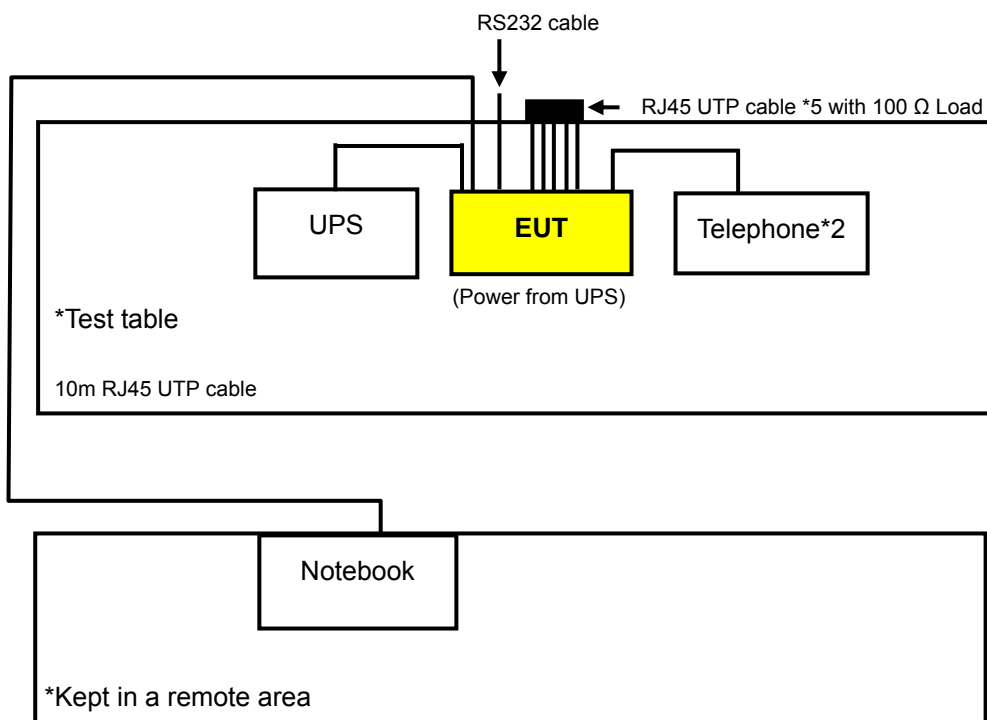


For Model name: AT-IMG616WCRF

Test Mode D & E:

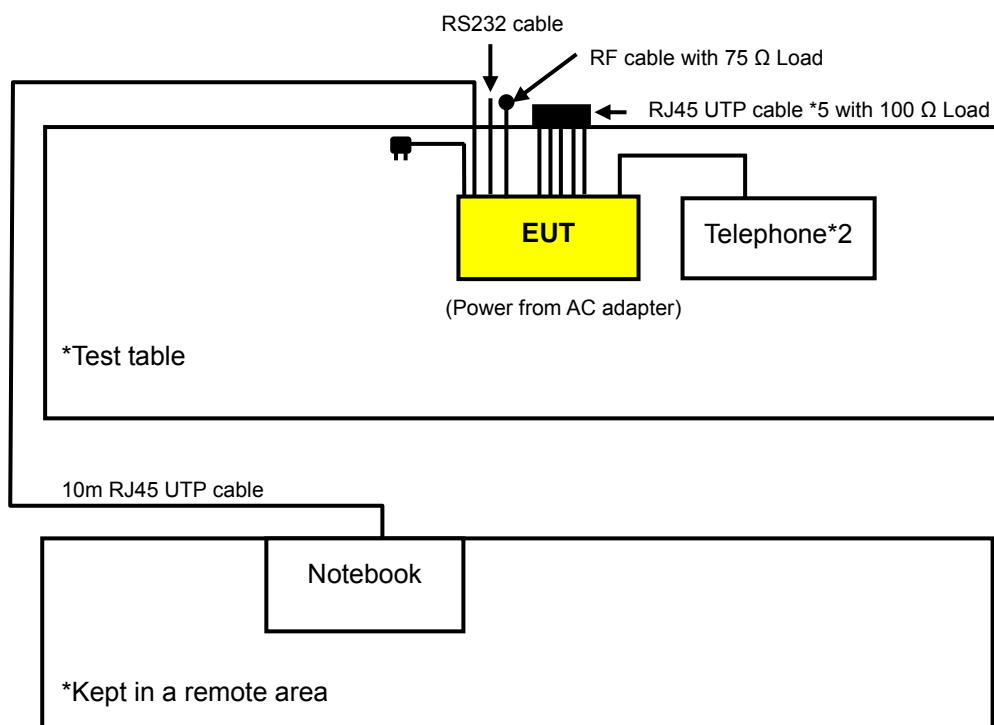

Test Mode F:

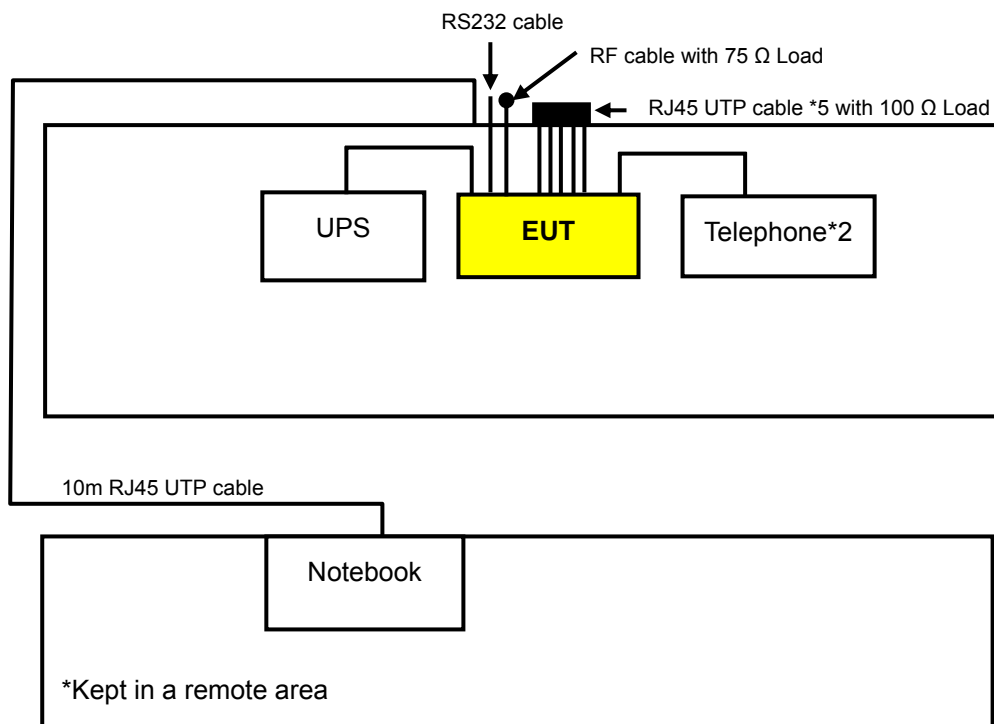

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION	
	RE \geq 1G	RE $<$ 1G	PLC	APCM		
A	√	√	√	√	Power from adapter: DSA-20P-10 US 120180	Model name: AT-IMG616W
B	-	√	√	-	Power from adapter: AU1241203u	
C	-	√	√	-	Power from UPS	
D	-	√	√	-	Power from adapter: DSA-20P-10 US 120180	Model name: AT-IMG616WCRF
E	-	√	√	-	Power from adapter: AU1241203u	
F	-	√	√	-	Power from UPS	

Where **PLC**: Power Line Conducted Emission
RE \geq 1G: Radiated Emission above 1GHz

RE $<$ 1G: Radiated Emission below 1GHz
APCM: Antenna Port Conducted Measurement

NOTE: "-" means no effect.

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	X
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	X

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A, B, C, D, E, F	802.11g	1 to 11	6	OFDM	BPSK	6	X

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B, C, D, E, F	802.11g	1 to 11	6	OFDM	BPSK	6

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	D531	CN-0XM006-48643 -81U-2786	QDS-BRCM1020
2	TELEPHONE	WONDER	WD-303	5C17DA03116	NA
3	TELEPHONE	WONDER	WD-303	5C17DA09279	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m RJ45 UTP cable.
2	1.8m non-shielded cable, RJ11 connector, w/o core.
3	1.8m non-shielded cable, RJ11 connector, w/o core.

NOTE: 1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 acted as communication partner to transfer data.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	100033	Jun. 30, 2008	Jun. 29, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Jul. 04, 2008	Jul. 03, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-306	Aug. 14, 2008	Aug. 13, 2009
HORN Antenna SCHWARZBECK	9120D	9120D-209	Jun. 24, 2008	Jun. 23, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 25, 2008	Dec. 24, 2009
Preamplifier Agilent	8447D	2944A10633	Nov. 03, 2008	Nov. 02, 2009
Preamplifier Agilent	8449B	3008A01964	Oct. 23, 2008	Oct. 22, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	238141/4	May 20, 2008	May 19, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	12738/6	May 20, 2008	May 19, 2009
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100.	TT93021703	NA	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

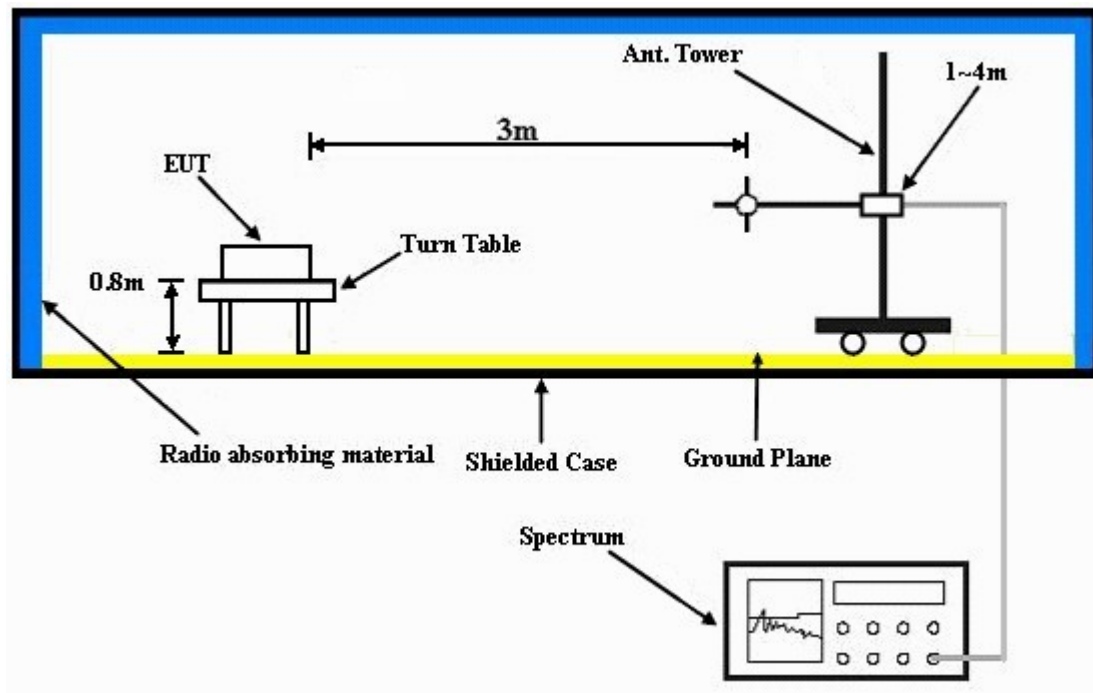

For the actual test configuration, please refer to the attached file (Test Setup Photo)

4.1.6 EUT OPERATING CONDITIONS

For Test mode A, D & B, E

- a. Placed the EUT on the testing table.
- b. Prepared notebook system outside of testing area to act as a communication partners.
- c. The communication partner connected with EUT via a RJ45 UTP cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The necessary accessories enable the EUT in full functions.

For Test mode C, F

- a. The EUT connected with UPS on the testing table.
- b. Prepared notebook system outside of testing area to act as a communication partners.
- c. The communication partner connected with EUT via a RJ45 UTP cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The necessary accessories enable the EUT in full functions.

4.1.7 TEST RESULTS

For Model name: AT-IMG616W

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH 1000hPa	TESTED BY	Antony Lee
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.98 PK	74.00	-18.02	1.00 H	62	23.54	32.44
2	2390.00	47.15 AV	54.00	-6.85	1.00 H	62	14.71	32.44
3	*2412.00	101.40 PK			1.00 H	178	68.88	32.52
4	*2412.00	96.89 AV			1.00 H	178	64.37	32.52
5	2490.00	60.62 PK	74.00	-13.38	1.00 H	105	27.84	32.78
6	2490.00	48.42 AV	54.00	-5.58	1.00 H	105	15.64	32.78
7	4824.00	51.95 PK	74.00	-22.05	1.37 H	290	13.65	38.30
8	4824.00	44.62 AV	54.00	-9.38	1.37 H	290	6.32	38.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.26 PK	74.00	-11.74	1.31 V	238	29.82	32.44
2	2390.00	52.28 AV	54.00	-1.72	1.31 V	238	19.84	32.44
3	*2412.00	111.34 PK			1.27 V	273	78.82	32.52
4	*2412.00	106.61 AV			1.27 V	273	74.09	32.52
5	2490.00	64.28 PK	74.00	-9.72	1.00 V	258	31.50	32.78
6	2490.00	52.98 AV	54.00	-1.02	1.00 V	258	20.20	32.78
7	4824.00	55.45 PK	74.00	-18.55	1.00 V	57	17.15	38.30
8	4824.00	50.87 AV	54.00	-3.13	1.00 V	57	12.57	38.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH 1000hPa	TESTED BY	Antony Lee
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2355.00	56.75 PK	74.00	-17.25	1.00 H	236	24.44	32.31
2	2355.00	47.51 AV	54.00	-6.49	1.00 H	236	15.20	32.31
3	*2437.00	100.33 PK			1.25 H	138	67.73	32.60
4	*2437.00	95.47 AV			1.25 H	138	62.87	32.60
5	4874.00	54.14 PK	74.00	-19.86	1.26 H	284	15.64	38.50
6	4874.00	43.15 AV	54.00	-10.85	1.26 H	284	4.65	38.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2355.00	60.36 PK	74.00	-13.64	1.23 V	322	28.05	32.31
2	2355.00	50.36 AV	54.00	-3.64	1.23 V	322	18.05	32.31
3	*2437.00	110.10 PK			1.26 V	289	77.50	32.60
4	*2437.00	105.68 AV			1.26 V	289	73.08	32.60
5	4874.00	52.24 PK	74.00	-21.76	1.00 V	55	13.74	38.50
6	4874.00	45.92 AV	54.00	-8.08	1.00 V	55	7.42	38.50

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH 1000hPa	TESTED BY	Antony Lee
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2380.00	46.16 PK	74.00	-27.84	1.00 H	47	13.76	32.40
2	2380.00	46.13 AV	54.00	-7.87	1.00 H	47	13.73	32.40
3	*2462.00	100.26 PK			1.00 H	179	67.58	32.68
4	*2462.00	95.68 AV			1.00 H	179	63.00	32.68
5	2483.50	59.10 PK	74.00	-14.90	1.00 H	179	26.34	32.76
6	2483.50	46.92 AV	54.00	-7.08	1.00 H	179	14.16	32.76
7	4924.00	54.63 PK	74.00	-19.37	1.00 H	106	15.99	38.64
8	4924.00	41.61 AV	54.00	-12.39	1.00 H	106	2.97	38.64
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2380.00	60.67 PK	74.00	-13.33	1.00 V	37	28.27	32.40
2	2380.00	50.92 AV	54.00	-3.08	1.00 V	37	18.52	32.40
3	*2462.00	110.71 PK			1.04 V	259	78.03	32.68
4	*2462.00	106.19 AV			1.04 V	259	73.51	32.68
5	2483.50	62.08 PK	74.00	-11.92	1.00 V	285	29.32	32.76
6	2483.50	51.42 AV	54.00	-2.58	1.00 V	285	18.66	32.76
7	4924.00	57.98 PK	74.00	-16.02	1.00 V	59	19.34	38.64
8	4924.00	45.48 AV	54.00	-8.52	1.00 V	59	6.84	38.64

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH 1000hPa	TESTED BY	Antony Lee
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1598.00	55.58 PK	74.00	-18.42	1.00 H	142	25.05	30.53
2	1598.00	44.03 AV	54.00	-9.97	1.00 H	142	13.50	30.53
3	2390.00	60.54 PK	74.00	-13.46	1.00 H	179	28.10	32.44
4	2390.00	47.57 AV	54.00	-6.43	1.00 H	179	15.13	32.44
5	*2412.00	99.34 PK			1.00 H	181	66.82	32.52
6	*2412.00	89.12 AV			1.00 H	181	56.60	32.52
7	2483.50	58.81 PK	74.00	-15.19	1.02 H	182	26.05	32.76
8	2483.50	48.39 AV	54.00	-5.61	1.02 H	182	15.63	32.76
9	4824.00	47.24 PK	74.00	-26.76	1.00 H	360	8.94	38.30
10	4824.00	34.56 AV	54.00	-19.44	1.00 H	360	-3.74	38.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH 1000hPa	TESTED BY	Antony Lee
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1598.00	61.79 PK	74.00	-12.21	1.00 V	166	31.26	30.53
2	1598.00	48.40 AV	54.00	-5.60	1.00 V	166	17.87	30.53
3	2390.00	62.23 PK	74.00	-11.77	1.01 V	279	29.79	32.44
4	2390.00	52.96 AV	54.00	-1.04	1.01 V	279	20.52	32.44
5	*2412.00	108.66 PK			1.00 V	283	76.14	32.52
6	*2412.00	98.49 AV			1.00 V	283	65.97	32.52
7	2483.50	63.58 PK	74.00	-10.42	1.00 V	289	30.82	32.76
8	2483.50	52.89 AV	54.00	-1.11	1.00 V	289	20.13	32.76
9	4824.00	48.38 PK	74.00	-25.62	1.00 V	66	10.08	38.30
10	4824.00	35.40 AV	54.00	-18.60	1.00 V	66	-2.90	38.30

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH 1000hPa	TESTED BY	Antony Lee
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.34 PK	74.00	-15.66	1.00 H	176	25.90	32.44
2	2390.00	47.06 AV	54.00	-6.94	1.00 H	176	14.62	32.44
3	*2437.00	101.06 PK			1.00 H	180	68.46	32.60
4	*2437.00	90.87 AV			1.00 H	180	58.27	32.60
5	2483.50	58.14 PK	74.00	-15.86	1.00 H	169	25.38	32.76
6	2483.50	48.02 AV	54.00	-5.98	1.00 H	169	15.26	32.76
7	4874.00	47.12 PK	74.00	-26.88	1.00 H	356	8.62	38.50
8	4874.00	35.09 AV	54.00	-18.91	1.00 H	356	-3.41	38.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.90 PK	74.00	-12.10	1.01 V	285	29.46	32.44
2	2390.00	51.67 AV	54.00	-2.33	1.01 V	285	19.23	32.44
3	*2437.00	109.76 PK			1.00 V	284	77.16	32.60
4	*2437.00	99.54 AV			1.00 V	284	66.94	32.60
5	2483.50	64.67 PK	74.00	-9.33	1.00 V	279	31.91	32.76
6	2483.50	52.72 AV	54.00	-1.28	1.00 V	279	19.96	32.76
7	4874.00	50.56 PK	74.00	-23.44	1.00 V	54	12.06	38.50
8	4874.00	35.62 AV	54.00	-18.38	1.00 V	54	-2.88	38.50

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH 1000hPa	TESTED BY	Antony Lee
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.51 PK	74.00	-15.49	1.00 H	181	26.07	32.44
2	2390.00	46.44 AV	54.00	-7.56	1.00 H	181	14.00	32.44
3	*2462.00	98.08 PK			1.00 H	179	65.40	32.68
4	*2462.00	87.94 AV			1.00 H	179	55.26	32.68
5	2483.50	58.22 PK	74.00	-15.78	1.00 H	179	25.46	32.76
6	2483.50	48.12 AV	54.00	-5.88	1.00 H	179	15.36	32.76
7	4924.00	47.52 PK	74.00	-26.48	1.00 H	360	8.88	38.64
8	4924.00	34.53 AV	54.00	-19.47	1.00 H	360	-4.11	38.64
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.65 PK	74.00	-11.35	1.00 V	287	30.21	32.44
2	2390.00	51.94 AV	54.00	-2.06	1.00 V	287	19.50	32.44
3	*2462.00	107.89 PK			1.00 V	285	75.21	32.68
4	*2462.00	97.53 AV			1.00 V	285	64.85	32.68
5	2483.50	63.42 PK	74.00	-10.58	1.00 V	281	30.66	32.76
6	2483.50	52.51 AV	54.00	-1.49	1.00 V	281	19.75	32.76
7	4924.00	47.41 PK	74.00	-26.59	1.00 V	353	8.77	38.64
8	4924.00	34.70 AV	54.00	-19.30	1.00 V	353	-3.94	38.64

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

For Model name: AT-iMG616W

BELOW 1GHz WORST-CASE DATA : 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH 999hPa	TESTED BY	Antony Lee
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	94.06	32.80 QP	43.50	-10.70	2.00 H	55	23.40	9.40
2	333.21	35.99 QP	46.00	-10.01	1.00 H	127	20.79	15.20
3	500.42	36.73 QP	46.00	-9.27	1.75 H	181	16.30	20.44
4	659.85	37.71 QP	46.00	-8.29	1.25 H	319	13.67	24.04
5	751.23	44.83 QP	46.00	-1.17	1.00 H	163	19.32	25.51
6	792.06	41.90 QP	46.00	-4.10	1.00 H	325	15.96	25.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.73	37.41 QP	40.00	-2.59	1.00 V	352	23.05	14.36
2	103.78	37.76 QP	43.50	-5.74	1.50 V	112	26.21	11.55
3	374.04	32.99 QP	46.00	-13.01	1.00 V	199	16.03	16.96
4	624.85	35.92 QP	46.00	-10.08	1.00 V	10	12.83	23.09
5	700.68	37.86 QP	46.00	-8.14	1.25 V	202	12.81	25.04
6	751.23	39.64 QP	46.00	-6.36	1.25 V	142	14.13	25.51

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH 999hPa	TESTED BY	Antony Lee
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	99.89	35.41 QP	43.50	-8.09	1.75 H	37	23.85	11.56
2	249.60	43.72 QP	46.00	-2.28	1.25 H	43	29.91	13.80
3	440.14	41.46 QP	46.00	-4.54	1.75 H	118	22.41	19.06
4	751.23	43.06 QP	46.00	-2.94	1.00 H	319	17.55	25.51
5	792.06	40.64 QP	46.00	-5.36	1.00 H	319	14.70	25.94
6	875.67	38.10 QP	46.00	-7.90	1.50 H	145	10.67	27.43
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	105.73	39.27 QP	43.50	-4.23	1.25 V	58	27.74	11.52
2	249.60	42.41 QP	46.00	-3.59	1.00 V	316	28.61	13.80
3	440.14	37.10 QP	46.00	-8.90	1.00 V	172	18.04	19.06
4	751.23	40.07 QP	46.00	-5.93	1.75 V	88	14.56	25.51
5	799.84	39.14 QP	46.00	-6.86	1.00 V	178	13.12	26.02
6	875.67	39.29 QP	46.00	-6.71	1.25 V	160	11.86	27.43

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH 999hPa	TESTED BY	Antony Lee
TEST MODE	C		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	99.89	39.54 QP	43.50	-3.96	1.75 H	13	27.97	11.56
2	249.60	41.55 QP	46.00	-4.45	1.50 H	187	27.75	13.80
3	440.14	38.86 QP	46.00	-7.14	1.75 H	22	19.80	19.06
4	751.23	42.75 QP	46.00	-3.25	1.00 H	70	17.24	25.51
5	875.67	40.02 QP	46.00	-5.98	1.00 H	154	12.59	27.43
6	959.27	40.08 QP	46.00	-5.92	1.25 H	79	11.48	28.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	105.73	41.40 QP	43.50	-2.10	1.00 V	70	29.88	11.52
2	249.60	40.11 QP	46.00	-5.89	1.00 V	100	26.31	13.80
3	558.75	38.19 QP	46.00	-7.81	1.00 V	346	16.55	21.63
4	718.18	41.19 QP	46.00	-4.81	1.50 V	76	15.99	25.20
5	751.23	41.01 QP	46.00	-4.99	1.75 V	91	15.50	25.51
6	879.55	38.86 QP	46.00	-7.14	1.00 V	46	11.35	27.51

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

For Model name: AT-iMG616WCRF

BELOW 1GHz WORST-CASE DATA : 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH 999hPa	TESTED BY	Antony Lee
TEST MODE	D		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	94.06	33.45 QP	43.50	-10.05	2.00 H	82	24.04	9.40
2	249.60	33.73 QP	46.00	-12.27	1.00 H	241	19.93	13.80
3	333.21	35.55 QP	46.00	-10.45	1.00 H	268	20.35	15.20
4	700.68	36.85 QP	46.00	-9.15	1.00 H	211	11.81	25.04
5	751.23	43.72 QP	46.00	-2.28	1.00 H	292	18.21	25.51
6	799.84	41.32 QP	46.00	-4.68	1.00 H	289	15.30	26.02
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	94.06	36.14 QP	43.50	-7.36	1.25 V	133	26.74	9.40
2	374.04	33.63 QP	46.00	-12.37	1.25 V	178	16.67	16.96
3	500.42	36.62 QP	46.00	-9.38	1.00 V	187	16.18	20.44
4	650.13	34.63 QP	46.00	-11.37	1.50 V	145	10.83	23.80
5	751.23	40.69 QP	46.00	-5.31	1.75 V	145	15.18	25.51
6	799.84	38.35 QP	46.00	-7.65	1.00 V	196	12.33	26.02

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH 999hPa	TESTED BY	Antony Lee
TEST MODE	E		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	99.89	36.54 QP	43.50	-6.96	1.50 H	52	24.97	11.56
2	249.60	44.05 QP	46.00	-1.95	1.00 H	49	30.25	13.80
3	440.14	39.52 QP	46.00	-6.48	1.50 H	106	20.47	19.06
4	624.85	37.11 QP	46.00	-8.89	1.25 H	130	14.02	23.09
5	751.23	43.56 QP	46.00	-2.44	1.00 H	316	18.05	25.51
6	792.06	40.57 QP	46.00	-5.43	1.00 H	316	14.64	25.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	101.84	41.56 QP	43.50	-1.94	1.25 V	76	29.99	11.58
2	249.60	42.69 QP	46.00	-3.31	1.00 V	325	28.89	13.80
3	440.14	35.44 QP	46.00	-10.56	1.00 V	169	16.39	19.06
4	624.85	36.67 QP	46.00	-9.33	1.50 V	157	13.57	23.09
5	751.23	39.26 QP	46.00	-6.74	1.75 V	88	13.75	25.51
6	875.67	38.23 QP	46.00	-7.77	1.25 V	151	10.80	27.43

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH 999hPa	TESTED BY	Antony Lee
TEST MODE	F		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	109.62	40.50 QP	43.50	-3.00	1.50 H	148	29.03	11.47
2	249.60	41.83 QP	46.00	-4.17	1.00 H	178	28.03	13.80
3	718.18	41.49 QP	46.00	-4.51	1.50 H	85	16.29	25.20
4	751.23	43.40 QP	46.00	-2.60	1.00 H	58	17.89	25.51
5	792.06	40.31 QP	46.00	-5.69	1.75 H	277	14.37	25.94
6	877.61	42.56 QP	46.00	-3.44	1.25 H	85	15.09	27.47
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	103.78	40.62 QP	43.50	-2.88	1.00 V	136	29.07	11.55
2	249.60	40.10 QP	46.00	-5.90	1.00 V	106	26.30	13.80
3	500.42	36.82 QP	46.00	-9.18	1.00 V	139	16.39	20.44
4	558.75	38.40 QP	46.00	-7.60	1.00 V	10	16.77	21.63
5	718.18	42.88 QP	46.00	-3.12	1.50 V	88	17.67	25.20
6	751.23	40.81 QP	46.00	-5.19	1.75 V	94	15.30	25.51

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 19, 2008	Nov. 18, 2009
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 31, 2008	Dec. 30, 2009
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Jun. 13, 2008	Jun. 12, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Dec. 04, 2008	Dec. 03, 2009
Software ADT	ADT_Cond_ V7.3.7	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

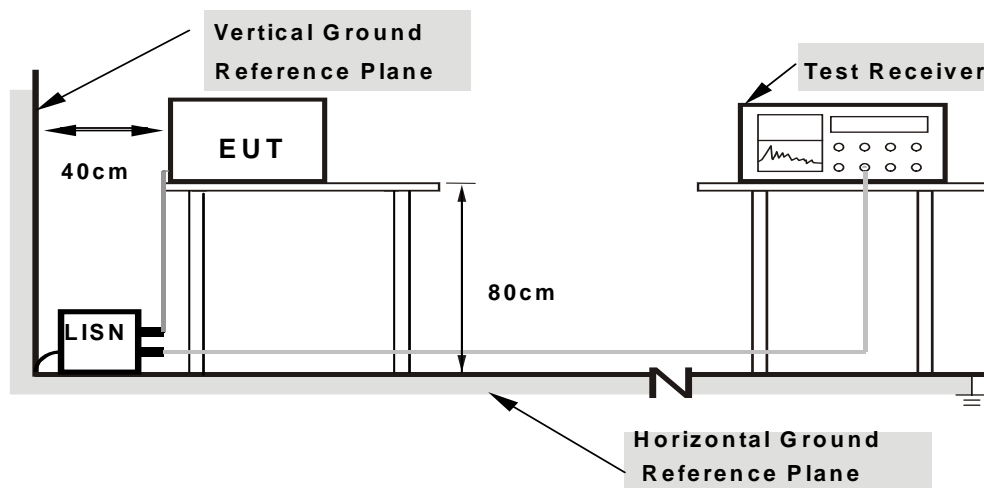

Note: 1.Support units were connected to second LISN.
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80
 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA: 802.11g OFDM MODULATION

For Model name: AT-iMG616W

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1021hPa	TEST MODE	A
TESTED BY	Lori Chiu		

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.13	46.07	-	46.20	-	65.38	55.38	-19.18	-
2	0.216	0.13	39.42	-	39.55	-	62.96	52.96	-23.40	-
3	0.275	0.13	37.81	-	37.94	-	60.97	50.97	-23.02	-
4	0.326	0.14	35.72	-	35.86	-	59.56	49.56	-23.70	-
5	4.590	0.40	28.54	-	28.94	-	56.00	46.00	-27.06	-
6	28.867	1.24	24.67	-	25.91	-	60.00	50.00	-34.09	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

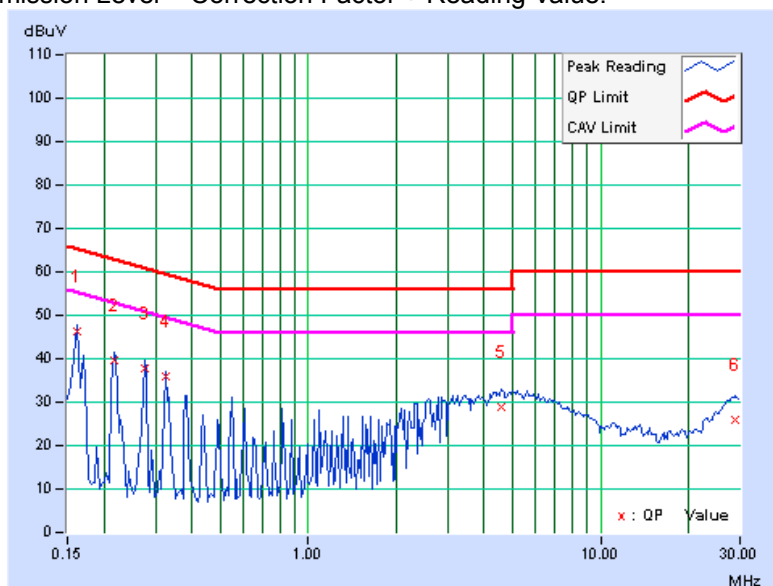

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1021hPa	TEST MODE	A
TESTED BY	Lori Chiu		

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.216	0.15	40.96	-	41.11	-	62.96	52.96	-21.84	-
2	0.275	0.15	36.85	-	37.00	-	60.97	50.97	-23.96	-
3	0.330	0.16	36.29	-	36.45	-	59.46	49.46	-23.01	-
4	0.826	0.19	30.16	-	30.35	-	56.00	46.00	-25.65	-
5	4.539	0.41	29.07	-	29.48	-	56.00	46.00	-26.52	-
6	26.926	0.81	22.19	-	23.00	-	60.00	50.00	-37.00	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

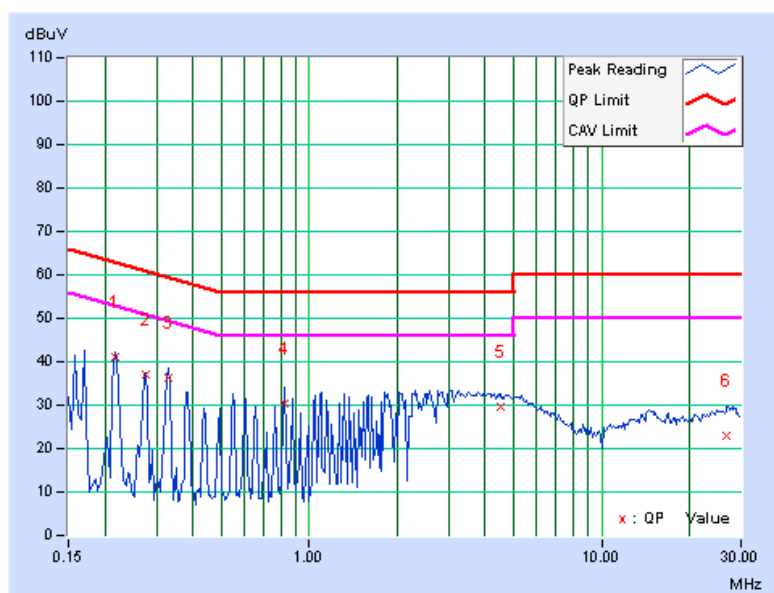

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1021hPa	TEST MODE	B
TESTED BY	Lori Chiu		

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.13	50.45	-	50.58	-	65.18	55.18	-14.60	-
2	0.209	0.13	39.00	-	39.13	-	63.26	53.26	-24.13	-
3	0.435	0.14	37.55	-	37.69	-	57.15	47.15	-19.46	-
4	0.892	0.17	28.69	-	28.86	-	56.00	46.00	-27.14	-
5	4.473	0.39	29.64	-	30.03	-	56.00	46.00	-25.97	-
6	16.215	0.96	27.06	-	28.02	-	60.00	50.00	-31.98	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

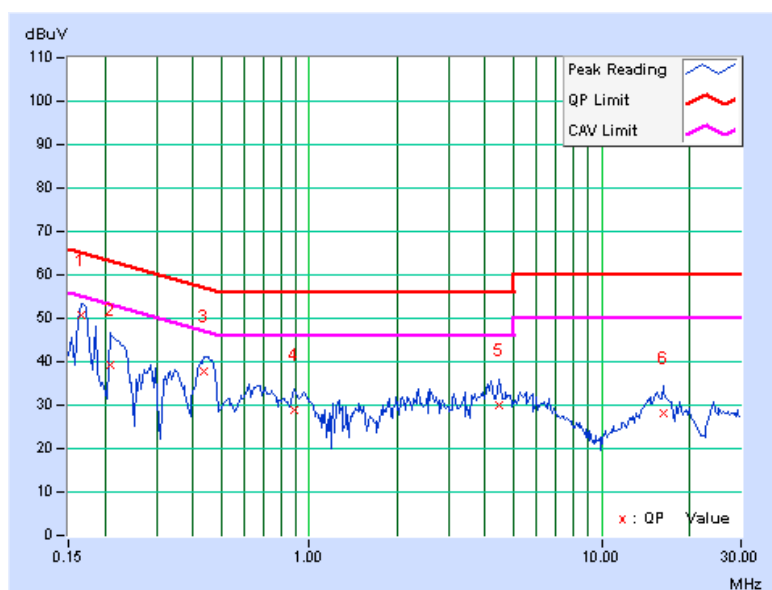

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1021hPa	TEST MODE	B
TESTED BY	Lori Chiu		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.14	51.20	-	51.34	-	64.98	54.98	-13.64	-
2	0.220	0.15	42.12	-	42.27	-	62.81	52.81	-20.54	-
3	0.439	0.16	42.95	-	43.11	-	57.08	47.08	-13.97	-
4	0.662	0.18	32.65	-	32.83	-	56.00	46.00	-23.17	-
5	3.840	0.38	28.79	-	29.17	-	56.00	46.00	-26.83	-
6	19.117	0.95	25.86	-	26.81	-	60.00	50.00	-33.19	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

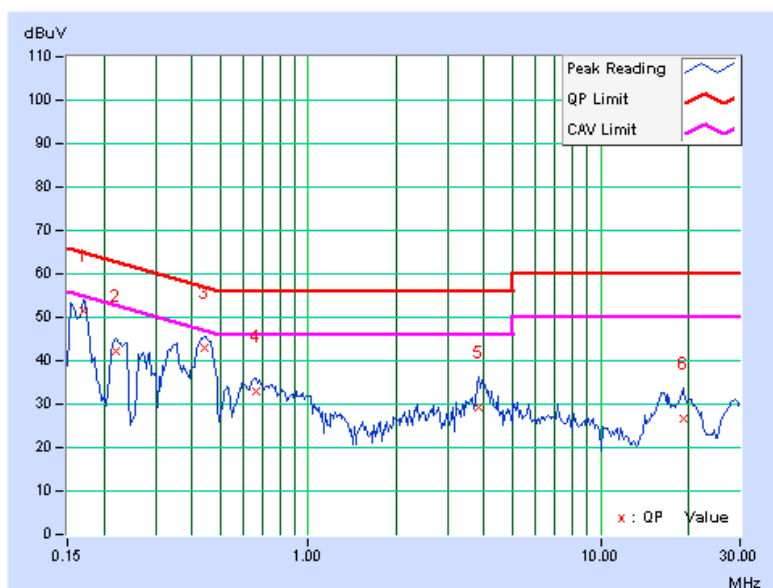

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1021hPa	TEST MODE	C
TESTED BY	Lori Chiu		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.13	49.69	-	49.82	-	64.79	54.79	-14.97	-
2	0.185	0.13	48.92	-	49.05	-	64.25	54.25	-15.20	-
3	0.244	0.13	42.30	-	42.43	-	61.97	51.97	-19.54	-
4	0.466	0.14	30.16	-	30.30	-	56.58	46.58	-26.27	-
5	6.801	0.51	24.56	-	25.07	-	60.00	50.00	-34.93	-
6	20.867	1.16	32.05	-	33.21	-	60.00	50.00	-26.79	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

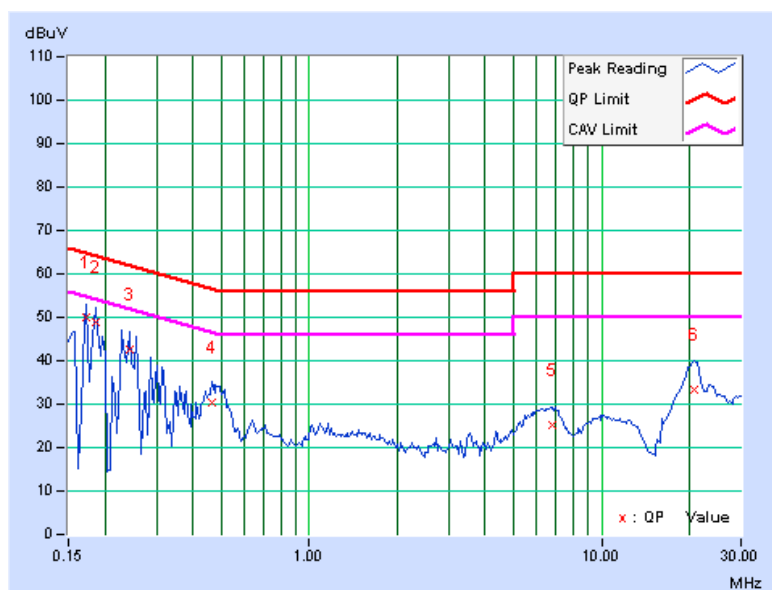

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1021hPa	TEST MODE	C
TESTED BY	Lori Chiu		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.14	46.54	-	46.68	-	64.98	54.98	-18.30	-
2	0.185	0.15	48.94	-	49.09	-	64.25	54.25	-15.16	-
3	0.240	0.15	42.31	-	42.46	-	62.10	52.10	-19.64	-
4	0.287	0.15	34.68	-	34.83	-	60.62	50.62	-25.78	-
5	6.672	0.51	24.71	-	25.22	-	60.00	50.00	-34.78	-
6	21.828	0.94	25.75	-	26.69	-	60.00	50.00	-33.31	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

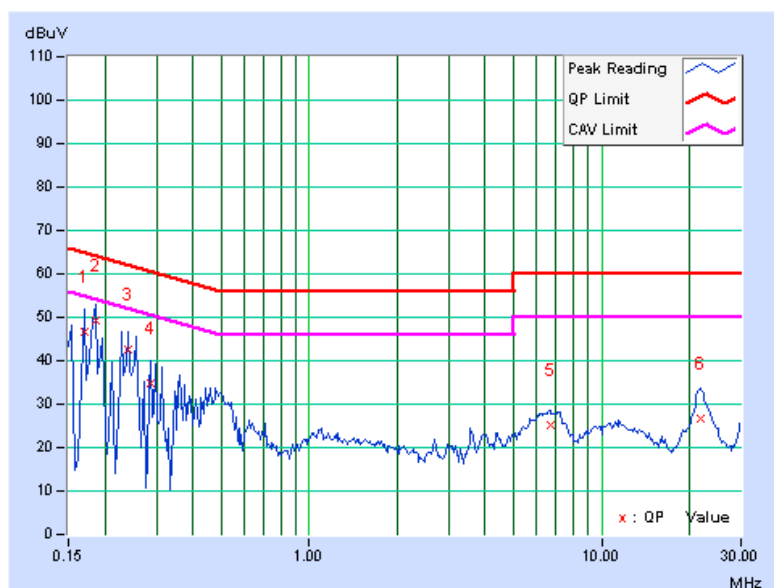


For Model name: AT-iMG616WCRF

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1021hPa	TEST MODE	D
TESTED BY	Lori Chiu		

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.197	0.13	43.31	-	43.44	-	63.74	53.74	-20.30	-
2	0.291	0.13	38.76	-	38.89	-	60.51	50.51	-21.61	-
3	0.341	0.14	34.84	-	34.98	-	59.17	49.17	-24.19	-
4	0.439	0.14	27.93	-	28.07	-	57.08	47.08	-29.01	-
5	4.547	0.40	28.84	-	29.24	-	56.00	46.00	-26.76	-
6	28.199	1.23	23.44	-	24.67	-	60.00	50.00	-35.33	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

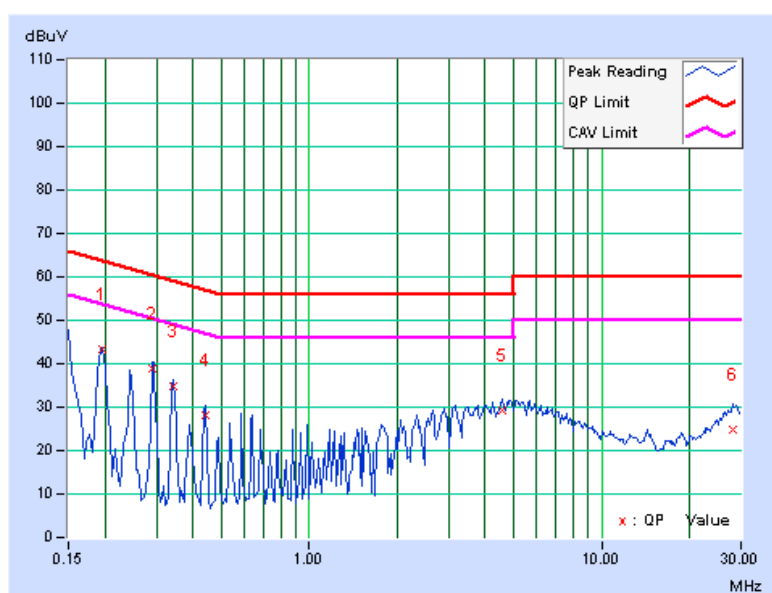

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1021hPa	TEST MODE	D
TESTED BY	Lori Chiu		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.197	0.15	42.48	-	42.63	-	63.74	53.74	-21.11	-
2	0.291	0.15	38.83	-	38.98	-	60.51	50.51	-21.52	-
3	0.338	0.16	34.07	-	34.23	-	59.26	49.26	-25.04	-
4	0.439	0.16	31.80	-	31.96	-	57.08	47.08	-25.12	-
5	4.000	0.39	29.39	-	29.78	-	56.00	46.00	-26.22	-
6	18.375	0.93	16.94	-	17.87	-	60.00	50.00	-42.13	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

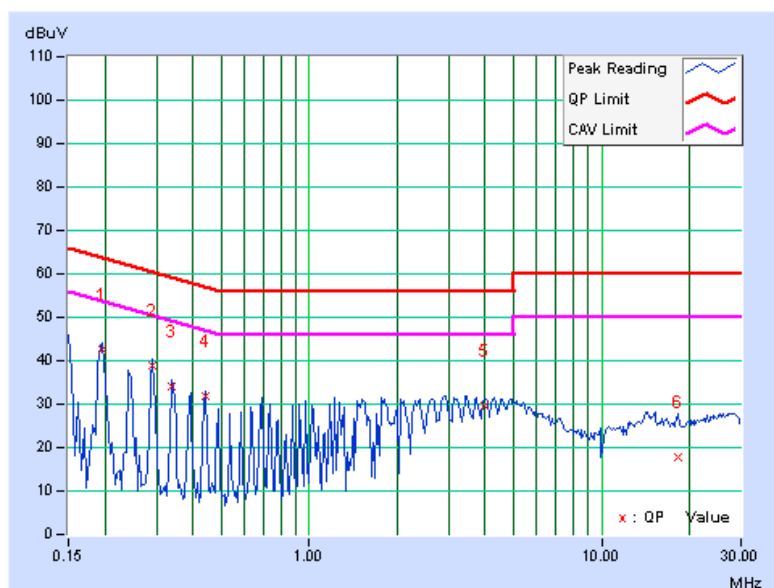

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1021hPa	TEST MODE	E
TESTED BY	Lori Chiu		

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	0.13	46.63	-	46.76	-	63.42	53.42	-16.66	-
2	0.259	0.13	38.69	-	38.82	-	61.45	51.45	-22.63	-
3	0.334	0.14	37.45	-	37.59	-	59.36	49.36	-21.77	-
4	0.420	0.14	38.71	-	38.85	-	57.46	47.46	-18.61	-
5	4.566	0.40	33.69	-	34.09	-	56.00	46.00	-21.91	-
6	15.965	0.95	32.80	-	33.75	-	60.00	50.00	-26.25	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

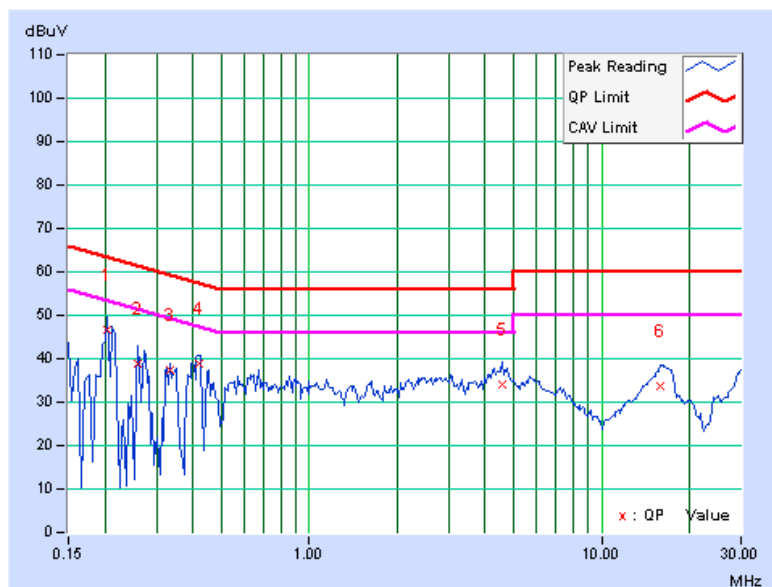

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1021hPa	TEST MODE	E
TESTED BY	Lori Chiu		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.15	48.62	-	48.77	-	63.91	53.91	-15.14	-
2	0.283	0.15	41.04	-	41.19	-	60.73	50.73	-19.54	-
3	0.326	0.16	40.89	-	41.05	-	59.56	49.56	-18.51	-
4	0.423	0.16	42.96	-	43.12	-	57.38	47.38	-14.26	-
5	4.305	0.40	30.49	-	30.89	-	56.00	46.00	-25.11	-
6	16.281	0.86	30.03	-	30.89	-	60.00	50.00	-29.11	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

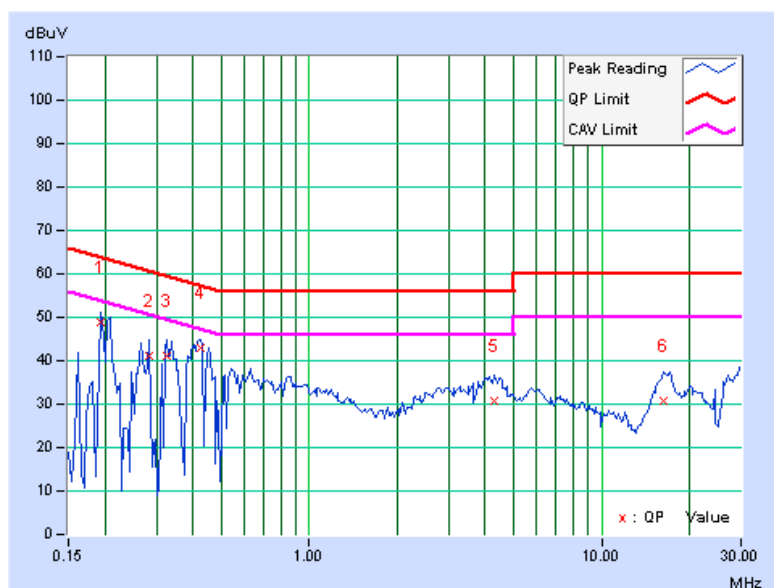

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1021hPa	TEST MODE	F
TESTED BY	Lori Chiu		

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.13	48.22	-	48.35	-	64.79	54.79	-16.44	-
2	0.232	0.13	40.92	-	41.05	-	62.38	52.38	-21.33	-
3	0.295	0.13	34.13	-	34.26	-	60.40	50.40	-26.13	-
4	0.439	0.14	30.31	-	30.45	-	57.08	47.08	-26.63	-
5	6.566	0.49	25.77	-	26.26	-	60.00	50.00	-33.74	-
6	21.289	1.17	34.84	-	36.01	-	60.00	50.00	-23.99	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

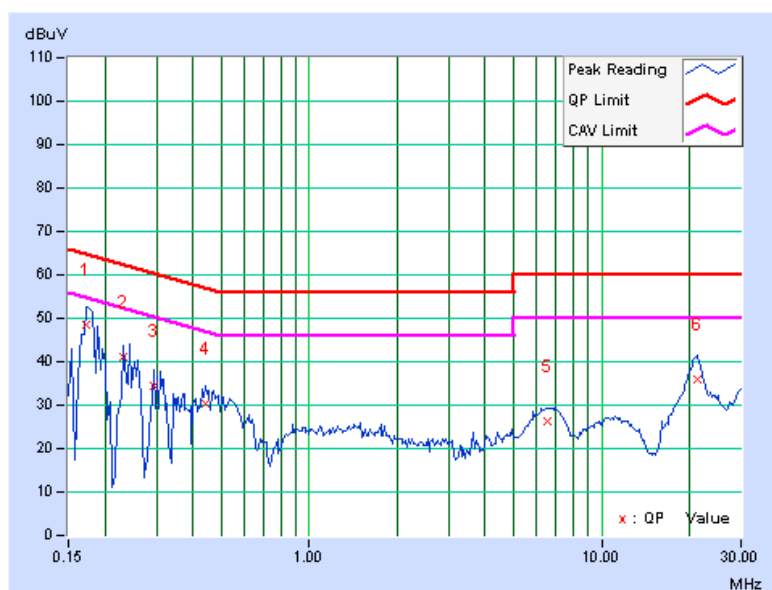

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1021hPa	TEST MODE	F
TESTED BY	Lori Chiu		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.15	49.07	-	49.22	-	64.61	54.61	-15.39	-
2	0.197	0.15	44.31	-	44.46	-	63.74	53.74	-19.28	-
3	0.236	0.15	41.45	-	41.60	-	62.24	52.24	-20.64	-
4	0.314	0.16	33.43	-	33.59	-	59.86	49.86	-26.28	-
5	6.910	0.52	24.95	-	25.47	-	60.00	50.00	-34.53	-
6	21.809	0.94	28.99	-	29.93	-	60.00	50.00	-30.07	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

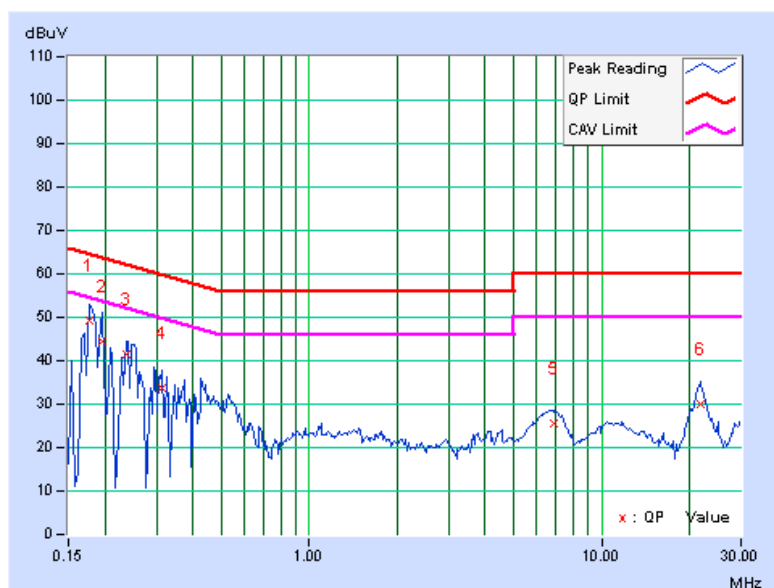

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jul. 04, 2008	Jul. 03, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 65%RH, 1022hPa
TESTED BY	Antony Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	13.16	0.5	PASS
6	2437	13.12	0.5	PASS
11	2462	13.16	0.5	PASS

CH 1

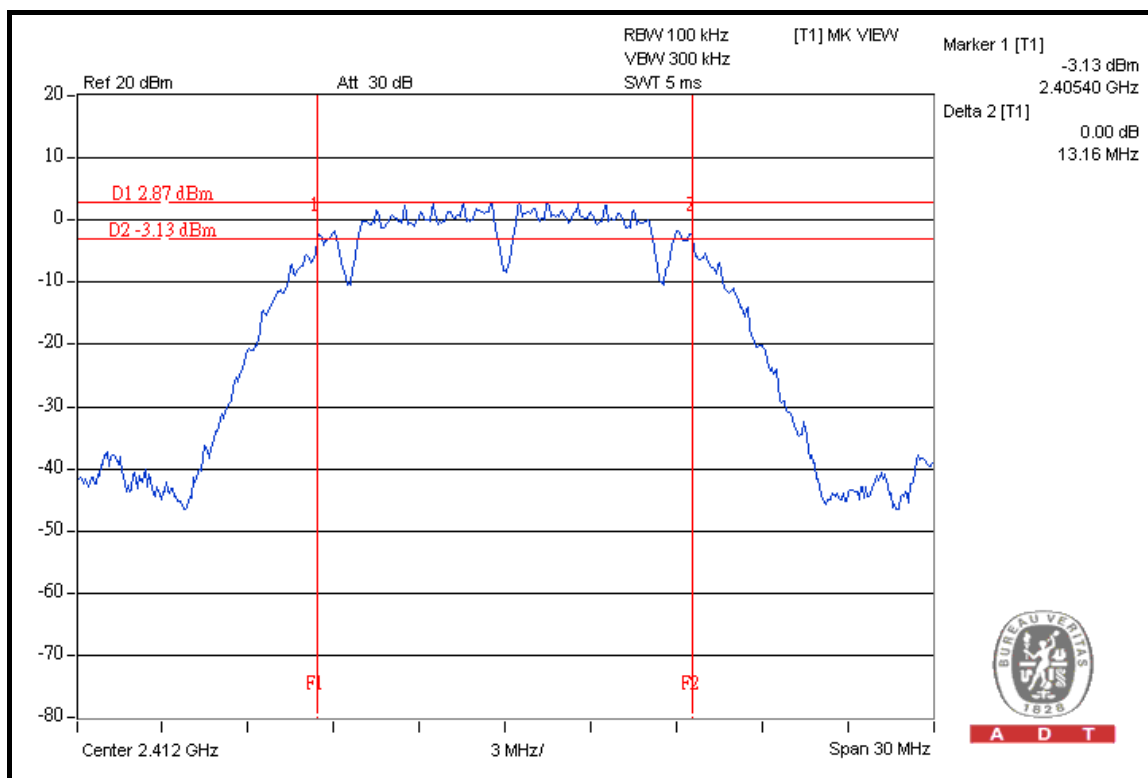



Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 5 ms [T1] MK VIEW

Marker 1 [T1] -3.04 dBm 2.43043 GHz

Delta 2 [T1] 0.00 dB 13.12 MHz

D1 2.96 dBm D2 -3.04 dBm

F1 F2

Center 2.437 GHz 3 MHz/ Span 30 MHz

BUREAU VERITAS 1828

A D T

Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 5 ms [T1] MK VIEW

Marker 1 [T1] -3.39 dBm 2.45539 GHz

Delta 2 [T1] 0.00 dB 13.16 MHz

D1 2.61 dBm D2 -3.39 dBm

F1 F2

Center 2.462 GHz 3 MHz/ Span 30 MHz

BUREAU VERITAS 1828


A D T

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 65%RH, 1022hPa
TESTED BY	Antony Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.63	0.5	PASS
6	2437	16.66	0.5	PASS
11	2462	16.65	0.5	PASS


CH 1

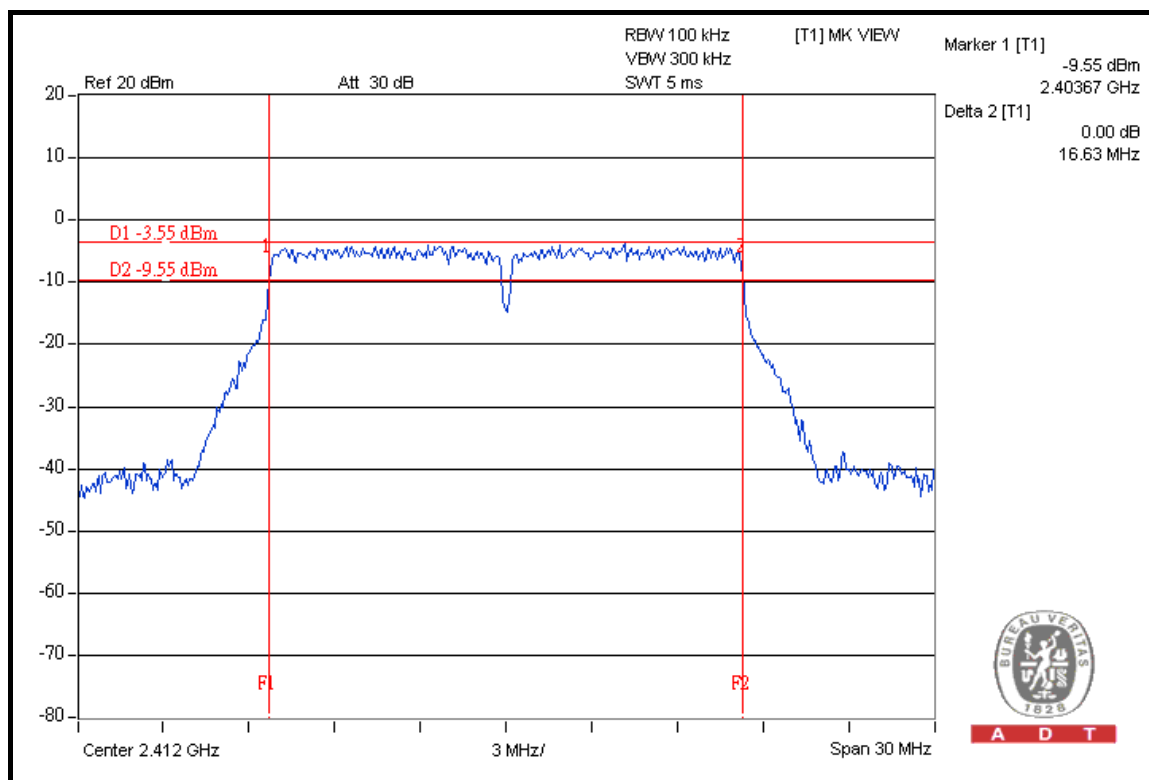




A D T

CH 6

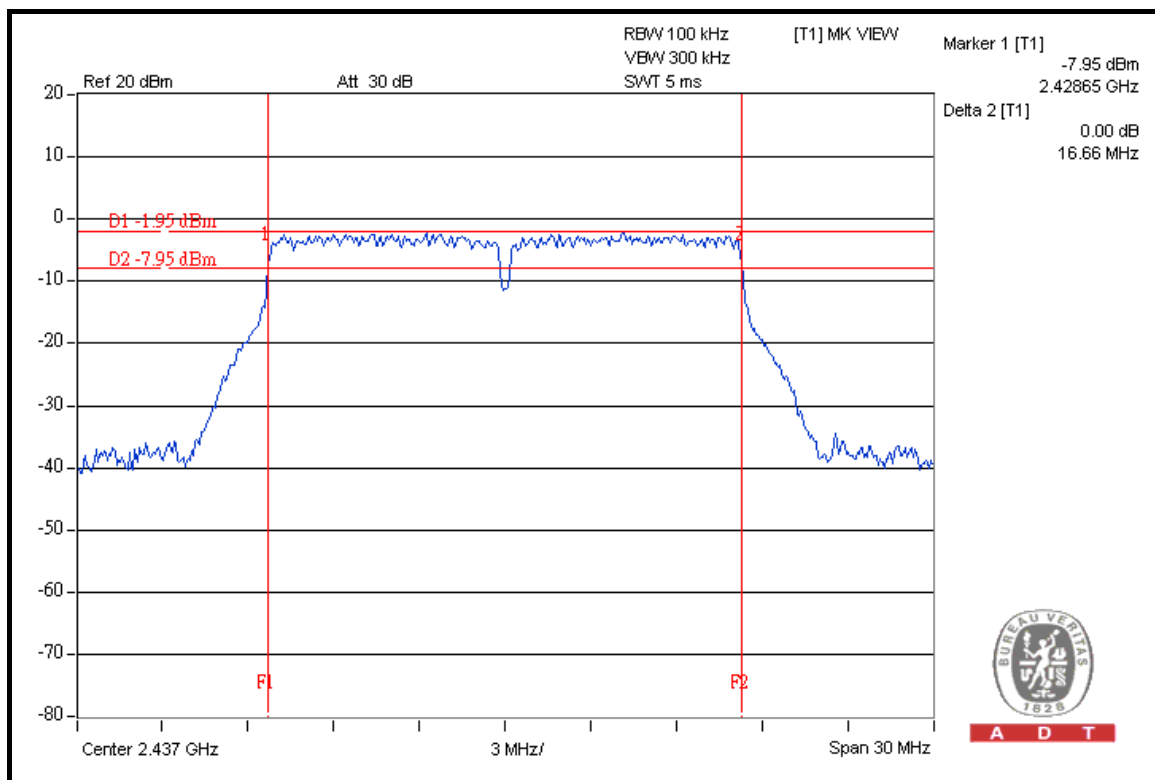

CH 11

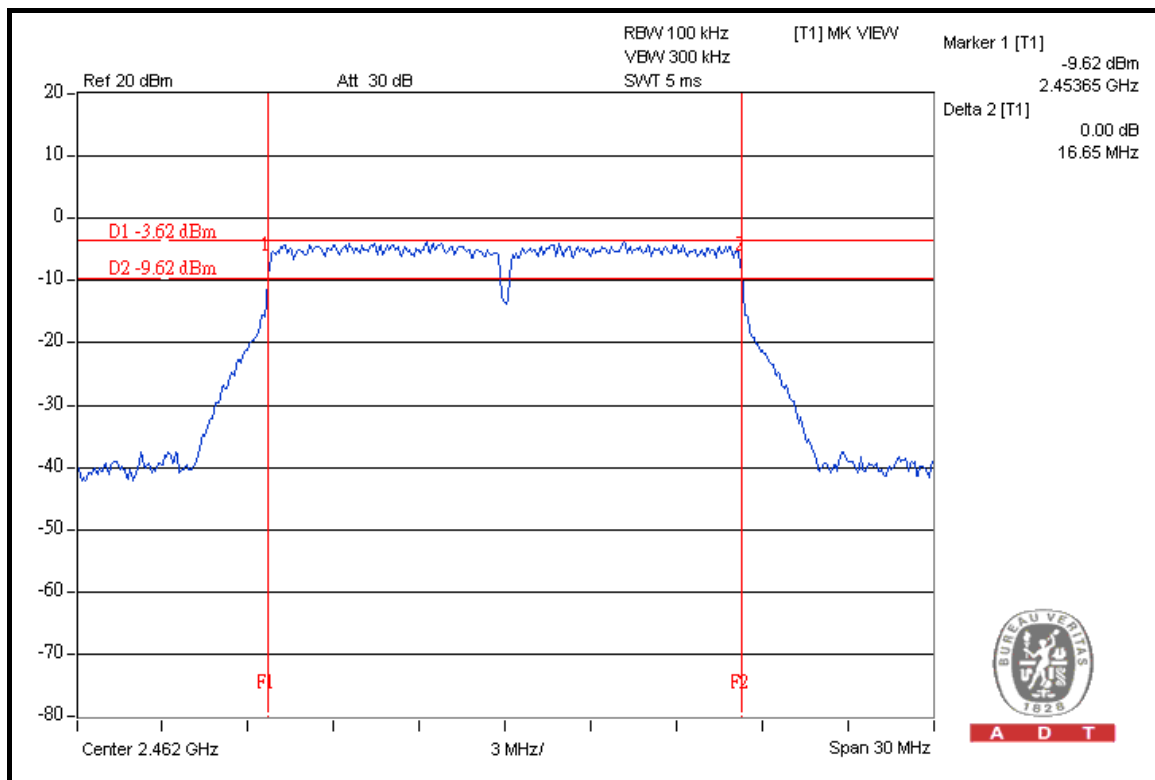

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
High Speed Peak Power Meter	ML2495A	0824012	Aug. 04, 2008	Aug. 03, 2009
Power Sensor	MA2411B	0738138	Aug. 04, 2008	Aug. 03, 2009

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


4.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

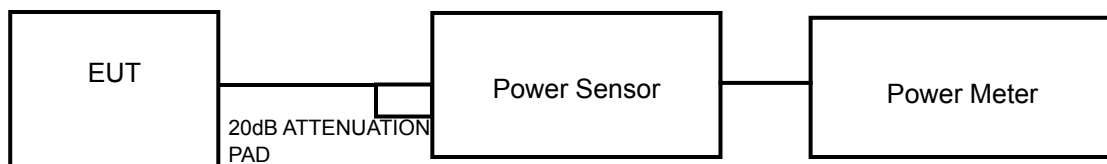

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

4.4.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 65%RH, 1022hPa
TESTED BY	Antony Lee		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	86.099	19.35	30	PASS
6	2437	84.528	19.27	30	PASS
11	2462	83.368	19.21	30	PASS

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 65%RH, 1022hPa
TESTED BY	Antony Lee		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	178.649	22.52	30	PASS
6	2437	271.644	24.34	30	PASS
11	2462	183.231	22.63	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100040	Jul. 04, 2008	Jul. 03, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6.


4.5.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 65%RH, 1022hPa
TESTED BY	Antony Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-15.07	8	PASS
6	2437	-14.97	8	PASS
11	2462	-15.22	8	PASS


CH 1

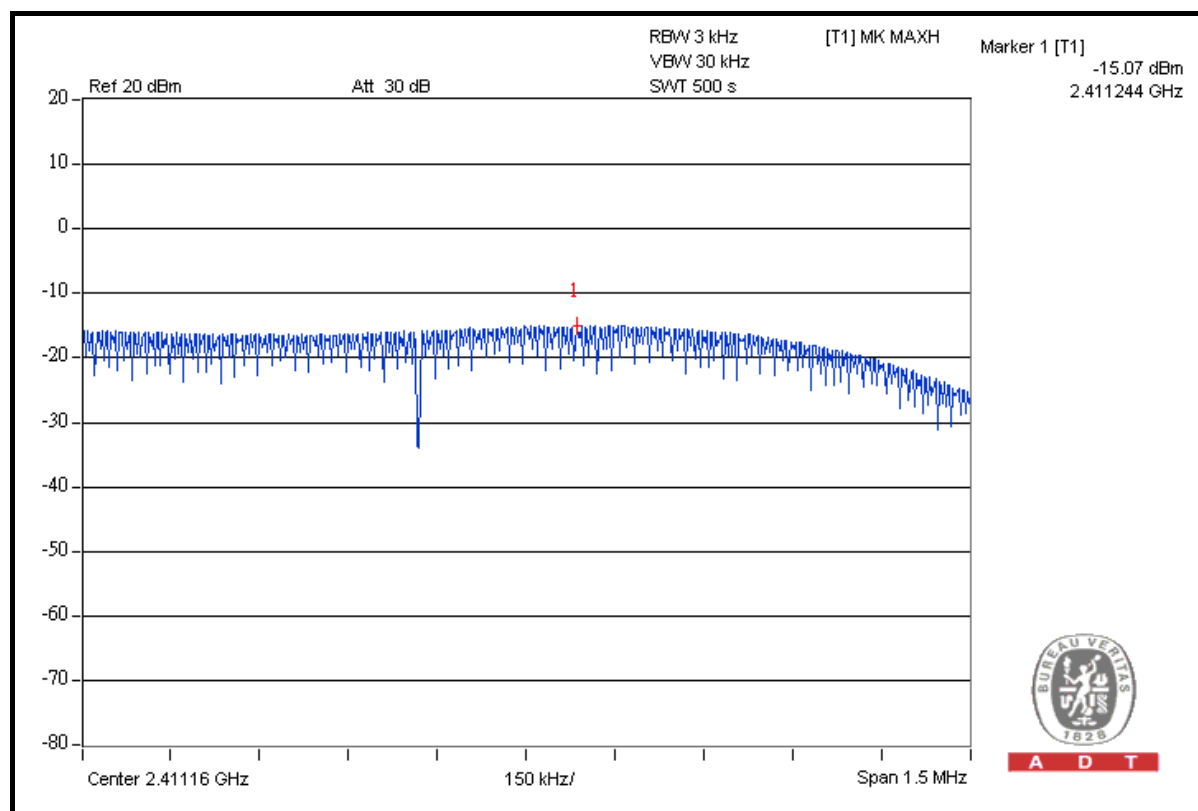




A D T

CH 6

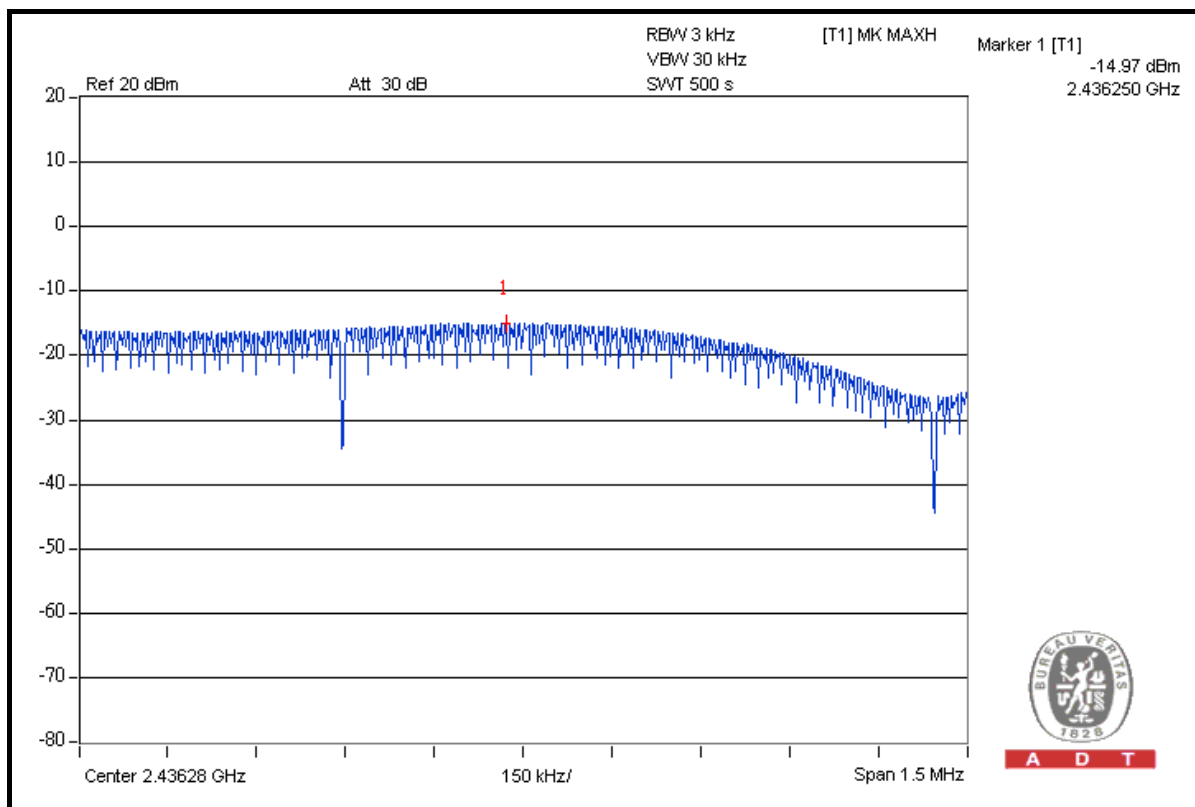

CH 11

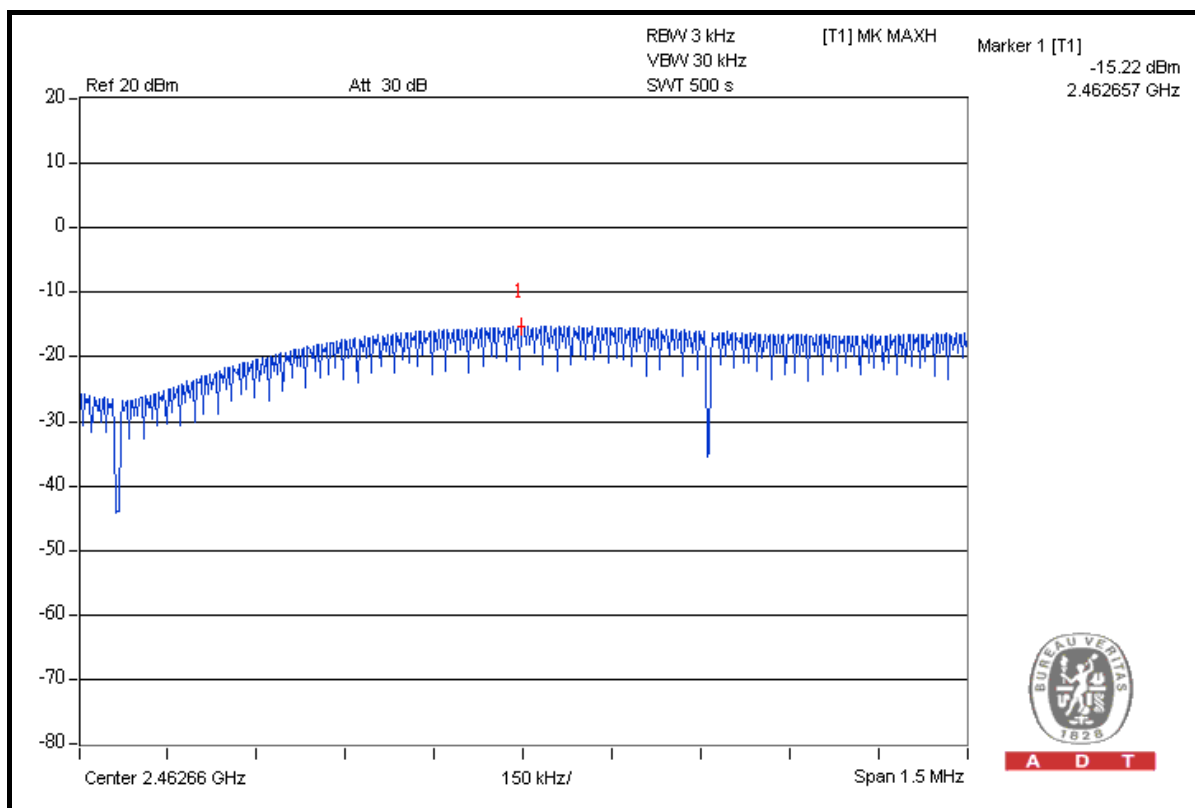


802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 65%RH, 1022hPa
TESTED BY	Antony Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-17.54	8	PASS
6	2437	-15.96	8	PASS
11	2462	-17.65	8	PASS


CH 1

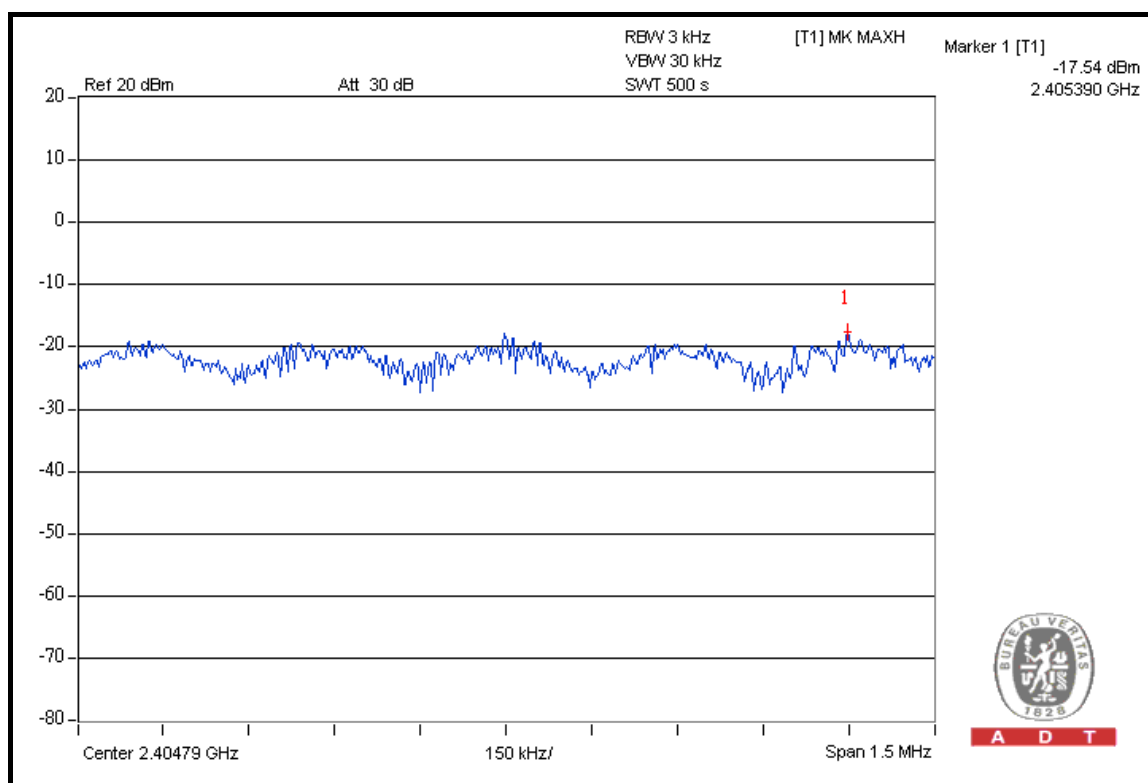




A D T

CH 6

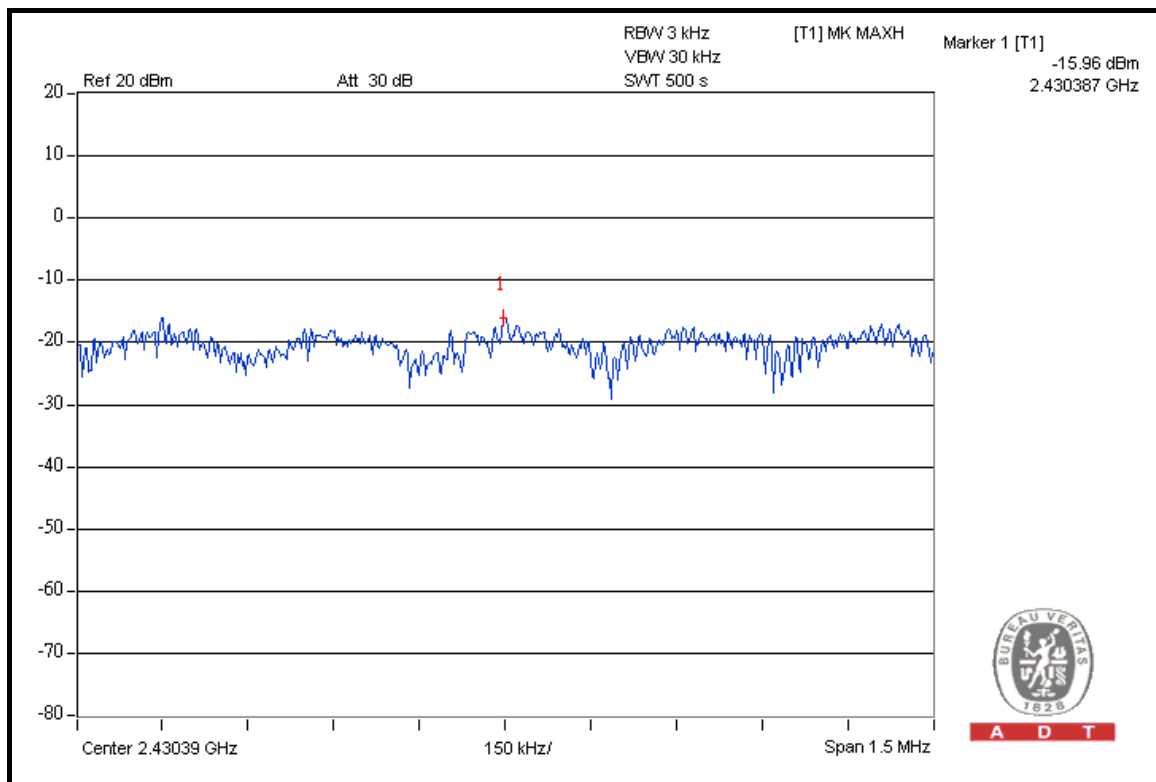

CH 11

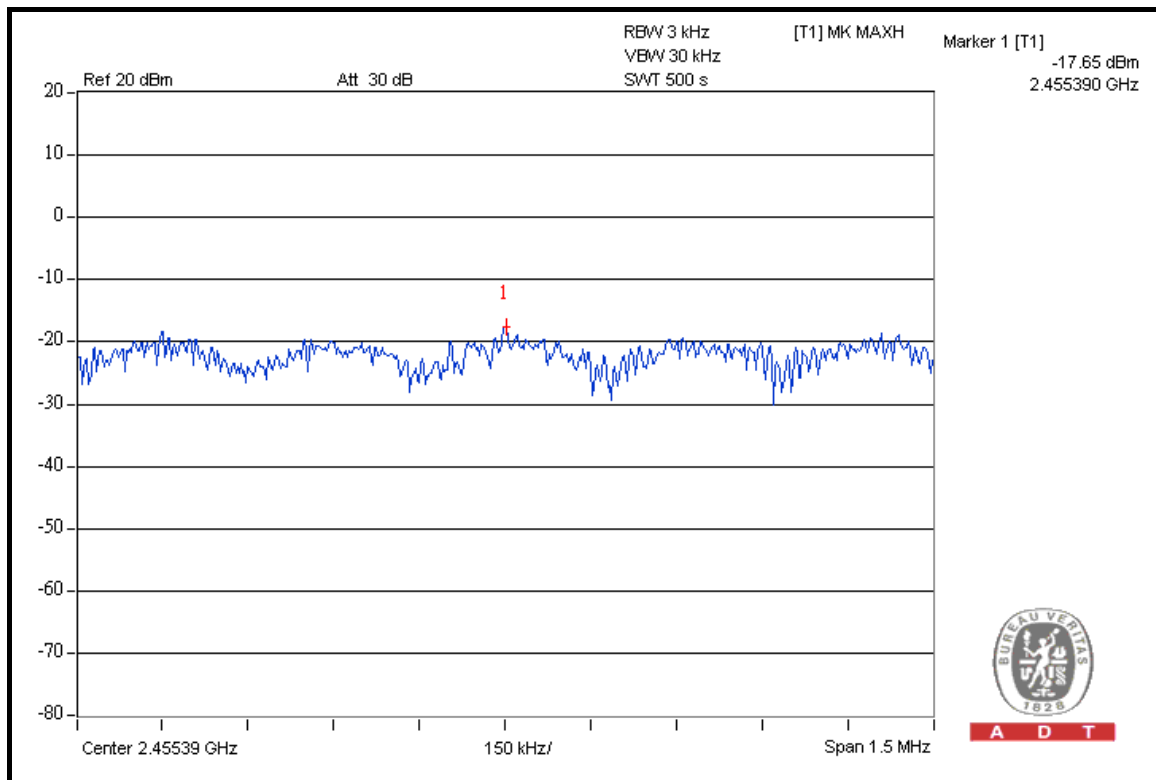

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100040	Jul. 04, 2008	Jul. 03, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz; Average RBW = 1MHz, VBW = 10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6.

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 24 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION

NOTE 1: The band edge emission plot on the next page shows 49.77dBc between carrier maximum power and local maximum emission in restrict band (2.3816GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 111.34dBuV/m (Peak), so the maximum field strength in restrict band is $111.34 - 49.77 = 61.57$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next page shows 55.82dBc between carrier maximum power and local maximum emission in restrict band (2.3874GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 106.61dBuV/m (Average), so the maximum field strength in restrict band is $106.61 - 55.82 = 50.79$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 49.13dBc between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 110.71dBuV/m (Peak), so the maximum field strength in restrict band is $110.71 - 49.13 = 61.58$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 54.27dBc between carrier maximum power and local maximum emission in restrict band (2.4886GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 106.19dBuV/m (Average), so the maximum field strength in restrict band is $106.19 - 54.27 = 51.92$ dBuV/m which is under 54dBuV/m limit.



A D T

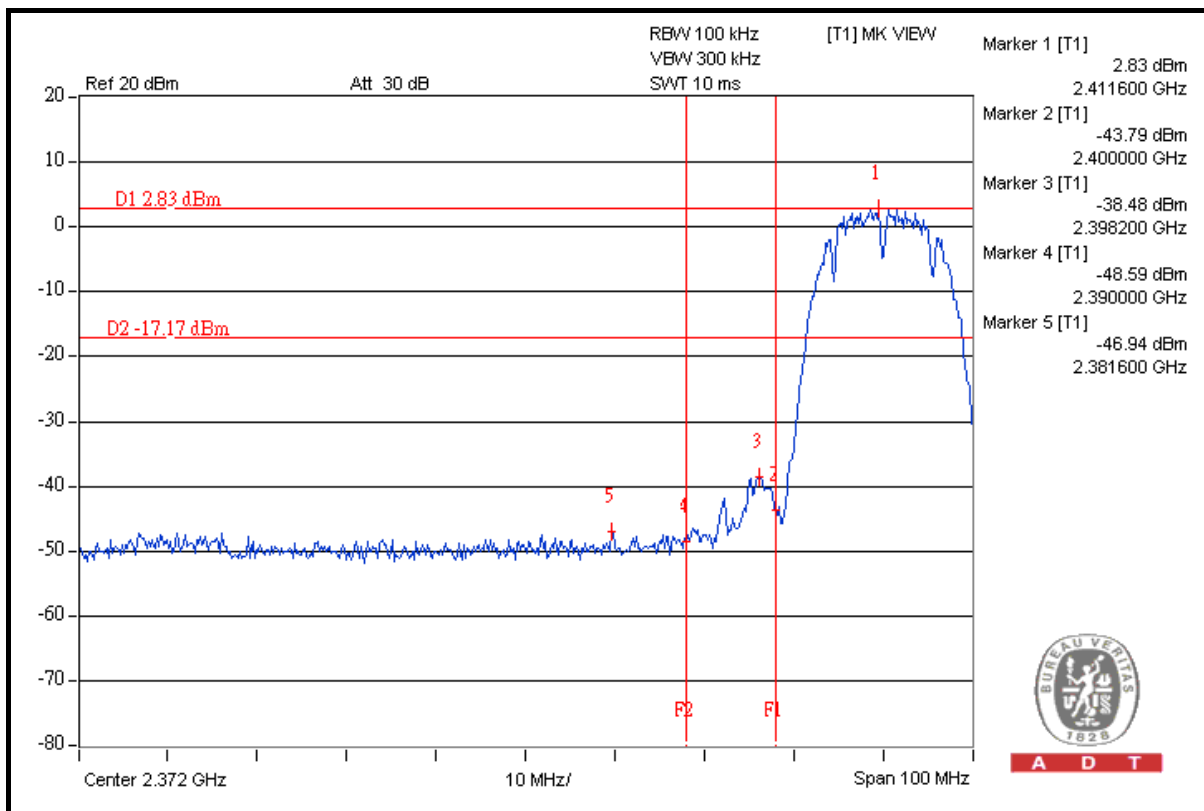



A D T

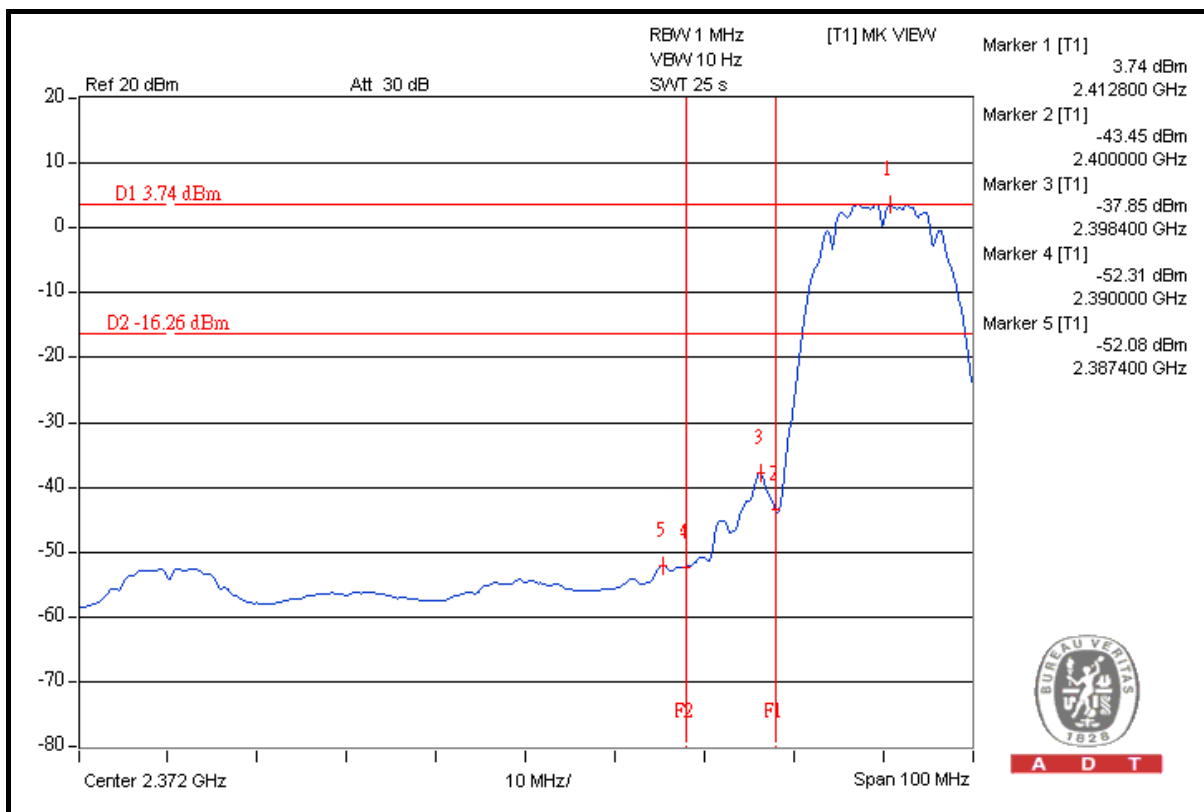

A D T



A D T

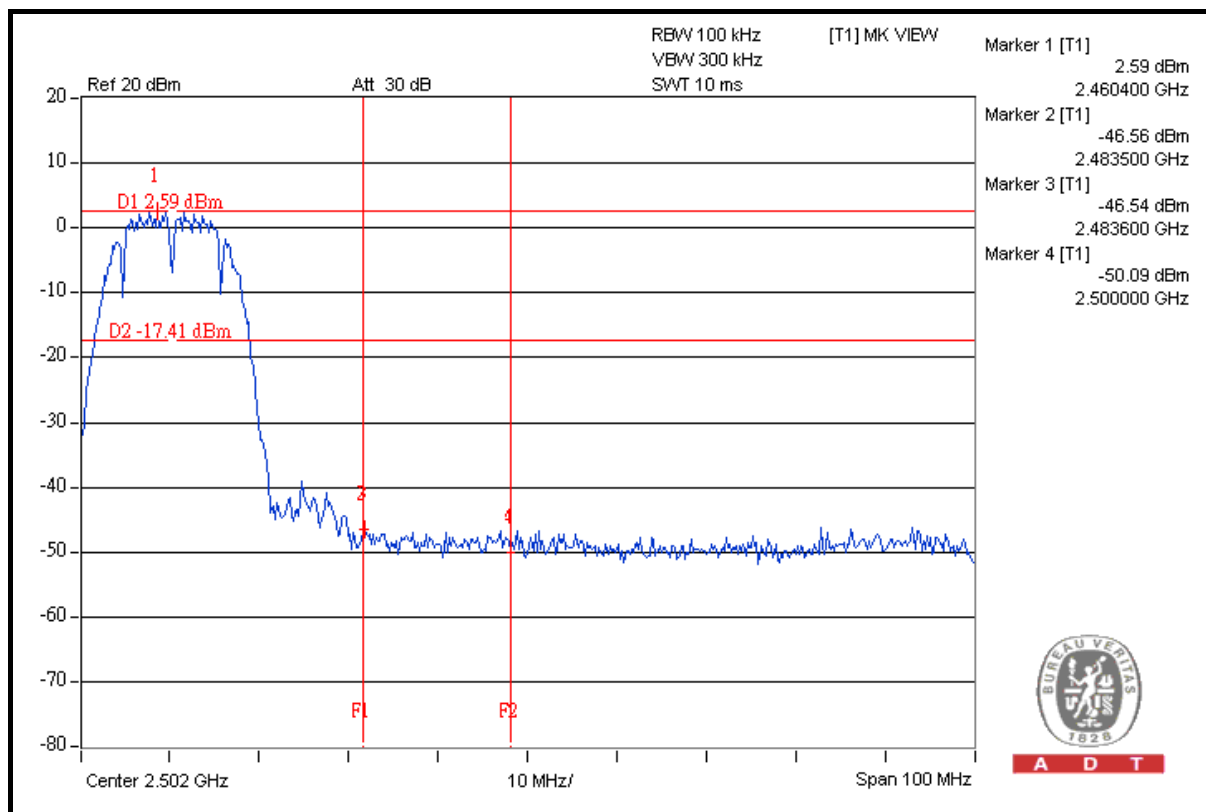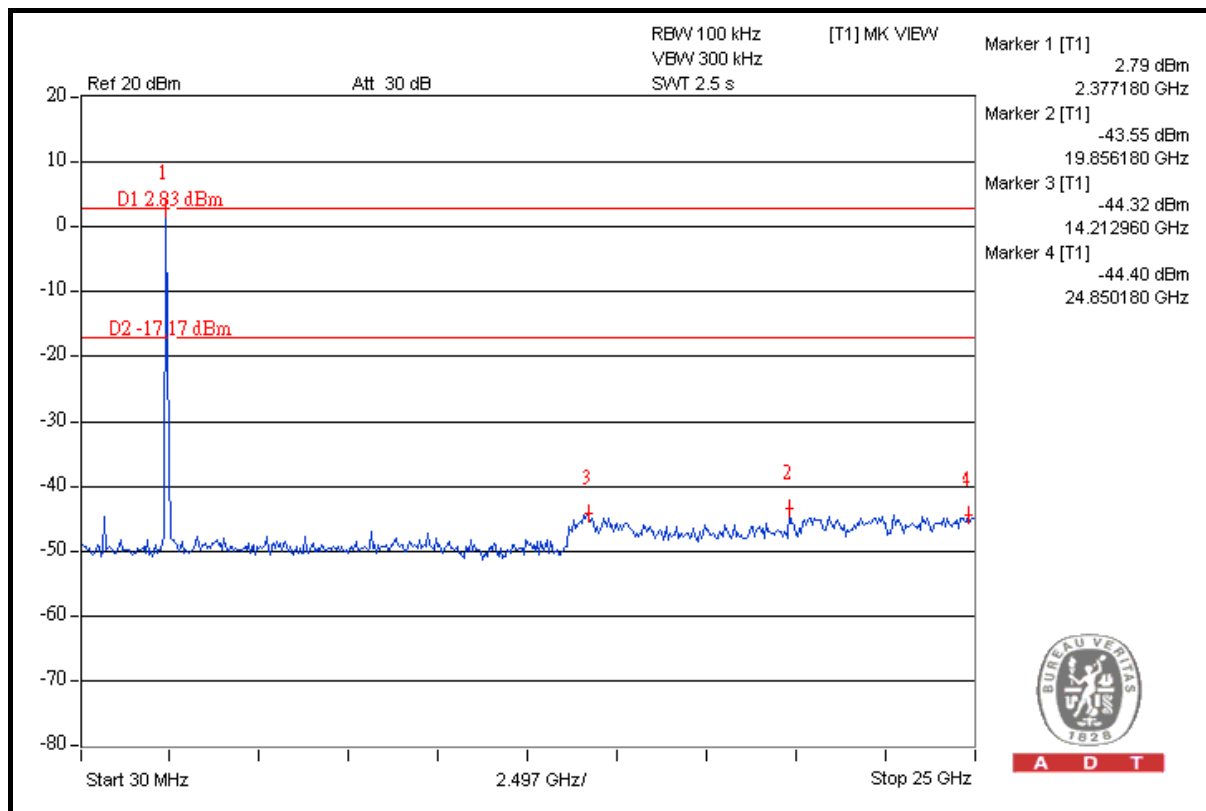



802.11g OFDM MODULATION

NOTE 1: The band edge emission plot on the next page shows 40.75dBc between carrier maximum power and local maximum emission in restrict band (2.3888GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 108.66dBuV/m (Peak), so the maximum field strength in restrict band is $108.66 - 40.75 = 67.91\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next page shows 45.47dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 98.49dBuV/m (Average), so the maximum field strength in restrict band is $98.49 - 45.47 = 53.02\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 41.11dBc between carrier maximum power and local maximum emission in restrict band (2.4898GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 107.89dBuV/m (Peak), so the maximum field strength in restrict band is $107.89 - 41.11 = 66.78\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 44.56dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 97.53dBuV/m (Average), so the maximum field strength in restrict band is $97.53 - 44.56 = 52.97\text{dBuV/m}$ which is under 54dBuV/m limit.



A D T

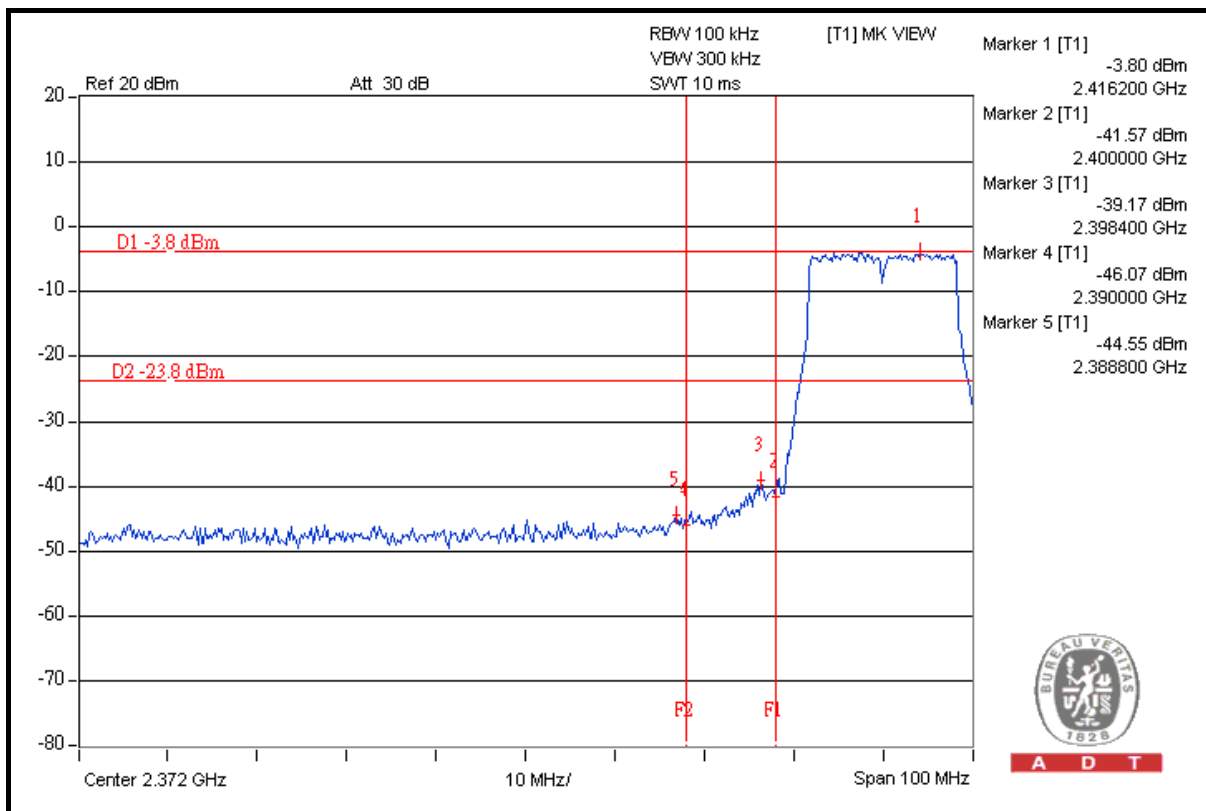



A D T

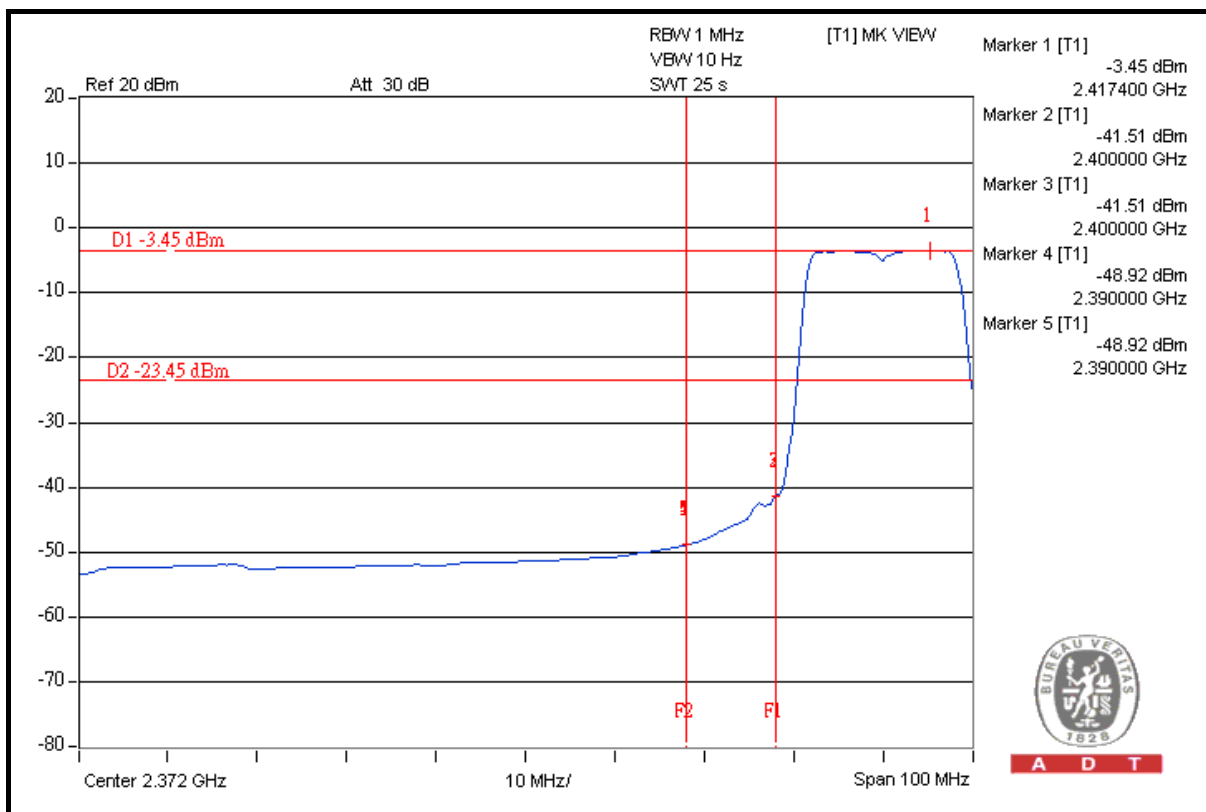

A D T




A D T

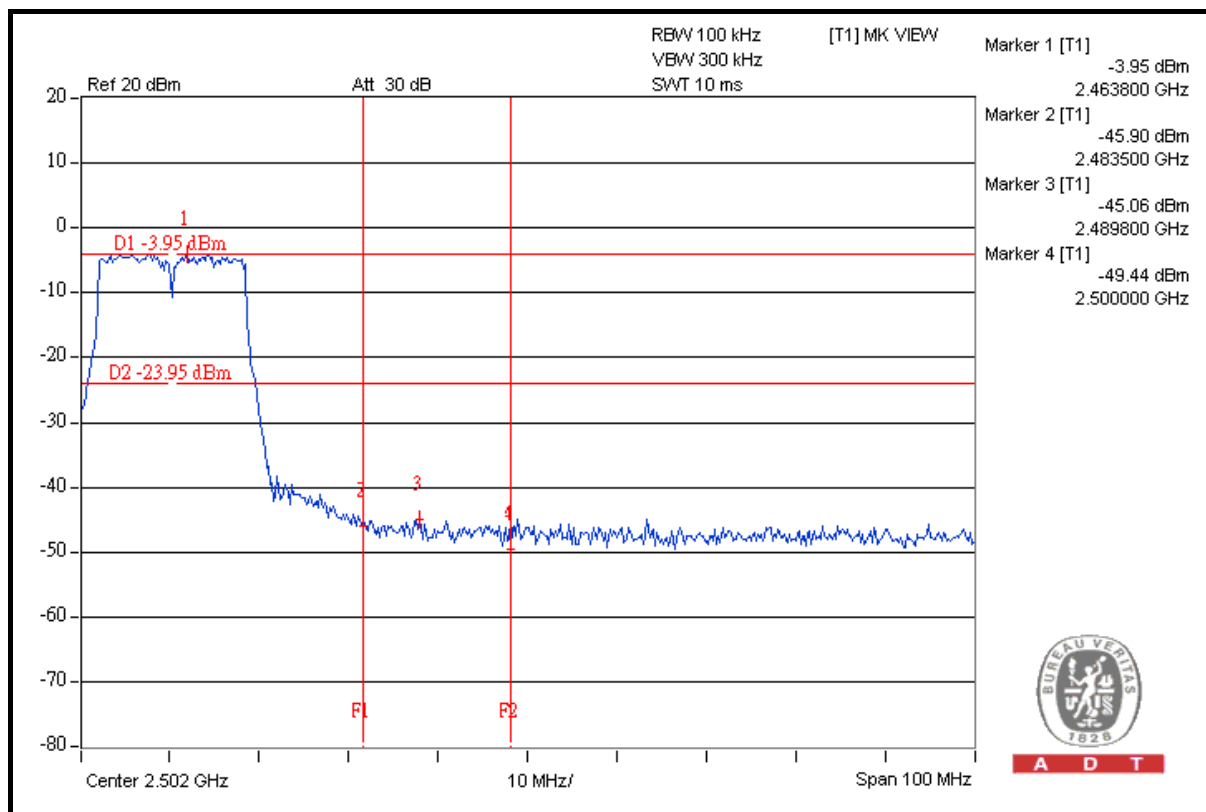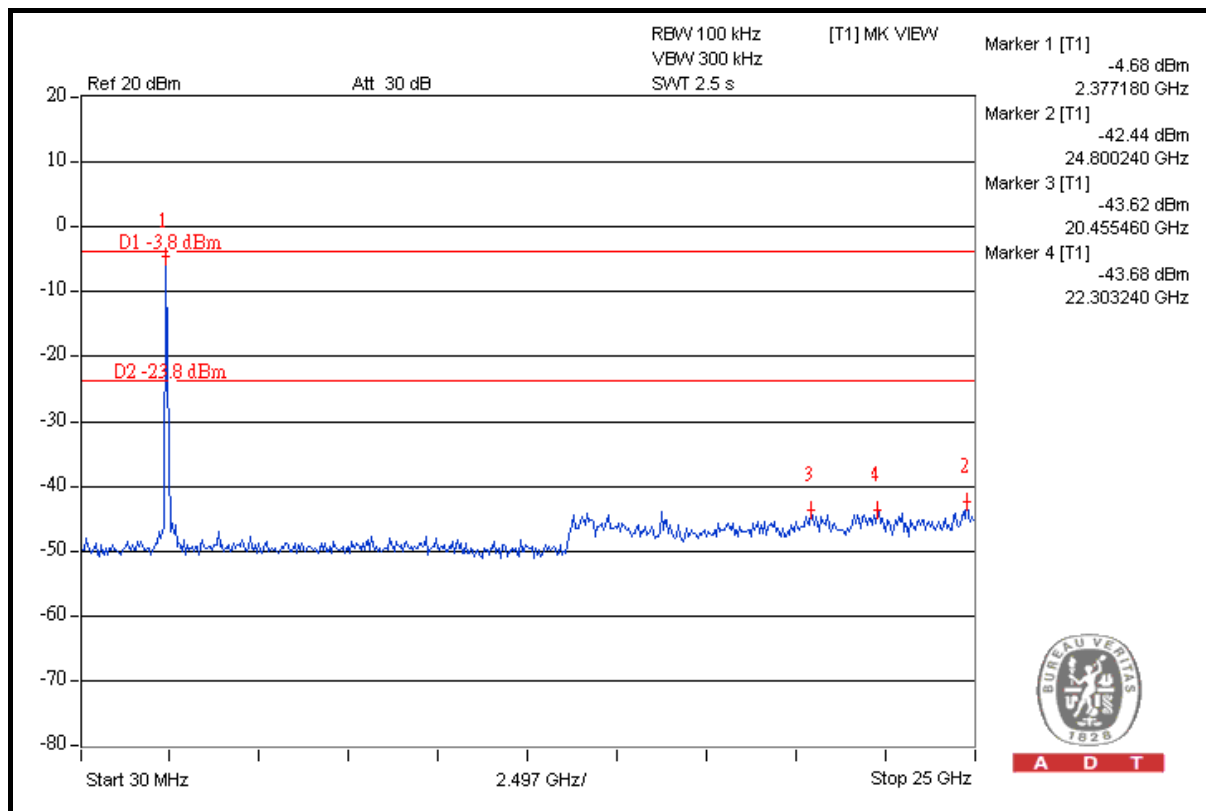




A D T

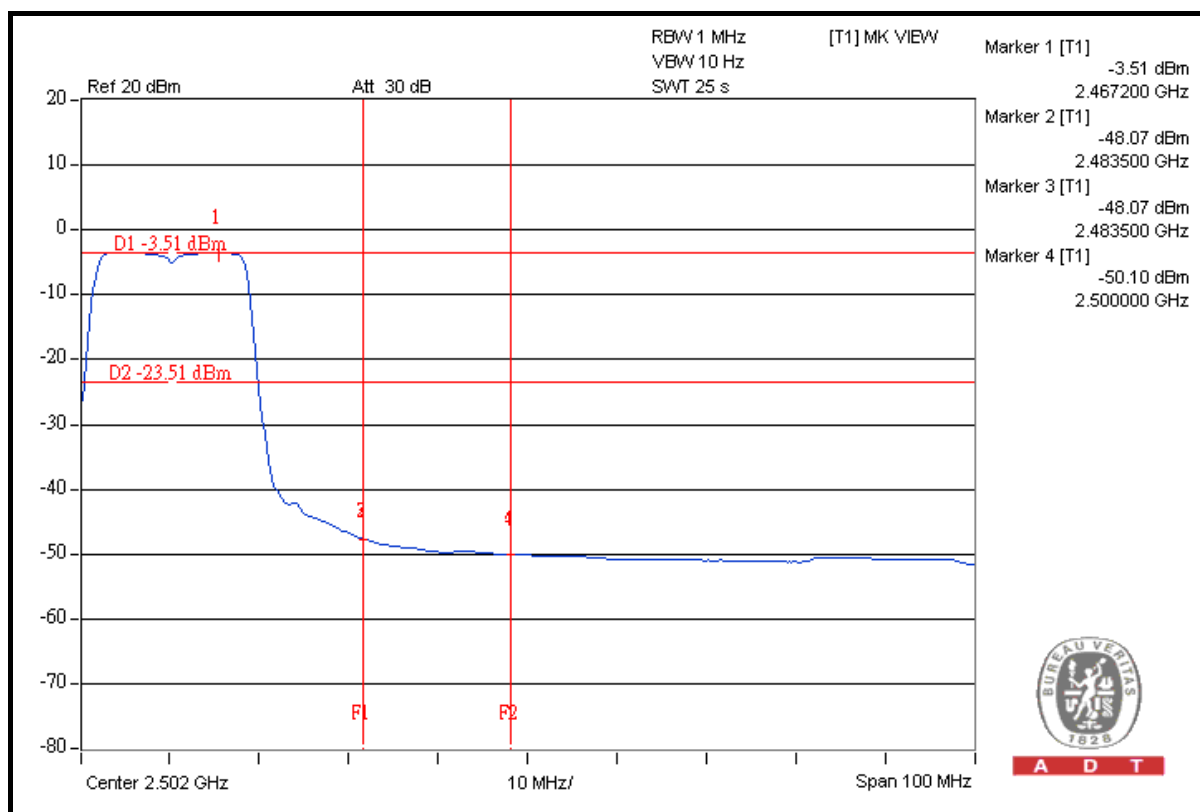

A D T

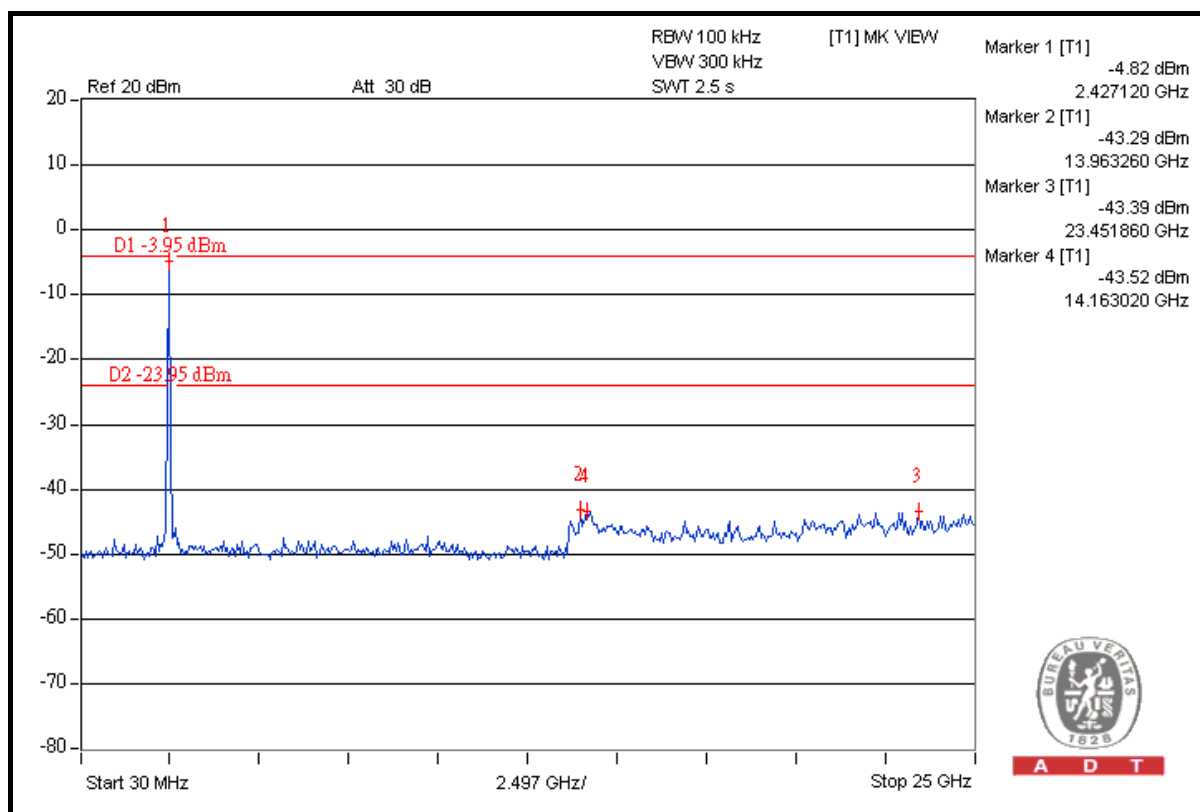

A D T

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna without antenna connector.
The maximum Gain of the antenna is 2dBi.

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---