

User manual

INSTRUCTIONS FOR RADIO CONTROL OPERATOR SINGLE ENTRY TRANSMITTER MODEL NO.:X219-1

Read the following instructions thoroughly before using transmitter

This transmitter must be adjusted so that the coding switches match the coding switches on your present operating transmitter or receiver.

1.Remove the transmitter cover

- a Unscrew the screws(Figure A).
- b Remove the front cover from the transmitter(Figure B).
- c In order to facilitate the replacement of the battery.

2.The transmitter is rolling code encoding and transmitting, it will automatically and receiver code matching.

User can click the push button,A signal transmits out.

If the receiver successfully decoded, the receiver will normally work.

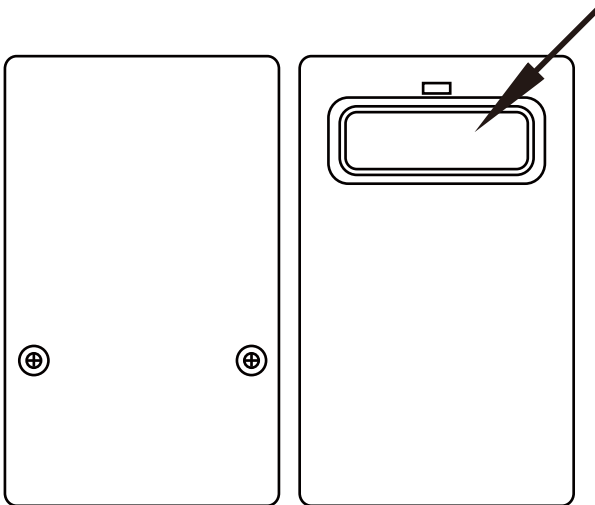


FIGURE A

FIGURE B

FCC NOTE:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) this device may not cause harmful interference,and (2) this device must accept any interference received,including interference that may cause undesired operation.

THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS OR CHANGE TO THIS EQUIPMENT. SUCH MODIFICATIONS OR CHANGE COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.