


The width of differential trace should be the same and approximate spacing.  
Ground gap > 20mil. Impedance is 100ohm.  
SATA Differential pair mismatch < 10mil

Hotkey Input



The width of differential trace should be the same and approximate spacing.  
Ground gap > 20mil. Impedance is 90ohm.  
SS Differential pair mismatch < 5mil

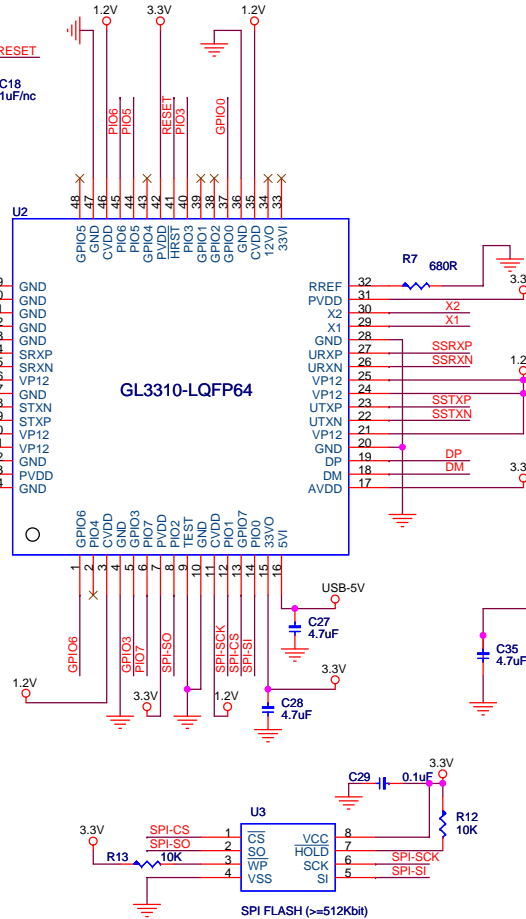