RF TESTREPORT

ISSUED BY Shenzhen BALUN Technology Co., Ltd.



FOR

Bluetooth audio receiver with FM transmitter and charger

ISSUED TO AAMP of Florida, dba AAMP of America

13190 56th Court, Suite 401, Clearwater, FI 33760



Tested by: Cao Shaodong)
(Engineer)
Date Ct. M2, 2015

Approved by: Wei Yanguan

Date Ct. 12, 2015

Report No.: EUT Type: BL-SZ1580260-601

Bluetooth audio receiver with FM

transmitter and charger

Model Name: Brand Name:

ISBT43 iSimple

Test Standard: 47 C

47 CFR Part 15 Subpart C

FCC ID: XBD-ISBT43

Test conclusion:

Pass

Test Date:

Sep. 5, 2015 ~ Sep. 13, 2015

Date of Issue:

Oct. 12, 2015

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.

Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong, P. R. China 518055 TEL: +86-755-66850100, FAX: +86-755-61824271

Email: info@baluntek.com www.baluntek.com



Revision History

Version Rev. 01 Oct. 12, 2015

Revisions Initial Issue

TABLE OF CONTENTS

MBLL OF CONTENTS	
1 ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1 Identification of the Testing Laboratory	5
1.2 Identification of the Responsible Testing Location	5
1.3 Announce	5
2 PRODUCT INFORMATION	6
2.1 Applicant	6
2.2 Manufacturer	6
2.3 General Description for Equipment under Test (EUT)	6
2.4 Technical Information	6
2.5 Ancillary Equipment	6
3 SUMMARY OF TEST RESULTS	7
3.1 Test Standards	7
3.2 Verdict	8
4 GENERAL TEST CONFIGURATIONS	9
4.1 Test Environments	9
4.2 Test Equipment List	9
4.3 Test Configurations	10
4.4 Description of Test Setup	11
4.4.1 For Antenna Port Test	11
4.4.2 For AC Power Supply Port Test	11
4.4.3 For Radiated Test (Below 30 MHz)	12
4.4.4 For Radiated Test (30 MHz-1 GHz)	12
4.4.5 For Radiated Test (Above 1 GHz)	13
4.5 Test Conditions	14
4.6 Measurement Results Explanation Example	15
4.6.1 For conducted test items:	15
4.6.2 For radiated band edges and spurious emission test:	15



5 TEST ITEMS	16
5.1 Antenna Requirements	16
5.1.1 Standard Applicable	16
5.1.2 Antenna Anti-Replacement Construction	16
5.1.3 Antenna Gain	16
5.2 Number of Hopping Frequency	17
5.2.1 Limit	17
5.2.2 Test Setup	17
5.2.3 Test Procedure	17
5.2.4 Test Result	17
5.3 Peak Output Power	18
5.3.1 Test Limit	18
5.3.2 Test Setup	18
5.3.3 Test Procedure	18
5.3.4 Test Result	18
5.4 Occupied Bandwidth	19
5.4.1 Limit	19
5.4.2 Test Setup	19
5.4.3 Test Procedure	19
5.4.4 Test Result	19
5.5 Carrier Frequency Separation	20
5.5.1 Limit	20
5.5.2 Test Setup	20
5.5.3 Test Procedure	20
5.5.4 Test Result	20
5.6 Time of Occupancy (Dwell time)	21
5.6.1 Limit	21
5.6.2 Test Setup	21
5.6.3 Test Procedure	21
5.6.4 Test Result	21
5.7 Conducted Spurious Emission	22
5.7.1 Limit	22
5.7.2 Test Setup	22



5.7.3 Test Procedure	22
5.7.4 Test Result	22
5.8 Conducted Emission	23
5.8.1 Limit	23
5.8.2 Test Setup	23
5.8.3 Test Procedure	23
5.8.4 Test Result	23
5.9 Radiated Spurious Emission	24
5.9.1 Limit	24
5.9.2 Test Setup	24
5.9.3 Test Procedure	24
5.9.4 Test Result	25
5.10 Band Edge	26
5.10.1 Limit	26
5.10.2 Test Setup	26
5.10.3 Test Procedure	26
5.10.4 Test Result	26
ANNEX A TEST RESULT	27
A.1 Number of Hopping Frequency	27
A.2 Peak Output Power	31
A.3 20 dB and 99% bandwidth	37
A.4 Hopping Frequency Separation	43
A.5 Average Time of Occupancy	45
A.6 Conducted Spurious Emissions	51
A.7 Radiated Emission	64
A.8 Band Edge	91
ANNEX B TEST SETUP PHOTOS	98
ANNEX C EUT EXTERNAL PHOTOS	98
ANNEX D EUT INTERNAL PHOTOS	98



1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.		
A dalua a a	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road,		
Address	Nanshan District, Shenzhen, Guangdong Province, P. R. China		
Phone Number	+86 755 6685 0100		
Fax Number	+86 755 6182 4271		

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.			
Test Location	9, 1			
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road,			
Addiess	Nanshan District, Shenzhen, Guangdong Province, P. R. China			
	The laboratory has been listed by Industry Canada to perform			
	electromagnetic emission measurements. The recognition numbers of test			
	site are 11524A-1.			
	The laboratory has been listed by US Federal Communications Commission			
	to perform electromagnetic emission measurements. The recognition			
Accreditation	numbers of test site are 832625. The laboratory has met the requirements of the IAS Accreditation Criteria for			
Certificate				
Testing Laboratories (AC89), has demonstrated compliance with I				
	Standard 17025:2005. The accreditation certificate number is TL-588.			
	The laboratory is a testing organization accredited by China National			
	Accreditation Service for Conformity Assessment (CNAS) according to			
	ISO/IEC 17025. The accreditation certificate number is L6791.			
	All measurement facilities used to collect the measurement data are located			
Description	at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road,			
	Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055			

1.3 Announce

- (1) The test report reference to the report template version v2.0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.



2 PRODUCT INFORMATION

2.1 Applicant

Applicant	AAMP of Florida, dba AAMP of America.	
Address 13190 56th Court, Suite 401, Clearwater, FI 33760		

2.2 Manufacturer

Manufacturer	Skytech Creations Limited.	
Address	Qiaotou Industrial district, Qiaoli Zone, Changping town, Dongguan.	

2.3 General Description for Equipment under Test (EUT)

EUT Type	Bluetooth audio receiver with FM transmitter and charger		
Model Name	ISBT43		
Hardware Version	N/A		
Software Version	N/A		
Network and Wireless	Divistanth 2.0. FM		
connectivity	Bluetooth 3.0, FM		
	The equipment is Bluetooth audio receiver with FM transmitter and		
About the Product	charger, it contains Bluetooth 3.0 and FM Modules operating at 2.4		
	GHz ISM band and 88MHz to 108MHz band. Only the Bluetooth 3.0		
	was tested in this report.		

2.4 Technical Information

Modulation Technology	FHSS	
Modulation Type	GFSK, ∏/4-DQPSK, 8-DPSK	
Transfer Rate	1 Mbps, 2 Mbps, 3 Mbps	
Fraguency Dongs	The frequency range used is 2402 MHz – 2480 MHz;	
Frequency Range	The frequency block is 2400 MHz to 2483.5 MHz.	
Number of channel	79 (at intervals of 1 MHz)	
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz).	
Antenna Type	PCB Antenna	
Antenna Gain	0 dBi (All involve the antenna gain test item, has been included in the	
	final results)	

Note: The above EUT information in section 2.3 and 2.4 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.5 Ancillary Equipment

Ancillary Equipment 1		
Ancillary Equipment 1	Length	1 m



3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title		
	47 CFR Part 15,			
1	Subpart C	Miscellaneous Wireless Communications Services		
	(10-1-14 Edition)			
	FCC PUBLIC			
2	NOTICE	Filling and Measurement Guidelines for Frequency Hopping		
	DA 00-705	Spread Spectrum Systems		
	(Mar. 30, 2000)			
3		American National Standard for Standard for Methods of		
	ANSI C63.4-2014	Measurement of Radio-Noise Emissions from Low-Voltage		
		Electrical and Electronic Equipment in the Range of 9 kHz to 40		
		GHz		
1	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless		
4	ANSI C03. 10-2013	Devices		



3.2 Verdict

No.	Description	FCC Part No.	Test Result	Verdict
1	Antenna Requirement	15.203		Pass Note 1
2	Number of Hopping Frequency	15.247(a)	ANNEX A.1	Pass
3	Peak Output Power	15.247(b)	ANNEX A.2	Pass
4	Occupied Bandwidth	15.247(a)	ANNEX A.3	Pass
5	Carrier Frequency Separation	15.247(a)	ANNEX A.4	Pass
6	Time of Occupancy (Dwell time)	15.247(a)	ANNEX A.5	Pass
7	Conducted Spurious Emission	15.247(d)	ANNEX A.6	Pass
8	Conducted Emission	15.207		N/A Note 2
9	Radiated Spurious Emission	15.209	ANNEX A.7	Pass
		15.247(d)	AININEA A.7	Pass
10	Band Edge	15.209	ANNEX A.8	Pass
		15.247(d)	AININEA A.O	F 433

Note 1: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note 2: The EUT only support car charger power supply, so the conducted emission test was not applicable.



4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 55%			
Atmospheric Pressure	100 kPa - 102 kPa			
Temperature	NT (Normal Temperature)	-22℃ to +25℃		
Working Voltage of the EUT	NV (Normal Voltage)	12 V		

4.2Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2015.07.16	2016.07.15
Vector Signal Generator	ROHDE&SCHWARZ	SMBV100A	177746	2015.07.16	2016.07.15
Signal Generator	ROHDE&SCHWARZ	SMB100A	260592	2015.07.01	2016.06.30
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2015.07.16	2016.07.15
Spectrum Analyzer	AGILENT	E4440A	MY45304434	2014.10.18	2015.10.17
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2015.07.14	2016.07.13
LISN	SCHWARZBECK	NSLK 8127	8127-687	2015.07.14	2016.07.13
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2015.07.16	2016.07.15
Power Splitter	KMW	DCPD-LDC	1305003215	2015.07.01	2016.06.30
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2015.07.21	2016.07.20
Attenuator (20 dB)	KMW	ZA-S1-201	110617091		
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189		
DC Power Supply	ROHDE&SCHWARZ	HMP2020	18141664	2015.07.17	2016.07.16
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2014/11/20	2015/11/19
Test Antenna- Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2015.07.22	2017.07.21
Test Antenna- Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2015.07.22	2017.07.21
Test Antenna- Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2015.07.22	2017.07.21
Test Antenna- Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2015.07.22	2017.07.21
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2015.02.28	2016.02.27
Shielded Enclosure	ChangNing	CN-130701	130703		




4.3 Test Configurations

Test	Description				
Configurations (TC) NO.	Signal Description	Operating Frequency			
Transmitter					
TC01	GFSK modulation, package type DH5, hopping on				
TC02	GFSK modulation, package type DH5, hopping off	Ch No. 0/ 2402 MHz			
TC03	GFSK modulation, package type DH5, hopping off	Ch No. 39/ 2441 MHz			
TC04	GFSK modulation, package type DH5, hopping off	Ch No. 78/ 2480 MHz			
TC05	π/4-DQPSK modulation, package type DH5, hopping on				
TC06	π/4-DQPSK modulation, package type DH5, hopping off	Ch No. 0/ 2402 MHz			
TC07	π/4-DQPSK modulation, package type DH5, hopping off	Ch No. 39/ 2441 MHz			
TC08	π/4-DQPSK modulation, package type DH5, hopping off	Ch No. 78/ 2480 MHz			
TC09	8DPSK modulation, package type DH5, hopping on				
TC10	8DPSK modulation, package type DH5, hopping off	Ch No. 0/ 2402 MHz			
TC11	8DPSK modulation, package type DH5, hopping off	Ch No. 39/ 2441 MHz			
TC12	8DPSK modulation, package type DH5, hopping off	Ch No. 78/ 2480 MHz			




4.4 Description of Test Setup

4.4.1 For Antenna Port Test

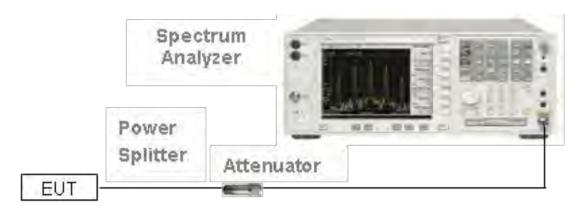

(Diagram 1)


4.4.2 For AC Power Supply Port Test

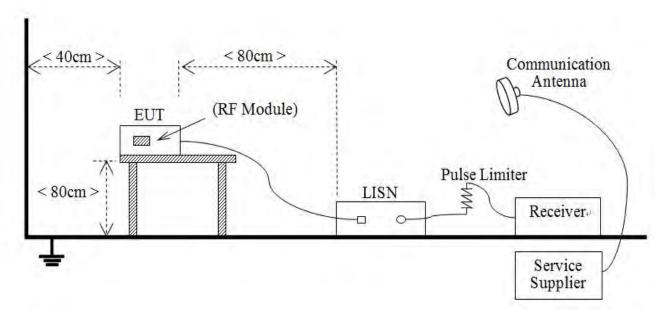

(Diagram 2)




4.4.3 For Radiated Test (Below 30 MHz)

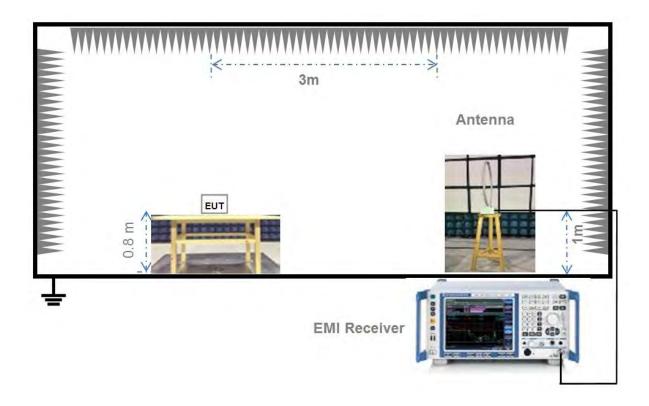

(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

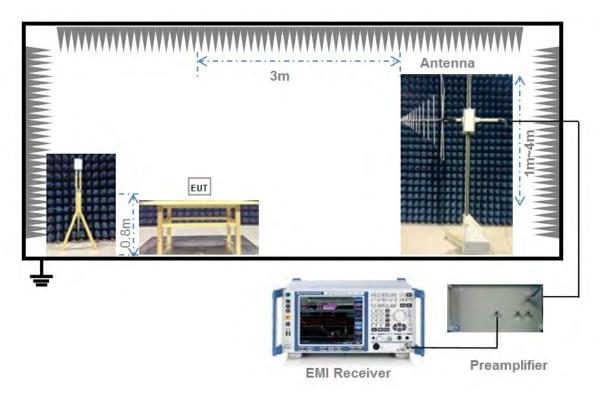


(Diagram 4)

12



4.4.5 For Radiated Test (Above 1 GHz)

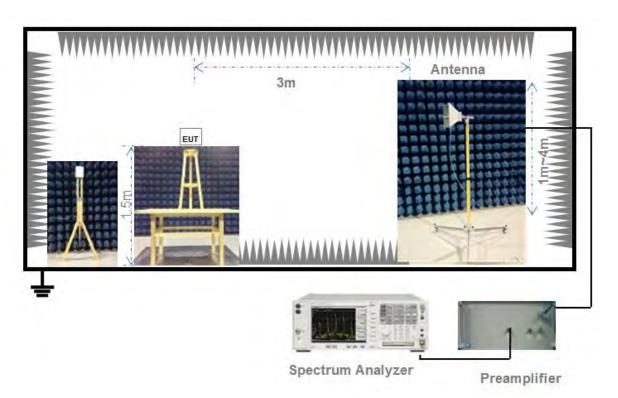

(Diagram 5)



4.5 Test Conditions

Toot Coop	Test Conditions			
Test Case	Test Env.	Test Setup Note 1	Test Configuration Note 2	
Number of Hopping Frequency	NTNV	Test Setup 1	TC01, TC05, TC09	
Peak Output Power	NTNV	Test Setup 1	TC02, TC03, TC04, TC06, TC07, TC08, TC10, TC11, TC12	
Occupied Bandwidth	NTNV	Test Setup 1	TC02, TC03, TC04, TC06, TC07, TC08, TC10, TC11, TC12	
Carrier Frequency Separation	NTNV	Test Setup 1	TC01, TC05, TC09	
Time of Occupancy (Dwell time)	NTNV	Test Setup 1	TC01, TC05, TC09	
Conducted Spurious Emission	NTNV	Test Setup 1	TC02, TC03, TC04, TC06, TC07, TC08, TC10, TC11, TC12	
Conducted Emission	NTNV	Test Setup 2	TC01, TC02, TC03, TC04, TC05, TC06, TC07, TC08, TC09, TC10, TC11, TC12	
Radiated Emission	NTNV	Test Setup 3 Test Setup 4 Test Setup 5	TC01, TC02, TC03, TC04, TC05, TC06, TC07, TC08, TC09, TC10, TC11, TC12	
Band Edge	NTNV	Test Setup 5	TC01, TC02, TC04, TC05, TC06, TC08, TC09, TC10, TC12	

Note:

- 1. Please refer to section 4.4 for test setup details.
- 2. Please refer to section 4.3 for test configuration details.



4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + Duty cycle correction factor (dB)

Duty cycle correction factor (dB) = 20 * log (Duty cycle).

Duty cycle = on time / 100 milliseconds

On time = dwell time * hopping number in 100 ms

For example: bluetooth with dwell time 2.9 ms and 3 hops in 100 ms, then

Duty cycle correction factor (dB) = 20 * log ((2.9 * 3) / 100) = -21.21 dB

Following shows an average computation example with duty cycle correction factor = -21.21 dB, and the peak emission level is 45.61 dBuV/m.

Example:

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + duty cycle correction factor (dB) = 45.61 + (-21.21) = 24.4 (dBuV/m)



5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Standard Applicable

FCC §15.203 & 15.247(b)


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is An embedded-in	The antenna is welded on the mainboard, can't be replaced by the
	consumer

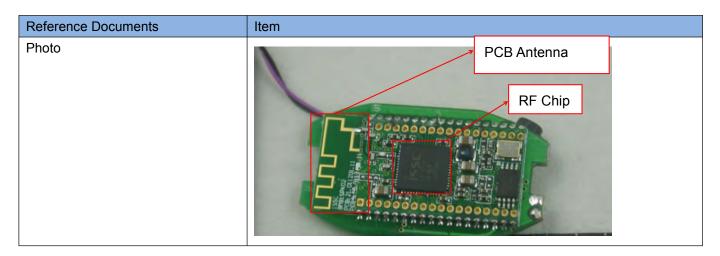

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



5.2 Number of Hopping Frequency

5.2.1 Limit

FCC §15.247(a) (1) (iii)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.2.2 Test Setup

See section 4.1.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW ≥ 1% of the span

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.2.4 Test Result

Please refer to ANNEX A.1.



5.3 Peak Output Power

5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems that operates in the 2400 MHz to 2483.5 MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1 Watt.

5.3.2 Test Setup

See section 4.1.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Please refer to ANNEX A.2.



5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a)

The 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth (10*log1%=20 dB) taking the total RF output power.

5.4.2 Test Setup

See section 4.1.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW ≥ 1% of the 20 dB bandwidth

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.3.



5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.5.2 Test Setup

See section 4.1.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span

Video (or Average) Bandwidth (VBW) ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Please refer to ANNEX A.4.



5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.6.2 Test Setup

See section 4.1.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The average time of occupancy on any channel within the Period can be calculated with formulas:

For DH1 package type

```
{Total of Dwell} = {Pulse Time} * (1600 / 2) / {Number of Hopping Frequency} * {Period} 
{Period} = 0.4 s * {Number of Hopping Frequency}
```

For DH3 package type

```
{Total of Dwell} = {Pulse Time} * (1600 / 4) / {Number of Hopping Frequency} * {Period} = 0.4 s * {Number of Hopping Frequency}
```

For DH5 package type

```
{Total of Dwell} = {Pulse Time} * (1600 / 6) / {Number of Hopping Frequency} * {Period} 
{Period} = 0.4 s * {Number of Hopping Frequency}
```

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result

Please refer to ANNEX A.5



5.7 Conducted Spurious Emission

5.7.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.1.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Please refer to ANNEX A.6.



5.8 Conducted Emission

5.8.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a $50\mu\text{H}/50\Omega$ line impedance stabilization network (LISN).

Frequency range	Conducted Limit (dBµV)				
(MHz)	Quai-peak	Average			
0.15 - 0.50	66 to 56	56 to 46			
0.50 - 5	56	46			
0.50 - 30	60	50			

5.8.2 Test Setup

See section 4.1.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

5.8.4 Test Result

Please refer to ANNEX A.7.



5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

- 1. Field Strength ($dB\mu V/m$) = 20*log[Field Strength ($\mu V/m$)].
- 2. In the emission tables above, the tighter limit applies at the band edges.
- 3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
- 4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.9.2 Test Setup

See section 4.4.2 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz

VBW ≥ RBW

Sweep = auto





Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Please refer to ANNEX A.8.



5.10 Band Edge

5.10.1 Limit

FCC §15.209&15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.10.2 Test Setup

See section 4.1.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation

RBW ≥ 1% of the span

VBW ≥ RBW

Sweep = auto

Detector function = peak /AV

Trace = max hold

Allow the trace to stabilize.

E [dBμV/m] =UR + AT + AFactor [dB]; AT =LCable loss [dB] - Gpreamp [dB]

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m

5.10.4 Test Result

Please refer to ANNEX A.9.



ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
∏/4-DQPSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass


Test plots

GFSK 2.4 GHz ~ 2.4415 GHz

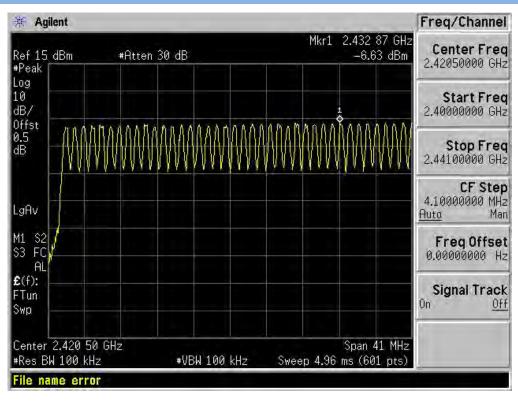




GFSK 2.4415 GHz ~ 2.4835 GHz

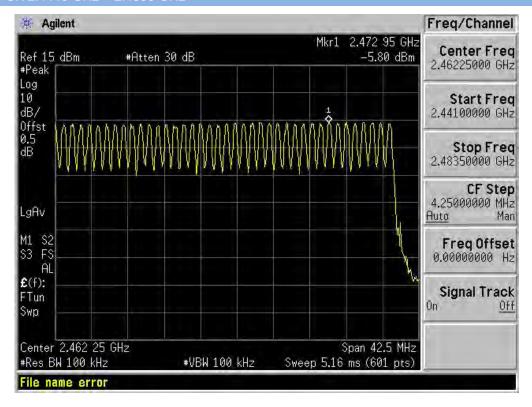


∏/4-DQPSK 2.4 GHz ~ 2.4415 GHz

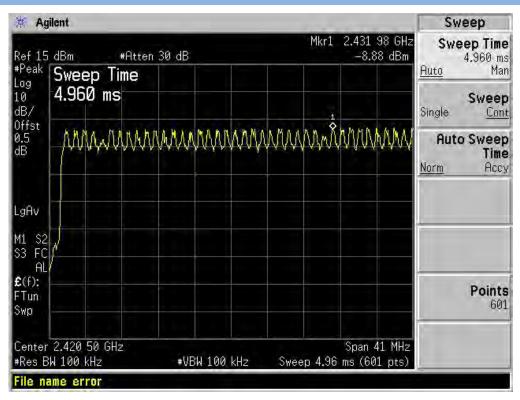




∏/4-DQPSK 2.4415 GHz ~ 2.4835 GHz

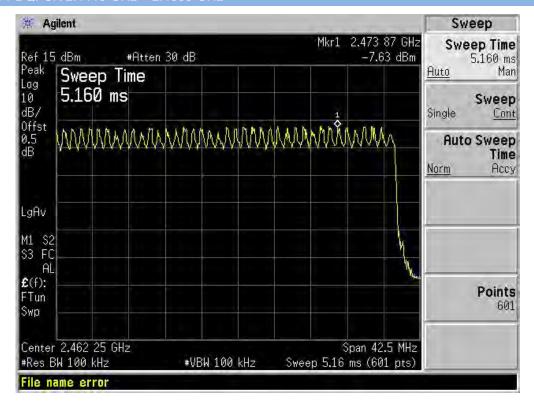


8-DPSK 2.4 GHz ~ 2.4415 GHz

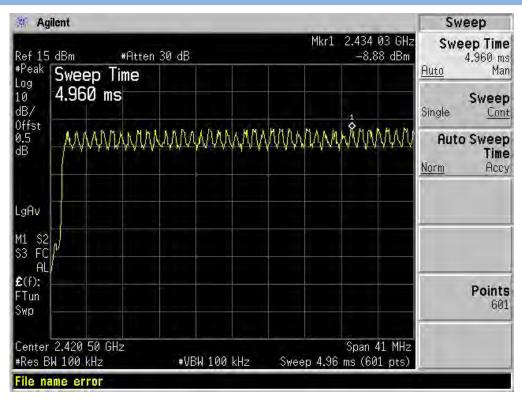



8-DPSK 2.4415 GHz ~ 2.4835 GHz

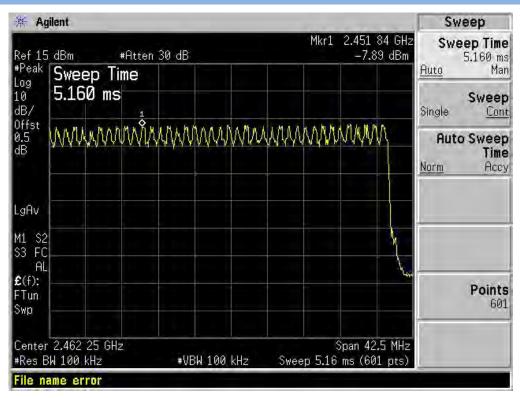



A.2 Peak Output Power

Test Data
GFSK Mode:

Channal	Measured Ou	utput Peak Power	Limit		Verdict	
Channel	dBm	mW	dBm	mW	verdict	
Low	-6.79	0.21			Pass	
Middle	-5.85	0.26	30	1000	Pass	
High	-4.91	0.32			Pass	

∏/4-DQPSK Mode:

Channel	Measured Ou	Output Peak Power Limit		Measured Output Peak Power Limit		Vordict
Channel	dBm	mW	dBm	mW	Verdict	
Low	-8.64	0.14			Pass	
Middle	-7.52	0.18	30	1000	Pass	
High	-6.55	0.22			Pass	


8-DPSK Mode:

Channel Measured Output Peak Po		utput Peak Power	Limit		Verdict
Channel	dBm	mW	dBm	mW	verdict
Low	-8.19	0.15			Pass
Middle	-7.23	0.19	30	1000	Pass
High	-6.53	0.22			Pass




Test plots

GFSK LOW CHANNEL

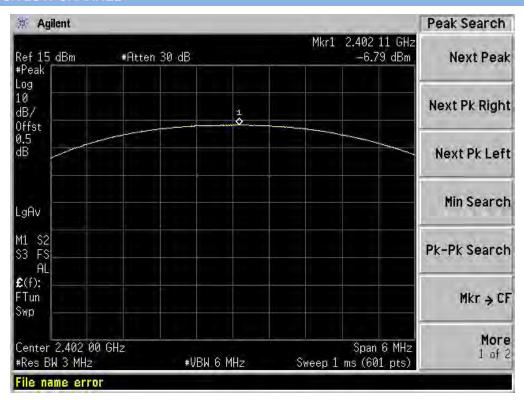


GESK MIDDLE CHANNE

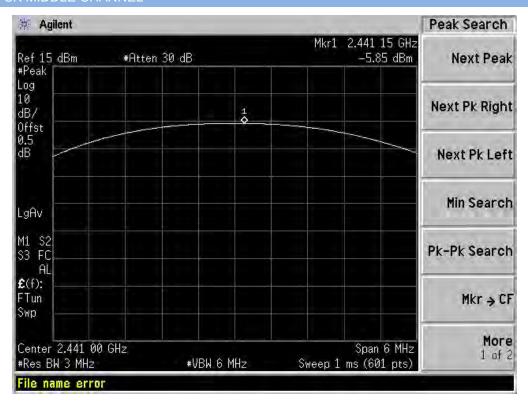




GFSK HIGH CHANNEL

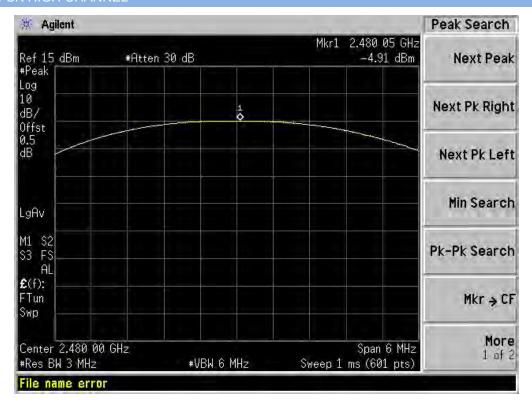


∏/4-DQPSK LOW CHANNEL

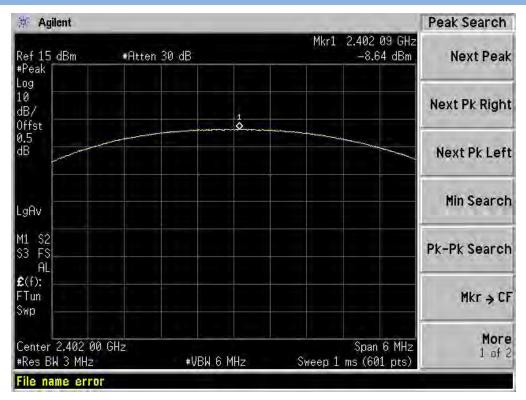




∏/4-DQPSK MIDDLE CHANNEL

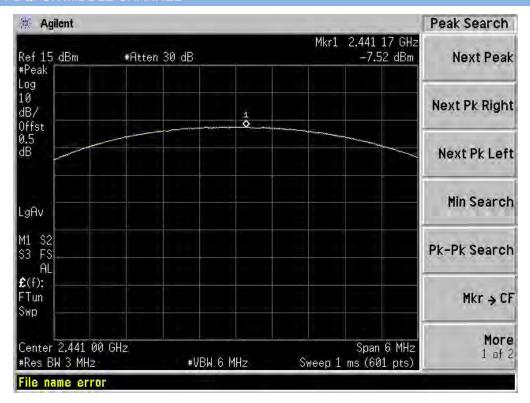


∏/4-DQPSK HIGH CHANNEL

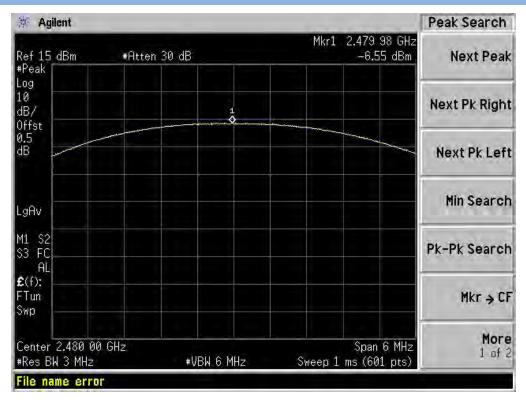




8-DPSK LOW CHANNEL

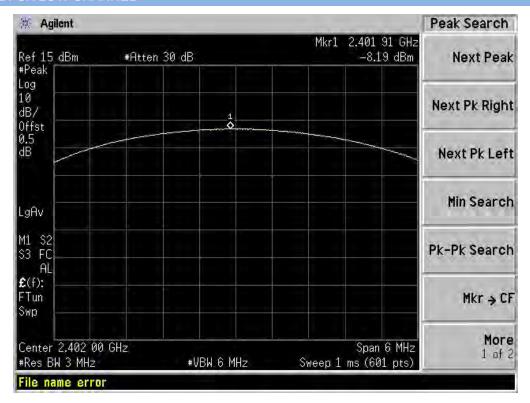


8-DPSK MIDDLE CHANNE

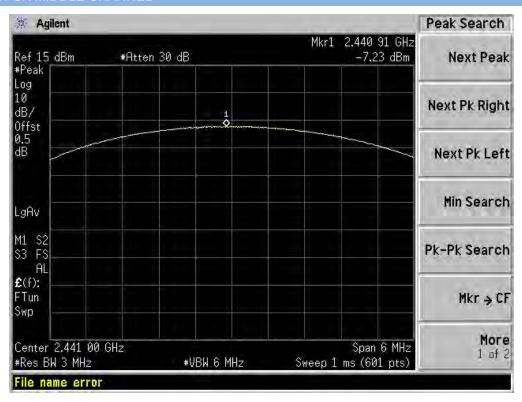



8-DPSK HIGH CHANNEL

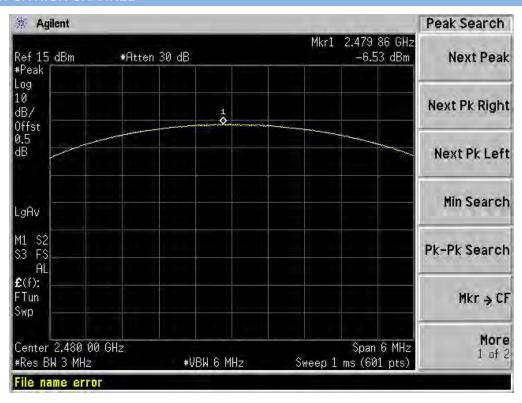



A.3 20 dB and 99% bandwidth

Test Data

GFSK Mode:

Channel	20 dB Bandwidth (MHz)	99% Bandwidth (kHz)		
Low	1.127	992.9965		
Middle	1.125	992.8299		
High	1.123	992.7455		

∏/4-DQPSK Mode:

Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)		
Low	1.350	1.1865		
Middle	1.354	1.1851		
High	1.349	1.1841		


8-DPSK Mode:

Channel	20 dB Bandwidth	99% Bandwidth		
	(MHz)	(MHz)		
Low	1.370	1.2025		
Middle	1.364	1.1976		
High	1.363	1.1961		




Test plots

GFSK LOW CHANNEL

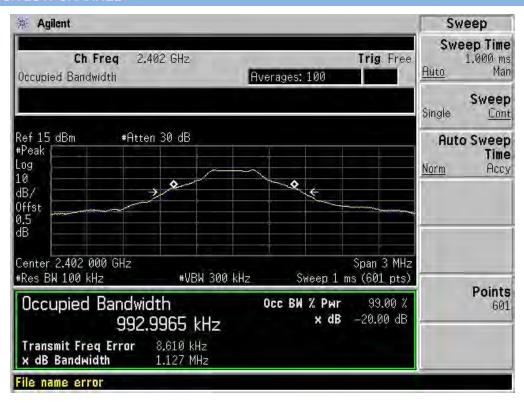


GFSK MIDDLE CHANNEL

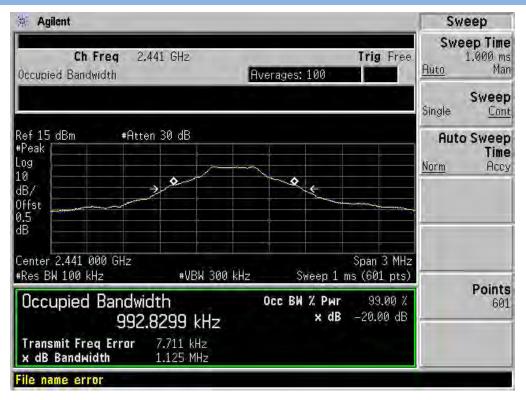




GFSK HIGH CHANNEL

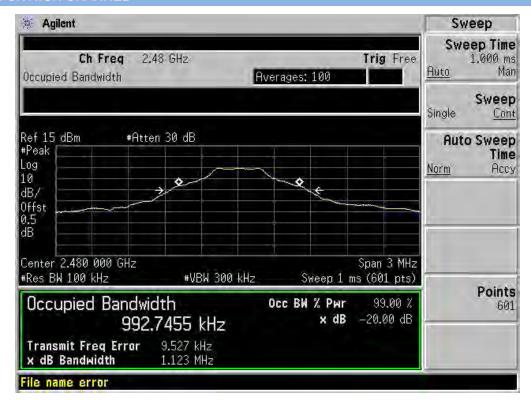


∏/4-DQPSK LOW CHANNEL

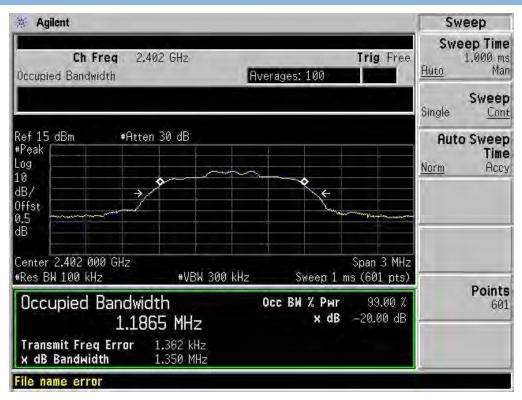




∏/4-DQPSK MIDDLE CHANNEL

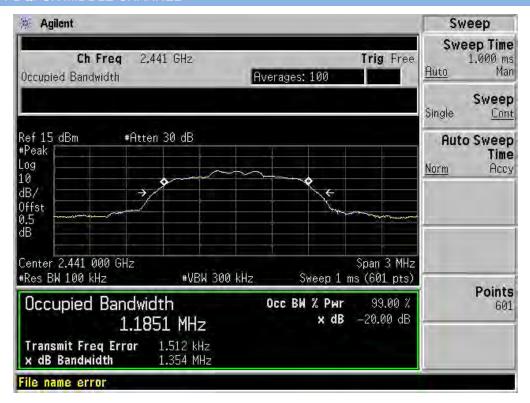


∏/4-DQPSK HIGH CHANNEL

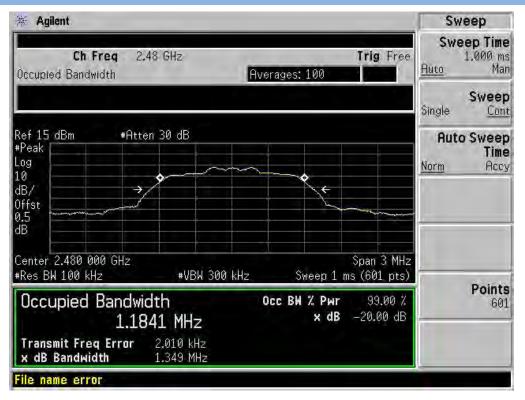




8-DPSK LOW CHANNEL

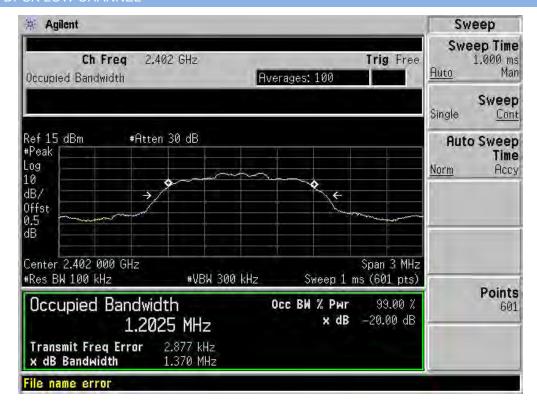


8-DPSK MIDDLE CHANNEL

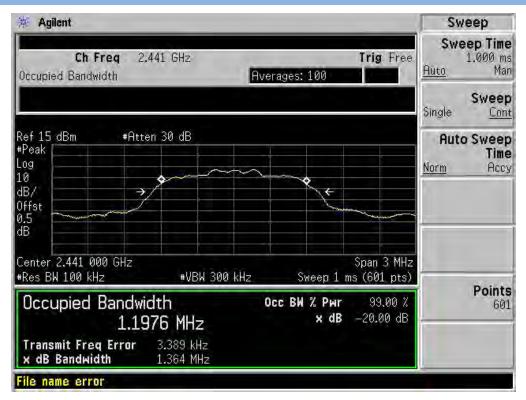



8-DPSK HIGH CHANNEL

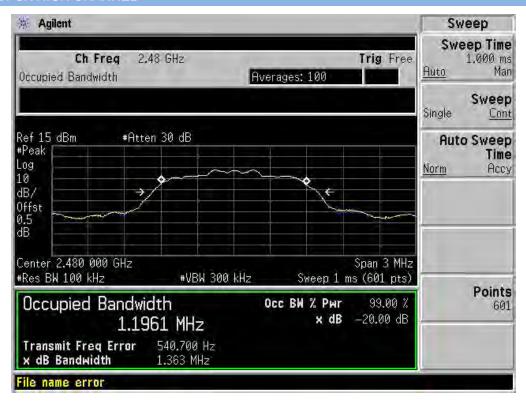




A.4 Hopping Frequency Separation

Test Data

	Frequency	Max 20 dB	Two-thirds of the	
Mode	separation	Bandwidth	20 dB bandwidth	Verdict
	(MHz)	(MHz)	(MHz)	
GFSK	1.011	1.127	0.751	Pass
∏/4-DQPSK	1.000	1.354	0.903	Pass
8-DPSK	1.000	1.370	0.913	Pass


Test Plots

GFSK

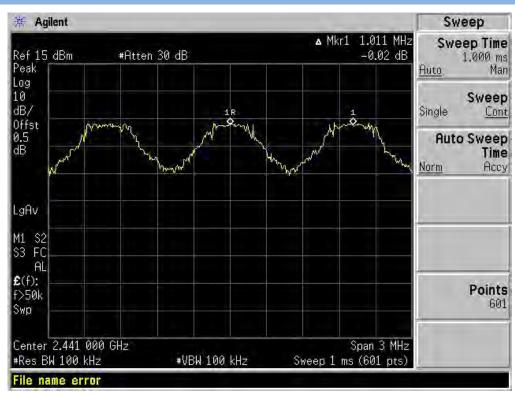




∏/4-DQPSK

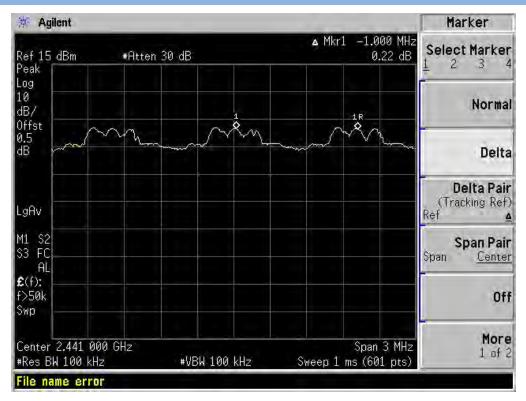

8-DPSK

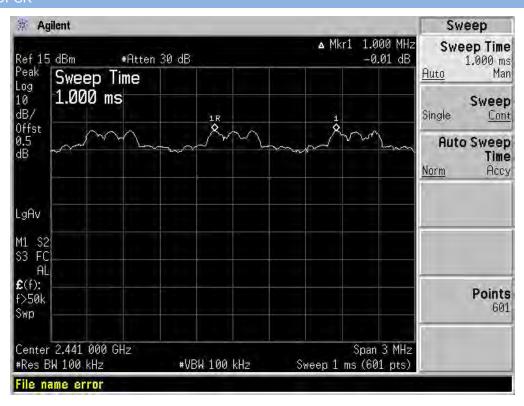



A.5 Average Time of Occupancy

Test Data

GFSK Mode:

DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.397	127.044	0.4	Pass
DH 3	1.647	263.528	0.4	Pass
DH 5	2.893	308.596	0.4	Pass

∏/4-DQPSK Mode:

DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.407	139.244	0.4	Pass
DH 3	1.647	263.528	0.4	Pass
DH 5	2.900	309.343	0.4	Pass


8-DPSK Mode:

DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.410	131.204	0.4	Pass
DH 3	1.660	265.608	0.4	Pass
DH 5	2.893	308.596	0.4	Pass




Test Plots

GFSK DH1

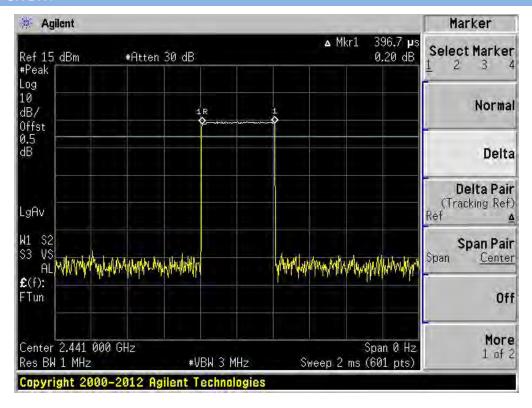


GESK DH3

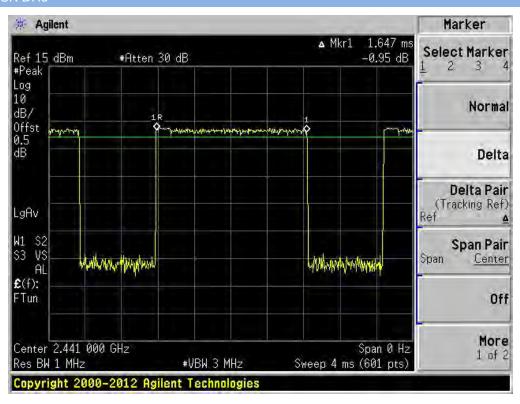




GFSK DH5

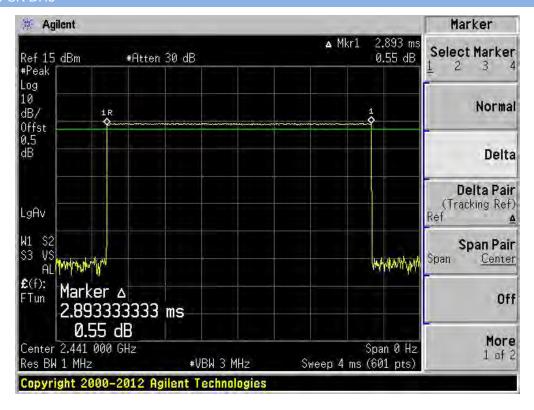


∏/4-DQPSK DH1

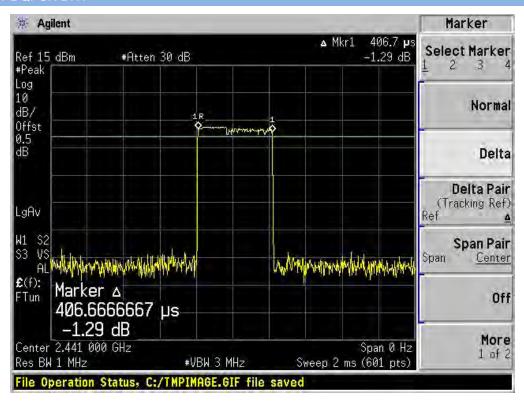




∏/4-DQPSK DH3

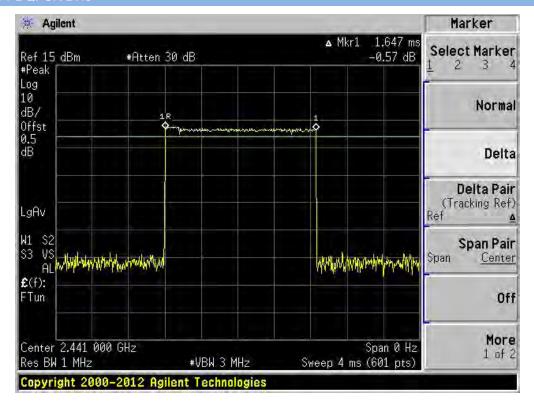


∏/4-DQPSK DH5

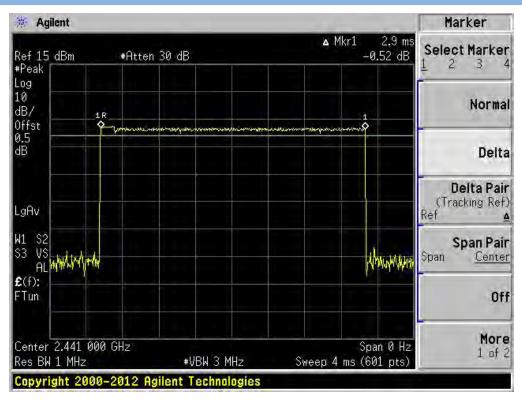




8-DPSK DH1

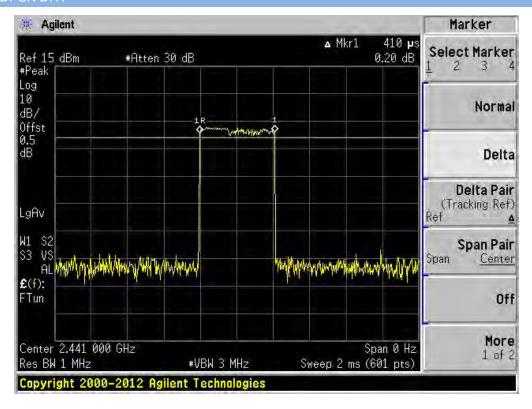


8-DPSK DH3

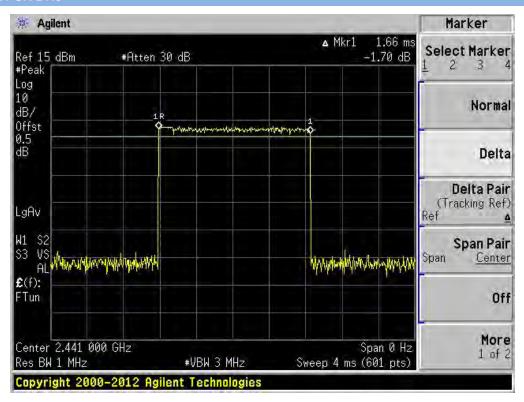



8-DPSK DH5

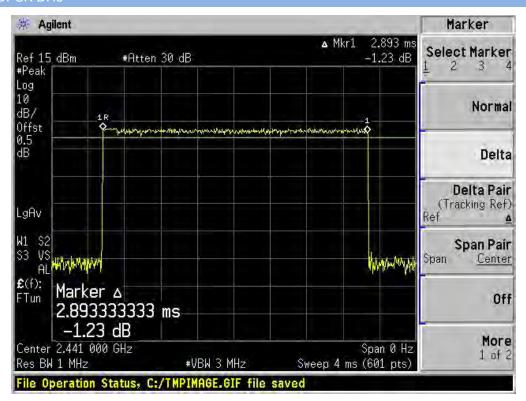



A.6 Conducted Spurious Emissions

Test Data
GFSK Mode:

Channel	Measured Max. Out of	Limit (V and a	
	Band Emission (dBm)	Carrier Level	Calculated 20 dBc Limit	Verdict
Low	-52.26	-7.52	-27.5	Pass
Middle	-53.40	-6.59	-26.6	Pass
High	-57.60	-5.58	-25.6	Pass

∏/4-DQPSK Mode:

Channel	Measured Max. Out of	Limit (
	Band Emission (dBm)	Carrier Level	Calculated 20 dBc Limit	Verdict
Low	-55.35	-11.97	-32.0	Pass
Middle	-56.98	-10.08	-30.1	Pass
High	-54.49	-8.55	-28.6	Pass


8-DPSK Mode:

	Measured Max. Out of	Limit (Va alba	
Channel	Band Emission (dBm)	Carrier Level	Calculated 20 dBc Limit	Verdict
Low	-55.24	-9.98	-30.0	Pass
Middle	-55.27	-11.31	-31.3	Pass
High	-55.37	-10.02	-30.0	Pass




Test Plots

GESK LOW CHANNEL BAND EDGE

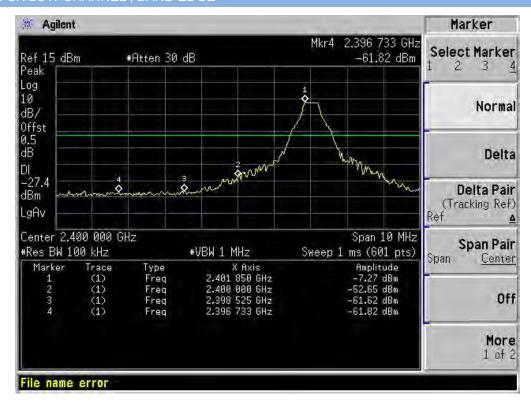


GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

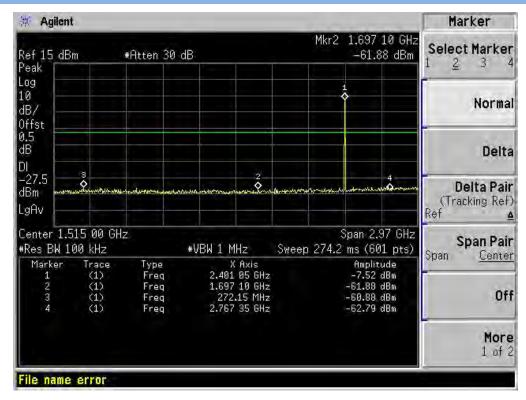





GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

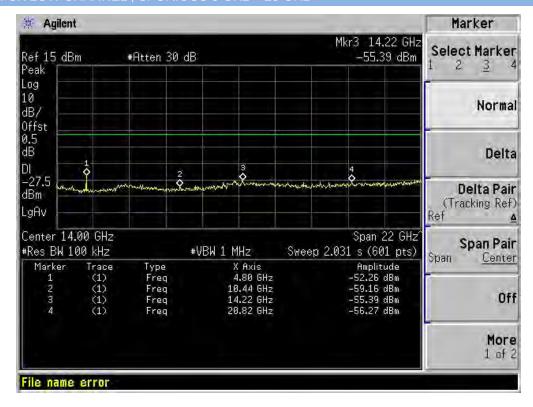


GFSK MIDDLE CHANNEL . SPURIOUS 30 MHz ~ 3 GHz

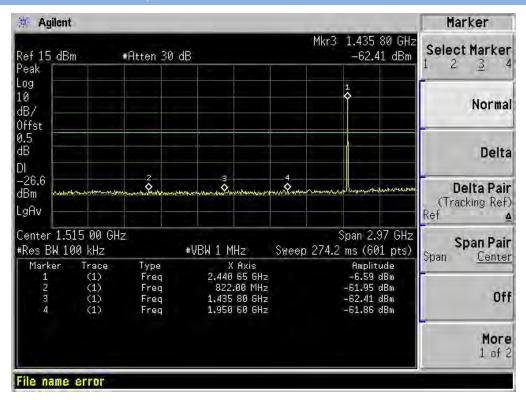



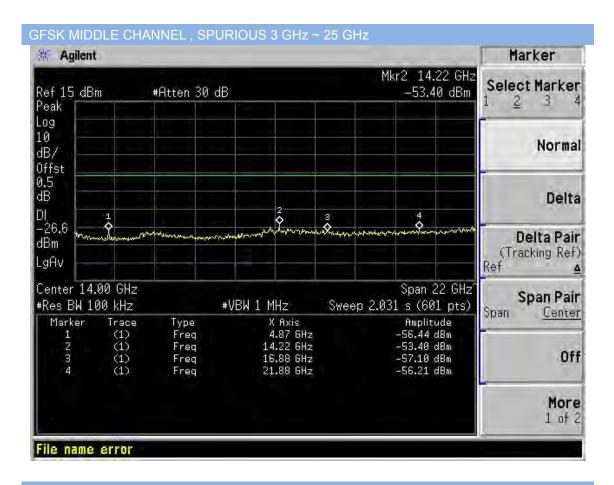


GFSK HIGH CHANNEL, BAND EDGE

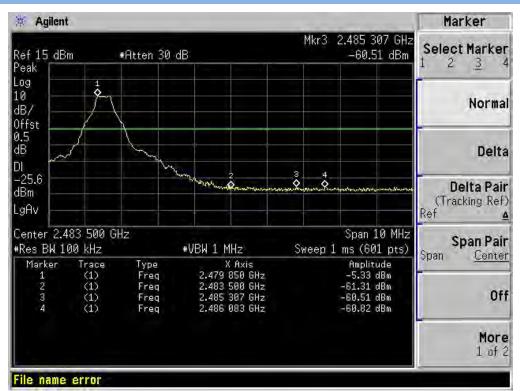




GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

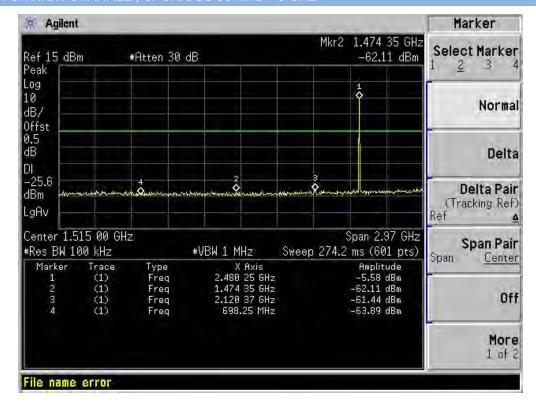


GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

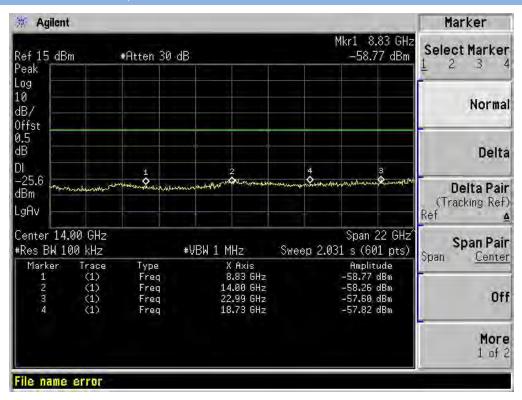




□/4-DQPSK LOW CHANNEL, BAND EDGE

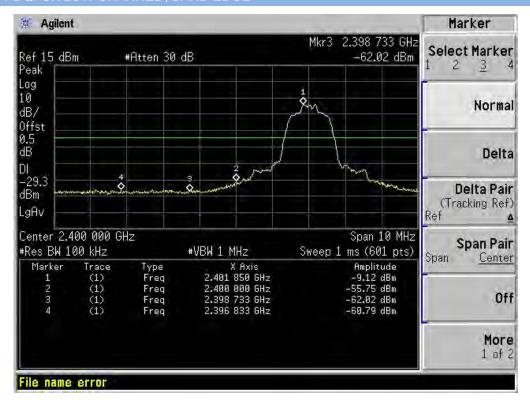


□/4-DQPSK LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

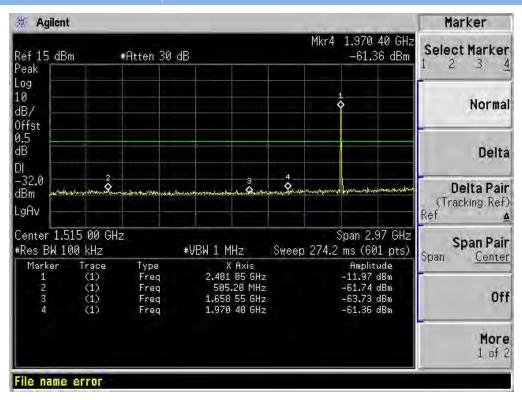




□/4-DQPSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

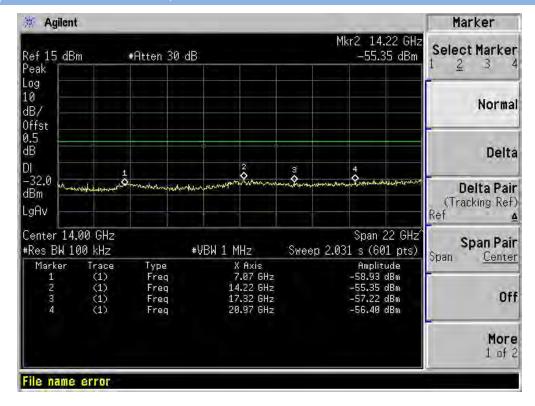


□/4-DQPSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

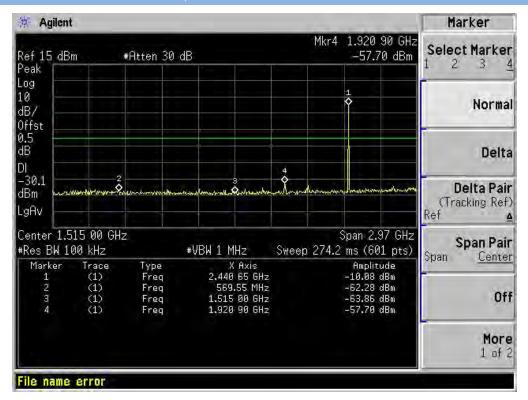




□/4-DQPSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

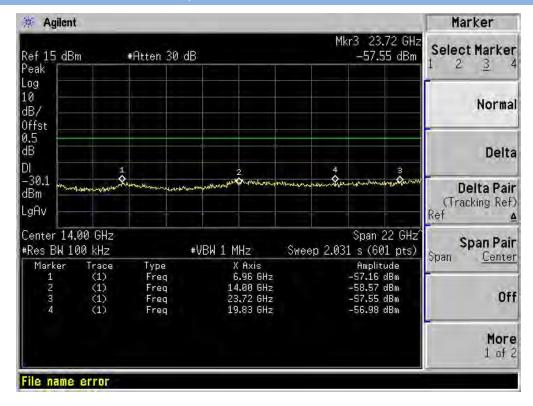


∏/4-DQPSK HIGH CHANNEL , BAND EDGE

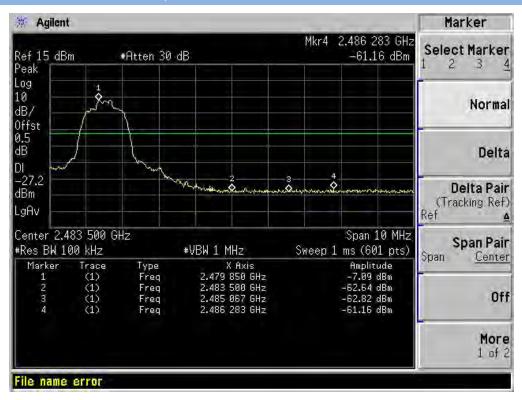




□/4-DQPSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

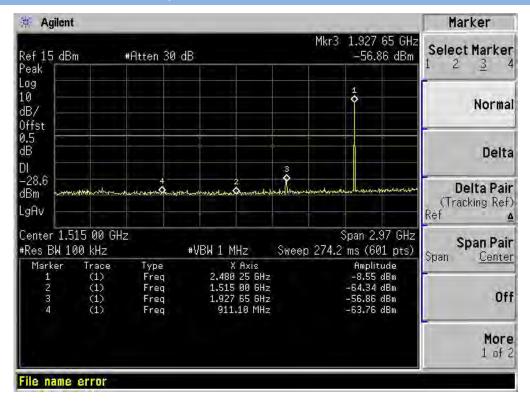


□/4-DQPSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

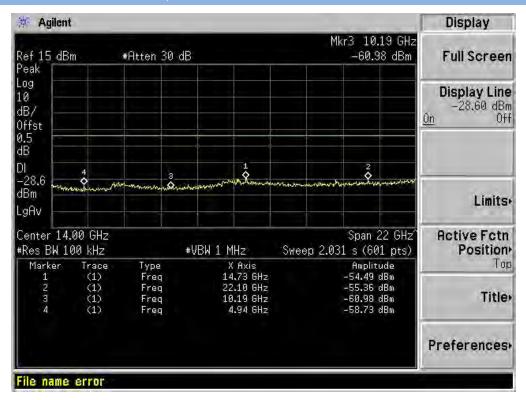




8-DPSK LOW CHANNEL, BAND EDGE

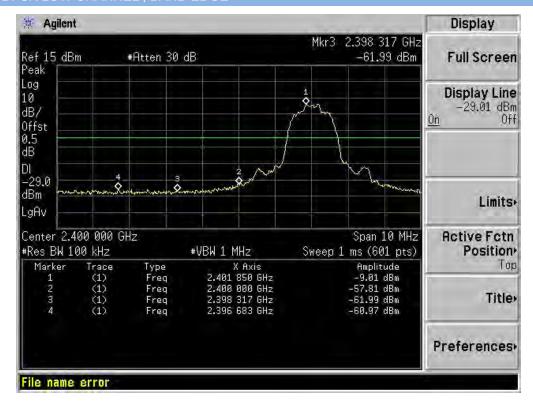


8-DPSK LOW CHANNEL . SPURIOUS 30 MHz ~ 3 GHz

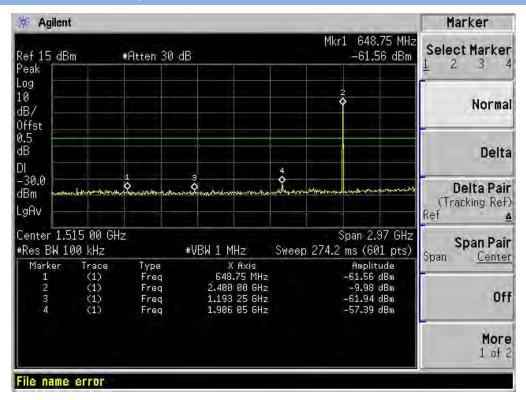




8-DPSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

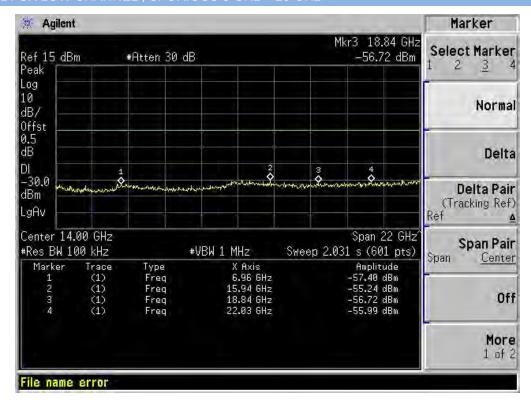


8-DPSK MIDDLE CHANNEL . SPURIOUS 30 MHz ~ 3 GHz

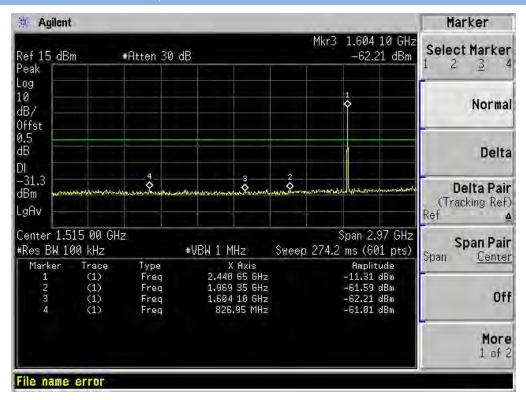




8-DPSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

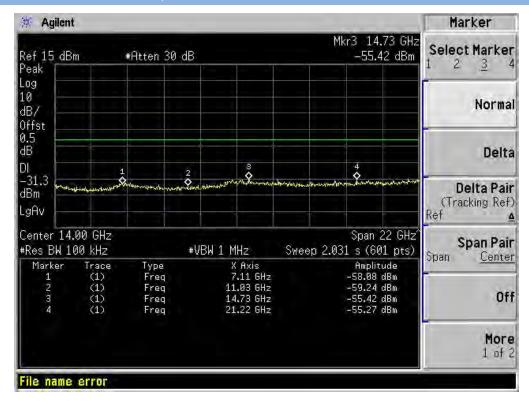


8-DPSK HIGH CHANNEL, BAND EDGE

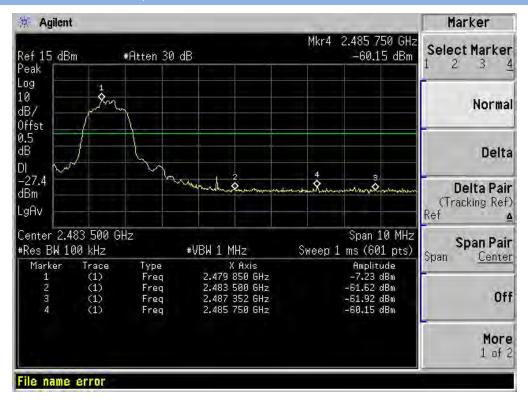




8-DPSK HIGH CHANNEL, SPURIOUS 30 MHz ~3 GHz

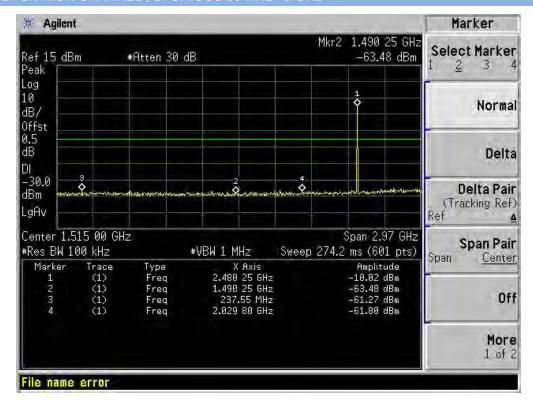

8-DPSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

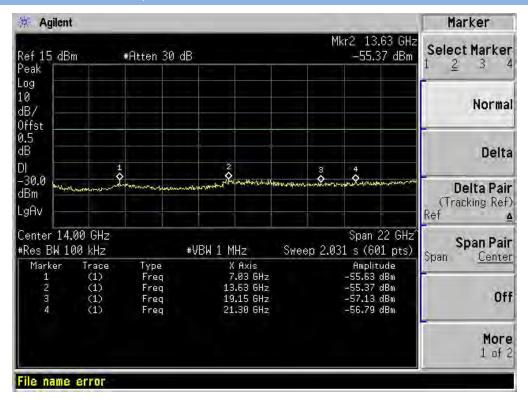





A.7 Radiated Emission

Duty cycle correction factor for average measurement.

DH5 on time/100 ms(Count Pulses) Plot on Channel 39

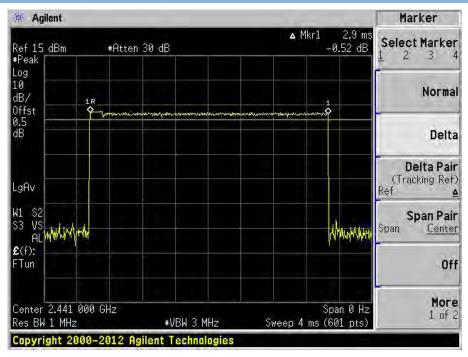

DH5 on time/100 ms(One Pulse) Plot on Channel 39

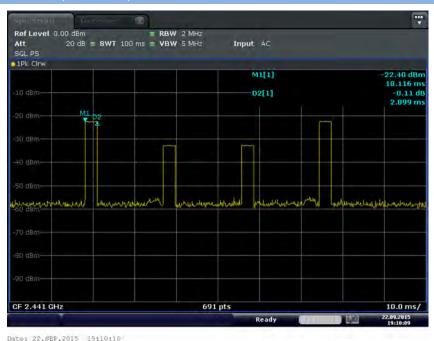

Note:

- 1. Duty cycle = on time/100 milliseconds = 4* 2.9 / 100 =11.6 %
- 2. Duty cycle correction factor = 20*log (Duty cycle) = -18.71 dB
- 3. DH5 has the highest duty cycle and is reported.



Note 1: The symbol of "--" in the table which means not application.


Note 2: For the test data above 1 GHz, According the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: All configurations have been tested, only the worst configuration (GFSK High Channel) shown here.

Test Data and Plots

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note 4: All configurations have been tested, only the worst configuration (GFSK Low Channel) shown here. This frequency which near 107 MHz with circle should be ignored because they are FM carrier frequency,

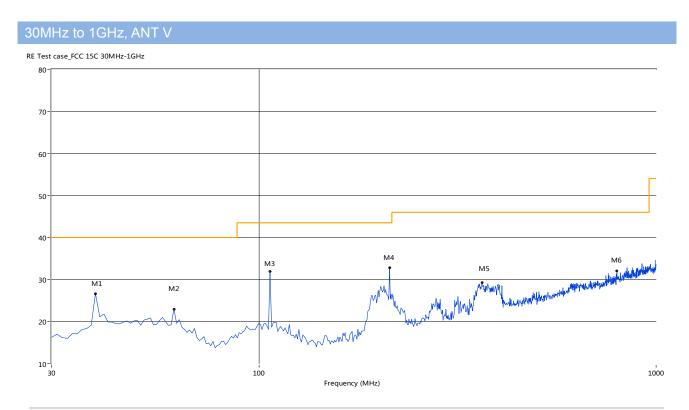

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	38.72	22.24	-20.05	40.0	17.76	Peak	36.70	100	Vertical	Pass
2	61.01	22.97	-20.19	40.0	17.03	Peak	162.70	100	Vertical	Pass
3	106.55	31.93	-20.20	43.5	11.57	Peak	304.70	100	Vertical	N/A
4	213.15	32.88	-20.07	43.5	10.62	Peak	286.70	100	Vertical	Pass
5	364.32	29.23	-16.10	46.0	16.77	Peak	283.50	100	Vertical	Pass
6	796.50	32.05	-7.41	46.0	13.95	Peak	244.40	100	Vertical	Pass



30MHz to 1GHz ANT F

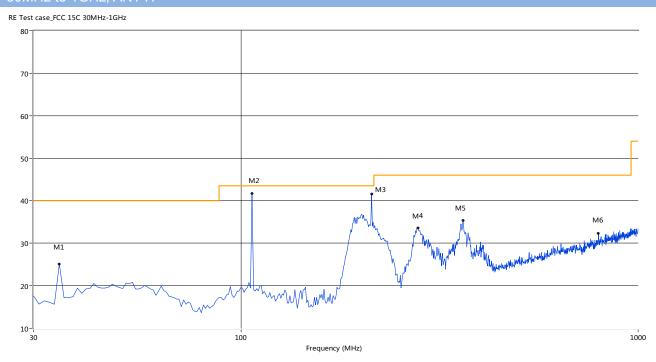


No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)			(cm)		
1	34.85	25.14	-21.41	40.0	14.86	Peak	94.80	100	Horizontal	Pass
2	106.55	41.75	-20.20	43.5	1.75	Peak	358.20	100	Horizontal	N/A
3	213.35	41.62	-20.07	43.5	1.88	Peak	26.20	102.60	Horizontal	Pass
3*	213.35	40.47	-20.07	43.5	3.03	QP	26.20	102.60	Horizontal	Pass
4	279.04	33.62	-18.38	46.0	12.38	Peak	79.80	100	Horizontal	Pass
5	362.38	35.37	-16.18	46.0	10.63	Peak	358.20	100	Horizontal	Pass
6	794.57	32.31	-7.35	46.0	13.69	Peak	227.50	100	Horizontal	Pass



Note: The marked spikes near 2400MHz with circle should be ignored because they are Fundamental signal. <u>Test Data and Plots(1GHz ~ 10th Harmonic)</u>


GFSK LOW CHANNEL 1GHz to 25GHz, ANT V

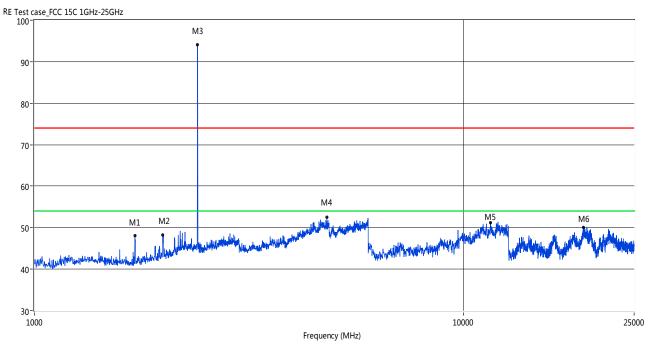

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1715.29	48.08	-4.07	74.0	25.92	Peak	244.00	100	Vertical	Pass
2	1993.01	48.18	-2.55	74.0	25.82	Peak	354.60	100	Vertical	Pass
3	2400.60	94.05	-0.31	74.0	-20.05	Peak	342.00	100	Vertical	N/A
4	4804.20	52.44	13.75	74.0	21.56	Peak	129.00	100	Vertical	Pass
5	11570.72	51.15	20.24	74.0	22.85	Peak	168.00	100	Vertical	Pass
6	19049.92	50.02	13.57	74.0	23.98	Peak	159.00	100	Vertical	Pass




GFSK LOW CHANNEL 1GHz to 25GHz, ANT H

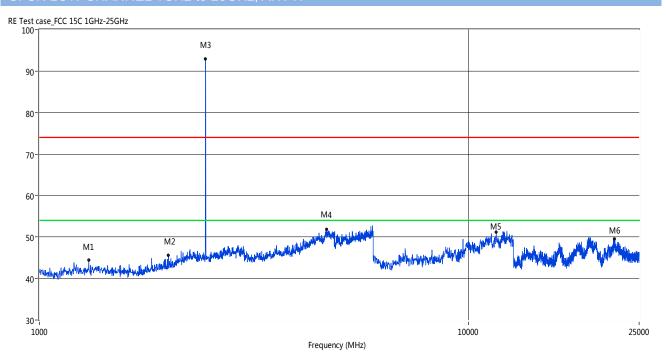

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1303.70	44.38	-4.73	74.0	29.62	Peak	305.00	100	Horizontal	Pass
2	1999.00	45.57	-2.37	74.0	28.43	Peak	71.00	100	Horizontal	Pass
3	2440.56	92.99	-0.41	74.0	-18.99	Peak	307.00	100	Horizontal	N/A
4	4672.33	51.82	13.15	74.0	22.18	Peak	179.00	100	Horizontal	Pass
5	11615.64	51.20	20.33	74.0	22.80	Peak	54.00	100	Horizontal	Pass
6	21915.14	49.54	12.55	74.0	24.46	Peak	24.00	100	Horizontal	Pass




GFSK MID CHANNEL 1GHz to 25GHz, ANT V

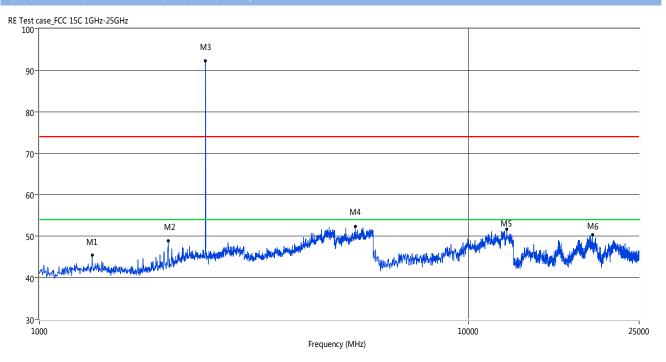

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1327.67	45.44	-4.82	74.0	28.56	Peak	178.00	100	Vertical	Pass
2	1997.00	48.96	-2.54	74.0	25.04	Peak	96.00	100	Vertical	Pass
3	2440.56	92.23	-0.41	74.0	-18.23	Peak	180.00	100	Vertical	N/A
4	5448.55	52.31	14.84	74.0	21.69	Peak	57.00	100	Vertical	Pass
5	12289.52	51.73	20.65	74.0	22.27	Peak	286.00	100	Vertical	Pass
6	19449.25	50.33	12.80	74.0	23.67	Peak	238.00	100	Vertical	Pass




GFSK MID CHANNEL 1GHz to 25GHz, ANT H

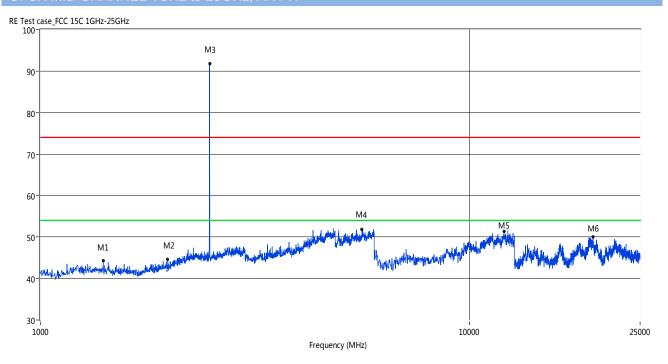

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1401.60	44.26	-4.58	74.0	29.74	Peak	291.00	100	Horizontal	Pass
2	1981.02	44.63	-2.65	74.0	29.37	Peak	4.00	100	Horizontal	Pass
3	2480.52	91.72	-0.60	74.0	-17.72	Peak	353.00	100	Horizontal	N/A
4	5619.38	51.84	15.40	74.0	22.16	Peak	349.00	100	Horizontal	Pass
5	12042.43	51.36	20.83	74.0	22.64	Peak	324.00	100	Horizontal	Pass
6	19409.32	49.97	12.89	74.0	24.03	Peak	359.00	100	Horizontal	Pass




GFSK HIGH CHANNEL 1GHz to 25GHz, ANT \setminus

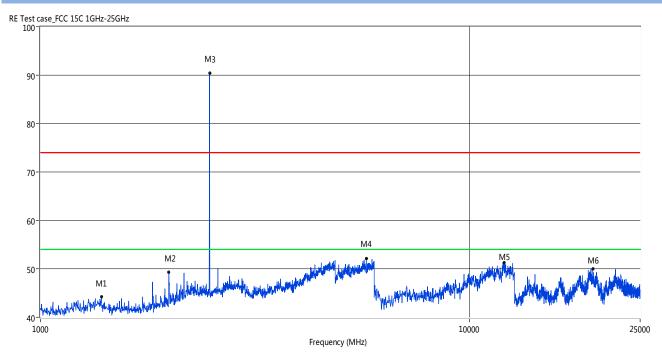

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1387.61	44.21	-4.52	74.0	29.79	Peak	104.00	100	Vertical	Pass
2	1993.01	49.31	-2.55	74.0	24.69	Peak	88.00	100	Vertical	Pass
3	2480.52	90.45	-0.60	74.0	-16.45	Peak	180.00	100	Vertical	N/A
4	5751.25	52.14	15.43	74.0	21.86	Peak	349.00	100	Vertical	Pass
5	12042.43	51.31	20.83	74.0	22.69	Peak	259.00	100	Vertical	Pass
6	19389.35	50.04	12.97	74.0	23.96	Peak	326.00	100	Vertical	Pass




GFSK HIGH CHANNEL 1GHz to 25GHz, ANT H

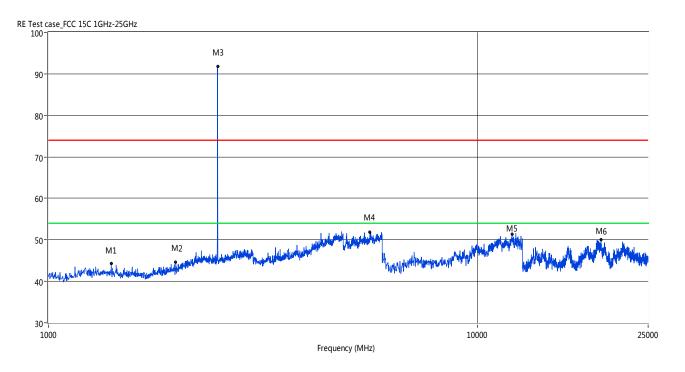

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1401.60	44.26	-4.58	74.0	29.74	Peak	291.00	100	Horizontal	Pass
2	1981.02	44.63	-2.65	74.0	29.37	Peak	4.00	100	Horizontal	Pass
3	2480.52	91.72	-0.60	74.0	-17.72	Peak	353.00	100	Horizontal	N/A
4	5619.38	51.84	15.40	74.0	22.16	Peak	349.00	100	Horizontal	Pass
5	12042.43	51.36	20.83	74.0	22.64	Peak	324.00	100	Horizontal	Pass
6	19409.32	49.97	12.89	74.0	24.03	Peak	359.00	100	Horizontal	Pass




Π /4-DQPSK LOW CHANNEL 1GHz to 25GHz, ANT V

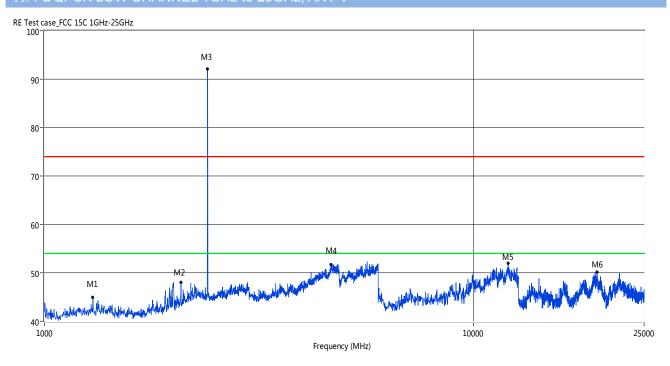

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1297.70	44.98	-4.77	74.0	29.02	Peak	271.00	100	Vertical	Pass
2	2082.92	47.98	-1.69	74.0	26.02	Peak	258.00	100	Vertical	Pass
3	2400.60	92.15	-0.31	74.0	-18.15	Peak	286.00	100	Vertical	N/A
4	4654.35	51.66	13.08	74.0	22.34	Peak	97.00	100	Vertical	Pass
5	12042.43	51.99	20.83	74.0	22.01	Peak	62.00	100	Vertical	Pass
6	19409.32	50.13	12.89	74.0	23.87	Peak	99.00	100	Vertical	Pass




Π /4-DQPSK LOW CHANNEL 1GHz to 25GHz, ANT H

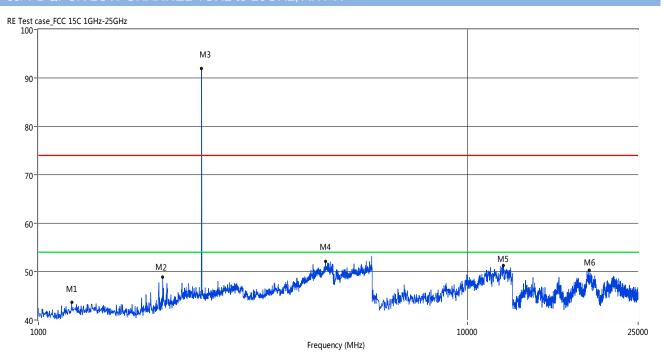

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1195.80	43.62	-5.42	74.0	30.38	Peak	322.00	100	Horizontal	Pass
2	1949.05	48.81	-2.43	74.0	25.19	Peak	225.00	100	Horizontal	Pass
3	2400.60	91.93	-0.31	74.0	-17.93	Peak	251.00	100	Horizontal	N/A
4	4669.33	52.09	13.19	74.0	21.91	Peak	70.00	100	Horizontal	Pass
5	12143.51	51.21	20.72	74.0	22.79	Peak	117.00	100	Horizontal	Pass
6	19219.63	50.22	14.00	74.0	23.78	Peak	286.00	100	Horizontal	Pass




Π /4-DQPSK MID CHANNEL 1GHz to 25GHz, ANT V

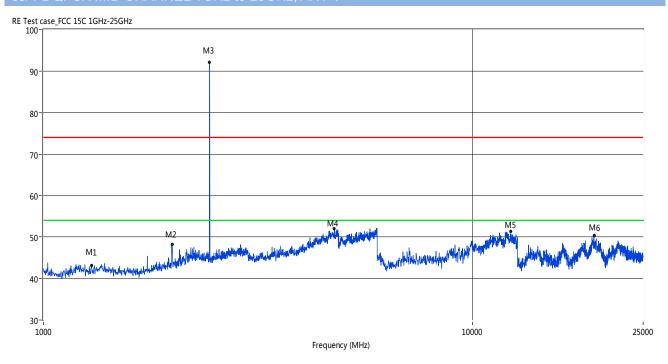

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1295.70	43.16	-4.82	74.0	30.84	Peak	354.00	100	Vertical	Pass
2	1997.00	48.17	-2.54	74.0	25.83	Peak	181.00	100	Vertical	Pass
3	2440.56	92.10	-0.41	74.0	-18.10	Peak	334.00	100	Vertical	N/A
4	4768.23	52.08	13.48	74.0	21.92	Peak	237.00	100	Vertical	Pass
5	12289.52	51.32	20.65	74.0	22.68	Peak	200.00	100	Vertical	Pass
6	19219.63	50.30	14.00	74.0	23.70	Peak	337.00	100	Vertical	Pass




Π /4-DQPSK MID CHANNEL 1GHz to 25GHz, ANT H

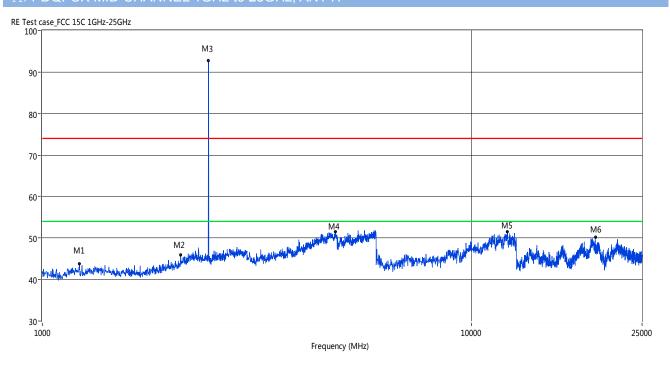

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	1221.78	43.76	-5.16	74.0	30.24	Peak	341.00	100	Horizontal	Pass
2	2102.90	45.86	-1.46	74.0	28.14	Peak	302.00	100	Horizontal	Pass
3	2440.56	92.71	-0.41	74.0	-18.71	Peak	185.00	100	Horizontal	N/A
4	4822.18	51.46	13.85	74.0	22.54	Peak	256.00	100	Horizontal	Pass
5	12143.51	51.52	20.72	74.0	22.48	Peak	219.00	100	Horizontal	Pass
6	19449.25	50.16	12.80	74.0	23.84	Peak	34.00	100	Horizontal	Pass




Π /4-DQPSK HIGH CHANNEL 1GHz to 25GHz, ANT V

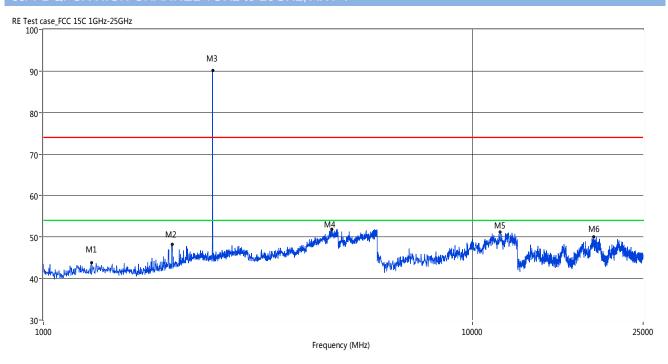

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1293.71	43.86	-4.81	74.0	30.14	Peak	61.00	100	Vertical	Pass
2	1997.00	48.19	-2.54	74.0	25.81	Peak	200.00	100	Vertical	Pass
3	2480.52	90.16	-0.60	74.0	-16.16	Peak	24.00	100	Vertical	N/A
4	4696.30	51.84	13.22	74.0	22.16	Peak	182.00	100	Vertical	Pass
5	11615.64	51.19	20.33	74.0	22.81	Peak	264.00	100	Vertical	Pass
6	19179.70	50.08	14.04	74.0	23.92	Peak	23.00	100	Vertical	Pass




Π /4-DQPSK HIGH CHANNEL 1GHz to 25GHz, ANT H

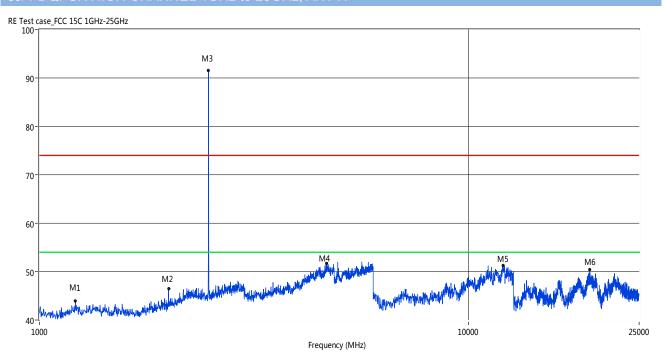

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	1213.79	43.90	-5.12	74.0	30.10	Peak	82.00	100	Horizontal	Pass
2	2001.00	46.47	-2.32	74.0	27.53	Peak	110.00	100	Horizontal	Pass
3	2478.52	91.60	-0.63	74.0	-17.60	Peak	284.00	100	Horizontal	N/A
4	4672.33	51.69	13.15	74.0	22.31	Peak	200.00	100	Horizontal	Pass
5	12042.43	51.32	20.83	74.0	22.68	Peak	156.00	100	Horizontal	Pass
6	19179.70	50.40	14.04	74.0	23.60	Peak	291.00	100	Horizontal	Pass




8-DPSK LOW CHANNEL 1GHz to 25GHz, ANT V

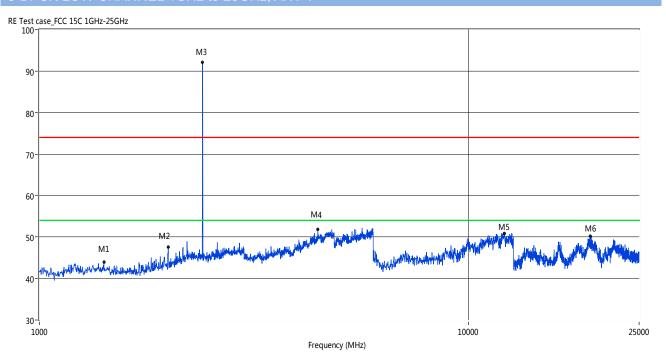

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1413.59	44.04	-4.62	74.0	29.96	Peak	147.00	100	Vertical	Pass
2	1997.00	47.66	-2.54	74.0	26.34	Peak	230.00	100	Vertical	Pass
3	2402.60	92.04	-0.27	74.0	-18.04	Peak	275.00	100	Vertical	N/A
4	4456.54	51.90	12.46	74.0	22.10	Peak	53.00	100	Vertical	Pass
5	12143.51	50.81	20.72	74.0	23.19	Peak	84.00	100	Vertical	Pass
6	19219.63	50.23	14.00	74.0	23.77	Peak	259.00	100	Vertical	Pass




8-DPSK LOW CHANNEL 1GHz to 25GHz, ANT H

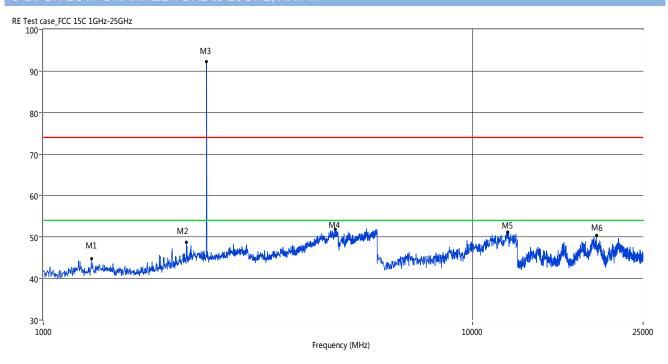

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1293.71	44.76	-4.81	74.0	29.24	Peak	340.00	100	Horizontal	Pass
2	2154.84	48.69	-1.02	74.0	25.31	Peak	223.00	100	Horizontal	Pass
3	2402.60	92.35	-0.27	74.0	-18.35	Peak	154.00	100	Horizontal	N/A
4	4798.20	51.84	13.70	74.0	22.16	Peak	148.00	100	Horizontal	Pass
5	12076.12	51.13	20.80	74.0	22.87	Peak	347.00	100	Horizontal	Pass
6	19449.25	50.38	12.80	74.0	23.62	Peak	54.00	100	Horizontal	Pass




8-DPSK MID CHANNEL 1GHz to 25GHz, ANT V

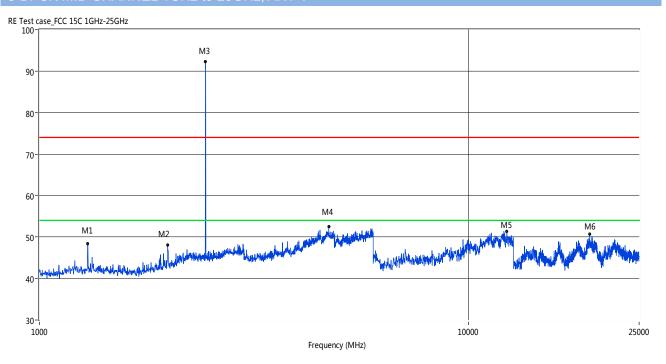

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1295.70	48.40	-4.82	74.0	25.60	Peak	339.00	100	Vertical	Pass
2	1991.01	48.11	-2.60	74.0	25.89	Peak	270.00	100	Vertical	Pass
3	2440.56	92.33	-0.41	74.0	-18.33	Peak	334.00	100	Vertical	N/A
4	4726.27	52.56	13.63	74.0	21.44	Peak	208.00	100	Vertical	Pass
5	12289.52	51.29	20.65	74.0	22.71	Peak	239.00	100	Vertical	Pass
6	19179.70	50.74	14.04	74.0	23.26	Peak	70.00	100	Vertical	Pass




8-DPSK MID CHANNEL 1GHz to 25GHz, ANT H

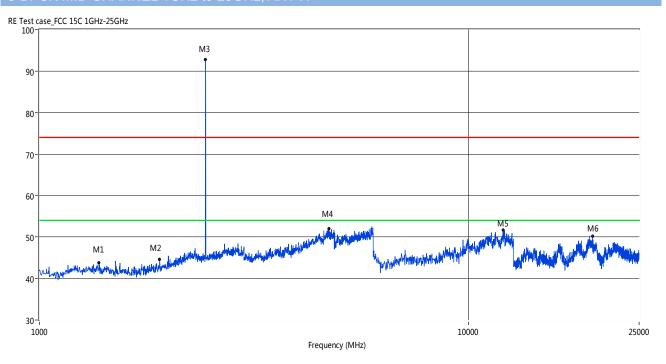

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1377.62	43.81	-4.54	74.0	30.19	Peak	124.00	100	Horizontal	Pass
2	1907.09	44.59	-2.86	74.0	29.41	Peak	340.00	100	Horizontal	Pass
3	2440.56	92.77	-0.41	74.0	-18.77	Peak	160.00	100	Horizontal	N/A
4	4732.27	51.99	13.70	74.0	22.01	Peak	66.00	100	Horizontal	Pass
5	12042.43	51.64	20.83	74.0	22.36	Peak	109.00	100	Horizontal	Pass
6	19449.25	50.15	12.80	74.0	23.85	Peak	55.00	100	Horizontal	Pass



8-DPSK HIGH CHANNEL 1GHz to 25GHz, ANT V

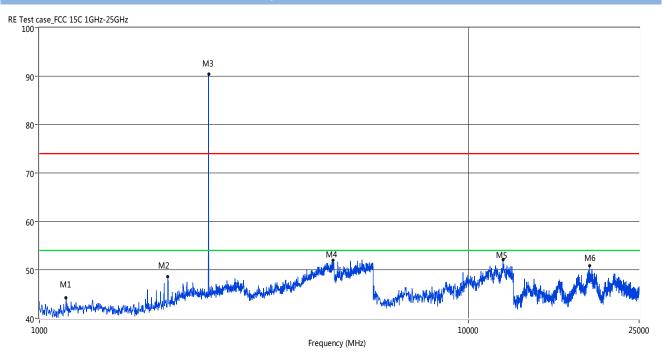

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1153.85	44.16	-5.82	74.0	29.84	Peak	136.00	100	Vertical	Pass
2	1993.01	48.52	-2.55	74.0	25.48	Peak	268.00	100	Vertical	Pass
3	2480.52	90.45	-0.60	74.0	-16.45	Peak	313.00	100	Vertical	N/A
4	4834.17	51.95	13.68	74.0	22.05	Peak	308.00	100	Vertical	Pass
5	12042.43	52.15	20.83	74.0	21.85	Peak	305.00	100	Vertical	Pass
6	19179.70	50.78	14.04	74.0	23.22	Peak	45.00	100	Vertical	Pass



8-DPSK HIGH CHANNEL 1GHz to 25GHz, ANT H




No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	1217.78	43.50	-5.19	74.0	30.50	Peak	102.00	100	Horizontal	Pass
2	2016.98	45.87	-2.21	74.0	28.13	Peak	78.00	100	Horizontal	Pass
3	2480.52	91.71	-0.60	74.0	-17.71	Peak	332.00	100	Horizontal	N/A
4	4702.30	51.76	13.30	74.0	22.24	Peak	67.00	100	Horizontal	Pass
5	11312.40	50.93	20.18	74.0	23.07	Peak	136.00	100	Horizontal	Pass
6	19179.70	50.37	14.04	74.0	23.63	Peak	1.00	100	Horizontal	Pass



Hopping Mode:


GFSK MODE 1GHz to 25GHz, ANT V

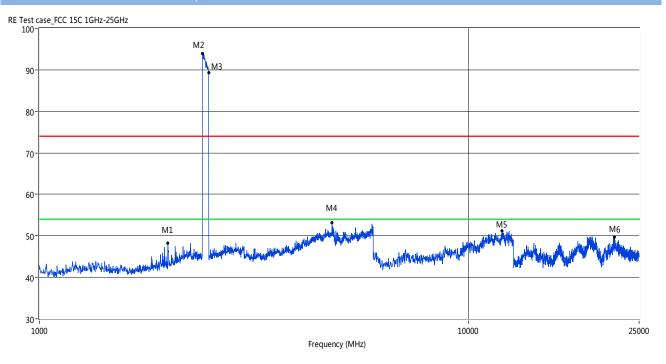

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1993.01	48.18	-2.55	74.0	25.82	Peak	146.00	100	Vertical	Pass
2	2402.60	93.88	-0.27	74.0	-19.88	Peak	19.00	100	Vertical	N/A
3	2480.52	90.98	-0.60	74.0	-16.98	Peak	192.00	100	Vertical	N/A
4	4813.19	53.11	13.95	74.0	20.89	Peak	129.00	100	Vertical	Pass
5	11975.04	51.23	20.76	74.0	22.77	Peak	273.00	100	Vertical	Pass
6	21915.14	49.77	12.55	74.0	24.23	Peak	300.00	100	Vertical	Pass




GFSK MODE 1GHz to 25GHz, ANT H

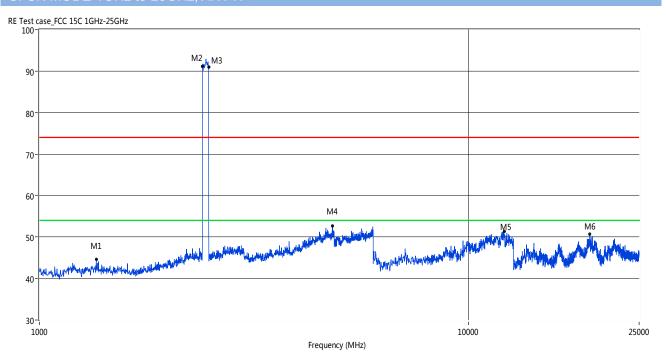

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1357.64	44.65	-4.44	74.0	29.35	Peak	182.00	100	Horizontal	Pass
2	2400.60	91.11	-0.31	74.0	-17.11	Peak	116.00	100	Horizontal	N/A
3	2480.52	90.98	-0.60	74.0	-16.98	Peak	192.00	100	Horizontal	N/A
4	4825.18	52.67	13.75	74.0	21.33	Peak	293.00	100	Horizontal	Pass
5	12109.82	51.36	20.76	74.0	22.64	Peak	213.00	100	Horizontal	Pass
6	19179.70	50.73	14.04	74.0	23.27	Peak	262.00	100	Horizontal	Pass




Π /4-DQPSK MODE 1GHz to 25GHz, ANT V

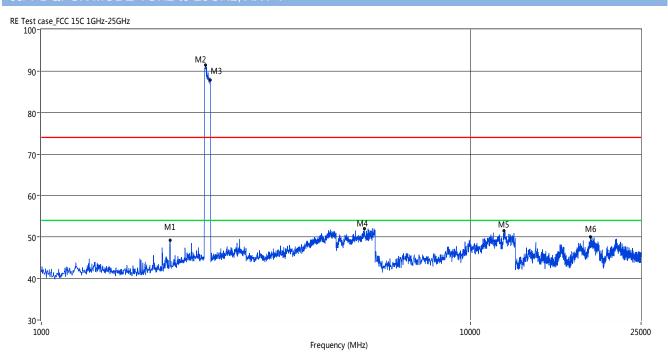

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1995.01	49.21	-2.62	74.0	24.79	Peak	96.00	100	Vertical	Pass
2	2414.59	91.47	-0.05	74.0	-17.47	Peak	112.00	100	Vertical	N/A
3	2472.53	87.78	-0.53	74.0	-13.78	Peak	67.00	100	Vertical	N/A
4	5673.33	51.96	15.44	74.0	22.04	Peak	132.00	100	Vertical	Pass
5	11975.04	51.45	20.76	74.0	22.55	Peak	358.00	100	Vertical	Pass
6	19049.92	49.99	13.57	74.0	24.01	Peak	349.00	100	Vertical	Pass




Π /4-DQPSK MODE 1GHz to 25GHz, ANT H

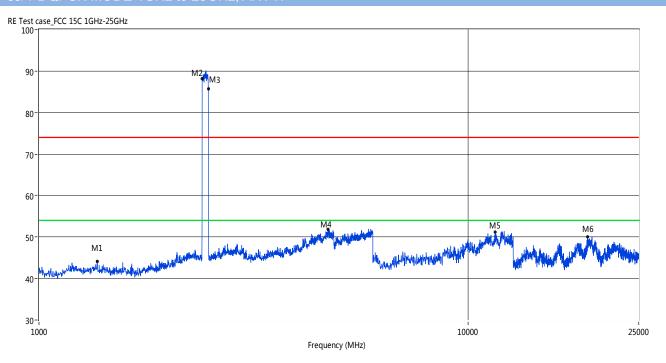

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1365.63	44.15	-4.42	74.0	29.85	Peak	79.00	100	Horizontal	Pass
2	2402.60	88.14	-0.27	74.0	-14.14	Peak	8.00	100	Horizontal	N/A
3	2480.52	85.67	-0.60	74.0	-11.67	Peak	239.00	100	Horizontal	N/A
4	4711.29	51.83	13.39	74.0	22.17	Peak	180.00	100	Horizontal	Pass
5	11570.72	51.21	20.24	74.0	22.79	Peak	16.00	100	Horizontal	Pass
6	19009.98	50.12	13.42	74.0	23.88	Peak	209.00	100	Horizontal	Pass




8-DPSK MODE 1GHz to 25GHz, ANT V

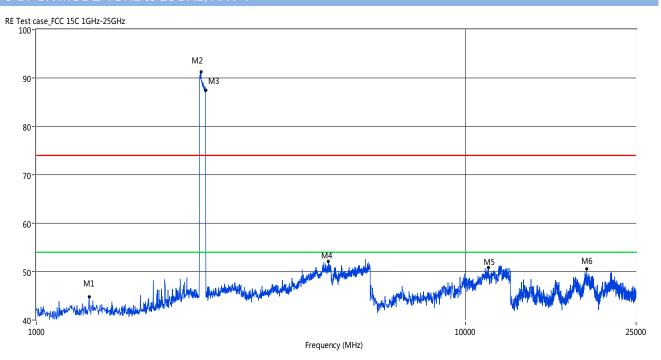

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1327.67	44.78	-4.82	74.0	29.22	Peak	183.00	100	Vertical	Pass
2	2418.58	91.23	-0.03	74.0	-17.23	Peak	255.00	100	Vertical	N/A
3	2480.52	87.40	-0.60	74.0	-13.40	Peak	274.00	100	Vertical	N/A
4	4792.21	52.08	13.71	74.0	21.92	Peak	249.00	100	Vertical	Pass
5	11312.40	50.80	20.18	74.0	23.20	Peak	256.00	100	Vertical	Pass
6	19179.70	50.56	14.04	74.0	23.44	Peak	351.00	100	Vertical	Pass



8-DPSK MODE 1GHz to 25GHz, ANT H

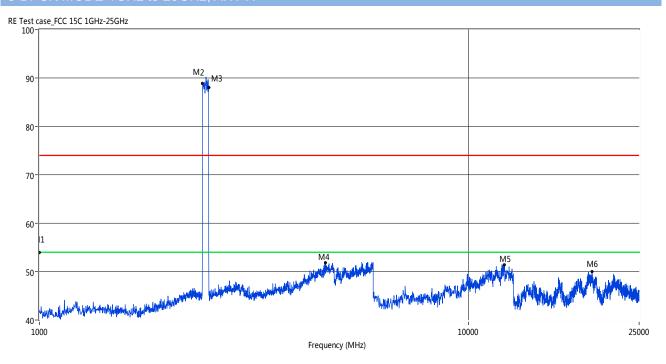

No.	Frequency	Results	Factor (dB)	Limit	Margin	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(0)	(cm)		
1	1000.00	41.48	-5.90	74.0	32.52	Peak	19.00	100	Horizontal	Pass
2	2402.60	88.87	-0.27	74.0	-14.87	Peak	317.00	100	Horizontal	N/A
3	2480.52	87.99	-0.60	74.0	-13.99	Peak	1.00	100	Horizontal	N/A
4	4642.36	51.81	13.08	74.0	22.19	Peak	224.00	100	Horizontal	Pass
5	12143.51	51.39	20.72	74.0	22.61	Peak	6.00	100	Horizontal	Pass
6	19409.32	49.94	12.89	74.0	24.06	Peak	188.00	100	Horizontal	Pass



A.8 Band Edge

Test Data

Note 1: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note 2: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note 3: The average levels were calculated from the peak level corrected with duty cycle correction factor (13.85 dB) derived from 20log (dwell time/100 ms).


For example: Average level = 59.33 dBuV/m - 18.71 (dB) = 40.62 dBuV/m.

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2400.00	59.33	74	14.67	PEAK	Pass
GFSK	LOW	2400.00	40.62	54	13.38	AVERAGE	Pass
GFSK	HIGH	2483.50	59.71	74	14.29	PEAK	Pass
GFSK	пібп	2483.50	41.00	54	13.00	AVERAGE	Pass
EMPORCK	Low	2400.00	68.07	74	5.93	PEAK	Pass
∏/4DQPSK	Low	2400.00	49.36	54	4.64	AVERAGE	Pass
EMPORCK	ШСП	2483.50	54.70	74	19.30	PEAK	Pass
∏/4DQPSK	HIGH	2483.50	35.99	54	18.01	AVERAGE	Pass
0 DDCK	1	2400.00	69.14	74	4.86	PEAK	Pass
8-DPSK	Low	2400.00	50.43	54	3.57	AVERAGE	Pass
0 DDCK	HIGH	2483.50	55.12	74	18.88	PEAK	Pass
8-DPSK		2483.50	36.41	54	17.59	AVERAGE	Pass
OFOK(Henning)	Low	2400.00	62.56	74	11.44	PEAK	Pass
GFSK(Hopping)		2400.00	43.85	54	10.15	AVERAGE	Pass
CECK/Hanning	ШСП	2483.50	55.31	74	18.69	PEAK	Pass
GFSK(Hopping	HIGH	2483.50	36.60	54	17.40	AVERAGE	Pass
∏/4DQPSK	1	2400.00	66.56	74	7.44	PEAK	Pass
(Hopping)	Low	2400.00	47.85	54	6.15	AVERAGE	Pass
∏/4DQPSK	LUCLI	2483.50	54.76	74	19.24	PEAK	Pass
(Hopping)	HIGH	2483.50	36.05	54	17.95	AVERAGE	Pass
8-DPSK	1 6	2400.00	64.98	74	9.02	PEAK	Pass
(Hopping)	Low	2400.00	46.27	54	7.73	AVERAGE	Pass
8-DPSK	LIICH	2483.50	53.99	74	20.01	PEAK	Pass
(Hopping)	HIGH	2483.50	35.28	54	18.72	AVERAGE	Pass




Test Plots

GFSK LOW CHANNEL , PEAK

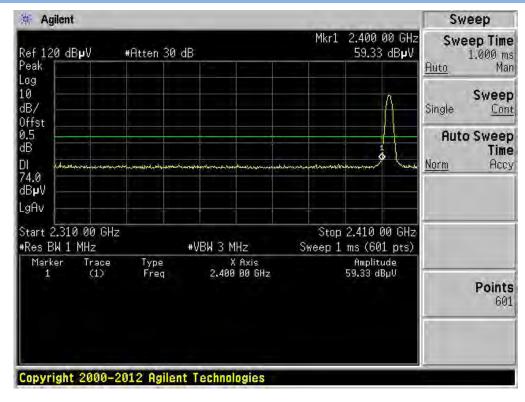


GFSK HIGH CHANNEL, PEAK

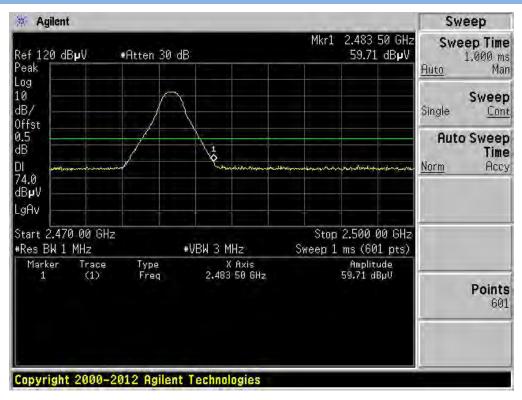




∏/4-DQPSK LOW CHANNEL, PEAK

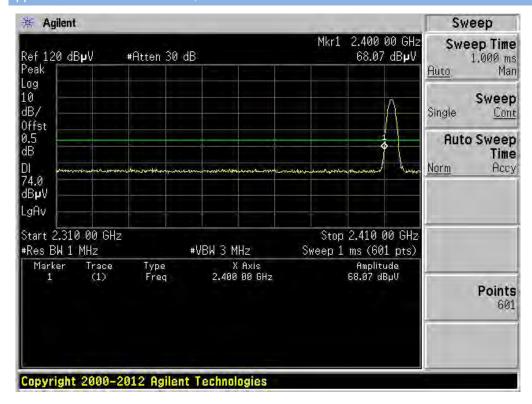


∏/4-DQPSK HIGH CHANNEL, PEAK

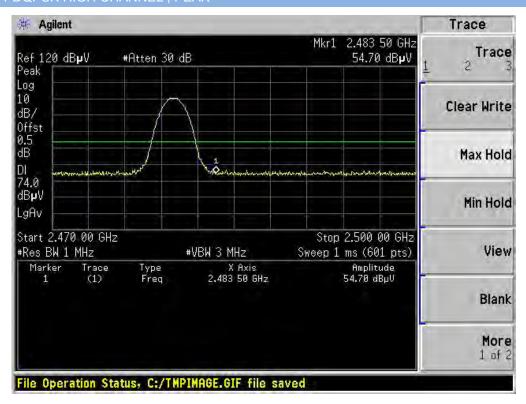




8-DPSK LOW CHANNEL, PEAK

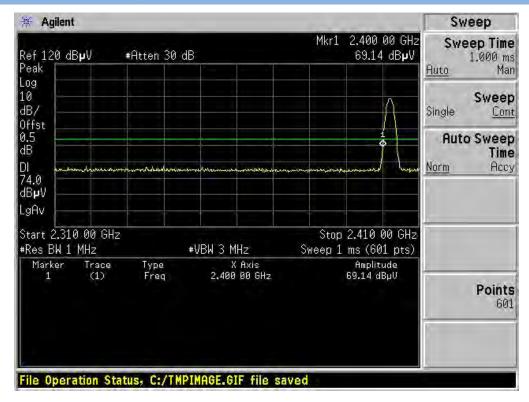


8-DPSK HIGH CHANNEL PEAK

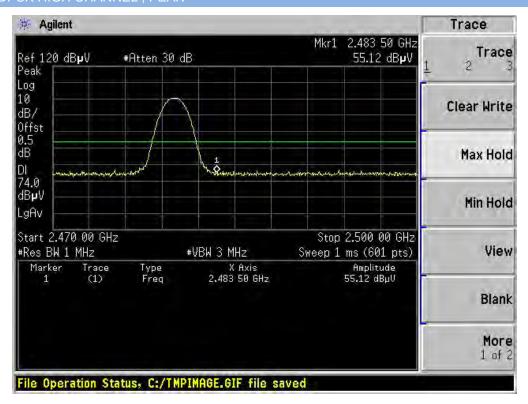




Hopping Mode:

GFSK LOW FREQUENCY BAND, PEAK

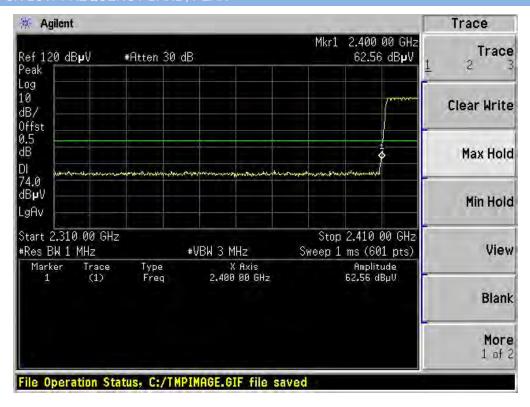


GFSK HIGH FREQUENCY BAND, PEAK

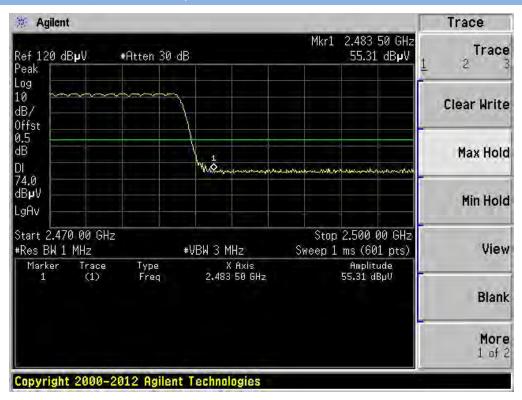




□/4-DQPSK LOW FREQUENCY BAND, PEAK

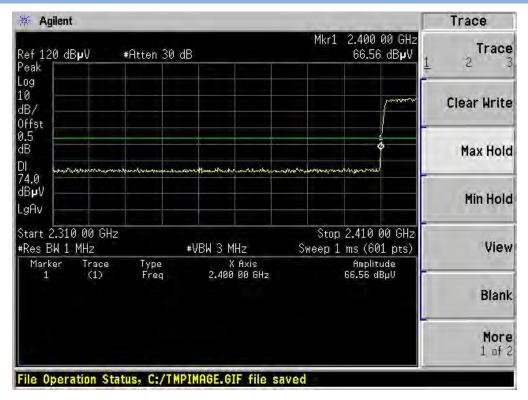


□/4-DQPSK HIGH FREQUENCY BAND, PEAK

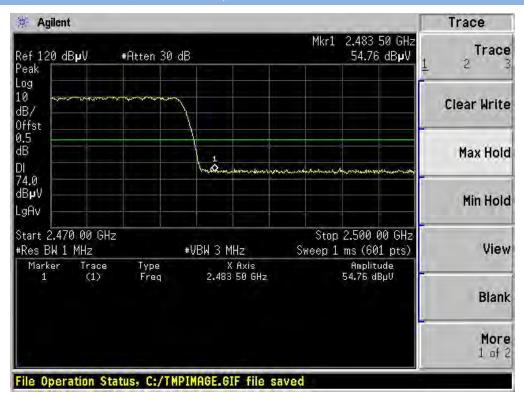




8-DPSK LOW FREQUENCY BAND, PEAK

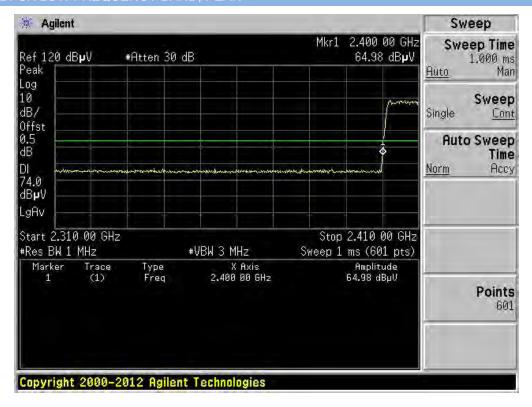

8-DPSK HIGH FREQUENCY BAND, PEAK

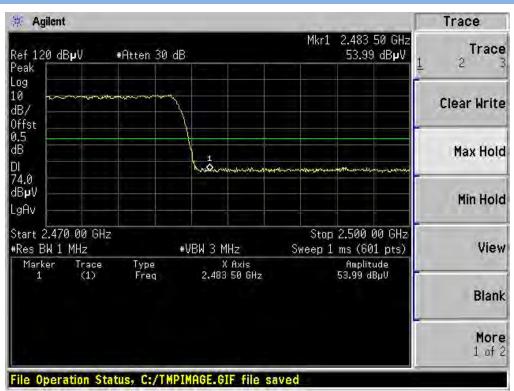



ANNEX B TEST SETUP PHOTOS

Please refer the document "DSS TEST SETUP PHOTOS.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "EUT EXTERNAL PHOTOS.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "EUT INTERNAL PHOTOS.PDF".

--END OF REPORT--