



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Ubee Interactive
Applicant Address	10F-1, No. 5, Taiyuan 1st St. Jhubei City, Hsinchu County 302, Taiwan, R.O.C.
FCC ID	XCNDDW36C

Product Name	Wireless Cable Modem
Brand Name	Ubee Interactive
Model No.	DDW36C
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	5725 ~ 5850MHz
Received Date	Jun. 18, 2014
Final Test Date	Jul. 27, 2014
Submission Type	Original Equipment

Statement

Test result included is only for the IEEE 802.11n, IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r02, KDB 662911 D01 v02r01, KDB644545 D01v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units	9
3.8. Table for Parameters of Test Software Setting	10
3.9. EUT Operation during Test	11
3.10. Duty Cycle	12
3.11. Test Configurations	13
4. TEST RESULT	17
4.1. AC Power Line Conducted Emissions Measurement.....	17
4.2. Maximum Conducted Output Power Measurement.....	21
4.3. Power Spectral Density Measurement	25
4.4. 6dB Spectrum Bandwidth Measurement	42
4.5. Radiated Emissions Measurement	50
4.6. Emissions Measurement	72
4.7. Antenna Requirements	93
5. LIST OF MEASURING EQUIPMENTS	94
6. MEASUREMENT UNCERTAINTY.....	96
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR470106AA	Rev. 01	Initial issue of report	Aug. 07, 2014

1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless Cable Modem
Brand Name : Ubee Interactive
Model No. : DDW36C
Applicant : Ubee Interactive
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jun. 18, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

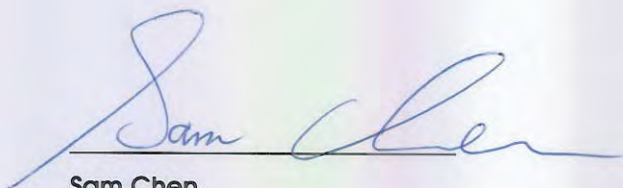

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	18.47 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	0.01 dB
4.3	15.247(e)	Power Spectral Density	Complies	1.06 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	3.03 dB
4.6	15.247(d)	Band Edge Emissions	Complies	-
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11a/n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Internal Power
Modulation	see the below table for IEEE 802.11a/n/ac
Data Modulation	For 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	For 802.11n/ac: see the below table For 802.11a: OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5725 ~ 5850MHz
Channel Number	5 for 20MHz bandwidth ; 2 for 40MHz bandwidth ; 1 for 80MHz bandwidth
Channel Band Width (99%)	<For Non-Beamforming Mode> 802.11ac MCS0/Nss1 (VHT20): 30.00 MHz ; 802.11ac MCS0/Nss1 (VHT40): 62.88 MHz ; 802.11ac MCS0/Nss1 (VHT80): 76.16 MHz ; 802.11a: 27.52 MHz <For Beamforming Mode> 802.11ac MCS0/Nss1 (VHT20): 17.76 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.48 MHz ; 802.11ac MCS0/Nss1 (VHT80): 75.84 MHz
Maximum Conducted Output Power	<For Non-Beamforming Mode> 802.11ac MCS0/Nss1 (VHT20): 29.64 dBm ; 802.11ac MCS0/Nss1 (VHT40): 28.85 dBm ; 802.11ac MCS0/Nss1 (VHT80): 24.87 dBm ; 802.11a: 29.44 dBm <For Beamforming Mode> 802.11ac MCS0/Nss1 (VHT20): 26.51 dBm ; 802.11ac MCS0/Nss1 (VHT40): 26.49 dBm ; 802.11ac MCS0/Nss1 (VHT80): 24.87 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Beamforming Function	<input checked="" type="checkbox"/> With beamforming for 802.11n/ac in 5GHz.	<input type="checkbox"/> Without beamforming

Antenna and Band width

Antenna	Three (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS0-23
802.11n (HT40)	3	MCS0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3
802.11ac (VHT80)	3	MCS 0-9/Nss1-3
<p>Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). The EUT supports HT20 and HT40.</p> <p>Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40, VHT80 in 5GHz.</p> <p>Note 3: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac</p>		

3.2. Accessories

N/A

3.3. Table for Filed Antenna


Ant.	Brand	P/N	Antenna Type	Connector	5GHz Gain (dBi)
					Band 4
1	M.gear	C107-511135-A	PCB Antenna	I-PEX	5.0
2	M.gear	C107-511136-A	PCB Antenna	I-PEX	4.8
3	M.gear	C107-511137-A	PCB Antenna	I-PEX	4.3

Note:

For IEEE 802.11a/n/ac mode (3TX/3RX):

Ant. 1, Ant. 2 and Ant. 3 can be used as transmitting/receiving antenna.

Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

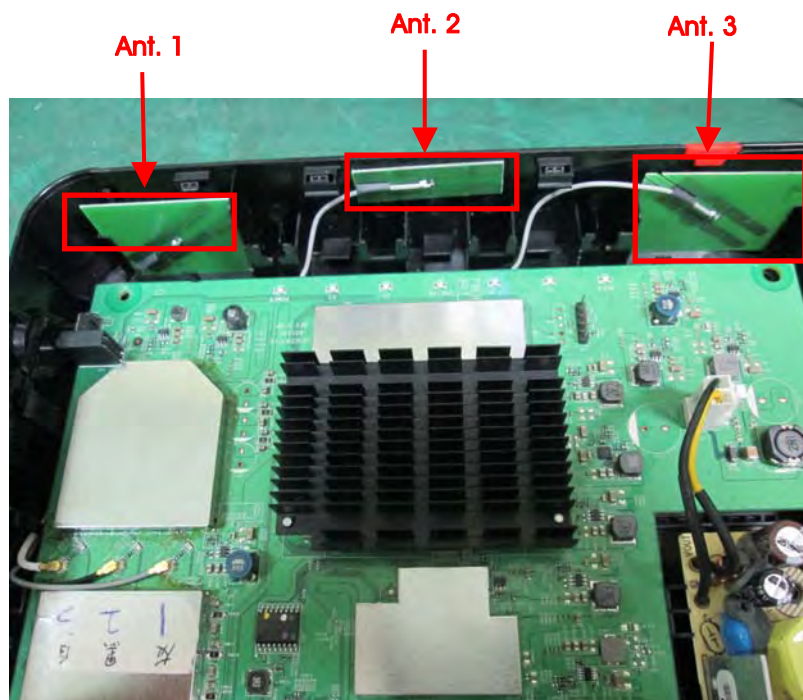

3.4. Table for Carrier Frequencies

For 5GHz Band:

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

For 80MHz bandwidth systems, use Channel 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3
	11ac VHT40	MCS0/Nss1	151/159	1+2+3
	11ac VHT80	MCS0/Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1+2+3
Power Spectral Density	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3
	11ac VHT40	MCS0/Nss1	151/159	1+2+3
	11ac VHT80	MCS0/Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1+2+3
6dB Spectrum Bandwidth	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3
	11ac VHT40	MCS0/Nss1	151/159	1+2+3
	11ac VHT80	MCS0/Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1+2+3
Radiated Emissions Below 1GHz	CTX	-	-	-
Radiated Emissions Above 1GHz	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3
	11ac VHT40	MCS0/Nss1	151/159	1+2+3
	11ac VHT80	MCS0/Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1+2+3
Band Edge Emissions	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3
	11ac VHT40	MCS0/Nss1	151/159	1+2+3
	11ac VHT80	MCS0/Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1+2+3

Note 1: VHT20/VHT40 covers HT20/HT40, due to same modulation.

Note 2: There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 802 11n/ac in 5GHz. Beamforming mode and non-beamforming mode has been test and record in this test report.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. EUT Standing - CTX

For Radiated Emission test<Below 1GHz>:

Mode 1. EUT Standing - CTX

For Radiated Emission test<Above 1GHz>:

Mode 1. EUT Standing - CTX

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

For Test Site No: 03CH01-CB <Below 1GHz>

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

For Test Site No: 03CH01-CB / Above 1GHz <For Non-Beamforming Mode>:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

For Test Site No: 03CH01-CB / Above 1GHz <For Beamforming Mode>:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
Notebook	DELL	E6220	DoC
WLAN ac Dongle	Netgear	A6200	PY312200200

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For Non-Beamforming Mode>

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	DOS		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0/Nss1 VHT20	98	100	100

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	DOS	
Frequency	5755 MHz	5795 MHz
MCS0/Nss1 VHT40	87	100

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	DOS
Frequency	5775 MHz
MCS0/Nss1 VHT80	80

Power Parameters of IEEE 802.11a

Test Software Version	DOS		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	98	100	100

<For Beamforming Mode>

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	DOS		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0/Nss1 VHT20	85	85	86

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	DOS	
Frequency	5755 MHz	5795 MHz
MCS0/Nss1 VHT40	84	84

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	DOS
Frequency	5775 MHz
MCS0/Nss1 VHT80	80

3.9. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by WLAN ac Dongle and transmit duty cycle no less 98%

3.10. Duty Cycle

For non-beamforming mode:


Mode	On Time(ms)	On+Off Time(ms)	Duty Cycle(%)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	1.878	1.908	98.43	0.01
802.11ac MCS0/Nss1 VHT40	0.908	0.936	97.01	1.10
802.11ac MCS0/Nss1 VHT80	0.448	0.475	94.32	2.23
802.11a	2.046	2.064	99.13	0.01

For beamforming mode:

Mode	On Time(ms)	On+Off Time(ms)	Duty Cycle(%)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	3.660	3.765	97.21	0.27
802.11ac MCS0/Nss1 VHT40	4.490	4.610	97.40	0.22
802.11ac MCS0/Nss1 VHT80	5.010	5.090	98.43	0.01

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

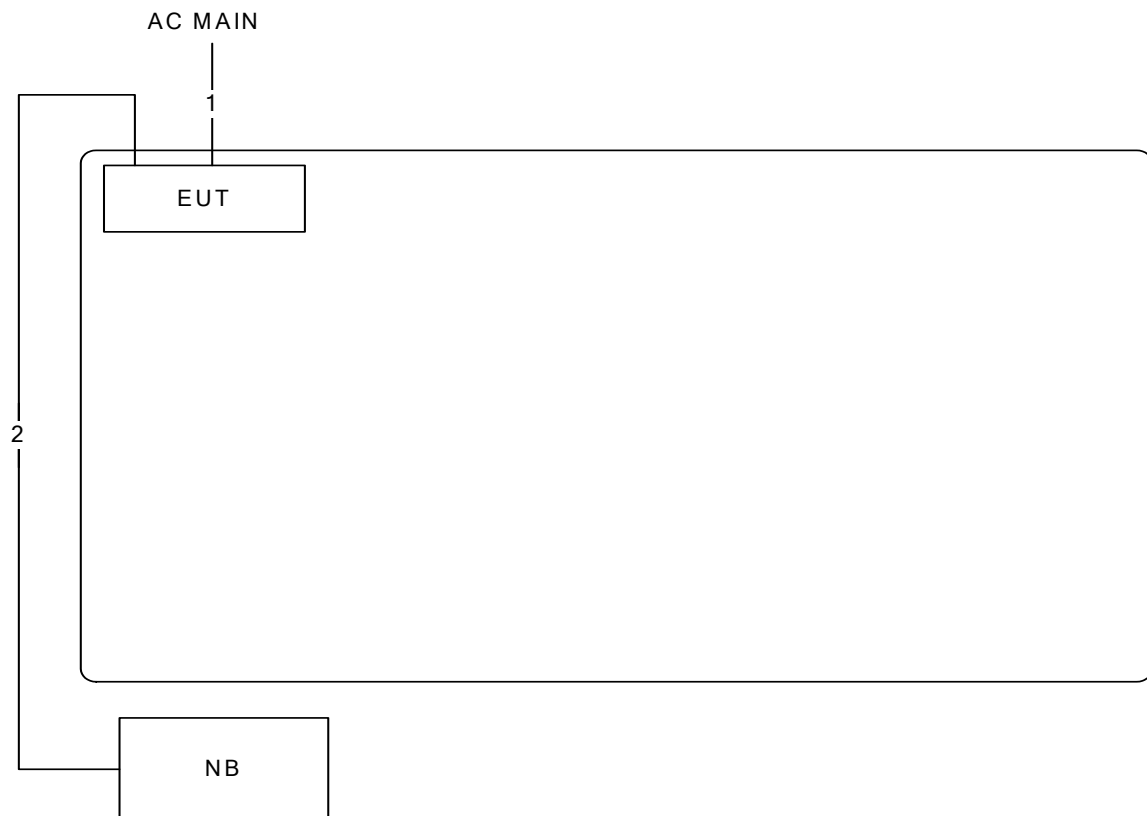

Item	Connection	Shield	Length(m)
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m


3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

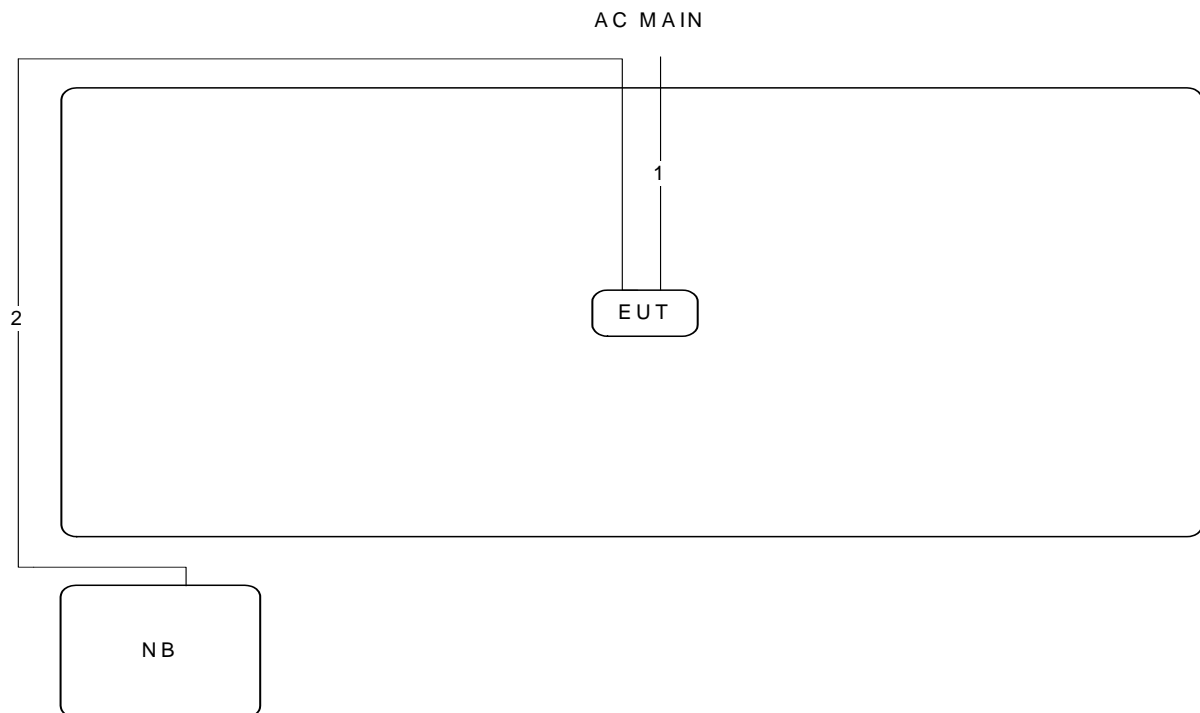


Item	Connection	Shielded	Length(m)
1	Power Cable	No	1.5m
2	RJ-45 Cable	No	10m

Test Configuration: above 1GHz <For Non-Beamforming Mode>

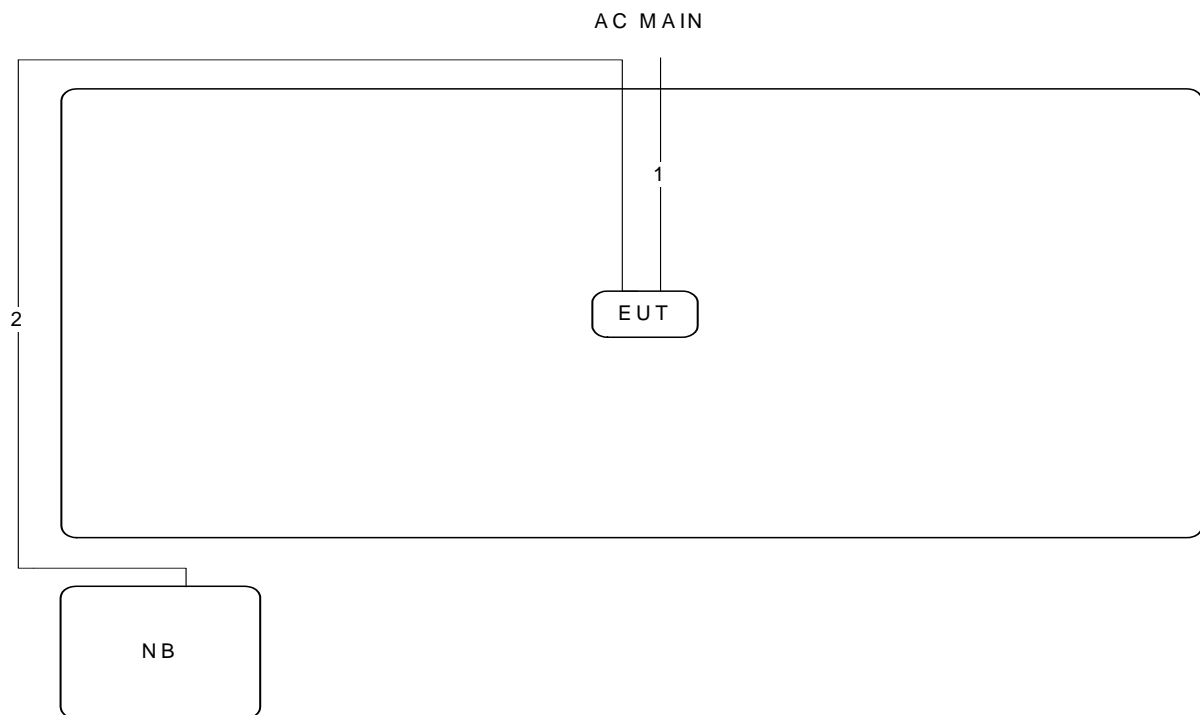

Item	Connection	Shielded	Length(m)
1	Power Cable	No	1.5m
2	RJ-45 Cable	No	10m

Test Configuration: above 1GHz <For Beamforming Mode>

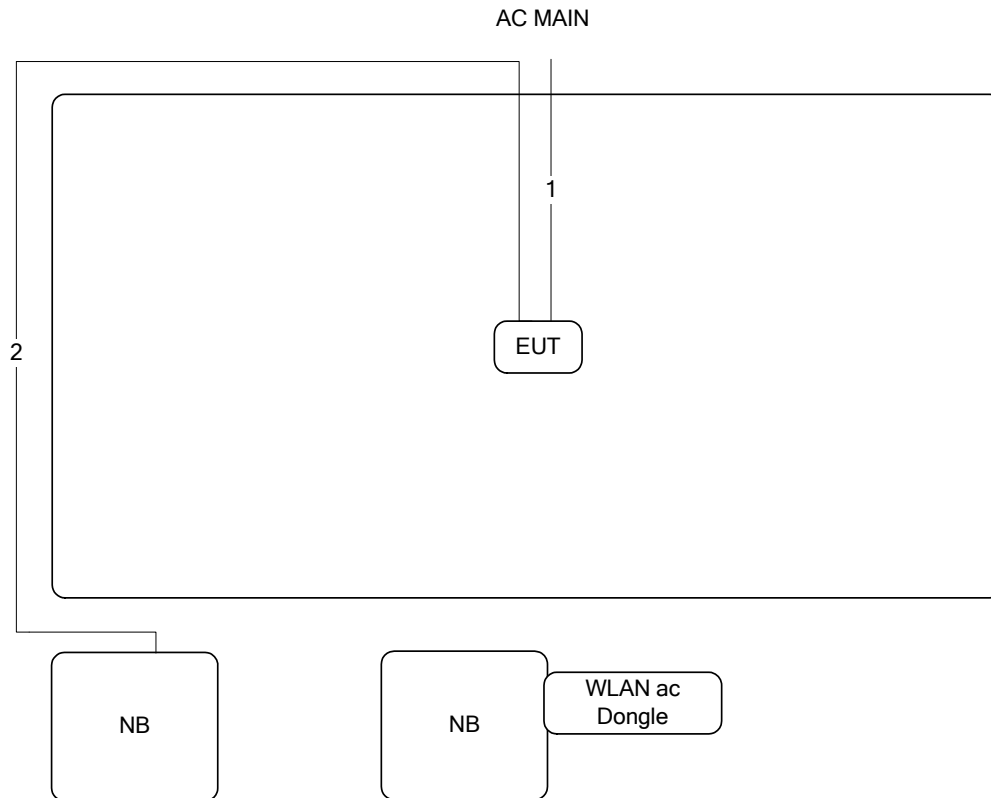

Item	Connection	Shielded	Length(m)
1	Power Cable	No	1.5m
2	RJ-45 Cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

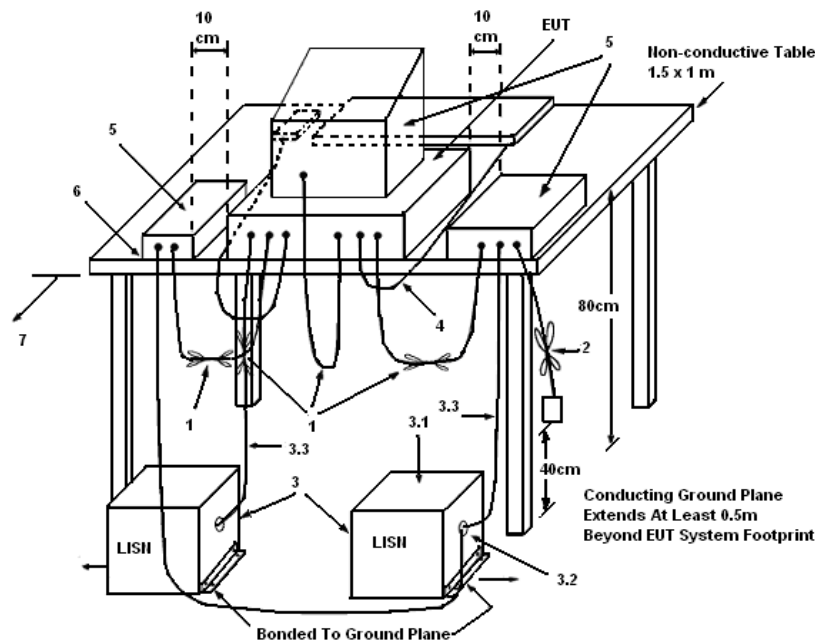

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	54%
Test Engineer	Parody Lin	Phase	Line
Configuration	CTX	Test Mode	Mode 1

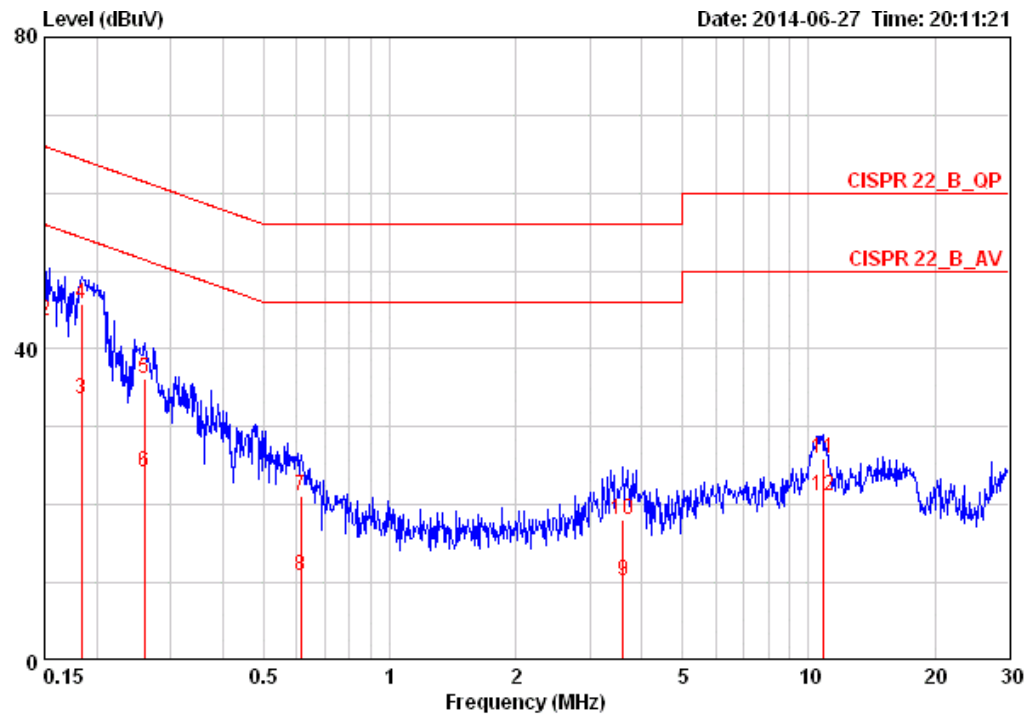

	Freq	Level	Over	Limit	LISN	Read	Cable		
	MHz	dBuV	Limit	Line	Factor	Level	Loss	Pol/Phase	Remark
			dB	dBuV	dB	dBuV	dB		
1	0.15000	32.54	-23.46	56.00	0.08	32.30	0.16	LINE	AVERAGE
2	0.15000	43.56	-22.44	66.00	0.08	43.32	0.16	LINE	QP
3	0.18346	33.56	-20.76	54.33	0.08	33.32	0.16	LINE	AVERAGE
4	0.18346	45.85	-18.47	64.33	0.08	45.61	0.16	LINE	QP
5	0.26026	36.16	-25.26	61.42	0.08	35.91	0.17	LINE	QP
6	0.26026	24.24	-27.18	51.42	0.08	23.99	0.17	LINE	AVERAGE
7	0.61400	21.05	-34.95	56.00	0.08	20.78	0.19	LINE	QP
8	0.61400	10.95	-35.05	46.00	0.08	10.68	0.19	LINE	AVERAGE
9	3.603	10.35	-35.65	46.00	0.14	9.91	0.29	LINE	AVERAGE
10	3.603	18.17	-37.83	56.00	0.14	17.73	0.29	LINE	QP
11	10.790	25.94	-34.06	60.00	0.27	25.28	0.39	LINE	QP
12	10.790	21.14	-28.86	50.00	0.27	20.48	0.39	LINE	AVERAGE

Temperature	24°C	Humidity	54%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	CTX	Test Mode	Mode 1

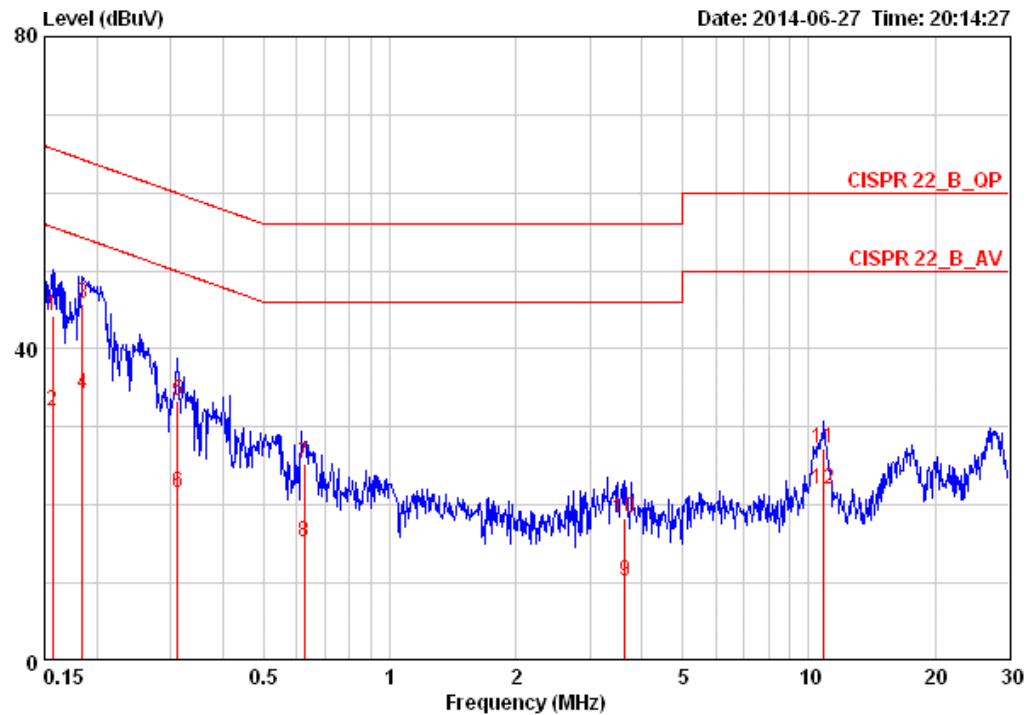

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.15650	44.15	-21.50	65.65	0.08	43.91	0.16	NEUTRAL	QP
2	0.15650	32.13	-23.52	55.65	0.08	31.89	0.16	NEUTRAL	AVERAGE
3	0.18443	45.77	-18.51	64.28	0.08	45.53	0.16	NEUTRAL	QP
4	0.18443	34.31	-19.97	54.28	0.08	34.07	0.16	NEUTRAL	AVERAGE
5	0.31163	33.38	-26.55	59.93	0.09	33.12	0.17	NEUTRAL	QP
6	0.31163	21.68	-28.25	49.93	0.09	21.42	0.17	NEUTRAL	AVERAGE
7	0.62383	25.32	-30.68	56.00	0.09	25.04	0.19	NEUTRAL	QP
8	0.62383	15.25	-30.75	46.00	0.09	14.97	0.19	NEUTRAL	AVERAGE
9	3.642	10.33	-35.67	46.00	0.15	9.88	0.29	NEUTRAL	AVERAGE
10	3.642	18.32	-37.68	56.00	0.15	17.87	0.29	NEUTRAL	QP
11	10.847	27.28	-32.72	60.00	0.27	26.62	0.39	NEUTRAL	QP
12	10.847	22.00	-28.00	50.00	0.27	21.34	0.39	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

4.2.3. Test Procedures

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 9.2.3.2 Method AVGPM-G (Measurement using a gated RF average power meter).
2. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

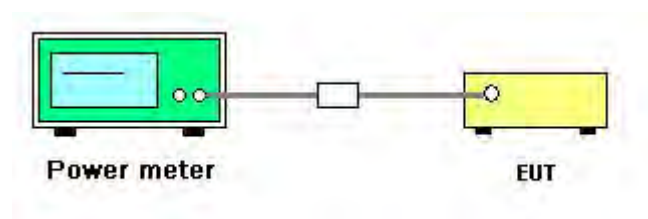

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

<For Non-Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11ac
Test Data	Jul. 27, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
149	5745 MHz	25.73	24.25	24.47	29.64	30.00	Complies
157	5785 MHz	24.68	24.36	24.33	29.23	30.00	Complies
165	5825 MHz	24.51	23.64	24.03	28.85	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
151	5755 MHz	22.69	22.52	21.97	27.18	30.00	Complies
159	5795 MHz	24.25	23.69	24.26	28.85	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
155	5775 MHz	20.38	19.99	19.92	24.87	30.00	Complies

Temperature	26°C	Humidity	63%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11a
Test Data	Jul. 27, 2014		

Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
149	5745 MHz	25.23	24.59	24.12	29.44	30.00	Complies
157	5785 MHz	24.79	24.15	24.93	29.41	30.00	Complies
165	5825 MHz	23.56	23.86	23.78	28.51	30.00	Complies

<For Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11ac
Test Data	Jul. 27, 2014		

For 5GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
149	5745 MHz	22.23	21.62	21.31	26.51	26.52	Complies
157	5785 MHz	21.77	21.84	21.58	26.50	26.52	Complies
165	5825 MHz	22.11	21.60	21.46	26.50	26.52	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{AS}} \left\{ \sum_{k=1}^{N_{ASQ}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 9.48\text{dBi} > 6\text{dBi}$, So Power Limit = 30-(9.48-6)=26.52dBm

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
151	5755 MHz	22.18	21.68	21.26	26.49	26.52	Complies
159	5795 MHz	21.71	21.72	21.61	26.45	26.52	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{AS}} \left\{ \sum_{k=1}^{N_{ASQ}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 9.48\text{dBi} > 6\text{dBi}$, So Power Limit = 30-(9.48-6)=26.52dBm

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
155	5775 MHz	20.38	19.99	19.92	24.87	26.52	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{AS}} \left\{ \sum_{k=1}^{N_{ASQ}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 9.48\text{dBi} > 6\text{dBi}$, So Power Limit = 30-(9.48-6)=26.52dBm

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

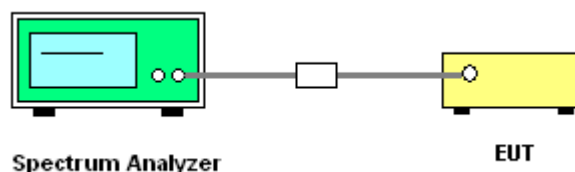

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

<For Non-Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11ac

For 5GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
149	5745 MHz	-1.22	-1.27	-1.69	3.38	4.52	Complies
157	5785 MHz	-1.37	-1.61	-2.57	2.95	4.52	Complies
165	5825 MHz	-1.86	-2.51	-2.69	2.43	4.52	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{AS}} \left\{ \sum_{k=1}^{N_{ANT}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 9.48\text{dBi} > 6\text{dBi}$, So PSD Limit = $8 - (9.48 - 6) = 4.52\text{dBm/3kHz}$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
151	5755 MHz	-6.17	-7.39	-7.45	-2.19	4.52	Complies
159	5795 MHz	-5.54	-4.55	-4.70	-0.14	4.52	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{AS}} \left\{ \sum_{k=1}^{N_{ANT}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 9.48\text{dBi} > 6\text{dBi}$, So PSD Limit = $8 - (9.48 - 6) = 4.52\text{dBm/3kHz}$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
155	5775 MHz	-9.77	-11.35	-13.33	-6.47	4.52	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{AS}} \left\{ \sum_{k=1}^{N_{ANT}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 9.48\text{dBi} > 6\text{dBi}$, So PSD Limit = $8 - (9.48 - 6) = 4.52\text{dBm/3kHz}$

Temperature	26°C	Humidity	63%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
149	5745 MHz	-1.68	-2.77	-2.42	2.51	4.52	Complies
157	5785 MHz	-1.26	-1.59	-1.19	3.43	4.52	Complies
165	5825 MHz	-1.36	-1.73	-0.88	3.46	4.52	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{AS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.48\text{dBi} > 6\text{dBi}$, So PSD Limit = $8 - (9.48 - 6) = 4.52\text{dBm/3kHz}$

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

<For Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11ac

For 5GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
149	5745 MHz	-4.22	-3.98	-5.18	0.34	4.52	Complies
157	5785 MHz	-3.68	-4.73	-4.54	0.48	4.52	Complies
165	5825 MHz	-3.00	-4.40	-4.53	0.85	4.52	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.48\text{dBi} > 6\text{dBi}$, So PSD Limit = $8 - (9.48 - 6) = 4.52\text{dBm/3kHz}$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
151	5755 MHz	-5.89	-7.01	-8.00	-2.11	4.52	Complies
159	5795 MHz	-4.83	-7.42	-5.75	-1.10	4.52	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.48\text{dBi} > 6\text{dBi}$, So PSD Limit = $8 - (9.48 - 6) = 4.52\text{dBm/3kHz}$


Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
155	5775 MHz	-10.50	-11.16	-11.84	-6.36	4.52	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.48\text{dBi} > 6\text{dBi}$, So PSD Limit = $8 - (9.48 - 6) = 4.52\text{dBm/3kHz}$


<For Non-Beamforming Mode>

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Ant. 1

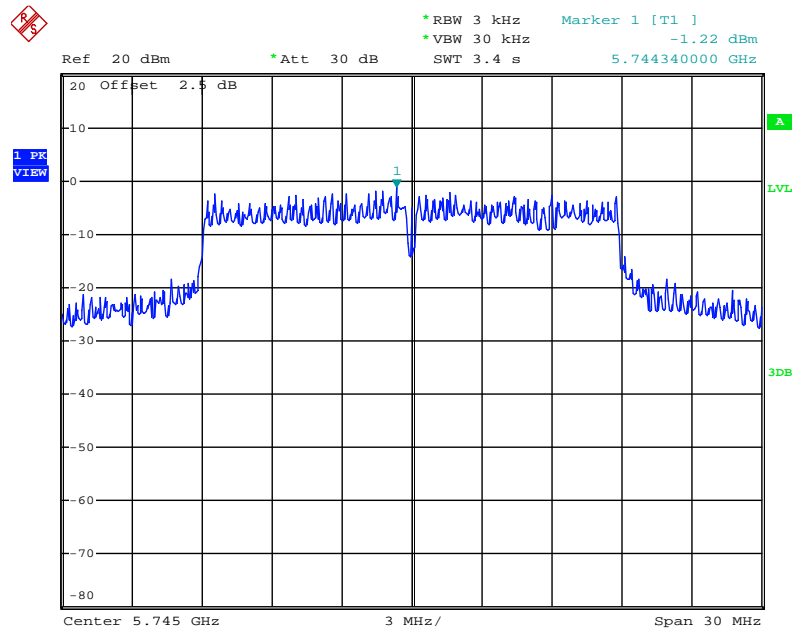


Date: 27.JUL.2014 12:27:30

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Ant. 2

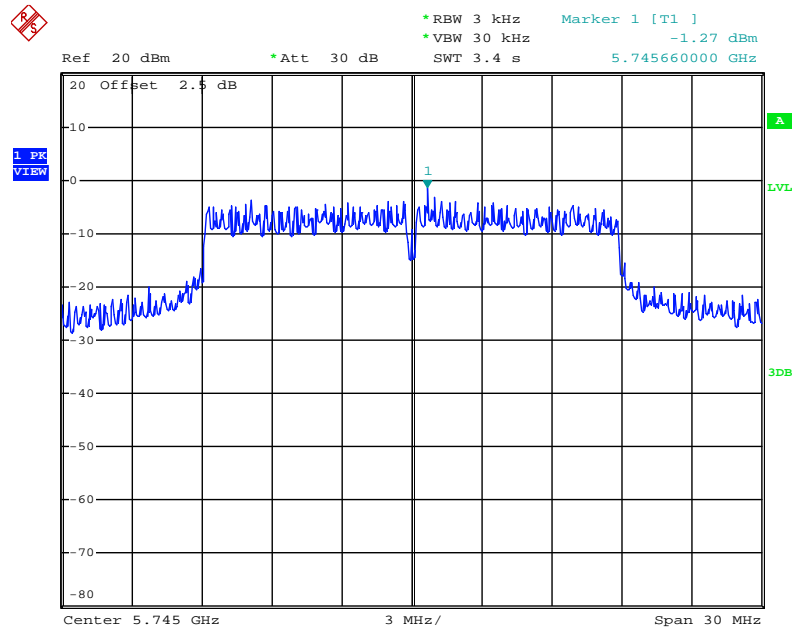


Date: 27.JUL.2014 12:28:02

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Ant. 3

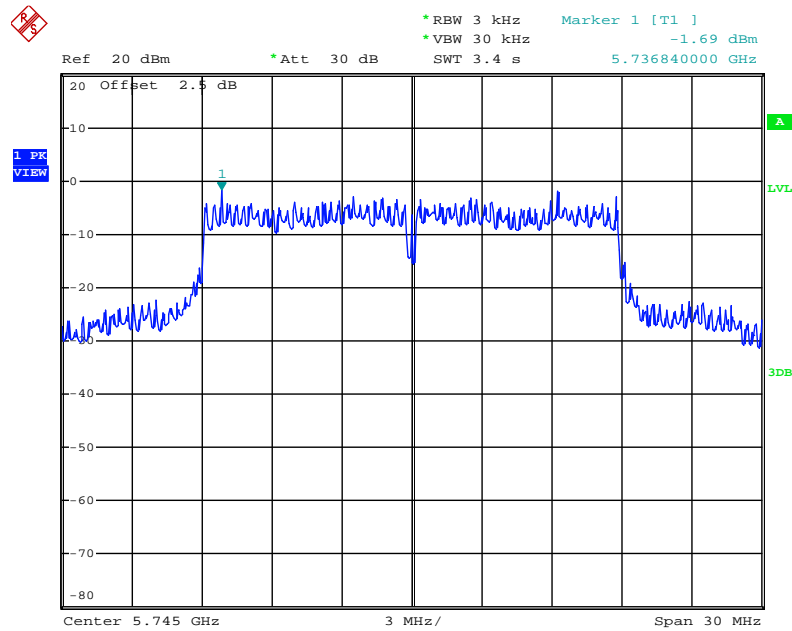


Date: 27.JUL.2014 12:26:51

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Ant. 1

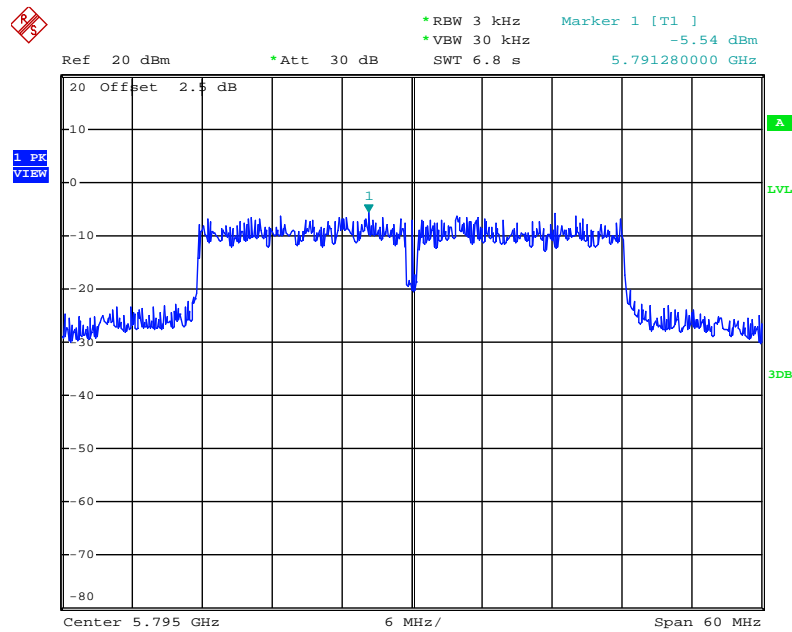


Date: 27.JUL.2014 12:35:08

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Ant. 2

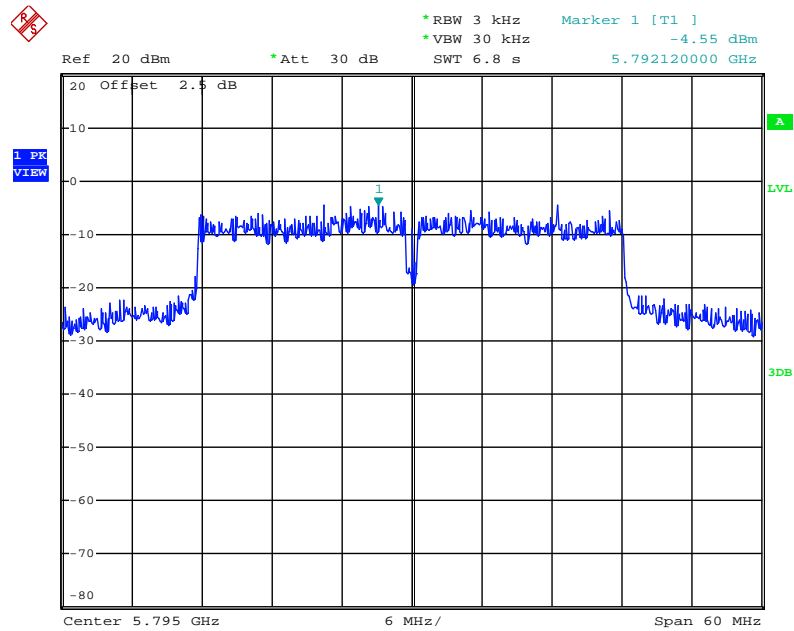


Date: 27.JUL.2014 12:34:33

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Ant. 3

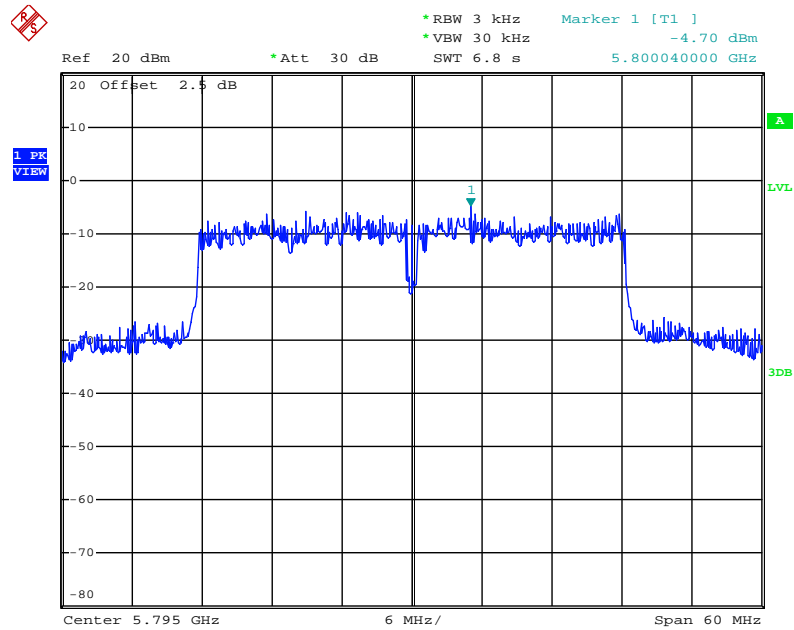


Date: 27.JUL.2014 12:35:46

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant. 1

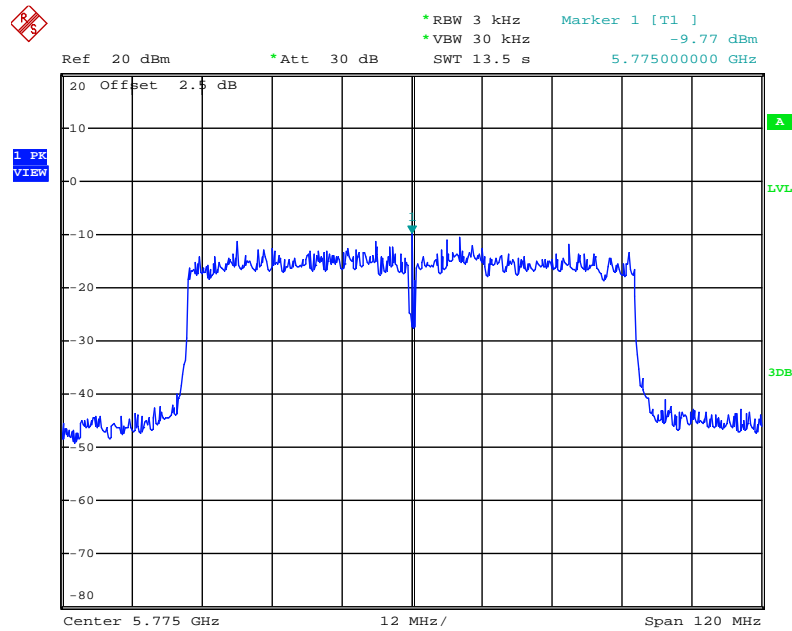


Date: 27.JUL.2014 12:45:19

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant. 2

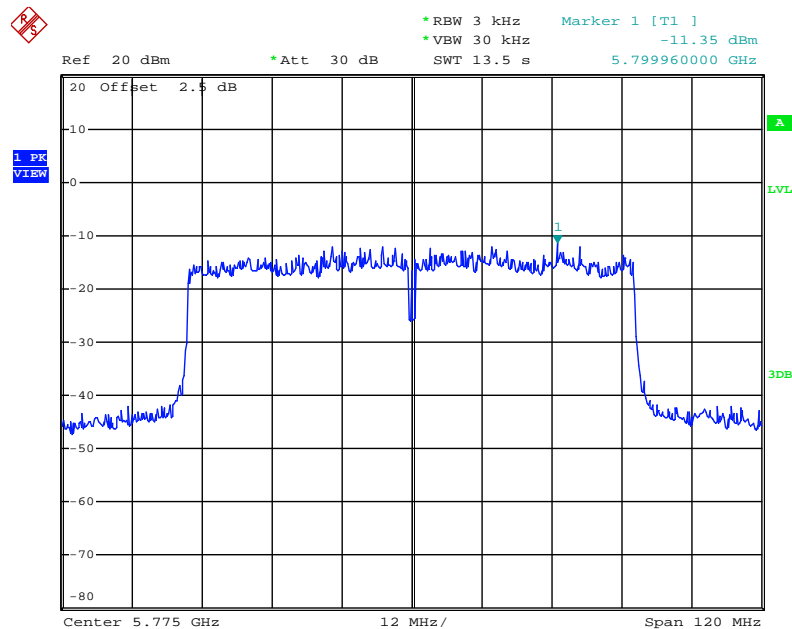


Date: 27.JUL.2014 12:44:08

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant. 3

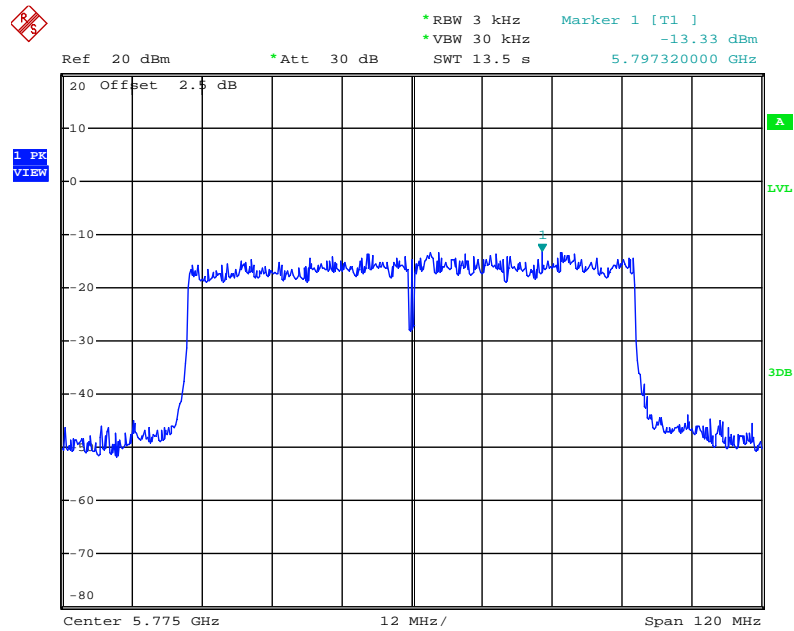


Date: 27.JUL.2014 12:44:45

Power Density Plot on Configuration IEEE 802.11a / 5825 MHz / Ant. 1

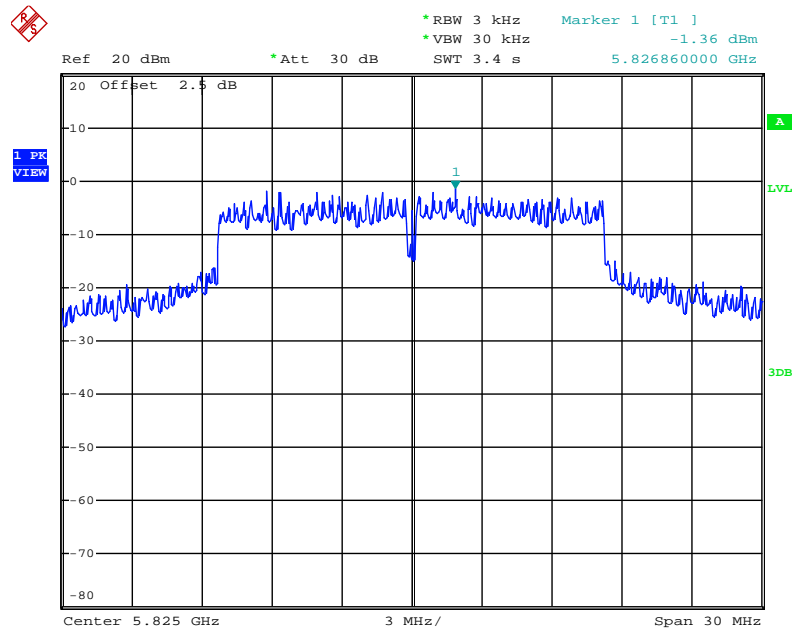


Date: 27.JUL.2014 12:20:47

Power Density Plot on Configuration IEEE 802.11a / 5825 MHz / Ant. 2

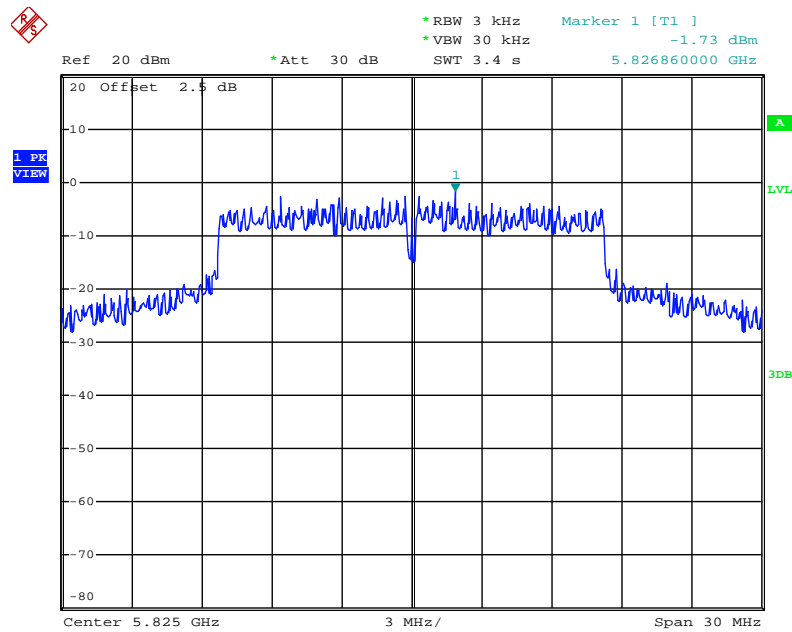

Date: 27.JUL.2014 12:21:54


Power Density Plot on Configuration IEEE 802.11a / 5825 MHz / Ant. 3

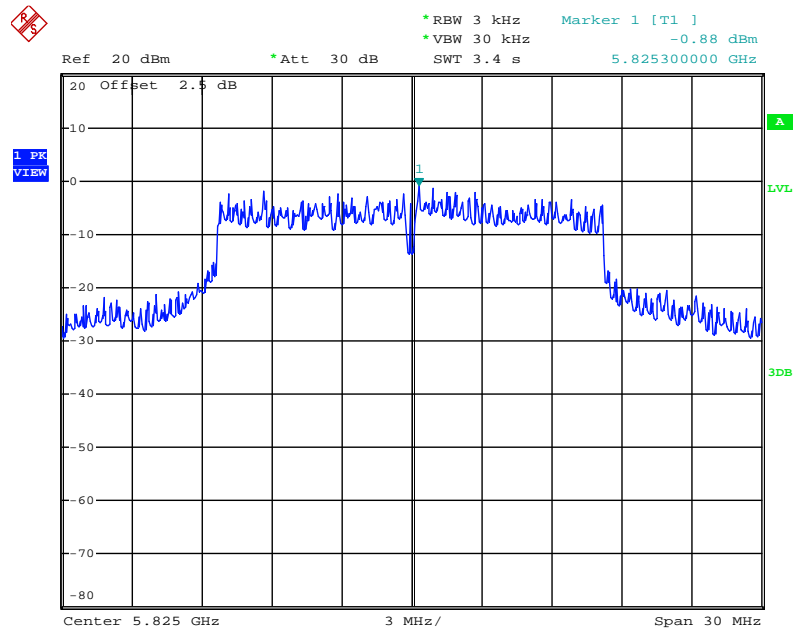

Date: 27.JUL.2014 12:19:32


<For Beamforming Mode>

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5825 MHz / Ant. 1

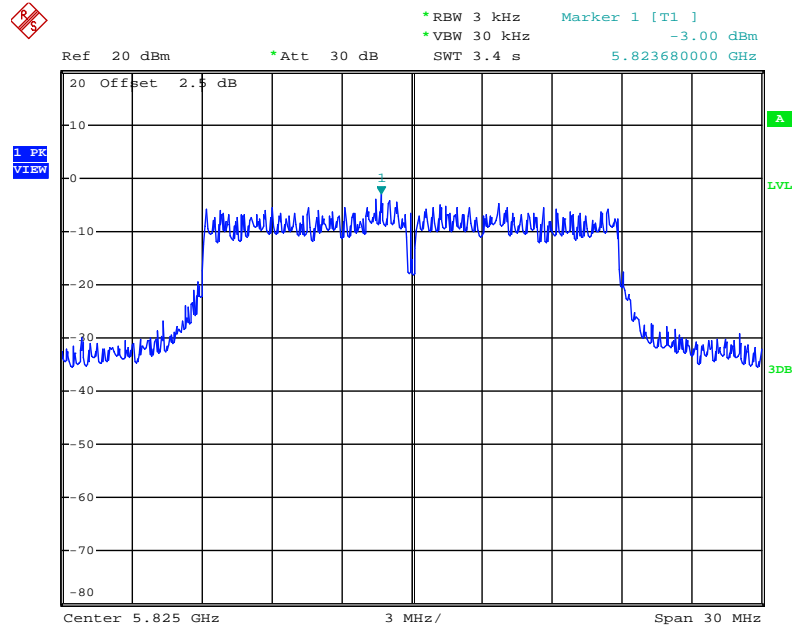


Date: 27.JUL.2014 12:17:41

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5825 MHz / Ant. 2

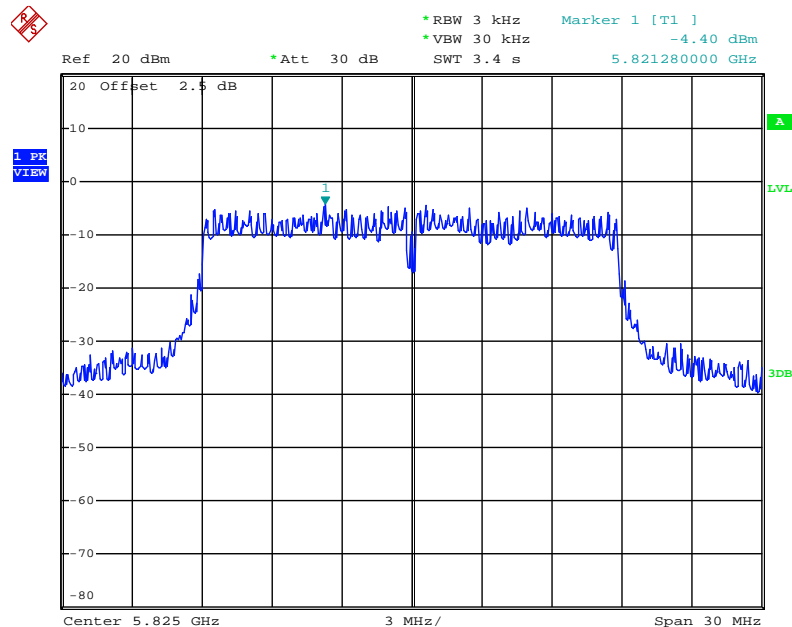


Date: 27.JUL.2014 12:18:18

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5825 MHz / Ant. 3

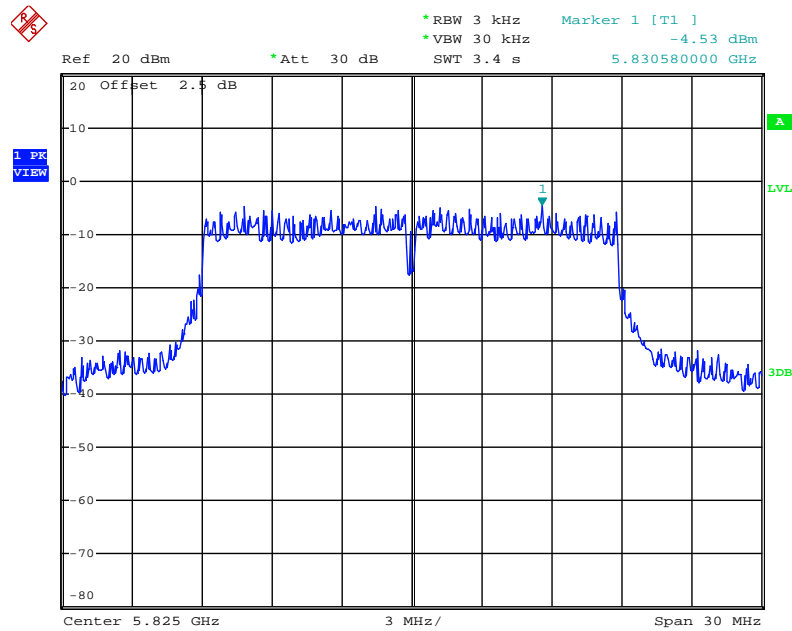


Date: 27.JUL.2014 12:17:07

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Ant. 1

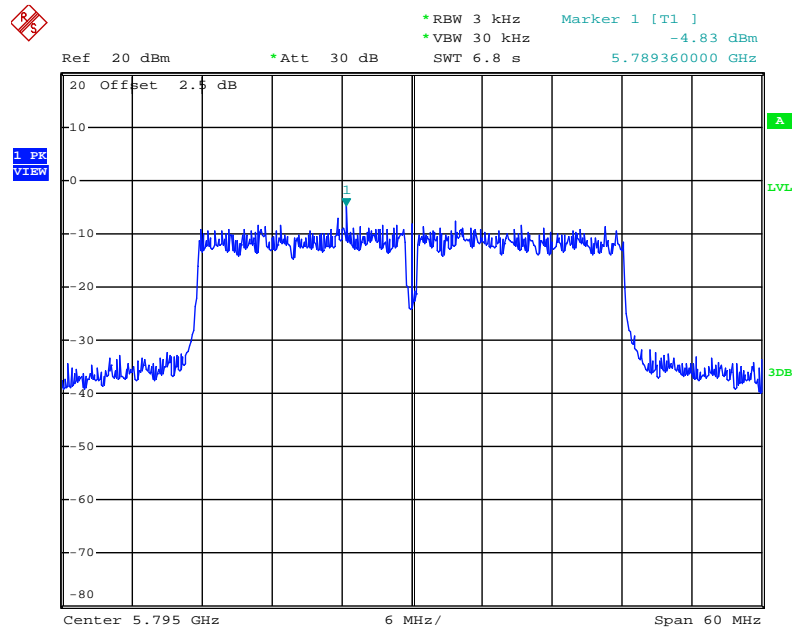


Date: 27.JUL.2014 12:37:43

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Ant. 2

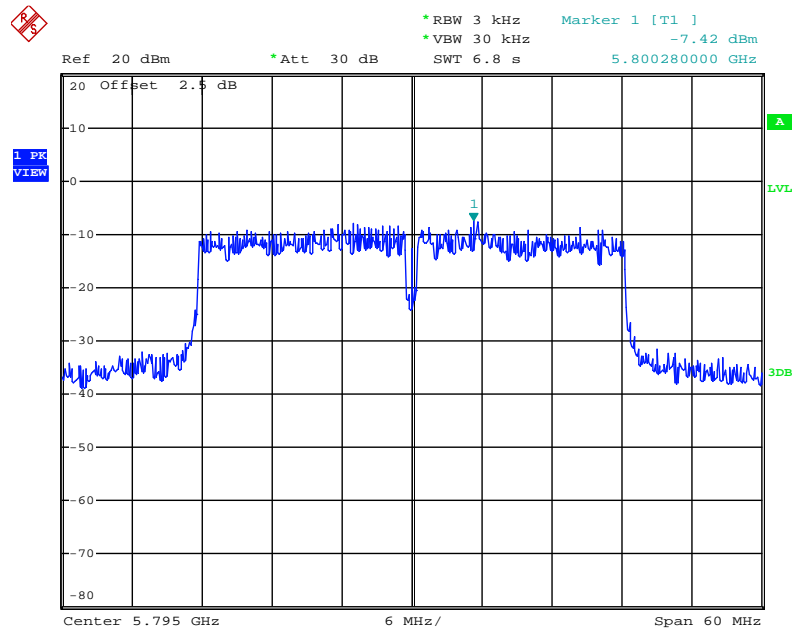


Date: 27.JUL.2014 12:38:15

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Ant. 3

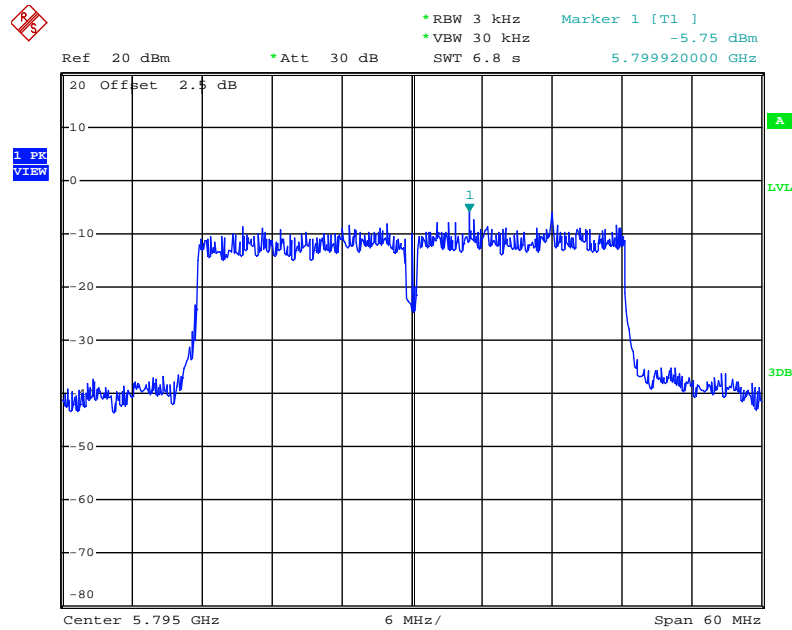


Date: 27.JUL.2014 12:37:01

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant. 1

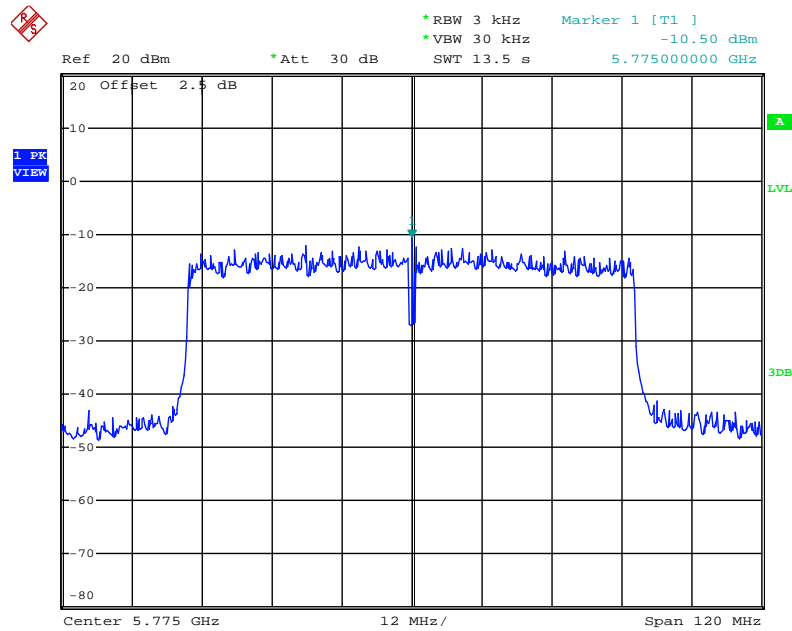


Date: 27.JUL.2014 12:42:06

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant. 2

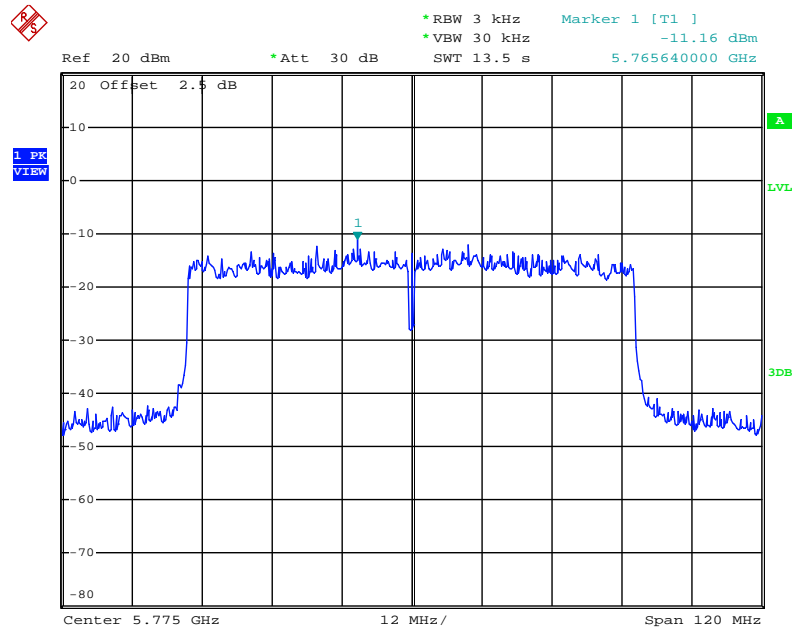

Date: 27.JUL.2014 12:42:53

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant. 3

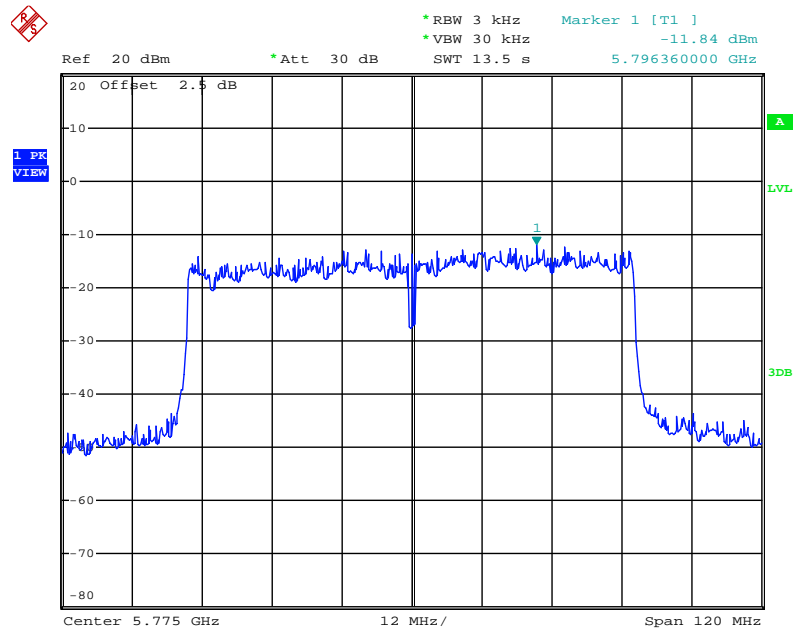

Date: 27.JUL.2014 12:41:30

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth= \geq 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

<For Non-Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11ac

For 5GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.56	26.64	500	Complies
157	5785 MHz	16.80	27.20	500	Complies
165	5825 MHz	16.88	30.00	500	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	36.48	36.80	500	Complies
159	5795 MHz	36.48	62.88	500	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
155	5775 MHz	76.16	76.16	500	Complies

Temperature	26°C	Humidity	63%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.32	26.00	500	Complies
157	5785 MHz	16.32	27.52	500	Complies
165	5825 MHz	16.40	27.36	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

<For Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11ac

For 5GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	17.52	17.76	500	Complies
157	5785 MHz	17.60	17.68	500	Complies
165	5825 MHz	17.52	17.76	500	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	32.96	36.48	500	Complies
159	5795 MHz	32.64	36.48	500	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
155	5775 MHz	72.96	75.84	500	Complies


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

<For Non-Beamforming Mode>

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz /


Ant. 1 + Ant. 2 + Ant. 3

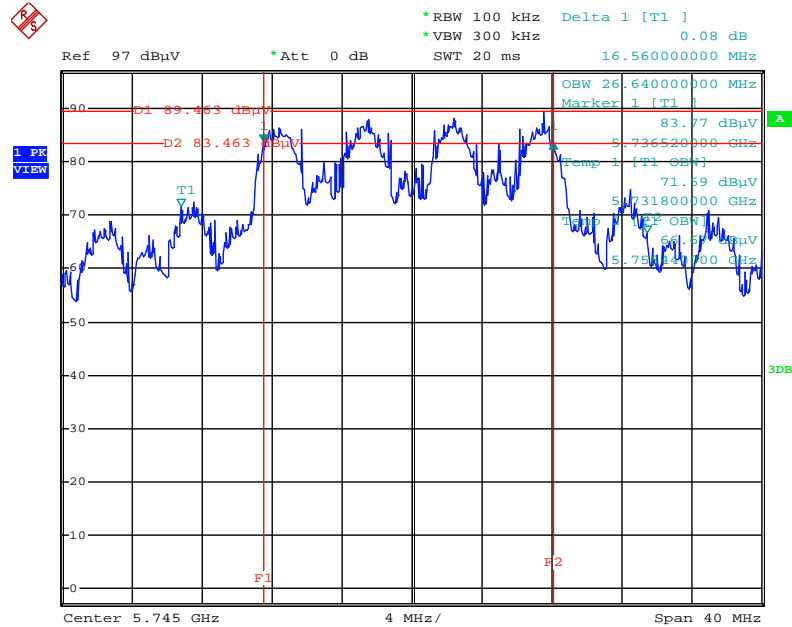

Date: 27.JUL.2014 11:42:15

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795MHz /


Ant. 1 + Ant. 2 + Ant. 3

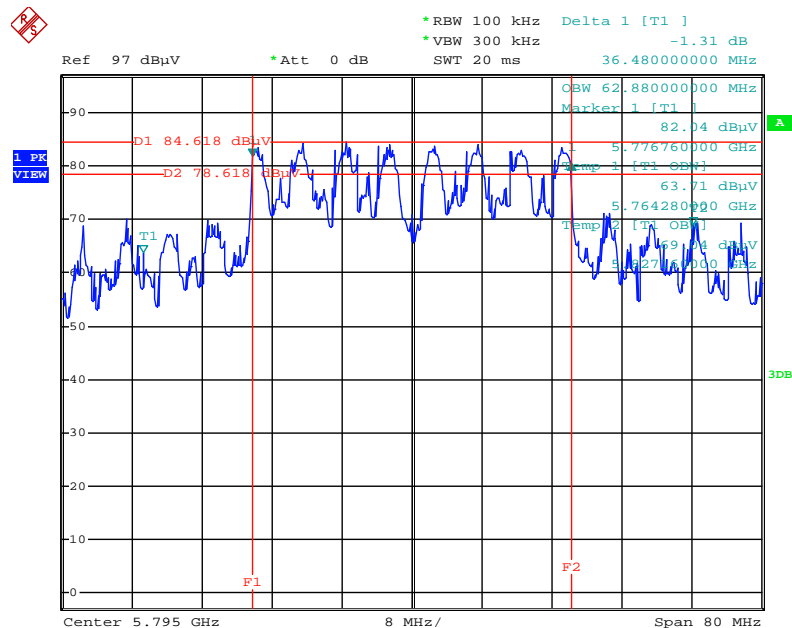

Date: 27.JUL.2014 11:43:30


6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz /

Ant. 1 + Ant. 2 + Ant. 3

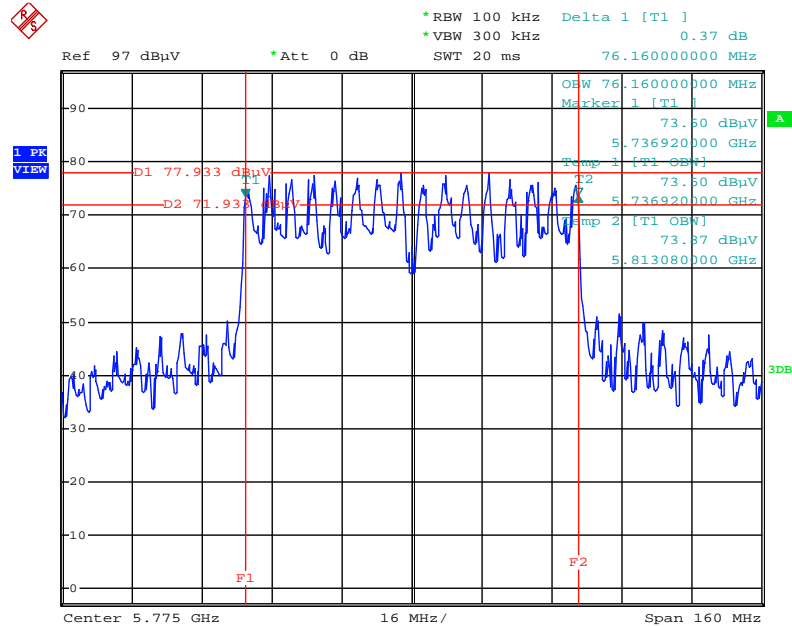

Date: 27.JUL.2014 11:44:20

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5785 MHz / Ant. 1 + Ant. 2 + Ant. 3

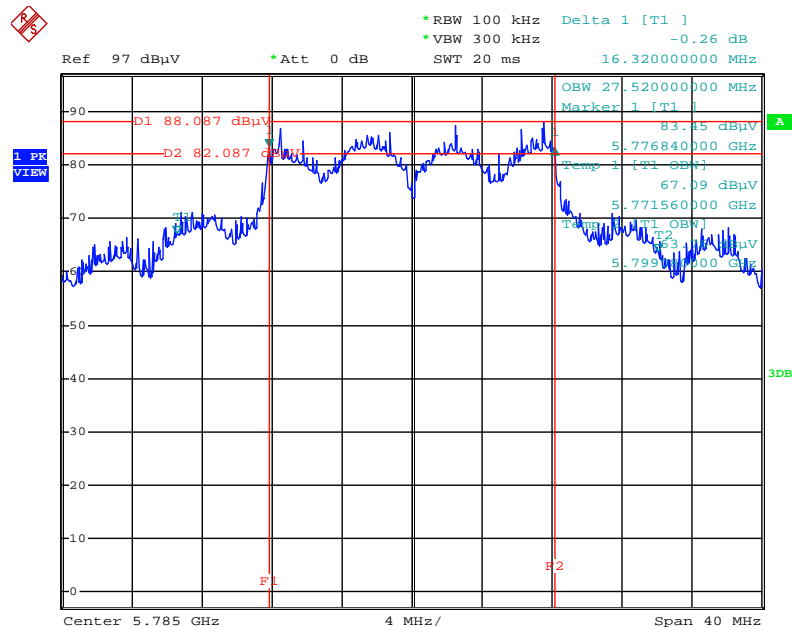


Date: 27.JUL.2014 11:38:37

<For Beamforming Mode>

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz /


Ant. 1 + Ant. 2 + Ant. 3

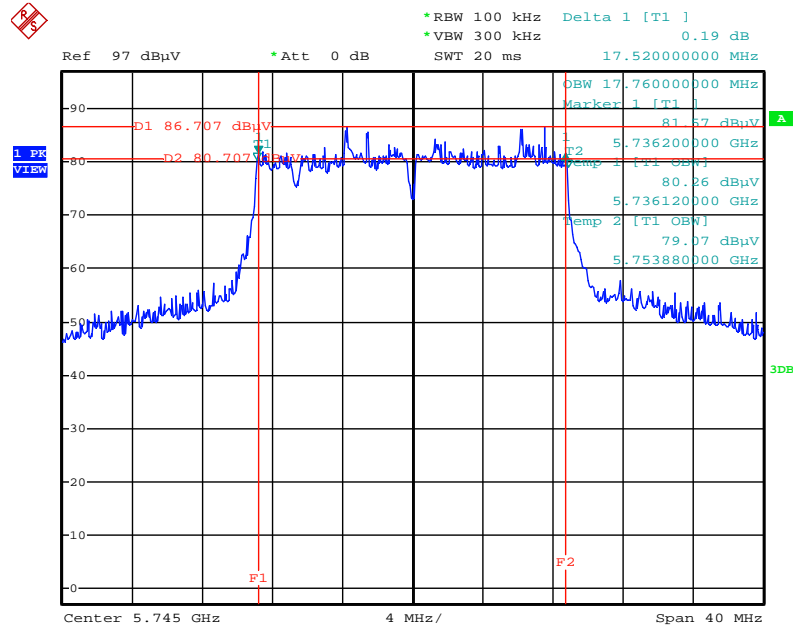

Date: 28.JUN.2014 11:40:40

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795MHz /


Ant. 1 + Ant. 2 + Ant. 3

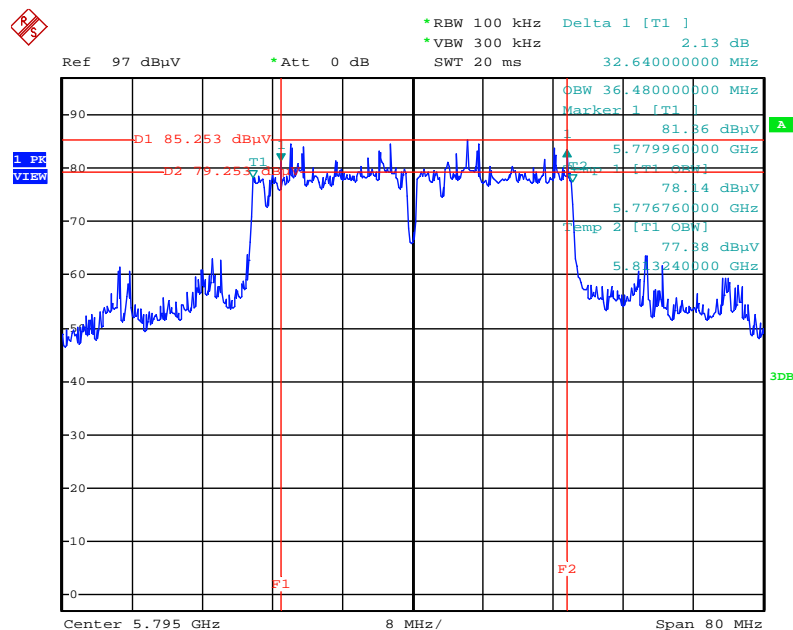

Date: 28.JUN.2014 11:38:14

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz /

Ant. 1 + Ant. 2 + Ant. 3

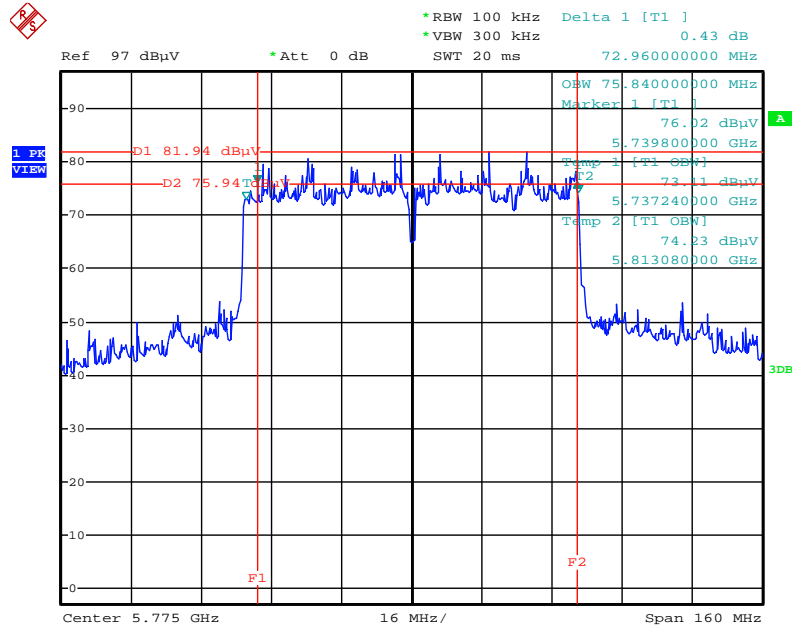

Date: 28.JUN.2014 11:37:06

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1 GHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1GHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

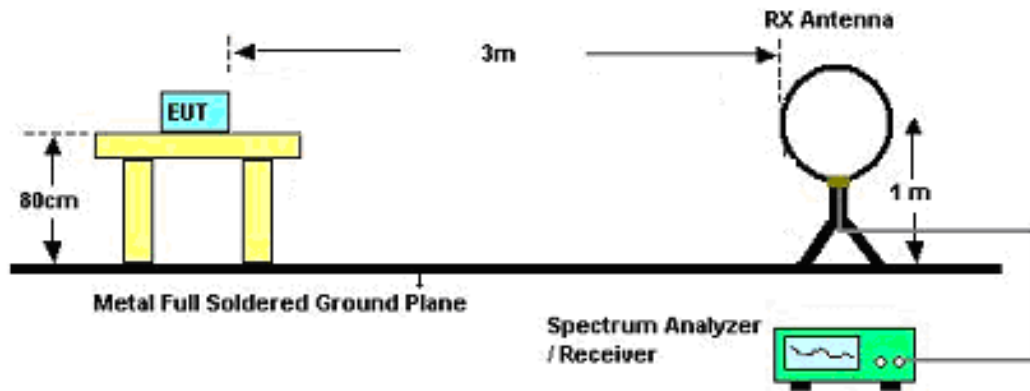

For Radiated Emissions: 30MHz~1GHz

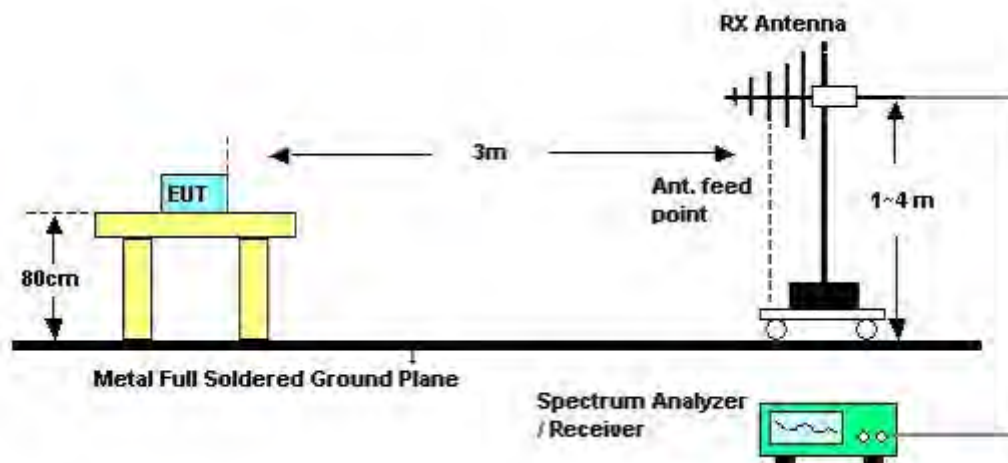

For Radiated Emissions: Above 1GHz

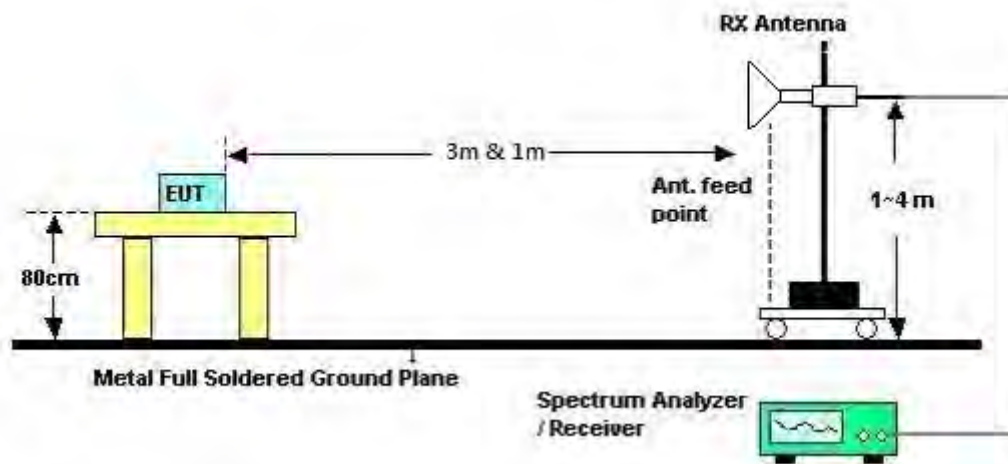

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	CTX
Test Date	Jul. 01, 2014	Test Mode	Mode 1

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	CTX
Test Mode	Mode 1		

Horizontal

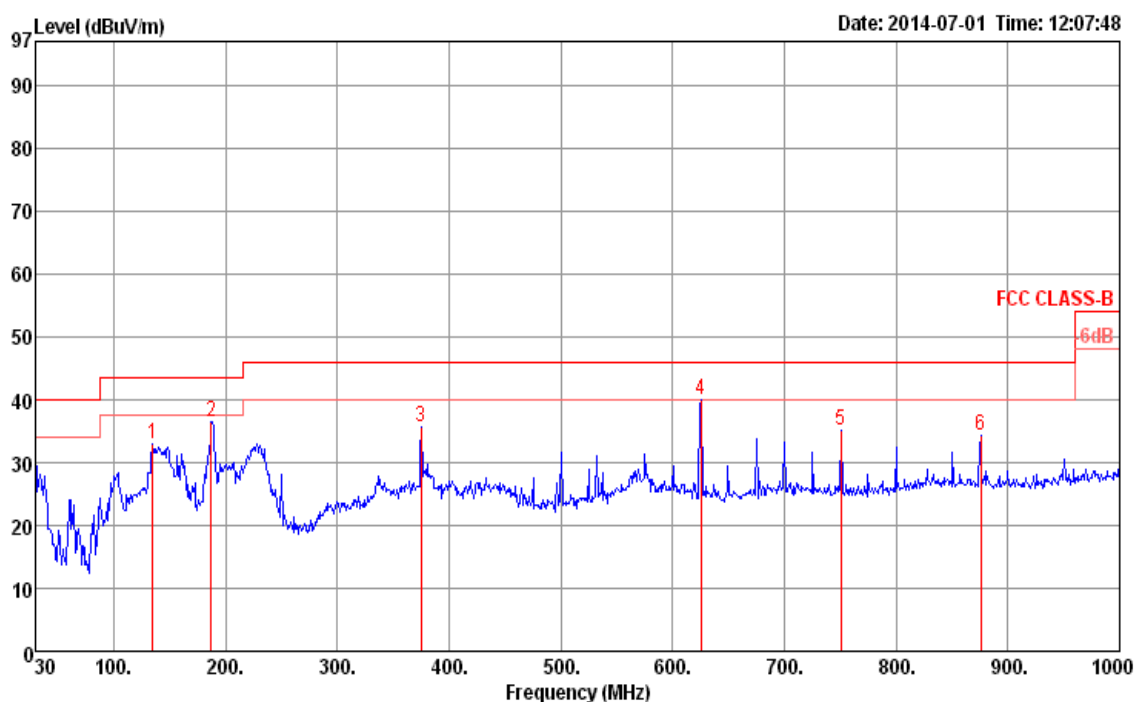

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	Pol/Phase
1	134.76	32.91	43.50	-10.59	46.64	1.40	12.30	27.43	Peak	100	0	HORIZONTAL
2	187.14	36.38	43.50	-7.12	50.23	1.60	11.71	27.16	Peak	100	0	HORIZONTAL
3	375.32	35.69	46.00	-10.31	45.52	2.20	15.40	27.43	Peak	100	0	HORIZONTAL
4	625.58	39.91	46.00	-6.09	46.23	2.90	18.85	28.07	Peak	100	0	HORIZONTAL
5	750.71	35.02	46.00	-10.98	40.19	3.20	19.43	27.80	Peak	100	0	HORIZONTAL
6	875.84	34.36	46.00	-11.64	38.00	3.46	20.35	27.45	Peak	100	0	HORIZONTAL

Vertical

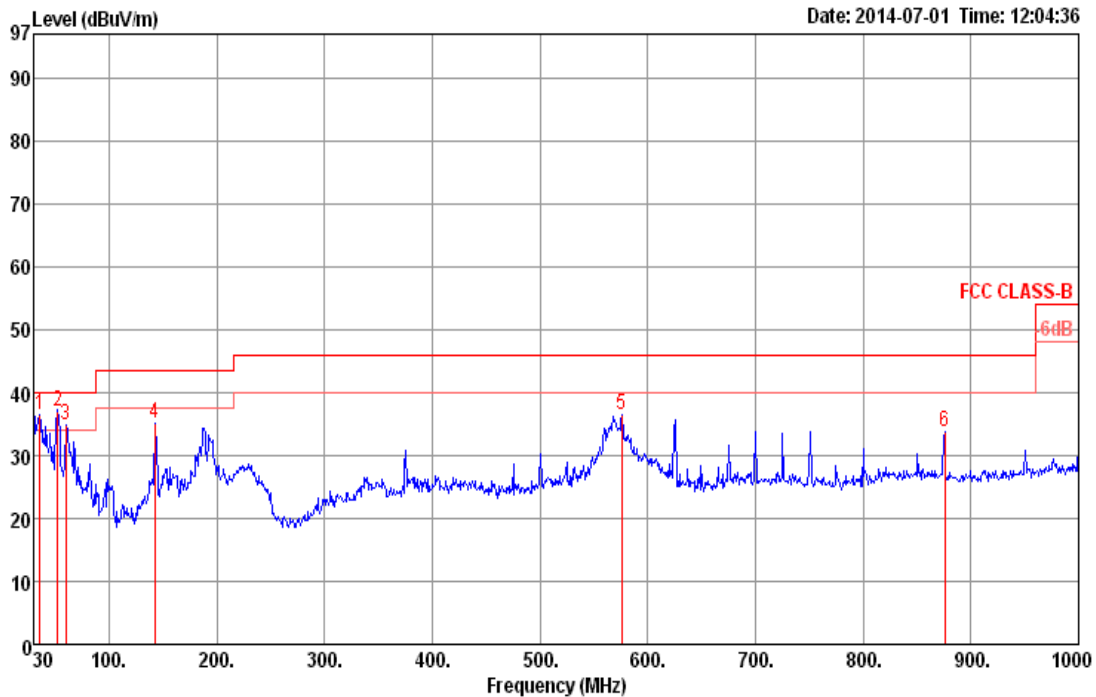

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	35.82	36.38	40.00	-3.62	48.00	0.69	15.49	27.80	Peak	400	0	VERTICAL
2	52.31	36.97	40.00	-3.03	55.72	0.86	8.18	27.79	Peak	400	0	VERTICAL
3	60.07	34.94	40.00	-5.06	55.02	0.91	6.77	27.76	Peak	400	0	VERTICAL
4	142.52	35.14	43.50	-8.36	48.89	1.43	12.21	27.39	Peak	400	0	VERTICAL
5	576.11	36.61	46.00	-9.39	43.42	2.80	18.49	28.10	Peak	400	0	VERTICAL
6	875.84	33.79	46.00	-12.21	37.43	3.46	20.35	27.45	Peak	400	0	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

<For Non-Beamforming Mode>

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 26, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11475.60	54.13	74.00	-19.87	40.80	9.08	39.10	34.85	155	150	HORIZONTAL	Peak
2	11536.90	46.76	54.00	-7.24	33.45	9.10	39.06	34.85	155	150	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11473.50	55.80	74.00	-18.20	42.47	9.08	39.10	34.85	100	263	VERTICAL	Peak
2	11490.30	44.91	54.00	-9.09	31.57	9.09	39.10	34.85	100	263	VERTICAL	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 26, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11560.10	55.63	74.00	-18.37	42.37	9.10	39.01	34.85	100	56	HORIZONTAL	Peak
2	11566.70	46.02	54.00	-7.98	32.75	9.11	39.01	34.85	100	56	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11570.50	45.18	54.00	-8.82	31.91	9.11	39.01	34.85	100	276	VERTICAL	Average
2	11580.60	53.99	74.00	-20.01	40.72	9.11	39.01	34.85	100	276	VERTICAL	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 26, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11646.80	56.26	74.00	-17.74	43.07	9.11	38.93	34.85	158	83	HORIZONTAL	Peak
2	11651.70	48.82	54.00	-5.18	35.67	9.11	38.89	34.85	158	83	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11650.50	46.65	54.00	-7.35	33.46	9.11	38.93	34.85	100	81	VERTICAL	Average
2	11661.10	55.19	74.00	-18.81	42.04	9.11	38.89	34.85	100	81	VERTICAL	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 26, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11505.10	54.27	74.00	-19.73	40.92	9.10	39.10	34.85	100	283	HORIZONTAL Peak
2	11516.90	44.43	54.00	-9.57	31.12	9.10	39.06	34.85	100	283	HORIZONTAL Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11500.20	54.77	74.00	-19.23	41.42	9.10	39.10	34.85	100	53	VERTICAL Peak
2	11509.40	44.05	54.00	-9.95	30.70	9.10	39.10	34.85	100	53	VERTICAL Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 26, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11568.20	54.81	74.00	-19.19	41.54	9.11	39.01	34.85	100	210	HORIZONTAL	Peak
2	11591.80	44.92	54.00	-9.08	31.69	9.11	38.97	34.85	100	210	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11581.00	54.16	74.00	-19.84	40.89	9.11	39.01	34.85	100	27	VERTICAL	Peak
2	11599.50	43.63	54.00	-10.37	30.40	9.11	38.97	34.85	100	27	VERTICAL	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 26, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5133.33	48.11	74.00	-25.89	44.53	5.98	33.01	35.41	100	122	HORIZONTAL	Peak
2	5133.36	41.26	54.00	-12.74	37.68	5.98	33.01	35.41	100	122	HORIZONTAL	Average
3	11563.00	42.67	54.00	-11.33	29.40	9.11	39.01	34.85	100	284	HORIZONTAL	Average
4	11563.56	53.23	74.00	-20.77	39.96	9.11	39.01	34.85	100	284	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5133.27	52.98	74.00	-21.02	49.40	5.98	33.01	35.41	100	310	VERTICAL	Peak
2	5133.41	48.40	54.00	-5.60	44.82	5.98	33.01	35.41	100	310	VERTICAL	Average
3	11561.45	43.08	54.00	-10.92	29.81	9.11	39.01	34.85	100	73	VERTICAL	Average
4	11563.65	52.84	74.00	-21.16	39.57	9.11	39.01	34.85	100	73	VERTICAL	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 149 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 26, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11486.35	45.33	54.00	-8.67	31.99	9.09	39.10	34.85	100	154	HORIZONTAL	Average
2	11486.70	56.19	74.00	-17.81	42.85	9.09	39.10	34.85	100	154	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11489.08	59.14	74.00	-14.86	45.80	9.09	39.10	34.85	178	91	VERTICAL	Peak
2	11490.22	46.97	54.00	-7.03	33.63	9.09	39.10	34.85	178	91	VERTICAL	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 157 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 26, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11565.80	46.42	54.00	-7.58	33.15	9.11	39.01	34.85	155	150	HORIZONTAL	Average
2	11576.10	56.03	74.00	-17.97	42.76	9.11	39.01	34.85	155	150	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11572.80	44.78	54.00	-9.22	31.51	9.11	39.01	34.85	100	275	VERTICAL	Average
2	11591.90	54.32	74.00	-19.68	41.09	9.11	38.97	34.85	100	275	VERTICAL	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 165 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 26, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11646.40	48.63	54.00	-5.37	35.44	9.11	38.93	34.85	126	142	HORIZONTAL	Average
2	11654.30	56.95	74.00	-17.05	43.80	9.11	38.89	34.85	126	142	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11650.30	47.74	54.00	-6.26	34.55	9.11	38.93	34.85	100	89	VERTICAL	Average
2	11659.60	58.46	74.00	-15.54	45.31	9.11	38.89	34.85	100	89	VERTICAL	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Beamforming Mode>

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 26, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11492.80	44.39	54.00	-9.61	31.05	9.09	39.10	34.85	100	355	HORIZONTAL	Average
2	11495.80	54.35	74.00	-19.65	41.00	9.10	39.10	34.85	100	355	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11480.60	58.47	74.00	-15.53	45.13	9.09	39.10	34.85	107	96	VERTICAL	Peak
2	11489.20	48.69	54.00	-5.31	35.35	9.09	39.10	34.85	107	96	VERTICAL	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 26, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11570.40	44.75	54.00	-9.25	31.48	9.11	39.01	34.85	100	300	HORIZONTAL	Average
2	11576.55	55.19	74.00	-18.81	41.92	9.11	39.01	34.85	100	300	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11539.20	53.49	74.00	-20.51	40.18	9.10	39.06	34.85	100	64	VERTICAL	Peak
2	11564.00	45.10	54.00	-8.90	31.83	9.11	39.01	34.85	100	64	VERTICAL	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 26, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11649.45	55.38	74.00	-18.62	42.19	9.11	38.93	34.85	100	40	HORIZONTAL	Peak
2	11651.50	47.06	54.00	-6.94	33.91	9.11	38.89	34.85	100	40	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11648.90	47.50	54.00	-6.50	34.31	9.11	38.93	34.85	100	203	VERTICAL	Average
2	11650.05	56.30	74.00	-17.70	43.11	9.11	38.93	34.85	100	203	VERTICAL	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 26, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11511.00	42.86	54.00	-11.14	29.51	9.10	39.10	34.85	100	243	HORIZONTAL	Average
2	11527.80	54.08	74.00	-19.92	40.77	9.10	39.06	34.85	100	243	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11522.50	44.19	54.00	-9.81	30.88	9.10	39.06	34.85	100	322	VERTICAL	Average
2	11550.70	55.42	74.00	-18.58	42.16	9.10	39.01	34.85	100	322	VERTICAL	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 26, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11592.30	54.07	74.00	-19.93	40.84	9.11	38.97	34.85	100	275	HORIZONTAL	Peak
2	11597.60	44.40	54.00	-9.60	31.17	9.11	38.97	34.85	100	275	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11584.80	54.60	74.00	-19.40	41.37	9.11	38.97	34.85	100	92	VERTICAL	Peak
2	11593.60	43.87	54.00	-10.13	30.64	9.11	38.97	34.85	100	92	VERTICAL	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jul. 26, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11545.60	54.59	74.00	-19.41	41.28	9.10	39.06	34.85	100	185	HORIZONTAL	Peak
2	11557.25	43.21	54.00	-10.79	29.95	9.10	39.01	34.85	100	185	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11550.20	55.32	74.00	-18.68	42.06	9.10	39.01	34.85	100	117	VERTICAL	Peak
2	11592.50	43.03	54.00	-10.97	29.80	9.11	38.97	34.85	100	117	VERTICAL	Average

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
2. The radiated emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions


<For Non-Beamforming Mode>

For Emission not in Restricted Band


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level




Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 30MHz~5725MHz (down 30dBc)

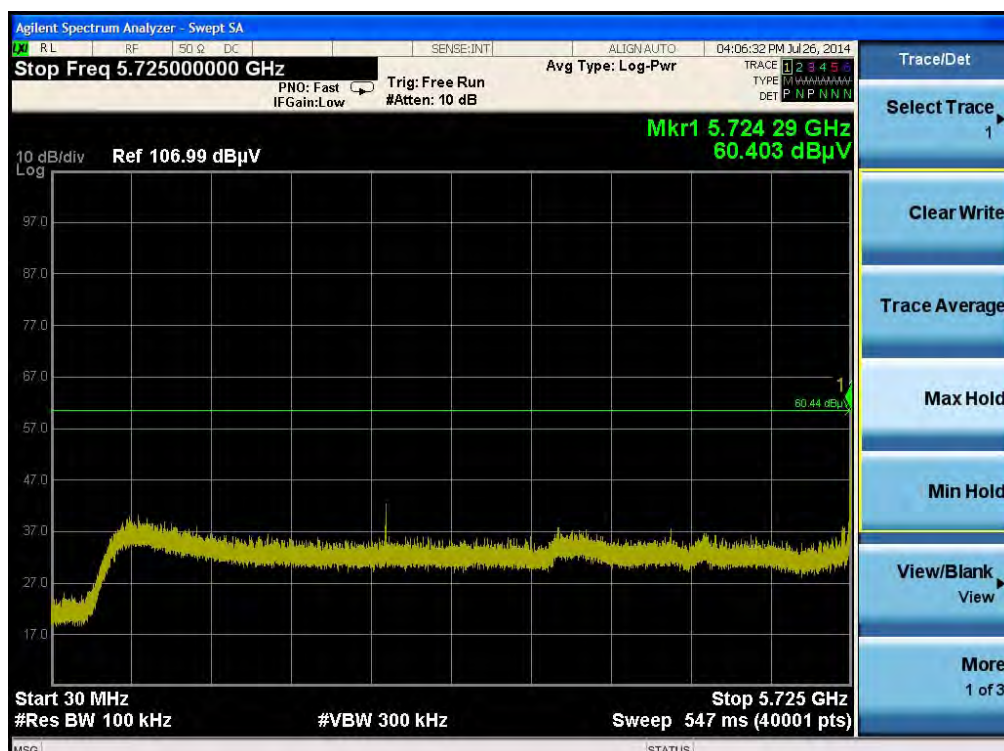


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 5850MHz~40000MHz (down 30dBc)

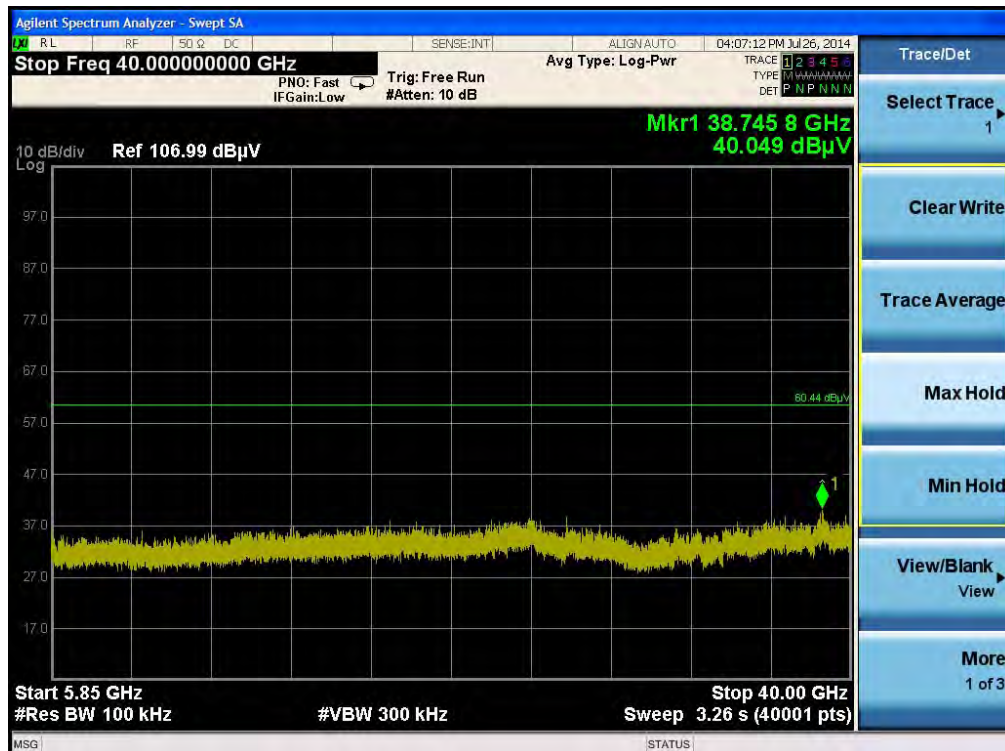

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 30MHz~5725MHz (down 30dBc)

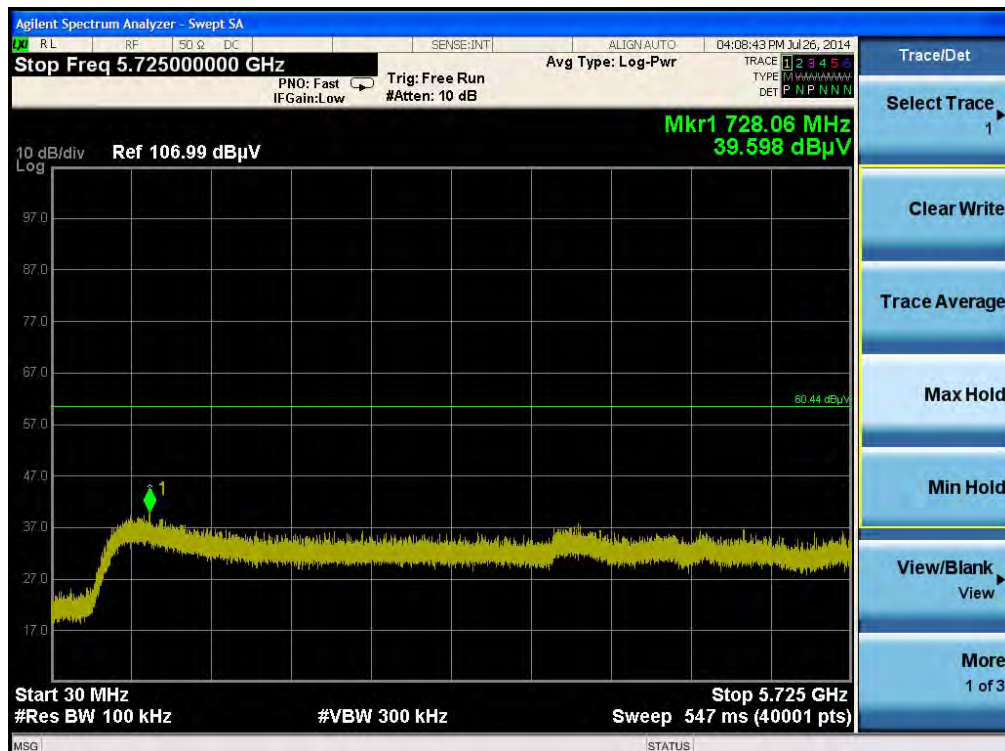

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 5850MHz~40000MHz (down 30dBc)

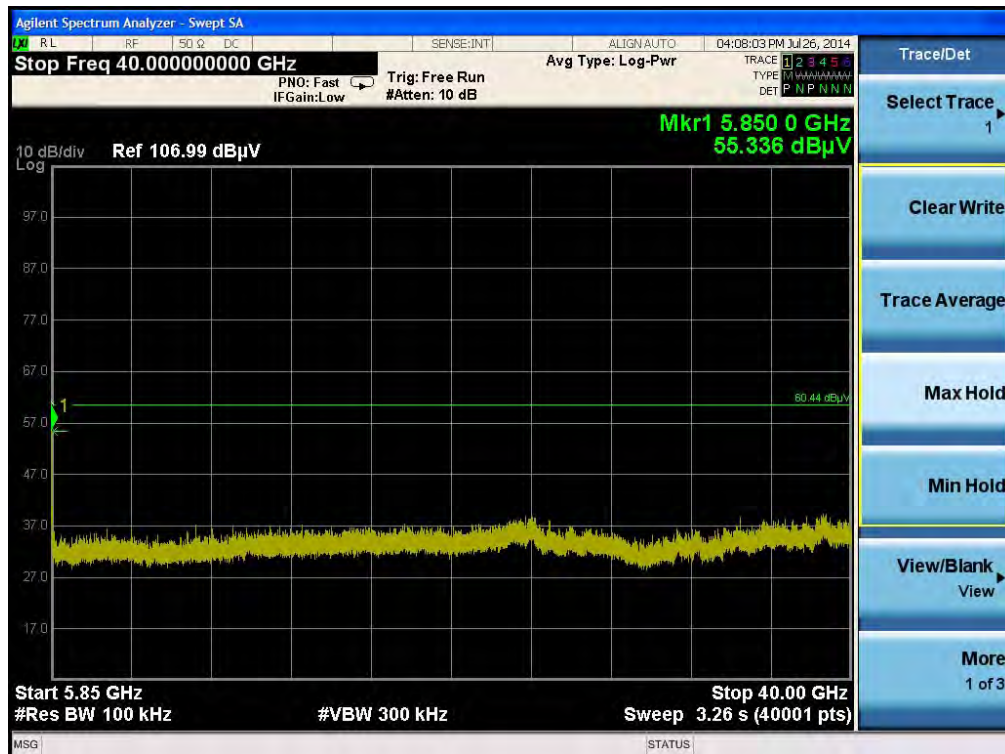



Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω DC SENSE:INT ALIGN: AUTO 04:12:02 PM Jul 26, 2014

RBW 100 kHz PNO: Fast Trig: Free Run Avg Type: Log-Pwr

IF Gain: Low #Atten: 10 dB TRACE 1 2 3 4 5 TYPE P P P P P DET P P P P P

10 dB/div Log Ref 106.99 dB μ V

Mkr1 5.806 254 5 GHz 87.403 dB μ V

97.0
87.0
77.0
67.0
57.0
47.0
37.0
27.0
17.0

Center 5.79500 GHz Span 60.00 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 8.00 ms (40001 pts)

Trace/Det

Select Trace 1

Clear Write

Trace Average

Max Hold

Min Hold

View/Blank View

More 1 of 3

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω DC SENSE:INT ALIGN: AUTO 04:18:31 PM Jul 26, 2014

Stop Freq 5.72500000 GHz Avg Type: Log-Pwr

PN0: Fast IF Gain: Low Trig: Free Run #Atten: 10 dB

TRACE 1 2 3 4 5
TYPE TVWWWWWWWW
DET P N P N N N

10 dB/div Ref 106.99 dB μ V

Mkr1 5.717 45 GHz
56.141 dB μ V


1 57.40 dB μ V

Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 5.725 GHz Sweep 547 ms (40001 pts)


MSG STATUS

Trace/Det
Select Trace
Clear Write
Trace Average
Max Hold
Min Hold
View/Blank
View
More
1 of 3


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 5850MHz~40000MHz (down 30dBc)

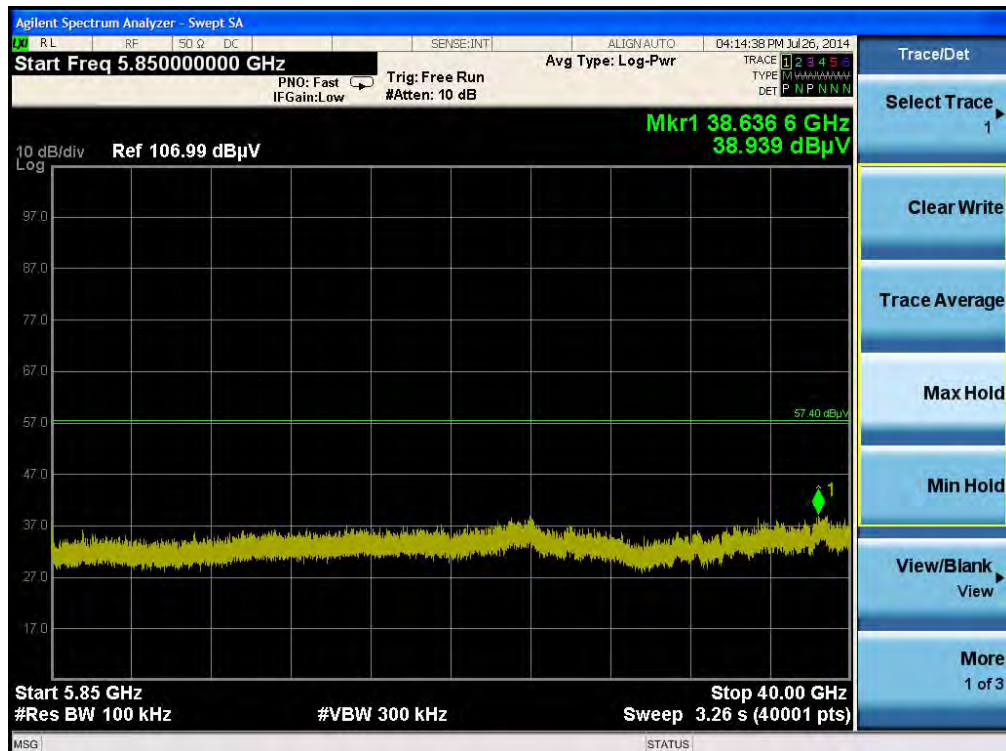


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 30MHz~5725MHz (down 30dBc)

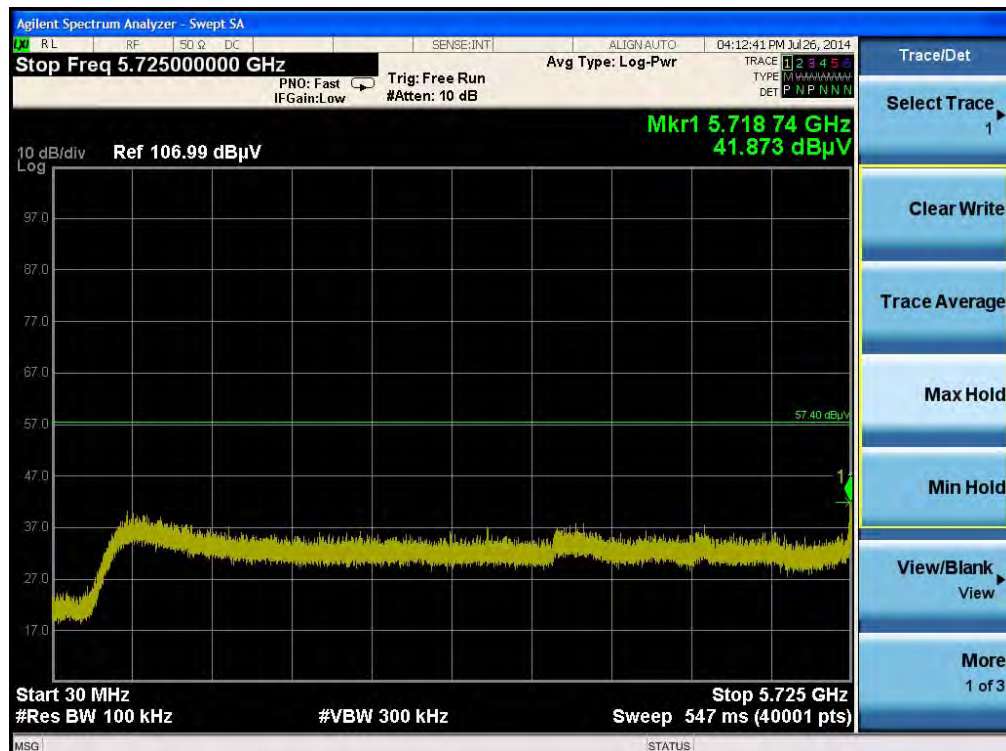

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 5850MHz~40000MHz (down 30dBc)

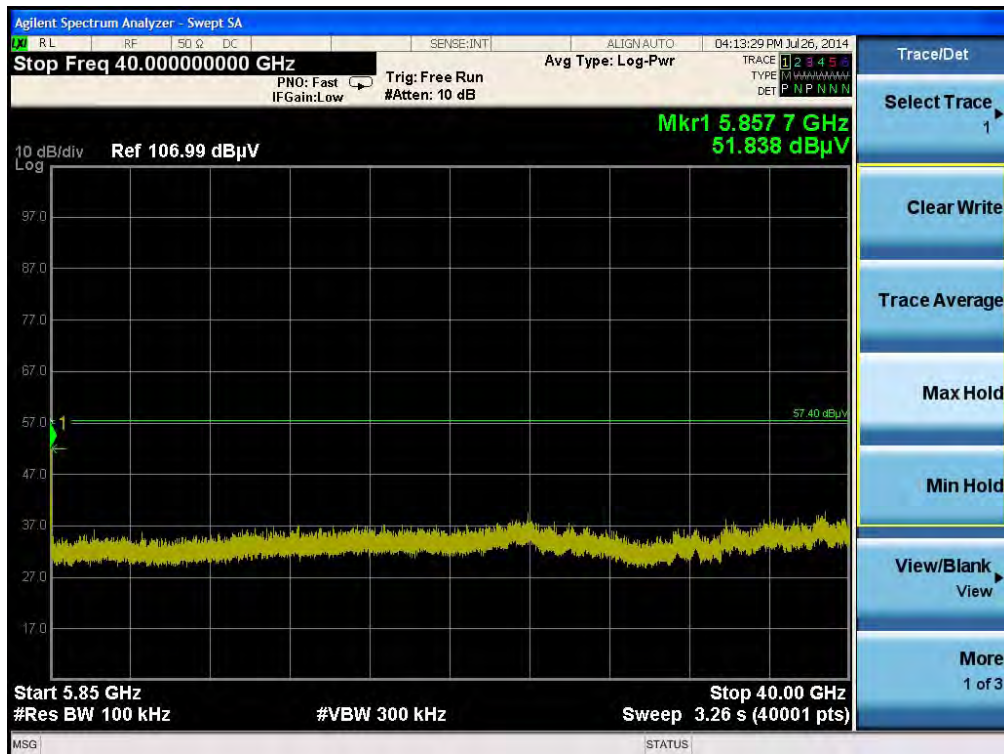


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Reference Level

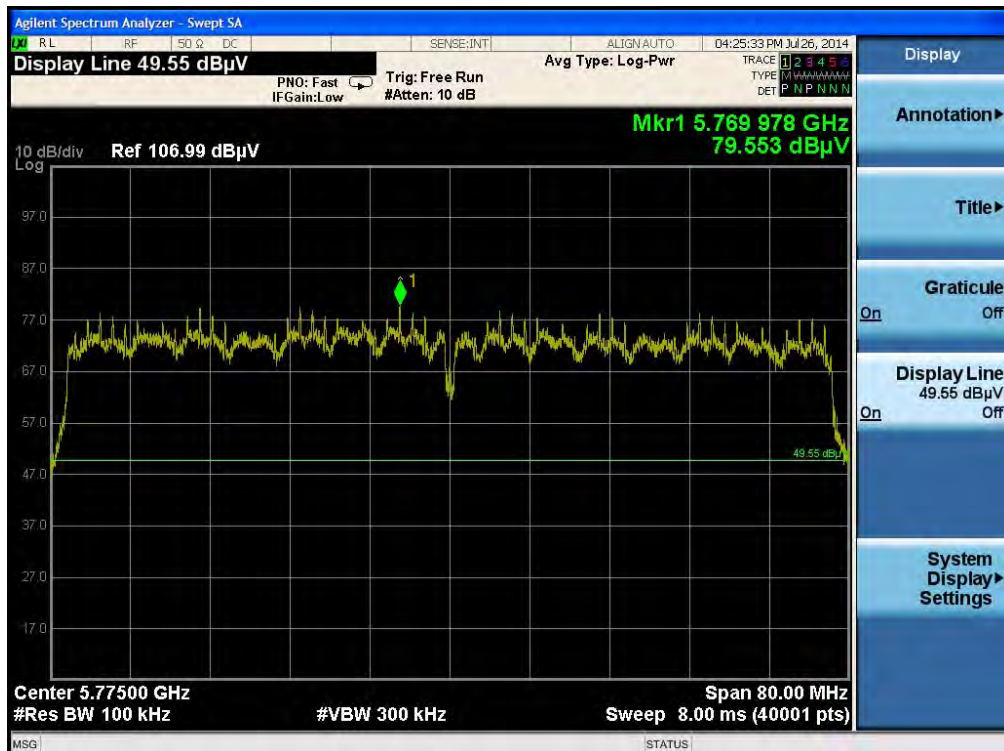

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 30MHz~5725MHz (down 30dBc)




Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 5850MHz~40000MHz (down 30dBc)

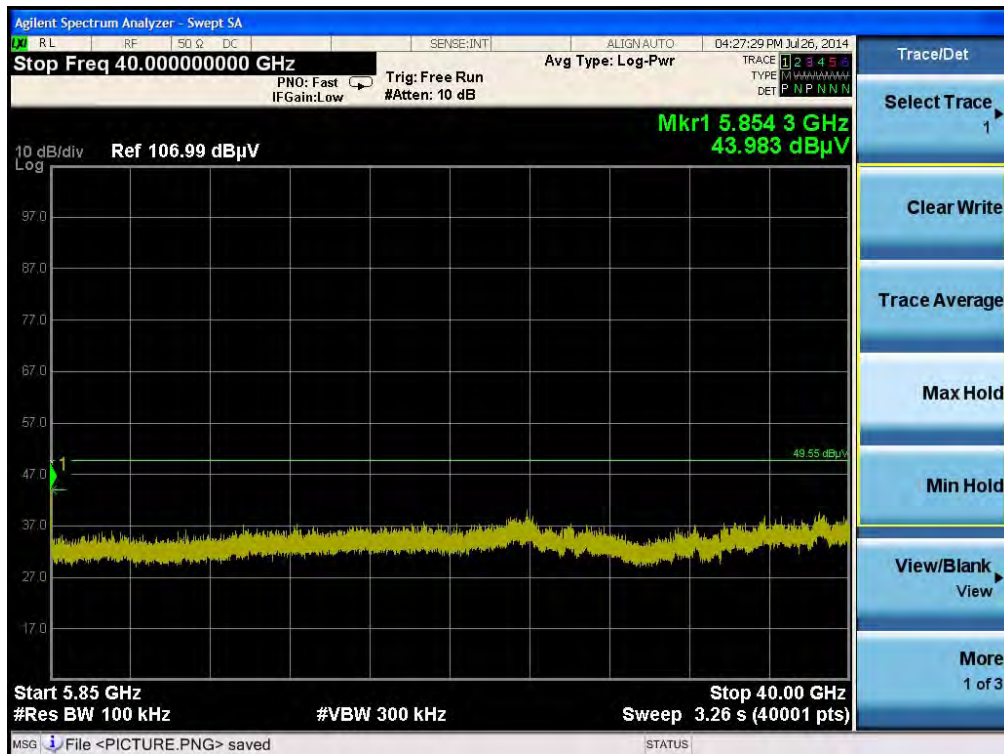

Plot on Configuration IEEE 802.11a / Reference Level



Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 30dBc)

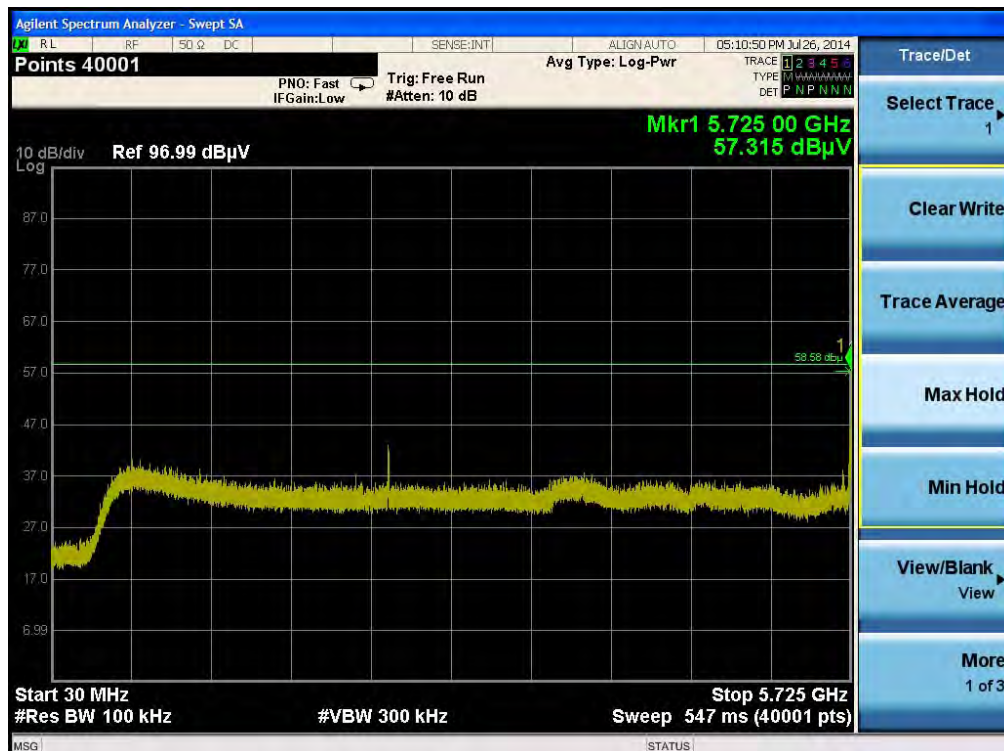



Agilent Spectrum Analyzer - Swept SA

R L RF 50 Ω DC SENSE:INT ALIGN:AUTO 03:57:34 PM Jul 26, 2014

Stop Freq 40.000000000 GHz

PNO: Fast IF Gain: Low Trig: Free Run #Atten: 10 dB Avg Type: Log-Pwr

TRACE 1 2 3 4 5
TYPE P N N N N
DET P N N N N

Mkr1 38.699 7 GHz
39.451 dBμV

10 dB/div Ref 106.99 dBμV
Log

Start 5.85 GHz Stop 40.00 GHz
#Res BW 100 kHz Sweep 3.26 s (40001 pts)
#VBW 300 kHz

MSG STATUS

Trace/Det Select Trace 1 Clear Write Trace Average Max Hold Min Hold View/Blank View More 1 of 3

Agilent Spectrum Analyzer - Swept SA

☒ R.L. RF 50 Ω DC SENSE:INT ALIGN: AUTO 03:58:57 PM Jul 26, 2014

Stop Freq 5.725000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 10 dB Avg Type: Log-Pwr

TRACE 1 2 3 4 5 6
 TYPE WWWWWWWWW
 DET P N P N N N


10 dB/div Log Ref 106.99 dB μ V **Mkr1 613.17 MHz 39.237 dB μ V**

Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 5.725 GHz Sweep 547 ms (40001 pts)

MSG STATUS

Trace/Det
 Select Trace 1
 Clear Write
 Trace Average
 Max Hold
 Min Hold
 View/Blank View
 More 1 of 3


Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~40000MHz (down 30dBc)

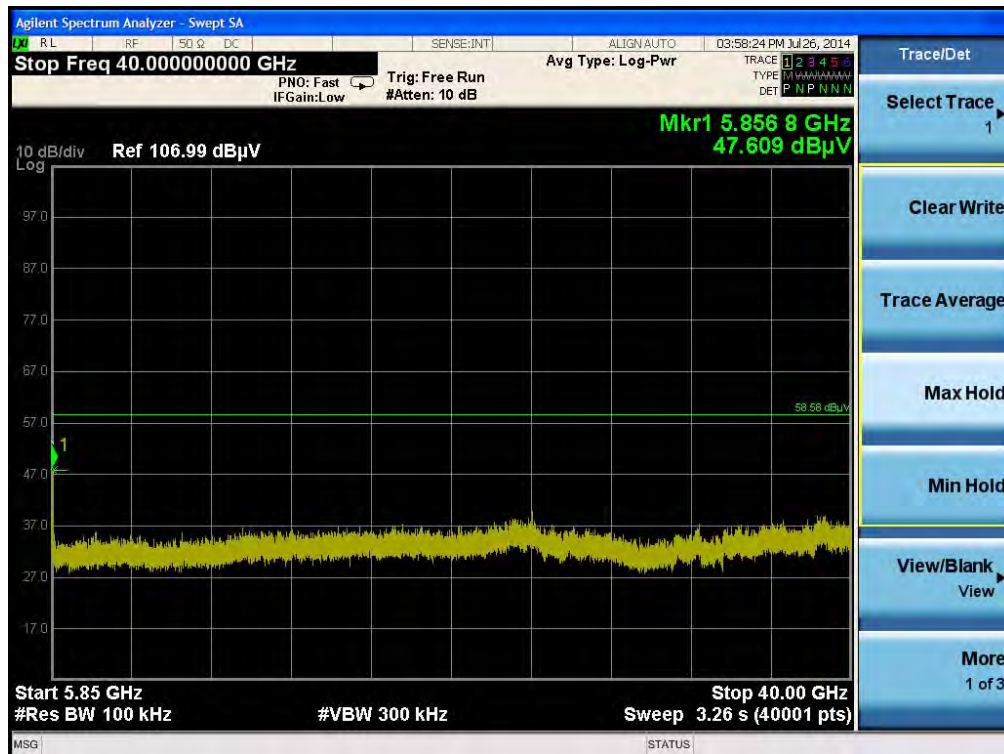


<For Beamforming Mode>

For Emission not in Restricted Band

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

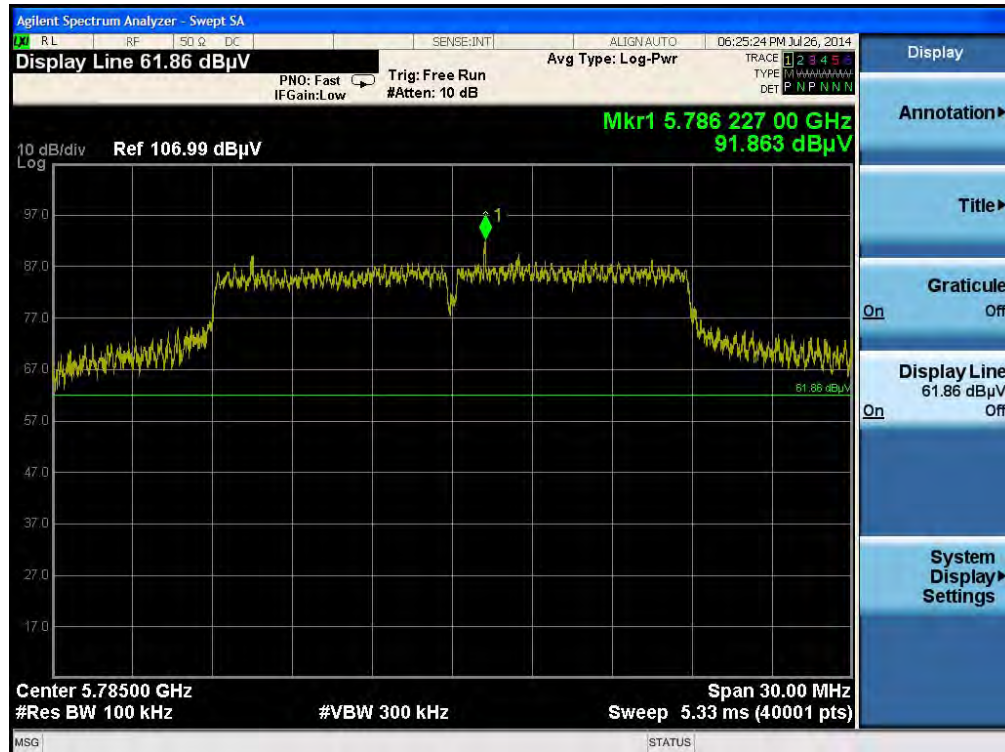

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 30MHz~5725MHz (down 30dBc)

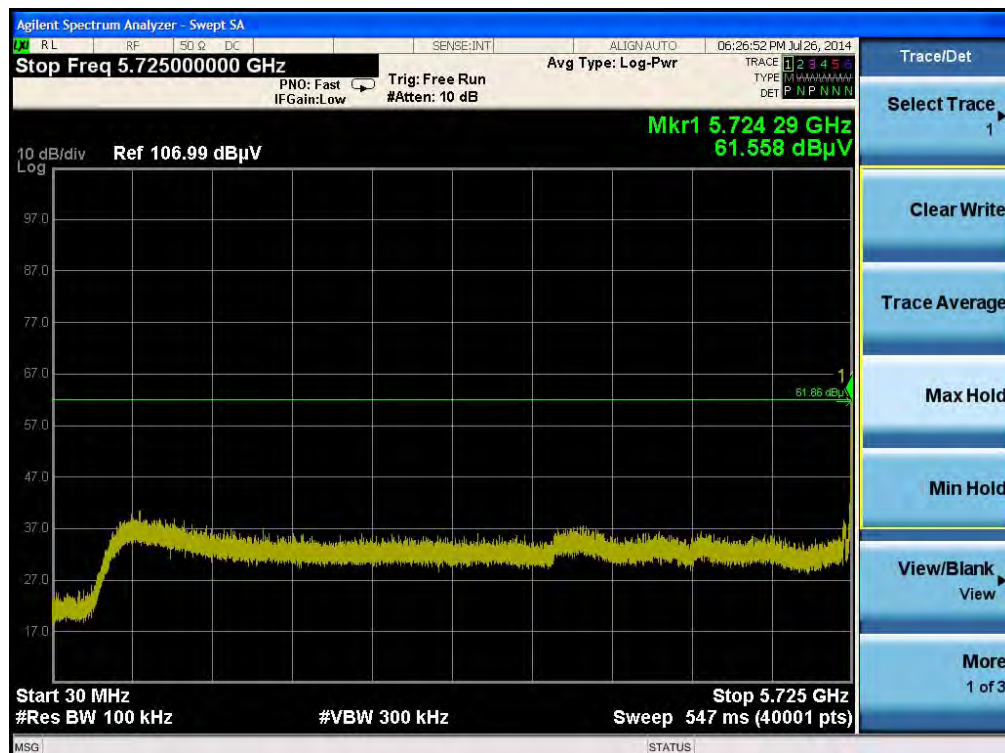



Agilent Spectrum Analyzer - Swept SA

Stop Freq 40.00000000 GHz

PNO: Fast IFGain: Low Trig: Free Run #Atten: 10 dB Avg Type: Log-Pwr

Trace 1 2 3 4 5
TYPE P N P N N N
DET P N P N N N

06:27:31 PM Jul 26, 2014

Select Trace

Clear Write

Trace Average

Max Hold

Min Hold

View/Blank View

More 1 of 3

The spectrum analyzer displays a noisy signal centered around 38.9507 GHz. The vertical axis represents power in dBμV, ranging from 17.0 to 97.0. A horizontal green line indicates the reference level at 106.99 dBμV. The signal level is approximately 30-35 dBμV. The horizontal axis shows frequency from Start 5.85 GHz to Stop 40.00 GHz, with a resolution bandwidth (RBW) of 300 kHz and a sweep time of 3.26 s.

Parameter	Value
Start Frequency	5.85 GHz
Stop Frequency	40.00 GHz
Resolution Bandwidth (#BW)	300 kHz
Sweep Time	3.26 s (4001 pts)
Reference Level	106.99 dBμV
Mkr1 Frequency	38.9507 GHz
Mkr1 Power	40.347 dBμV

Agilent Spectrum Analyzer - Swept SA

R L RF 50 Ω DC SENSE:INT ALIGN:AUTO 06:29:15 PM Jul 26, 2014

Stop Freq 5.72500000 GHz

PNO: Fast IFGain:Low Trig: Free Run #Atten: 10 dB Avg Type: Log-Pwr

TRACE 1 2 3 4 5
TYPE P P P P P P P P
DET N N N N N N

Ref 106.99 dBμV


Mkr1 567.75 MHz
39.879 dBμV

Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 5.725 GHz Sweep 547 ms (40001 pts)

MSG STATUS

Trace/Det Select Trace Clear Write Trace Average Max Hold Min Hold View/Blank View More 1 of 3


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 5850MHz~40000MHz (down 30dBc)

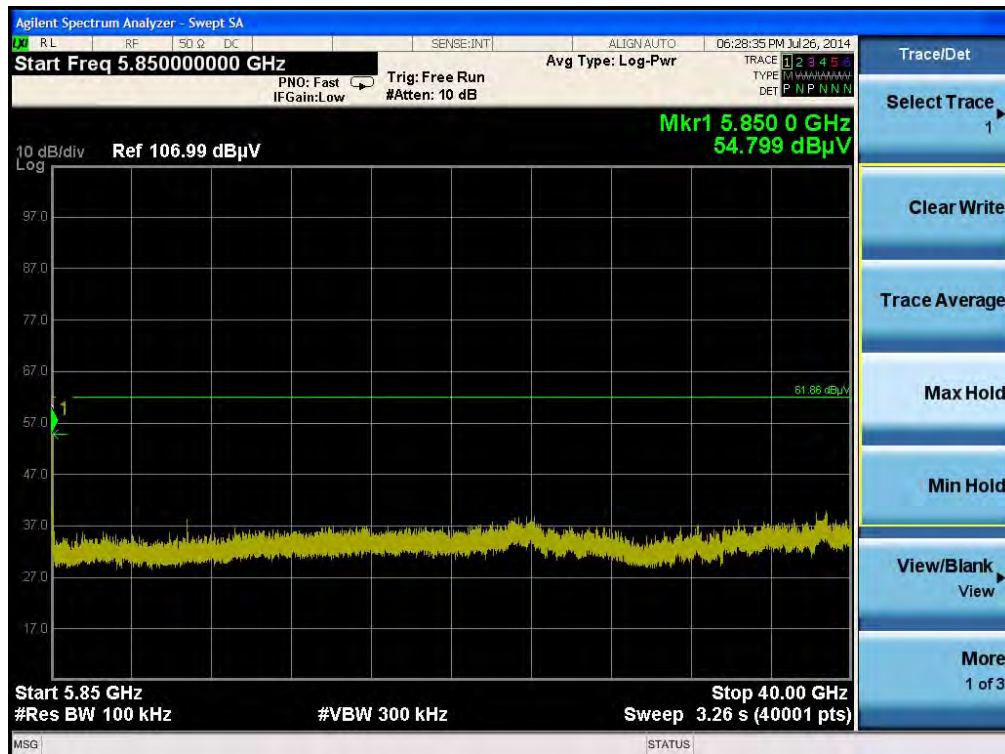


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level



Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 30MHz~5725MHz (down 30dBc)

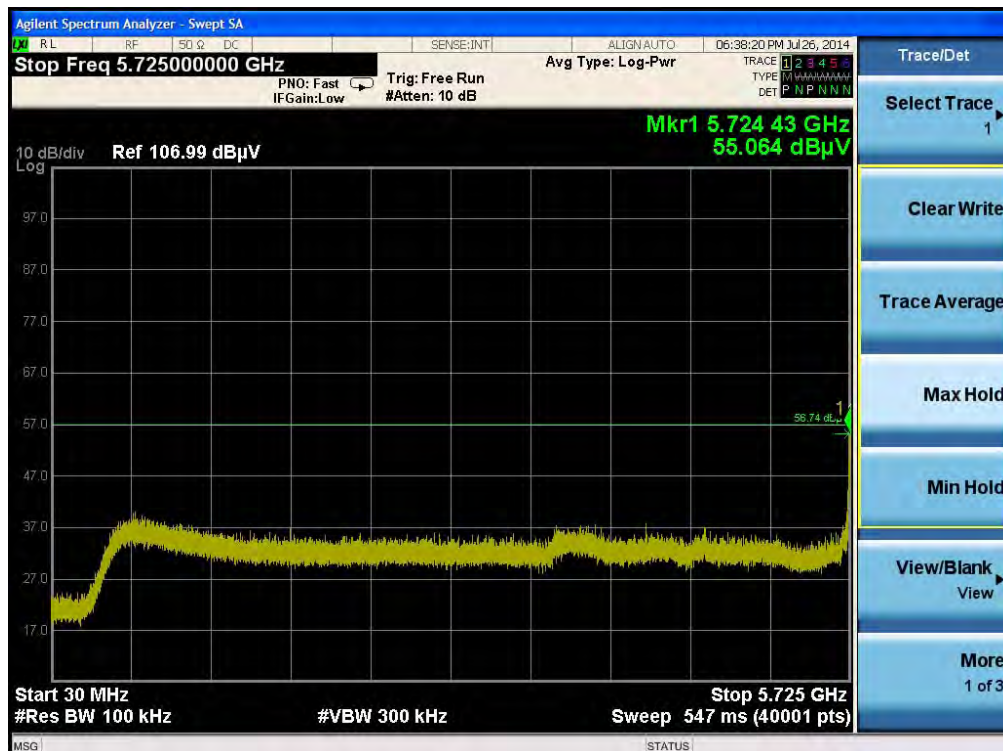

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 5850MHz~40000MHz (down 30dBc)

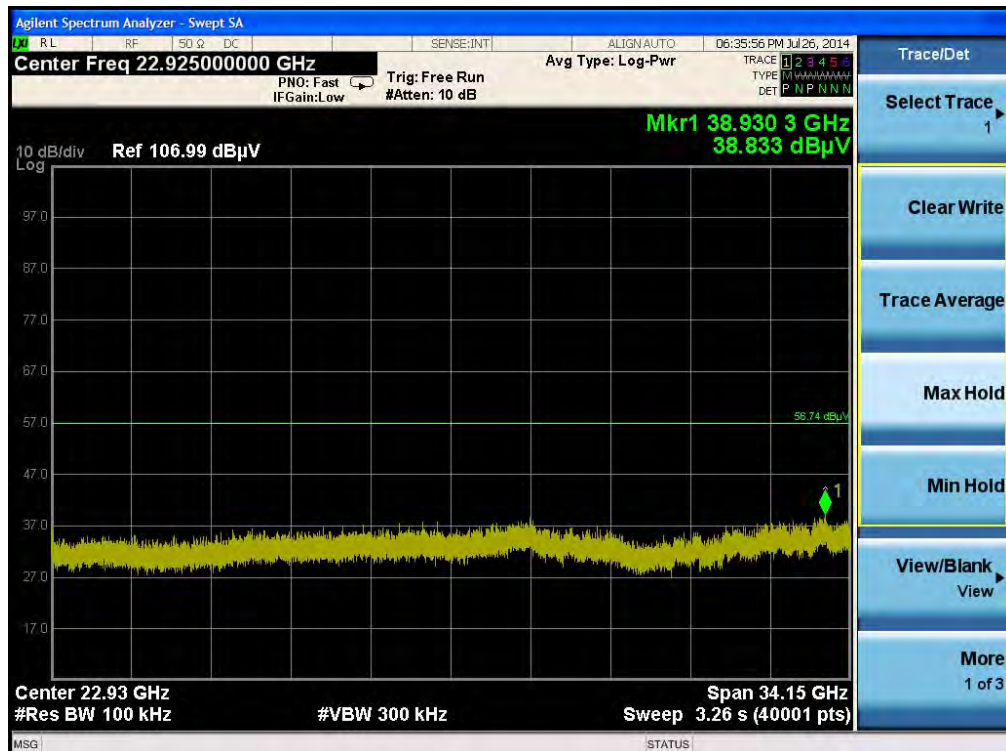

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 30MHz~5725MHz (down 30dBc)





Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω DC SENSE:INT ALIGN: AUTO 06:34:35 PM Jul 26, 2014

Stop Freq 40.000000000 GHz Avg Type: Log-Pwr

PNO: Fast IF Gain: Low Trig: Free Run #Atten: 10 dB

TRACE 1 2 3 4 5
TYPE U W W W W W W W W W
DET P N P N N N

10 dB/div Ref 106.99 dB μ V

Mkr1 5.850 0 GHz
46.931 dB μ V

58.74 dB μ V

Start 5.85 GHz
#Res BW 100 kHz

Stop 40.00 GHz
Sweep 3.26 s (40001 pts)

#VBW 300 kHz

MSG STATUS

Trace/Det

Select Trace 1

Clear Write

Trace Average


Max Hold

Min Hold


View/Blank View

More 1 of 3


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Reference Level

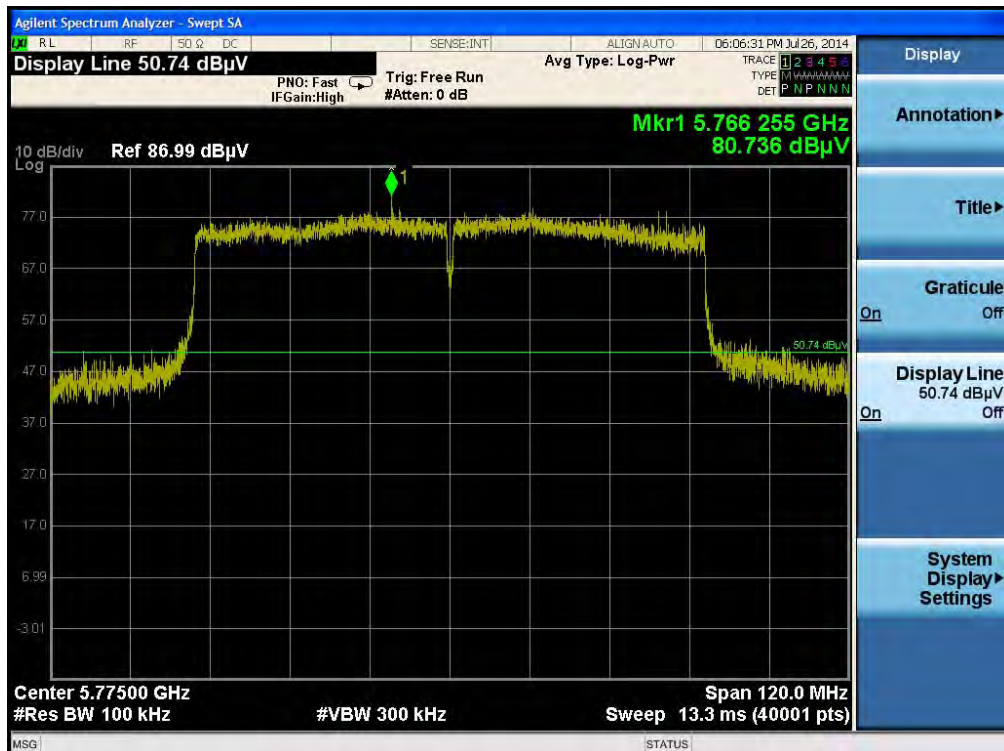

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 30MHz~5725MHz (down 30dBc)

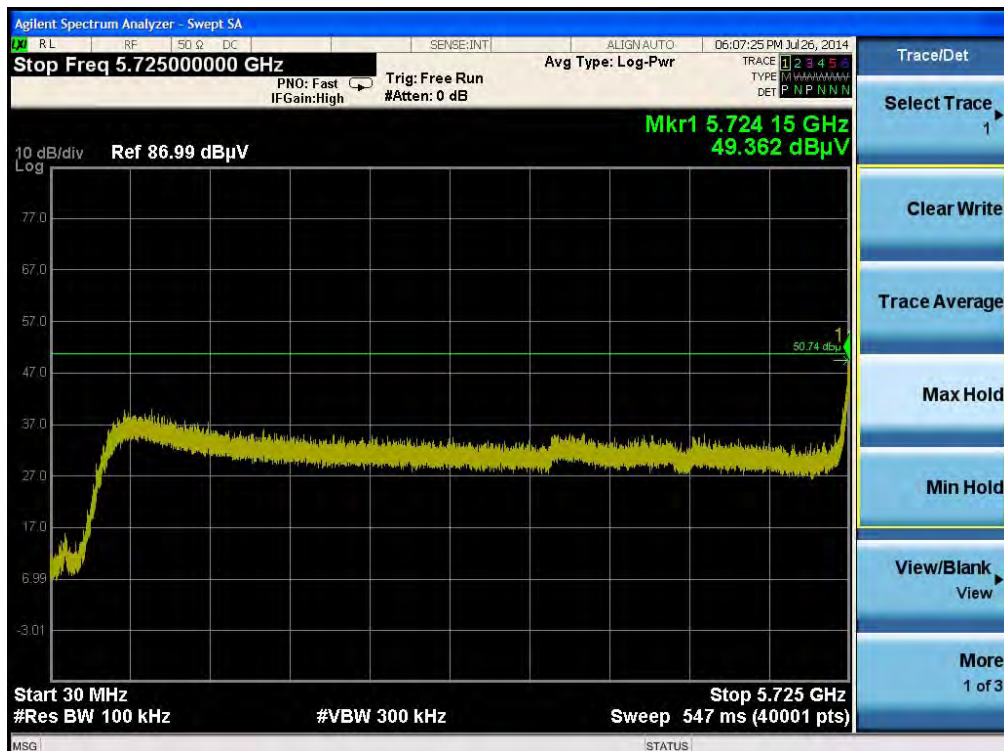

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 5850MHz~40000MHz (down 30dBc)

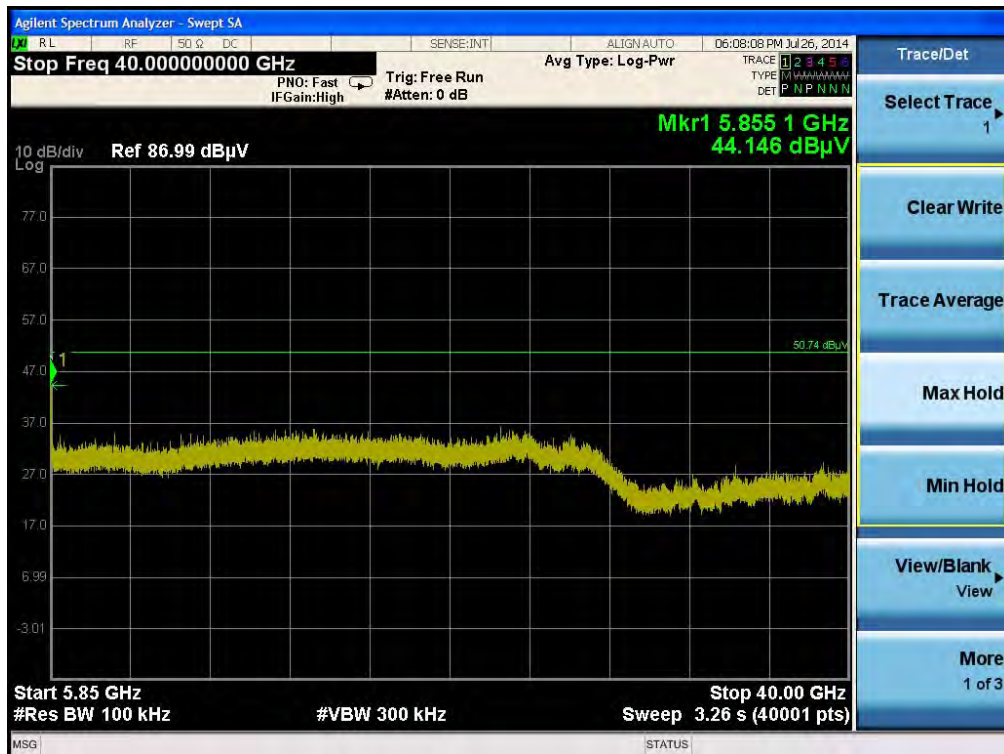

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 11, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112B	2928	30MHz ~ 2GHz	Dec. 27, 2013	Radiation (O3CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (O3CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (O3CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (O3CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (O3CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (O3CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (O3CH01-CB)
Spectrum analyzer	Agilent	N9010A	MY52220557	9KHz~44GHz	Nov. 29, 2013	Radiation (O3CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (O3CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (O3CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R.	Radiation (O3CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (O3CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (O3CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (O3CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.


6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%

Appendix A. Test Photos

1. Photographs of Conducted Emissions Test Configuration

FRONT VIEW

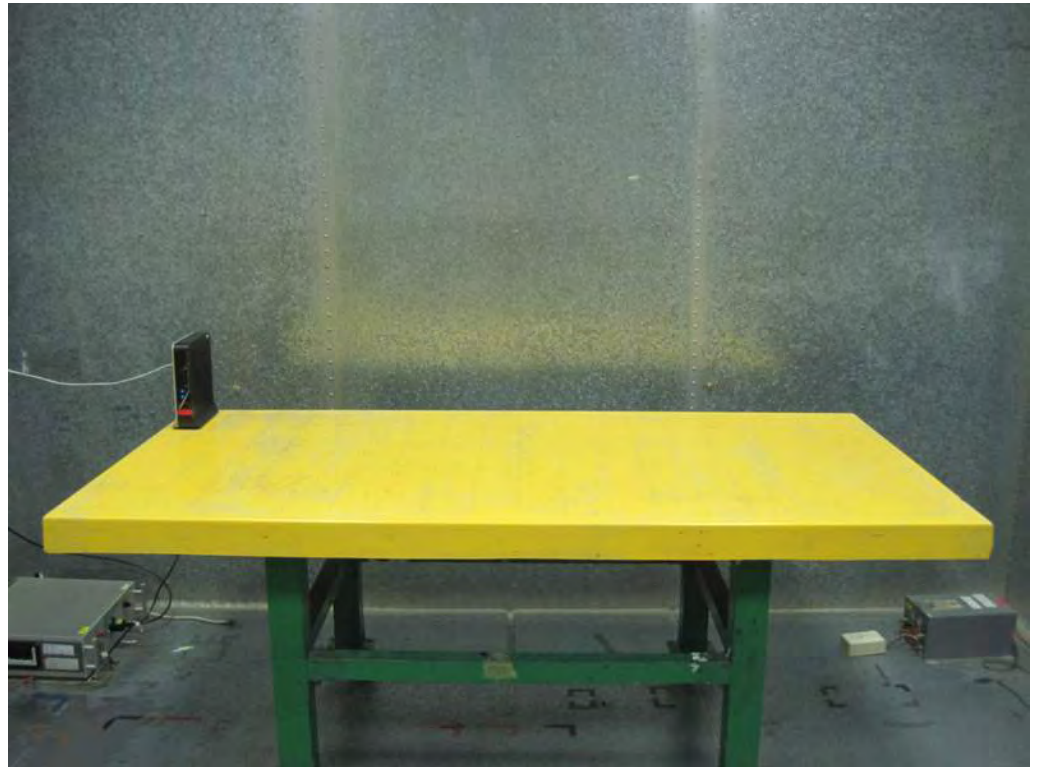

REAR VIEW



2. Photographs of Radiated Emissions Test Configuration

Test Configuration: 9kHz ~30MHz

FRONT VIEW



REAR VIEW



Test Configuration: 30MHz~1GHz

FRONT VIEW



REAR VIEW




Test Configuration: Above 1GHz

FRONT VIEW



REAR VIEW

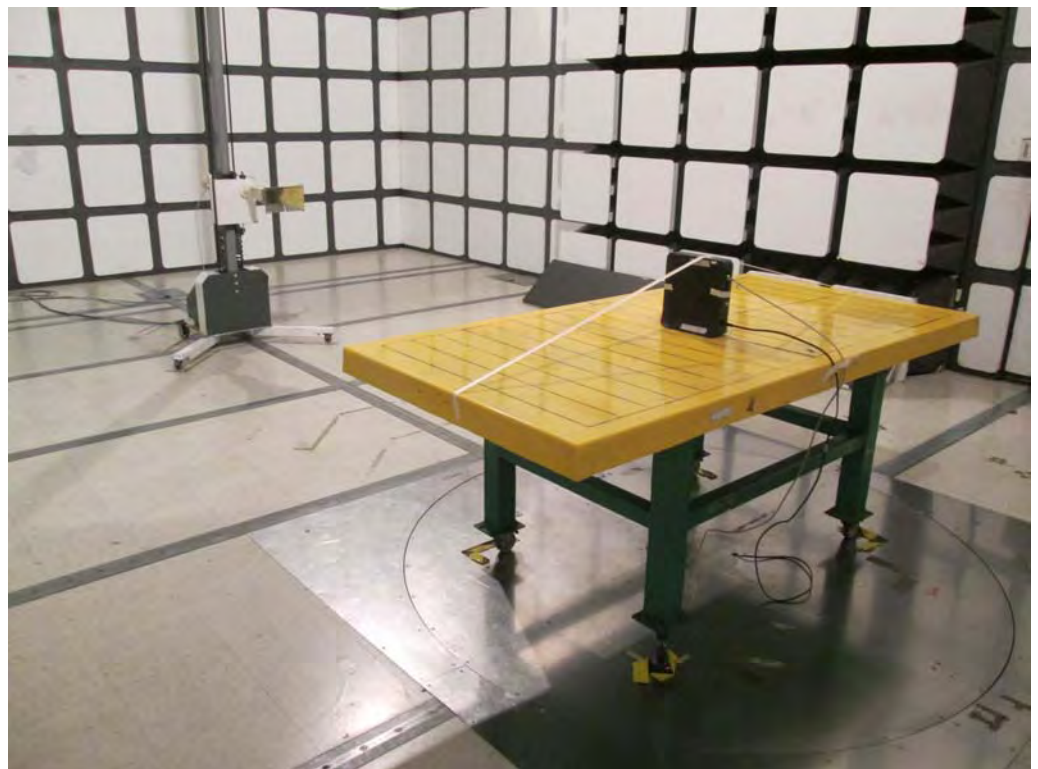

Appendix B. Maximum Permissible Exposure

1. Maximum Permissible Exposure

1.1. Applicable Standard

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

1.2. MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Average RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained.

1.3. Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

For 5GHz UNII Band:

Antenna Type : PCB Antenna

Conducted Power for IEEE 802.11ac VHT20: 25.62dBm

Directional Gain (dBi)	Antenna Gain (numeric)	Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
		(dBm)	(mW)			
9.37	8.6582	25.6230	365.0049	0.629039	1	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{AS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

For 5GHz ISM Band:

Antenna Type : PCB Antenna

Conducted Power for IEEE 802.11ac VHT 20: 26.51dBm

Directional Gain (dBi)	Antenna Gain (numeric)	Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
		(dBm)	(mW)			
9.48	8.8738	26.5082	447.5275	0.790456	1	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{AS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$