


Label position

D		C		B		A
VER.	MARK	DCR/ECN NO.	DATE	UPDATE DESCRIPTION		SIGNATURE
0	N/A	N/A	2019/03/14	First Release		Yong-feng Li

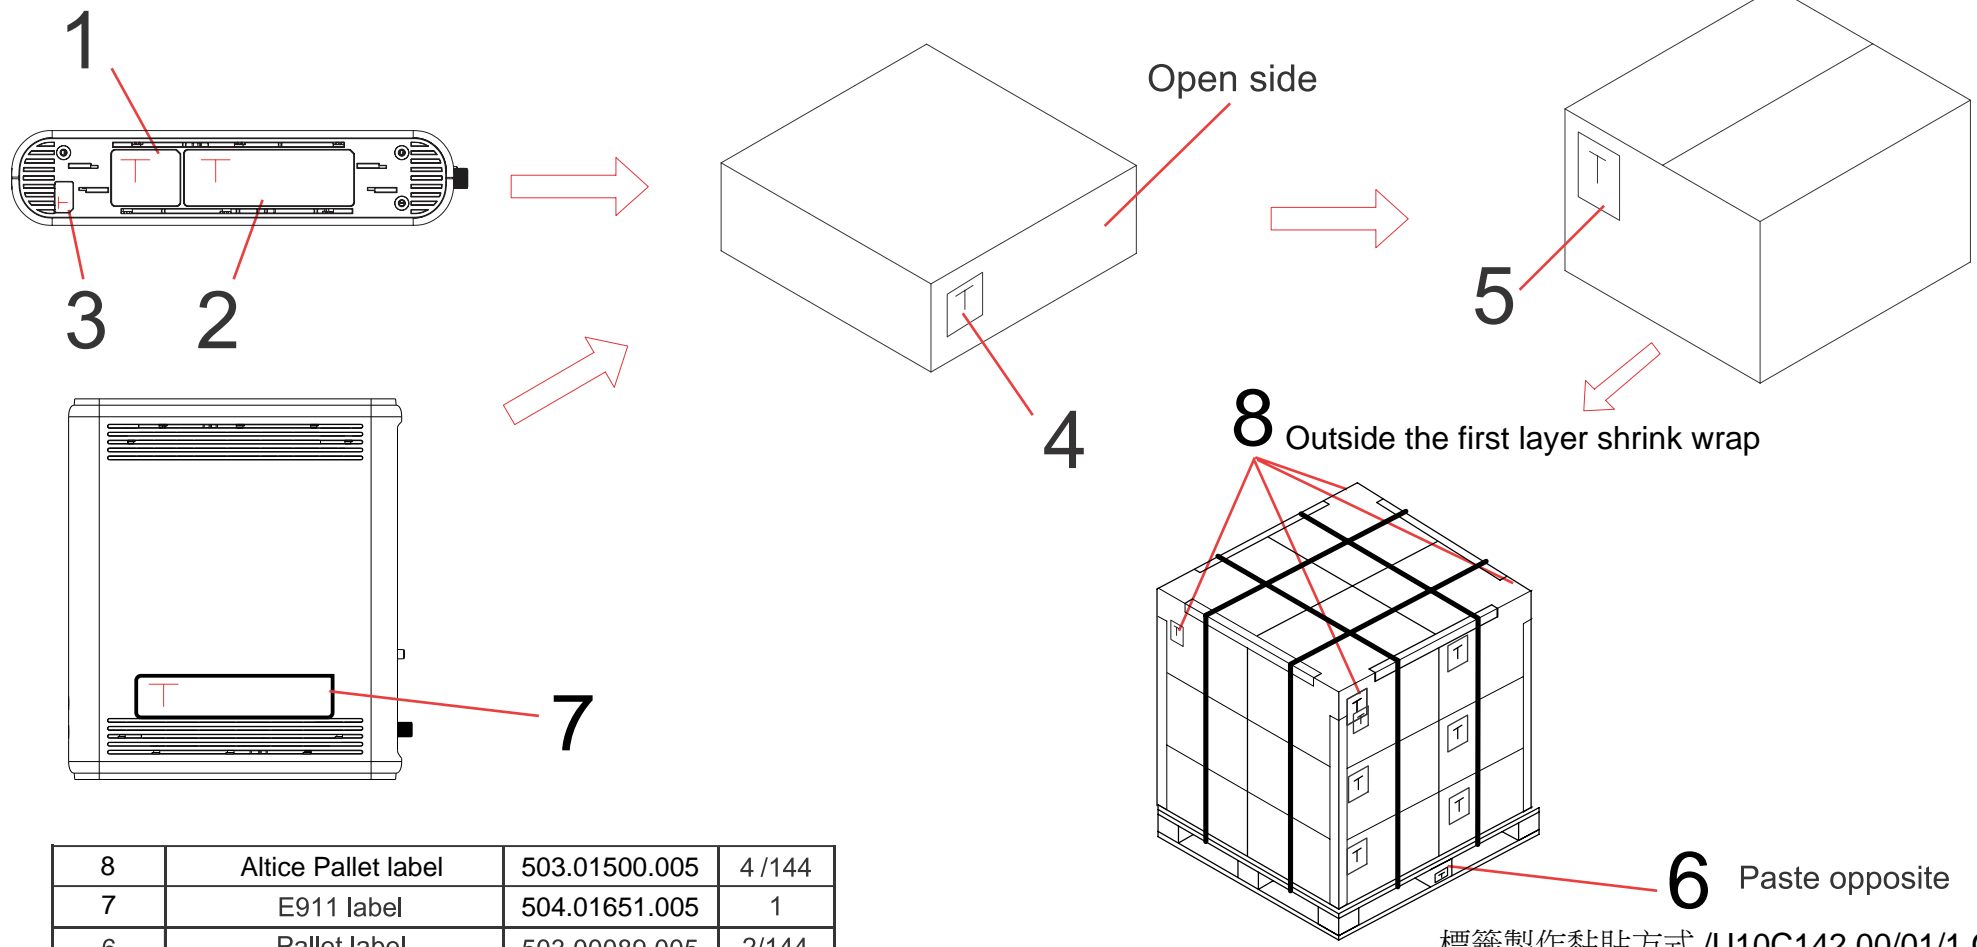

8	Altice Pallet label	503.01500.005	4 /144
7	E911 label	504.01651.005	1
6	Pallet label	503.00089.005	2/144
5	Carton label	503.00519.005	1/12
4	Giftbox label	503.01330.005	1
3	Warranty label	503.01512.005	1
2	Device Label	503.01518.005	1
1	PTT label	500.02349.005	1
Item	Description	Foxconn PN	QTY



MATERIAL (SPEC.)										SCALE	FOXCONN HON HAI PRECISION IND. CO., LTD CNSBG		
FINISH										SHEET 1/1			
Select										UNIT	PART NAME Label position		
Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	V	mm			
0~6		0.05	0.05	0.10					0.20	0.05			
6~30		0.10	0.15	0.20	0.50	0.50	3.00		0.20	0.05			
30~120		0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.10			
120~300		0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.15			
300~450		0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20			
450~600		0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20			
DRAFT TOLERANCE ±0.2° CRITICAL DIM. MARK										UNIT			
										mm			
										SIZE			
										A4			
										MODEL			
										U10C142.00			
										CUSTOMER MODEL			
										N/A			
										CUSTOMER PART NO.			
										N/A			
										DESIGNED			
										Yong-feng Li			
										APPROVED			
										Bailey Tan			

標籤製作黏貼方式 /U10C142.00/01/1 OF 10

D		C		B		A	
VER.	MARK	DCR/ECN NO.	DATE	UPDATE DESCRIPTION		SIGNATURE	
0	N/A	N/A	2019/03/14	First Release		Yong-feng Li	




Vendor code _____

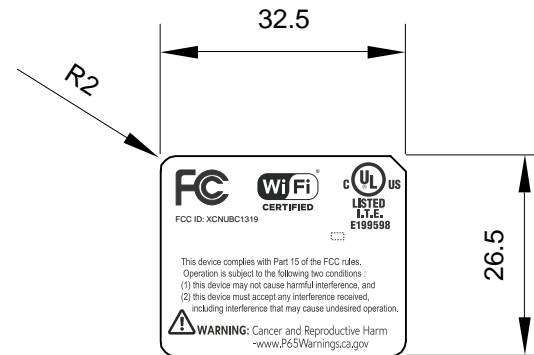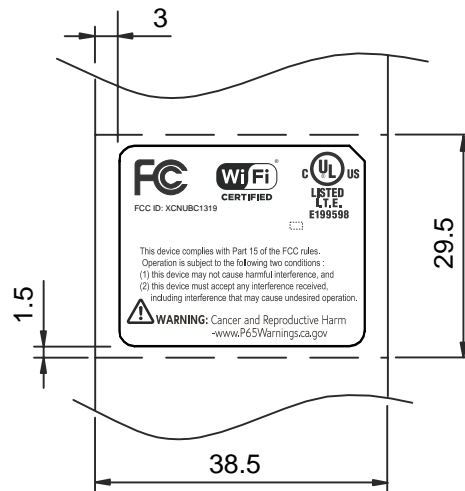


NOTES:

1. Surface Material color:white
2. Printing color is as color defined in artwork
3. Adhesive:Acrylic
4. Adhesive thickness:0.025+/-0.003mm
5. Adhesion to steel(180°磨鋼粘着力):1.8+/-0.3 kg/25mm
6. Initial Tack (初期力) : 4 #/boll
7. Release Power(90°剥离力):5 g/25mm
8. Holding Power(持粘力測試法):1 hr/kg/20mm²
9. Shipment method: Roll
10. This part must comply with RoHS.
11. Test condition :
 1. Soak alcohol(99.7%) at first trial and repeat to soak every 50 times
 2. Push force:250g
 3. Speed:30 times/min
 4. Move back and forth 100 times,printing was not removed

標籤製作黏貼方式 /U10C142.00/01/2 OF 10

MATERIAL (SPEC.)										SCALE 1:1		FOXCONN HON HAI PRECISION IND. CO., LTD CNSBG		
FINISH 膠面咬花										SHEET 1/1				
Select								V		UNIT	PART NAME			
Dim. Tol.	A	B	C	EPS	EPE	BAG	CTN	LABEL	USR	mm	PTT label			
0~6	0.05	0.05	0.10					0.20	0.05	SIZE A4	MODEL	PART NO.	DESIGNED	
6~30	0.10	0.15	0.20	0.50	0.50	3.00		0.20	0.05		U10C142.00	500.02349.005	Yong-feng Li	
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.10					
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.15					
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20					
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20		CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED	
DRAFT TOLERANCE				±0.2°		CRITICAL DIM. MARK					N/A		N/A	Bailey Tan

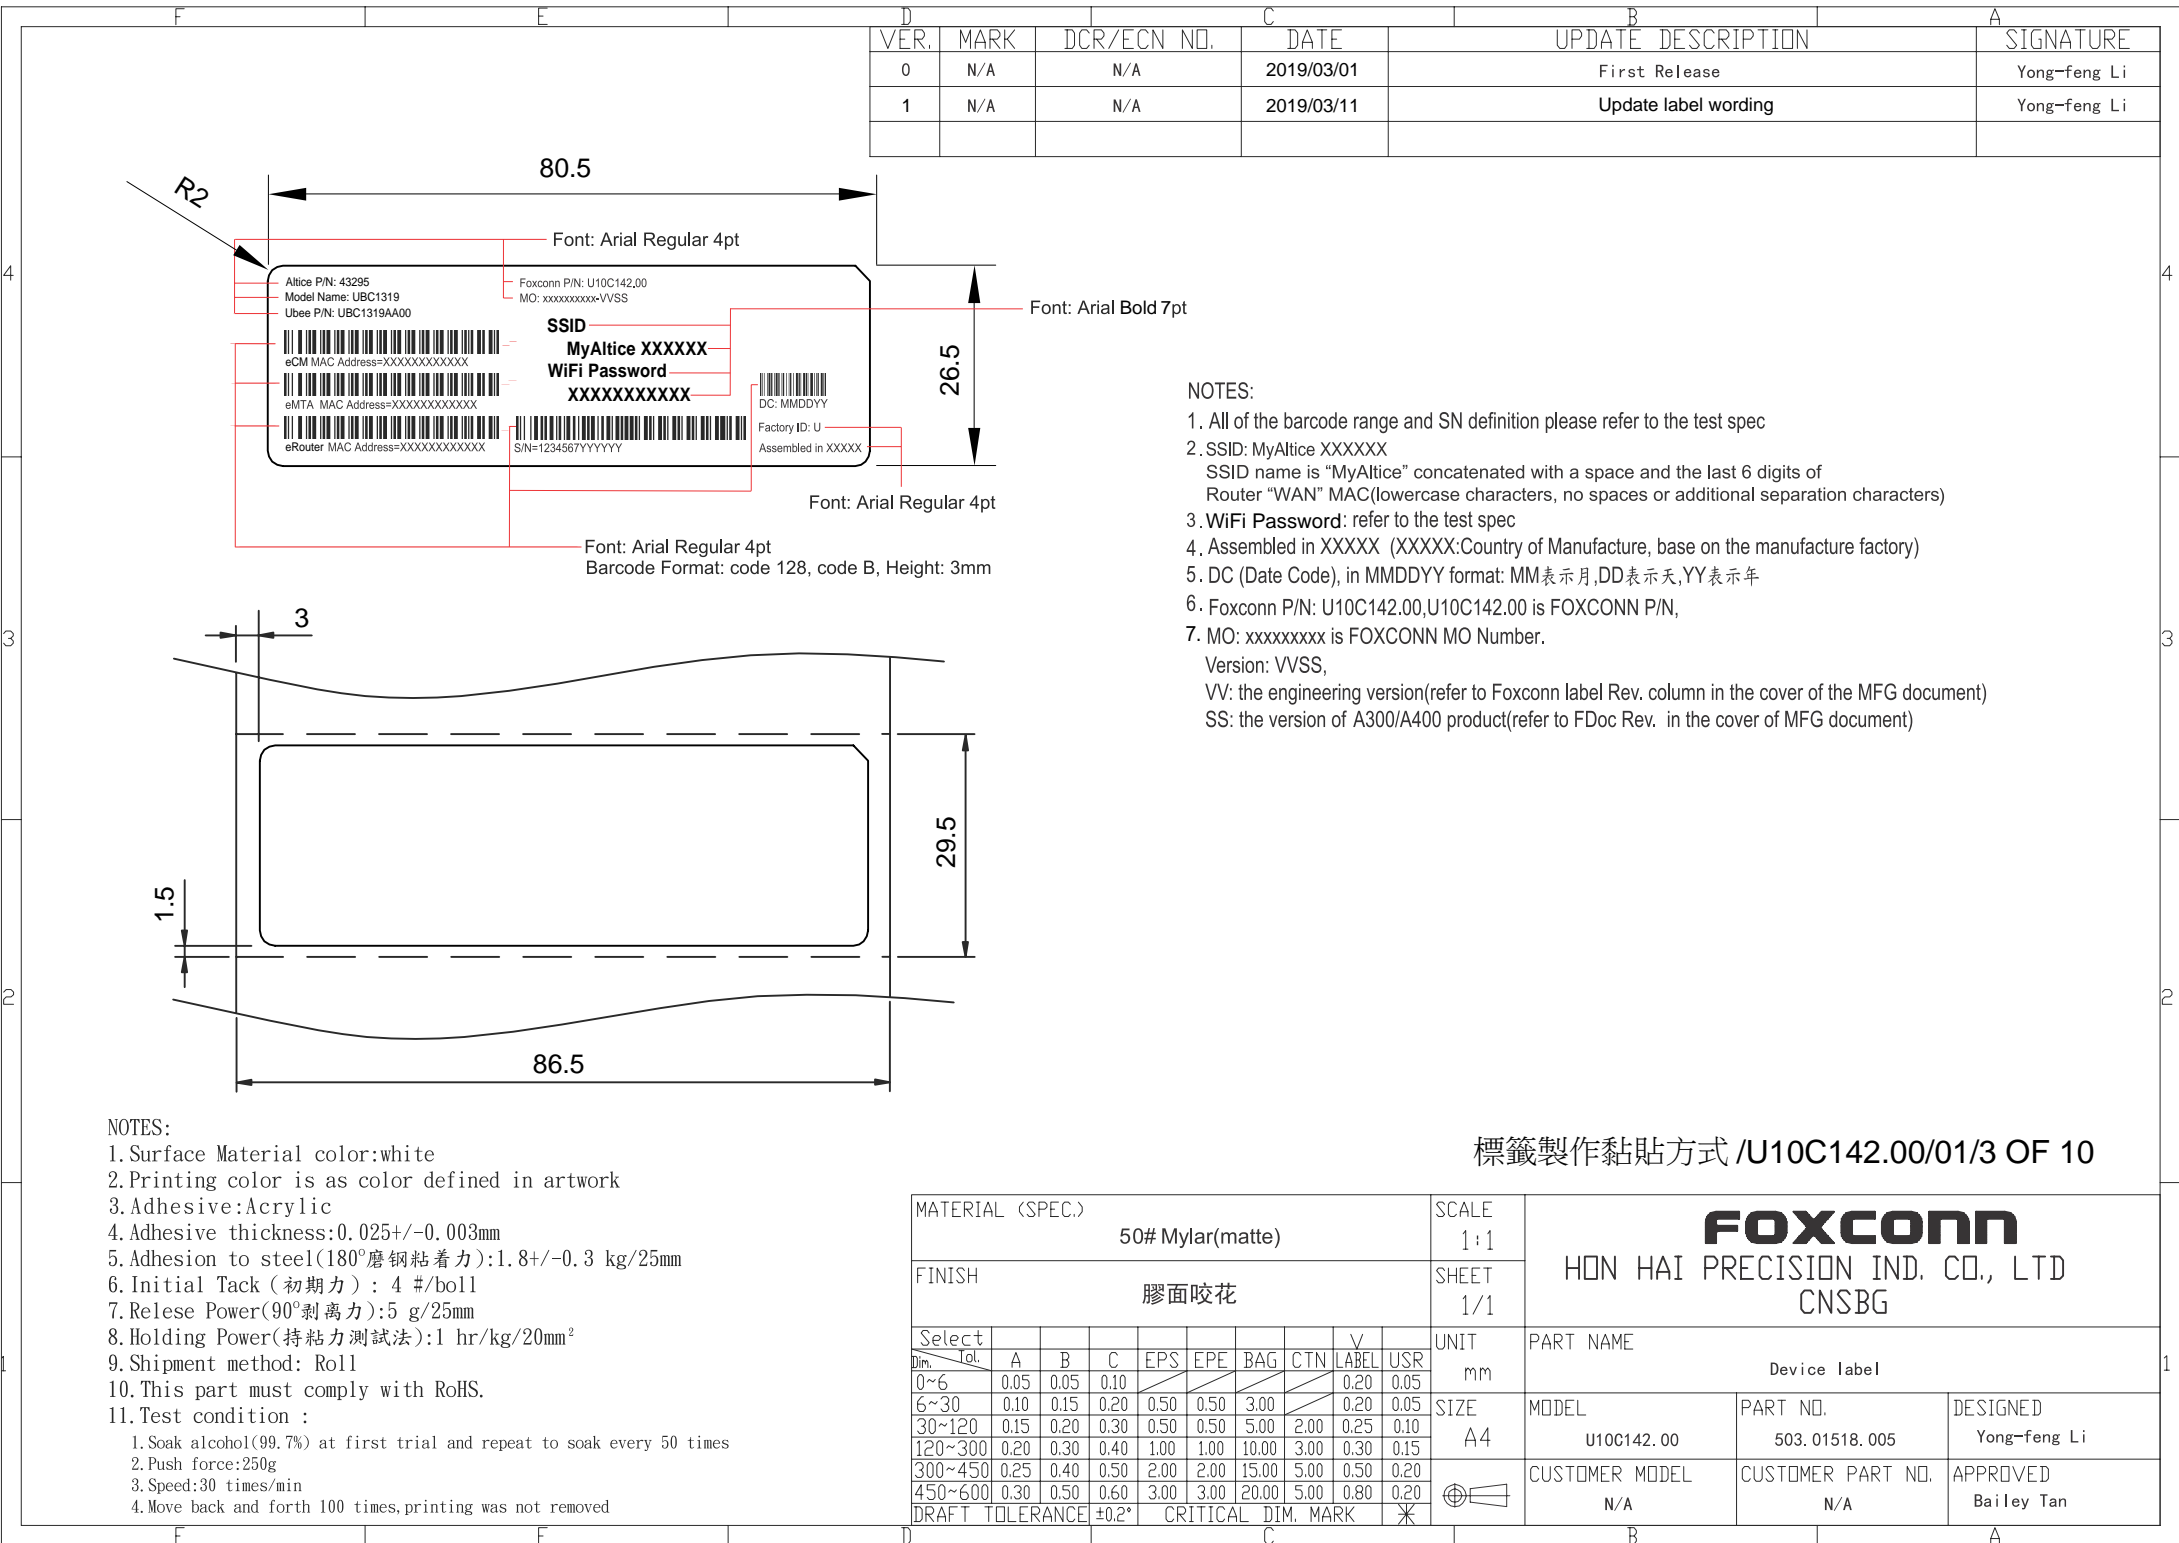

VER.	MARK	DCR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
0	N/A	N/A	2019/03/01	First Release	Yong-feng Li
1	N/A	N/A	2019/03/11	Update label wording	Yong-feng Li


- NOTES:
- All of the barcode range and SN definition please refer to the test spec
 - SSID: MyAltice XXXXXX
SSID name is "MyAltice" concatenated with a space and the last 6 digits of Router "WAN" MAC(lowercase characters, no spaces or additional separation characters)
 - WiFi Password: refer to the test spec
 - Assembled in XXXXX (XXXXX:Country of Manufacture, base on the manufacture factory)
 - DC (Date Code), in MMDDYY format: MM表示月,DD表示天,YY表示年
 - Foxconn P/N: U10C142.00,U10C142.00 is FOXCONN P/N,
 - MO: xxxxxxxx is FOXCONN MO Number.
Version: VVSS,
VV: the engineering version(refer to Foxconn label Rev. column in the cover of the MFG document)
SS: the version of A300/A400 product(refer to FDoc Rev. in the cover of MFG document)

- NOTES:
- Surface Material color:white
 - Printing color is as color defined in artwork
 - Adhesive:Acrylic
 - Adhesive thickness:0.025+/-0.003mm
 - Adhesion to steel(180°磨钢粘着力):1.8+/-0.3 kg/25mm
 - Initial Tack (初期力) : 4 #/boll
 - Relese Power(90°剥离力):5 g/25mm
 - Holding Power(持粘力测试法):1 hr/kg/20mm²
 - Shipment method: Roll
 - This part must comply with RoHS.
 - Test condition :
 - Soak alcohol(99.7%) at first trial and repeat to soak every 50 times
 - Push force:250g
 - Speed:30 times/min
 - Move back and forth 100 times,printing was not removed

標籤製作黏貼方式 /U10C142.00/01/3 OF 10

MATERIAL (SPEC.)										SCALE	FOXCONN HON HAI PRECISION IND. CO., LTD CNSBG		
50# Mylar(matte)										1:1			
FINISH										SHEET	PART NAME		
膠面咬花										1/1			
Select											Device label		
Dim. Tol.	A	B	C	EPS	EPE	BAG	CTN	V	USR				
0~6	0.05	0.05	0.10					0.20	0.05	UNIT	MODEL		
6~30	0.10	0.15	0.20	0.50	0.50	3.00		0.20	0.05	mm			
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.10	SIZE	U10C142.00		
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.15				
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20				
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20				
DRAFT TOLERANCE											CUSTOMER MODEL		
±0.2°													
CRITICAL DIM. MARK											CUSTOMER PART NO.		
											DESIGNED		
											APPROVED		
											Yong-feng Li		
											Bailey Tan		
											N/A		
											N/A		
											N/A		

REV.	MARK.	ECN NO.	DATE	UPDATE DESCRIPTIONS	SIGNATURE
0			2018.7.10	First release	Catheirne
0.1			2018.7.13	change material	Catheirne

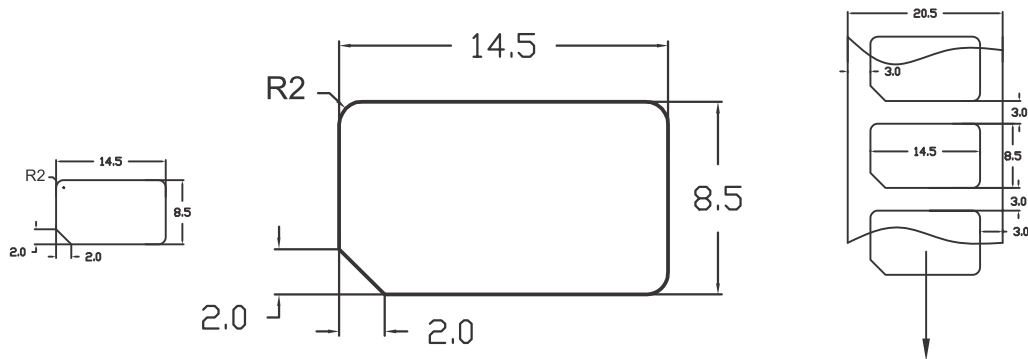

vendor supply
scale 3:1






















































package style

- NOTES:
1. Surface Material:25#消銀龍防偽VOID(陽版, 被貼物留有VOID字樣)
 - * 2. Surface Material tolerance:0.025±0.001mm
 3. Surface Material color:Matt silver
 4. printing color is as color defined
 5. Adhesive base:Acrylic
 - * 6. Adhesive thickness:0.015+/-0.002mm
 - * 7. Initial Tack:minimum 6#
 - * 8. Adhesion to steel:1+/-0.3 kg/25mm
 - * 9. Holding Power:minimum 1hr/kg*20mm²
 10. Package Style:Reel or sheet
 11. This part must comply with ROHs
 12. size tolerance:
0~30mm, ±0.2mm
30~120mm, ±0.25mm

標籤製作黏貼方式 /U10C142.00/01/5 OF 10

MATERIAL (SPEC.):			SCALE 1:1	FOXCONN HON HAI PRECISION IND. CO., LTD CNSBG		
FINISH:			SHEET 1/1			
DIM. TOLERANCES			UNIT mm	PART NAME warranty label		DESIGNED Catheirne
DIM.	TOL.	WARPAGE D(MAX.) =0.2%L	SIZE A4	MODEL	PART NO.	REV.
0~6	±0.05			U10C142.00	503.01512.005	Cun
6~30	±0.10	ANGLE TOLERANCES		CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED
30~120	±0.15	ANGLE				
120~300	±0.20	TOL.				
300~	±0.25	X°				
CRITICAL DIM. MARK "*"						

REV.	MARK.	ECN NO.	DATE	UPDATE DESCRIPTIONS	SIGNATURE
0			2019/01/12	First Release	Yong-feng Li

Product:  Altice P/N: 43295		Qty: 12 	
 Ubee P/N: UBC1319AA00		Assembled in DATE: MM/DD/YY XXXXXX TIME: HH:MM	
 Foxconn P/N: U10C142.00			
Carton ID:  CXXXXXXXXXX			
Serial Number	Cable RF MAC Address	eMTA MAC Address	WAN-MAN MAC Address
 1234567YYYYYY	XXXXXXXXXXXX 	 XXXXXXXXXXXX	XXXXXXXXXXXX 
 1234567YYYYYY	XXXXXXXXXXXX 	XXXXXXXXXXXX 	XXXXXXXXXXXX 
 1234567YYYYYY	XXXXXXXXXXXX 	XXXXXXXXXXXX 	XXXXXXXXXXXX 
 1234567YYYYYY	XXXXXXXXXXXX 	XXXXXXXXXXXX 	XXXXXXXXXXXX 
 1234567YYYYYY	XXXXXXXXXXXX 	XXXXXXXXXXXX 	XXXXXXXXXXXX 
 1234567YYYYYY	XXXXXXXXXXXX 	XXXXXXXXXXXX 	XXXXXXXXXXXX 
 1234567YYYYYY	XXXXXXXXXXXX 	XXXXXXXXXXXX 	XXXXXXXXXXXX 
 1234567YYYYYY	XXXXXXXXXXXX 	XXXXXXXXXXXX 	XXXXXXXXXXXX 
 1234567YYYYYY	XXXXXXXXXXXX 	XXXXXXXXXXXX 	XXXXXXXXXXXX 
 1234567YYYYYY	XXXXXXXXXXXX 	XXXXXXXXXXXX 	XXXXXXXXXXXX 
 1234567YYYYYY	XXXXXXXXXXXX 	XXXXXXXXXXXX 	XXXXXXXXXXXX 
 1234567YYYYYY	XXXXXXXXXXXX 	XXXXXXXXXXXX 	XXXXXXXXXXXX 
THIS PRODUCT CONTAINS ENCRYPTION AND MAY REQUIRE U.S. AND/OR LOCAL GOVERNMENT AUTHORIZATION PRIOR TO EXPORT OR IMPORT TO ANOTHER COUNTRY			


160mm

135mm

- Notes:
1. Background color: White
 2. Printing color: Black
 3. Material: art paper
 4. Carton ID: follow Foxconn rule
 5. DATE/TIME (Variable) that modem was assembled
According to the actual manufacturing time to print
DATE: MM/DD/YY (e.g.: DATE: 07/25/12)
TIME: HH:MM (e.g.: TIME: 21:30)
 6. Assembled in XXXXXX: Country of Manufacture
(base on the manufacture factory)
 7. MAC and SN range please refer to the test spec.
 8. Stick position please refer to ASY document

Barcode format: code 128 , Height :3mm
Font: Arial

標籤製作黏貼方式 /U10C142.00/01/7 OF 10

1								
ITEM	CNSBG P/N	CUSTOMER P/N	DESCRIPTIONS			QT'Y	REMARKS	
MATERIAL (SPEC.):			SCALE	<div>FOXCONN</div> <div>HON HAI PRECISION IND. CO., LTD</div> <div>CNSBG</div>				
Art Paper			1:1					
FINISH:			SHEET					
			1/1					
			UNIT	PART NAME			DESIGNED	
			mm	Carton Label			Yong-feng Li	
DIM. TOLERANCES		WARPAGE		SIZE				
DIM.	TOL.	D(MAX.)			MODEL	PART NO.	REV.	CHECKED
0~6	±0.05	=0.2%L			U10C142.00	503.00519.005	0	Bailey Tan
6~30	±0.10	ANGLE	TOLERANCES					
30~120	±0.15	ANGLE	TOL.					
120~300	±0.20	X°	±0.20°	CUSTOMER MODEL		CUSTOMER PART NO.	APPROVED	
300~	±0.25	.X°	±0.10°					
CRITICAL DIM. MARK *X*								

產地編號明細

LOCATION	LOCATIONNAME
0	Hsinchu
1	Zhongshan
2	Futian
3	Tucheng
4	Taiyoung
5	Jingyang
6	Guangchuan
7	Taibiao
8	Hongju
9	Xinjin
A	Hongkong
B	Guolian
C	Chongqing CBT
D	Dummy Lable
E	Ambit
F	Longhua E5 database
G	Longhua E5A database
H	Longhua E6 database
I	RESERVE
J	RESERVE
K	Nanning
L	Huandian
M	EASTAR
N	Mexico
P	Longhua RMA
Q	Chongqing CPEI
R	Shanghai RMA
S	Shanghai CPEII
T	Yantai(S-customer)
U	Vietnam(Bac Ninh,CMB)
V	Yantai(RTT-customer)
Y	Vietnam(Bac Giang)
Z	Vietnam(Bac Ninh,CPEII)

Size:110mm*36mm

P/N:U10C142.00

Barcode and words description:

barcode 1: UBC1319AA00

barcode 2: PIPPYWWSSSS

1. PIPPYWWSSSS:

P:Pallet,

I:Location name,refer to reference

PP:Line name,

Y:Year,

WW:Week,

SSSS:Serial number (0001-ZZZZ, reset to 0001 every week)



2. Rev:VVSS:Product manufacturing document revision

VV:the engineering version(refer to Foxconn label Rev
column in the cover of the MFG document)SS:the version of A300/A400 product(refer to Doc Rev.
in the cover of MFG document)

REV.	MARK.	ECN NO.	DATE	UPDATE DESCRIPTIONS	SIGNATURE
0			2019/01/12	First release	Yong-feng Li




標籤製作黏貼方式 /U10C142.00/01/8 OF 10

MATERIAL (SPEC.):			SCALE 1:1	FOXCONN HON HAI PRECISION IND. CO., LTD CNSBG		
FINISH:			SHEET 1/1			
			UNIT mm	PART NAME Pallet Label		DESIGNED Yong-feng Li
DIM. TOLERANCES		WARPAGE		SIZE A4	MODEL U10C142.00	PART NO. 503.00089.005
DIM.	TOL.	D(MAX.)			REV. 0	CHECKED Bailey Tan
0~6	±0.05	=0.2%L				
6~30	±0.10	ANGLE	TOLERANCES			
30~120	±0.15	ANGLE	TOL.			
120~300	±0.20	X°	±0.20°		CUSTOMER MODEL	CUSTOMER PART NO.
300~	±0.25	X°	±0.10°			APPROVED
CRITICAL DIM. MARK "※"						

REV.	MARK.	ECN NO.	DATE	UPDATE DESCRIPTIONS	SIGNATURE
0			2019/01/12	First Release	Yong-feng Li

Altice 43295



Pallet ID: AMMYWWSSSS

Quantity	XXX PCS
Product Description	WeMTA D3.0-11AC
Ubee Part Number	UBC1319AA00
Vendor	Ubee Interactive Inc

101.6

152.4

Barcode and words description:

Barcode: AMMYWWSSSS

1. AMMYWWSSSS:

A:Altice, fixed

MM:Model index in Ubee, UBC1319AA00 is 02

01	UBC13228A00
02	UBC1319AA00
03	UBC1326AA00

YY:Year, e.g: 2018>18


WW:Week,

SSSS:Serial number (0001-9999, reset to 0001 every week by model)

Barcode format: code 128, code B

Font: Arial

標籤製作黏貼方式 /U10C142.00/01/9 OF 10

1					
ITEM	CNSBG P/N	CUSTOMER P/N	DESCRIPTIONS	QT'Y	REMARKS
MATERIAL (SPEC.:		Art Paper	SCALE 1:1	FOXCONN HON HAI PRECISION IND. CO., LTD CNSBG	
FINISH:			SHEET 1/1		
			UNIT mm	PART NAME	DESIGNED
			SIZE A3	Altice Pallet Label	Yong-feng Li
DIM. TOLERANCES		WARPAGE		MODEL	CHECKED
DIM.	TOL.	D(MAX.)		U10C142. 00	Bailey Tan
0~6	±0.05	=0.2%L		PART NO.	
6~30	±0.10	ANGLE		503.01500.005	
30~120	±0.15	ANGLE		REV. 0	
120~300	±0.20	X°		CUSTOMER MODEL	CUSTOMER PART NO.
300~	±0.25	.X°			APPROVED
CRITICAL DIM. MARK		*"			

Modification list

Date	Version	Description
2018/12/25	V1	Update device label format.
2019/01/10	V2	Add E 911 label and Altice pallet label
2019/01/12	V3	Update label position and add Altice P/N
2019/01/15	V4	Update SSID
2019/02/01	V6	Update giftbox label position
2019/03/01	V7	Update device label
2019/03/08	V8	Update "Wi-fi Pre-Shared Key" to "Wi-Fi Password" and exchange of "SSID" and "Wi-Fi Password"
2019/03/11	V9	Update device label wording:Wi-Fi to WiFi
2019/03/14	V10	Update label position;Update UL logo