

# FCC TEST REPORT (15.247)

**REPORT NO.:** RF121129C04 R1

**MODEL NO.:** DVW325

**FCC ID:** XCNDVW325

**RECEIVED:** Nov. 29, 2012

**TESTED:** Jan. 15 to 17, 2013

**ISSUED:** Feb. 04, 2013

**APPLICANT:** Ubee Interactive Corp.

**ADDRESS:** 10F-1, No.5, Taiyuan 1st St., Jhubei City  
Hsinchu Country 302, Taiwan

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

**LAB ADDRESS :** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

**TEST LOCATION (1):** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

**TEST LOCATION (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

This report should not be used by the client to claim  
product certification, approval, or endorsement by TAF  
or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

## Table of Contents

RELEASE CONTROL RECORD .....	5
1. CERTIFICATION .....	6
2. SUMMARY OF TEST RESULTS .....	7
2.1 MEASUREMENT UNCERTAINTY .....	8
3. GENERAL INFORMATION.....	9
3.1 GENERAL DESCRIPTION OF EUT .....	9
3.2 DESCRIPTION OF TEST MODES .....	12
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	13
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	16
3.4 DESCRIPTION OF SUPPORT UNITS .....	17
3.5 CONFIGURATION OF SYSTEM UNDER TEST .....	18
4. TEST TYPES AND RESULTS (FOR 2.4GHz, 2.400 ~ 2.4835GHz Band) .....	19
4.1 CONDUCTED EMISSION MEASUREMENT .....	19
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	19
4.1.2 TEST INSTRUMENTS .....	19
4.1.3 TEST PROCEDURES .....	20
4.1.4 DEVIATION FROM TEST STANDARD .....	20
4.1.5 TEST SETUP .....	20
4.1.6 EUT OPERATING CONDITIONS .....	21
4.1.7 TEST RESULTS .....	22
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	24
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	24
4.2.2 TEST INSTRUMENTS .....	25
4.2.3 TEST PROCEDURES .....	27
4.2.4 DEVIATION FROM TEST STANDARD .....	27
4.2.5 TEST SETUP .....	28
4.2.6 EUT OPERATING CONDITIONS .....	28
4.2.7 TEST RESULTS .....	29
4.3 6dB BANDWIDTH MEASUREMENT .....	42
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	42
4.3.2 TEST INSTRUMENTS .....	42
4.3.3 TEST PROCEDURE .....	42
4.3.4 DEVIATION FROM TEST STANDARD .....	42
4.3.5 TEST SETUP .....	42
4.3.6 EUT OPERATING CONDITIONS .....	42
4.3.7 TEST RESULTS .....	43
4.4 CONDUCTED OUTPUT POWER MEASUREMENT .....	44
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	44
4.4.2 INSTRUMENTS .....	44
4.4.3 TEST PROCEDURES .....	44
4.4.4 DEVIATION FROM TEST STANDARD .....	44
4.4.5 TEST SETUP .....	44
4.4.6 EUT OPERATING CONDITIONS .....	44
4.4.7 TEST RESULTS .....	45
4.5 POWER SPECTRAL DENSITY MEASUREMENT .....	46
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	46
4.5.2 TEST INSTRUMENTS .....	46
4.5.3 TEST PROCEDURE .....	46
4.5.4 DEVIATION FROM TEST STANDARD .....	46
4.5.5 TEST SETUP .....	46



A D T

4.5.6	EUT OPERATING CONDITION .....	46
4.5.7	TEST RESULTS .....	47
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT .....	49
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT .....	49
4.6.2	TEST INSTRUMENTS .....	49
4.6.3	TEST PROCEDURE .....	49
4.6.4	DEVIATION FROM TEST STANDARD .....	50
4.6.5	TEST SETUP .....	50
4.6.6	EUT OPERATING CONDITION .....	50
4.6.7	TEST RESULTS .....	50
5.	TEST TYPES AND RESULTS (FOR 5GHz, 5.725~5.850GHz Band) .....	57
5.1	CONDUCTED EMISSION MEASUREMENT .....	57
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	57
5.1.2	TEST INSTRUMENTS .....	57
5.1.3	TEST PROCEDURES .....	58
5.1.4	DEVIATION FROM TEST STANDARD .....	58
5.1.5	TEST SETUP .....	58
5.1.6	EUT OPERATING CONDITIONS .....	59
5.1.7	TEST RESULTS .....	60
5.2	RADIATED AND BANDEDGE EMISSION MEASUREMENT .....	62
5.2.1	LIMITS OF RADIATED AND BANDEDGE EMISSION MEASUREMENT .....	62
5.2.2	TEST INSTRUMENTS .....	63
5.2.3	TEST PROCEDURES .....	65
5.2.4	DEVIATION FROM TEST STANDARD .....	65
5.2.5	TEST SETUP .....	66
5.2.6	EUT OPERATING CONDITIONS .....	66
5.2.7	TEST RESULTS .....	67
5.3	6dB BANDWIDTH MEASUREMENT .....	76
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	76
5.3.2	TEST INSTRUMENTS .....	76
5.3.3	TEST PROCEDURE .....	76
5.3.4	DEVIATION FROM TEST STANDARD .....	76
5.3.5	TEST SETUP .....	76
5.3.6	EUT OPERATING CONDITIONS .....	76
5.3.7	TEST RESULTS .....	77
5.4	CONDUCTED OUTPUT POWER MEASUREMENT .....	78
5.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	78
5.4.2	INSTRUMENTS .....	78
5.4.3	TEST PROCEDURES .....	78
5.4.4	DEVIATION FROM TEST STANDARD .....	78
5.4.5	TEST SETUP .....	78
5.4.6	EUT OPERATING CONDITIONS .....	78
5.4.7	TEST RESULTS .....	79
5.5	POWER SPECTRAL DENSITY MEASUREMENT .....	80
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	80
5.5.2	TEST INSTRUMENTS .....	80
5.5.3	TEST PROCEDURE .....	80
5.5.4	DEVIATION FROM TEST STANDARD .....	80
5.5.5	TEST SETUP .....	80
5.5.6	EUT OPERATING CONDITION .....	80
5.5.7	TEST RESULTS .....	81
5.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT .....	82



A D T

5.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT .....	82
5.6.2	TEST INSTRUMENTS .....	82
5.6.3	TEST PROCEDURE .....	82
5.6.4	DEVIATION FROM TEST STANDARD .....	83
5.6.5	TEST SETUP .....	83
5.6.6	EUT OPERATING CONDITION .....	83
5.6.7	TEST RESULTS .....	83
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	89
7.	INFORMATION ON THE TESTING LABORATORIES .....	90
8.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	91


## RELEASE CONTROL RECORD


ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF121129C04	Original release	Jan. 31, 2013
RF121129C04 R1	Modify the model name of adapter	Feb. 04, 2013

## 1. CERTIFICATION

**PRODUCT:** BCM 3383Z Wireless eMTA  
**BRAND NAME:** Ubee  
**MODEL NO.:** DVW325  
**TEST SAMPLE:** ENGINEERING SAMPLE  
**APPLICANT:** Ubee Interactive Corp.  
**TESTED:** Jan. 15 to 17, 2013  
**STANDARDS:** FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10-2009

The above equipment (Model: DVW325) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :**  , **DATE:** Feb. 04, 2013  
( Claire Kuan, Specialist )

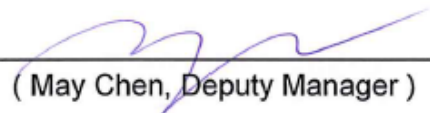**APPROVED BY :**  , **DATE:** Feb. 04, 2013  
( May Chen, Deputy Manager )

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 2.4GHz, 2400~2483.5MHz Band

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -5.87dB at 0.15781MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.6dB at 2497.00MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is I-PEX not a standard connector.

For 5GHz, 5725~5850MHz Band

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -5.86dB at 0.15391MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -5.6dB at 345.00MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is I-PEX not a standard connector.

**NOTE:** The EUT was operating in 2.400 ~ 2.4835GHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 2.400 ~ 2.4835GHz and 5.725~5.850GHz. For the 5.15~5.25GHz RF parameters was recorded in another test report.

## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.59 dB
Radiated emissions (1GHz -6GHz) for Chamber G	3.56 dB
Radiated emissions (1GHz -6GHz) for Chamber H	3.84 dB
Radiated emissions (6GHz -18GHz) for Chamber G	4.10 dB
Radiated emissions (6GHz -18GHz) for Chamber H	4.09 dB
Radiated emissions (18GHz -40GHz)	4.24 dB



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	BCM 3383Z Wireless eMTA
MODEL NO.	DVW325
POWER SUPPLY	DC 12V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS,OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11a / g: up to 54Mbps 802.11n: up to 300Mbps
OPERATING FREQUENCY	<b>For 15.407</b> 802.11a/n: 5.18 ~ 5.24GHz
	<b>For 15.247</b> 802.11b/g/n: 2.412 ~ 2.462GHz 802.11a/n: 5.745 ~ 5.825GHz
	<b>For 15.407</b> 4 for 802.11a, 802.11n (HT20) 2 for 802.11n (HT40)
NUMBER OF CHANNEL	<b>For 15.247 (2.4GHz)</b> 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
	<b>For 15.247 (5GHz)</b> 5 for 802.11a, 802.11n (HT20) 2 for 802.11n (HT40)

<b>MAXIMUM OUTPUT POWER</b>	<b>For 15.407</b> 802.11a: 44.668mW 802.11n (HT20): 34.839mW 802.11n (HT40): 48.295mW <b>For 15.247 (2.4GHz)</b> 802.11b: 151.356mW 802.11g: 354.813mW 802.11n (HT20): 557.261mW 802.11n (HT40): 299.426mW <b>For 15.247 (5GHz)</b> 802.11a: 257.04mW 802.11n (HT20): 475.399mW 802.11n (HT40): 432.802mW
<b>ANTENNA TYPE</b>	Please see NOTE
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	Refer to user's manual
<b>ASSOCIATED DEVICES</b>	Adapter x1

**NOTE:**

- There are 2.4GHz and 5GHz WLAN technology used for the EUT. The test report of EUT listed as below table:

Function	Report No.
WLAN	RF121129C04 (15.247) RF121129C04 -1(15.407)

- The EUT must be supplied with a power adapter or POE as below :

Brand	Model No.	Spec.
Asian Power Devices Inc.	WA-30E12FU	Input: 100-240V, 50-60Hz, 0.8A Max. Output: 12V, 2.5A DC output cable (unshielded, 1.8m)

3. The antennas provided to the EUT, please refer to the following table:

Transmitter Circuit	Brand	Model	Antenna Type	Gain(dBi) Include cable loss	Connector Type	Frequency range	Cable Length	
Chain (0)	NWInG	FX01F95-0G-EF	PIFA Antenna	3.42	I-PEX	2.4~2.5GHz	85mm +/- 5	
				4.73		5.15~5.25GHz		
				5.37		5.725~5.85GHz		
Chain (1)	NWInG	FX01F96-0G-EF		4.1		2.4~2.5GHz	135mm +/- 3	
				4.1		5.15~5.25GHz		
				5.27		5.725~5.85GHz		

4. The EUT incorporates a MIMO function without beam forming.

MODULATION MODE	TX/RX FUNCTION
802.11a	1TX/1RX
802.11b	1TX/1RX
802.11g	1TX/1RX
802.11n (HT20)	2TX/2RX
802.11n (HT40)	2TX/2RX

5. 2.4GHz and 5GHz technology cannot transmit at same time.
6. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15.
7. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

#### Operated in 2400 ~ 2483.5MHz band:

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

#### Operated in 5725 ~ 5850MHz band:

5 channels are provided for 802.11a, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY
151	5755 MHz
159	5795 MHz

### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
-	√	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission

**RE < 1G**: Radiated Emission below 1GHz

**RE ≥ 1G**: Radiated Emission above 1GHz

**APCM**: Antenna Port Conducted Measurement

**OB**: Conducted Out-Band Emission Measurement

**Note**: The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on Y-plane.

#### **POWER LINE CONDUCTED EMISSION TEST:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
For 2.4 GHz 802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5
For 5 GHz 802.11n (HT20)	149 to 165	165	OFDM	BPSK	6.5

#### **RADIATED EMISSION TEST (BELOW 1 GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
For 2.4 GHz 802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5
For 5 GHz 802.11n (HT20)	149 to 165	165	OFDM	BPSK	6.5

#### **RADIATED EMISSION TEST (ABOVE 1 GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (HT20)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (HT40)	151 to 159	151, 159	OFDM	BPSK	13.5

#### **ANTENNA PORT CONDUCTED MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (HT20)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (HT40)	151 to 159	151, 159	OFDM	BPSK	13.5

### **CONDUCTED OUT-BAND EMISSION MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (HT20)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (HT40)	151 to 159	151, 159	OFDM	BPSK	13.5

### **TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	23deg. C, 62%RH	120Vac, 60Hz	Gavin Peng
RE<1G	22deg. C, 64%RH	120Vac, 60Hz	Amos Chuang
	24deg. C, 70%RH	120Vac, 60Hz	Robert Cheng
RE≥1G	22deg. C, 64%RH	120Vac, 60Hz	Amos Chuang
APCM	25deg. C, 60%RH	120Vac, 60Hz	Amos Chuang
OB	25deg. C, 60%RH	120Vac, 60Hz	Amos Chuang

### **3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.247)**

**558074 D01 DTS Meas Guidance**

**662911 D01 Multiple Transmitter Output**

**ANSI C63.10-2009**

All test items have been performed and recorded as per the above standards.

**Note:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



### 3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC
3	TELEPHONE	WONDER	WD-303	7C17KA04011	FCC DoC
4	TELEPHONE	WONDER	WD-303	7C17KA04440	FCC DoC
5	iPod	Apple	MC749TA/A	CC4DMFJUDFDM	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP cable, 10m
2	UTP cable, 10m
3	RJ-11 cable, 10m
4	RJ-11 cable, 10m
5	USB cable, 0.1m

**NOTE:** All power cords of the above support units are non shielded (1.8m).

### 3.5 CONFIGURATION OF SYSTEM UNDER TEST

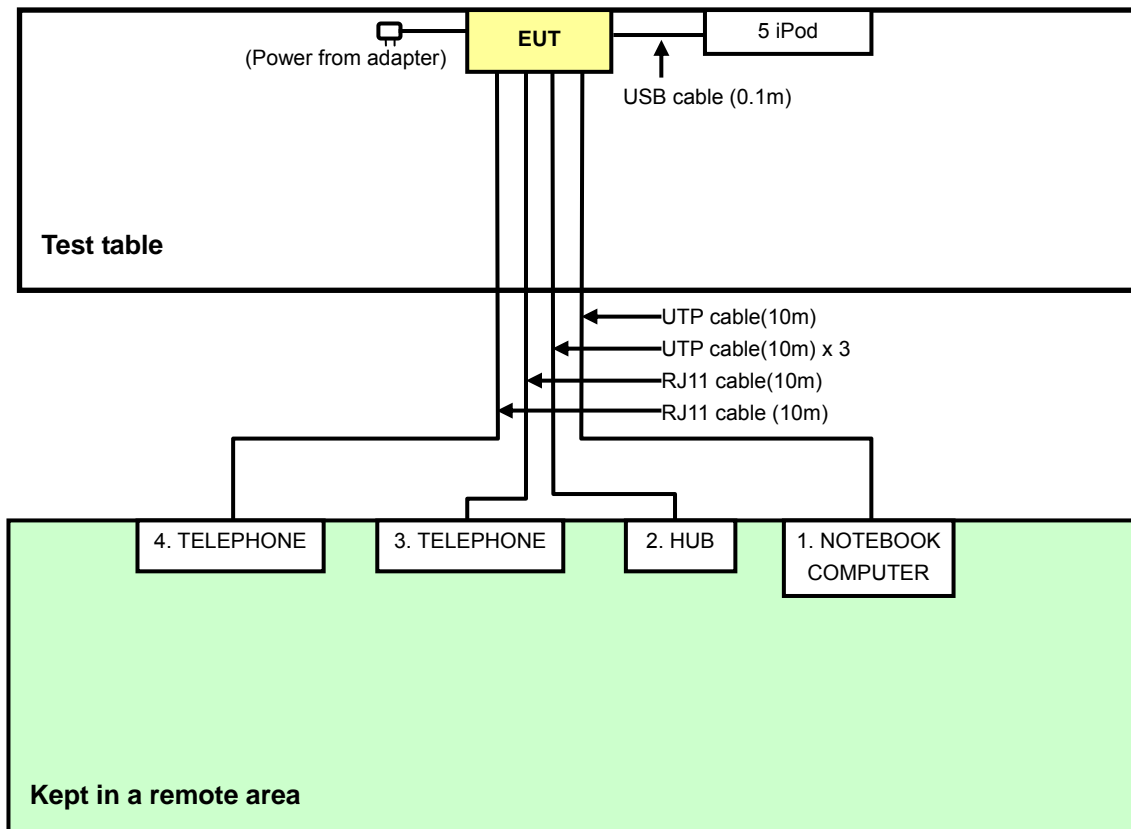

## 4. TEST TYPES AND RESULTS (FOR 2.4GHz, 2.400 ~ 2.4835GHz Band)

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 12, 2012	Mar.11, 2013
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 06, 2012	Sep. 05, 2013
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100072	June 08,2012	June 07,2013
RF Cable (JYEBAO)	5DFB	COCCAB-001	Aug. 28, 2012	Aug. 27, 2013
50 ohms Terminator	50	EMC-3	Sep. 25, 2012	Sep. 24, 2013
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Jan. 25, 2013

#### 4.1.3 TEST PROCEDURES

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


#### NOTE:

- The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

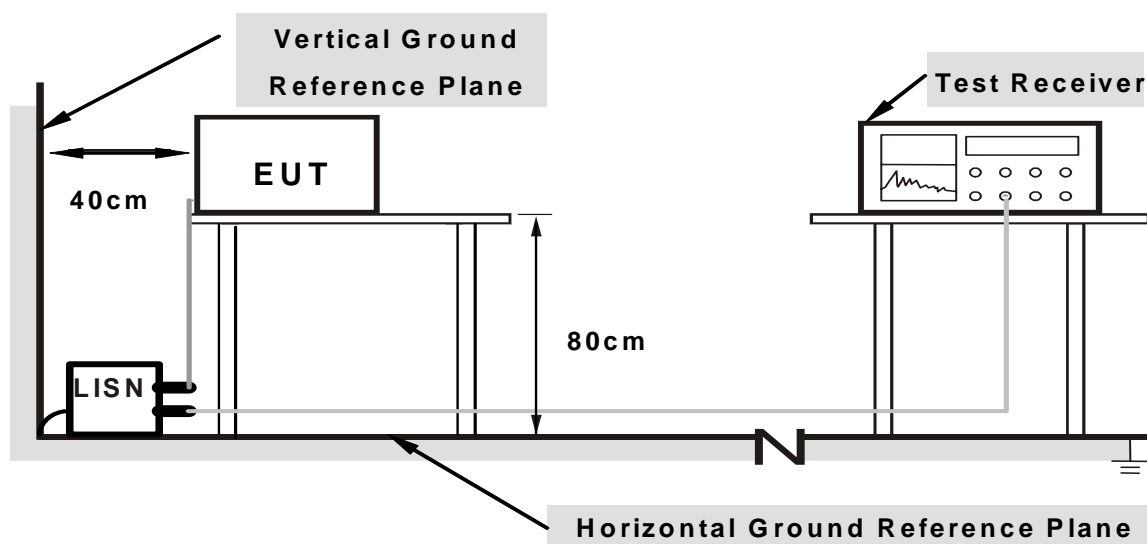

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Prepared other computer system (support unit 1) to act as communication partner and placed it outside of testing area.
3. The communication partner run test program "Telnet paste command" to enable EUT under transmission/receiving condition continuously at specific channel frequency.


#### 4.1.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	----------------------	-----------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	0.11	59.60	46.85	59.71	46.96	65.58	55.58	-5.87	-8.62
2	0.26719	0.13	51.57	39.21	51.70	39.34	61.20	51.20	-9.50	-11.86
3	0.33359	0.15	48.05	38.15	48.20	38.30	59.36	49.36	-11.16	-11.06
4	0.45078	0.16	48.15	38.09	48.31	38.25	56.86	46.86	-8.55	-8.61
5	0.51719	0.17	46.35	34.52	46.52	34.69	56.00	46.00	-9.48	-11.31
6	0.63828	0.17	44.03	28.69	44.20	28.86	56.00	46.00	-11.80	-17.14

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

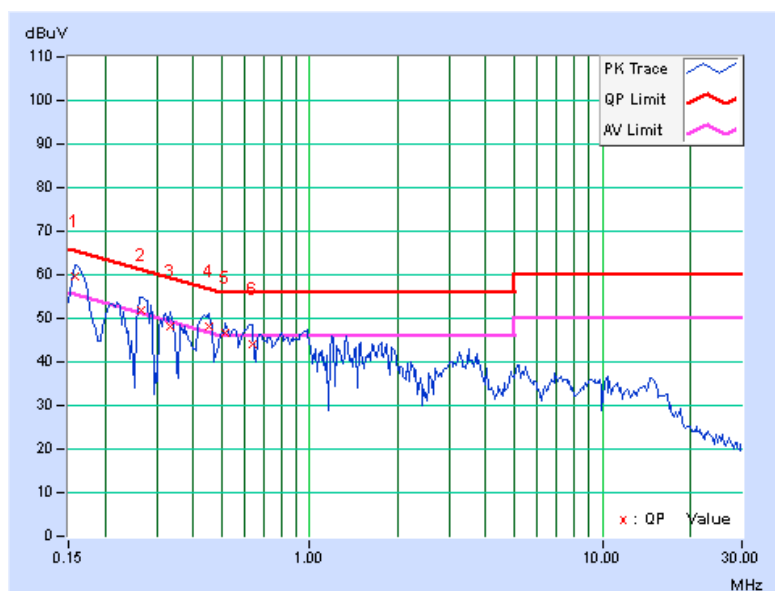


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	0.09	59.42	47.45	59.51	47.54	65.58	55.58	-6.07	-8.04
2	0.26328	0.12	52.98	40.18	53.10	40.30	61.33	51.33	-8.23	-11.03
3	0.32578	0.13	47.46	35.64	47.59	35.77	59.56	49.56	-11.97	-13.79
4	0.43906	0.15	48.30	37.38	48.45	37.53	57.08	47.08	-8.63	-9.55
5	0.52891	0.15	44.90	31.21	45.05	31.36	56.00	46.00	-10.95	-14.64
6	0.63047	0.16	45.62	33.28	45.78	33.44	56.00	46.00	-10.22	-12.56

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

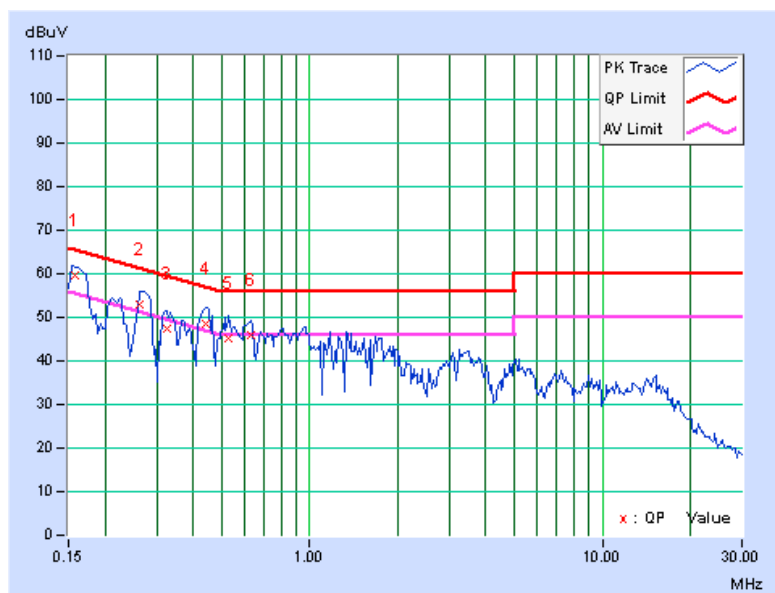

## 4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



## 4.2.2 TEST INSTRUMENTS

For below 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Sep. 03, 2012	Sep. 02, 2013
Pre-Selector Agilent	N9039A	MY46520310	Sep. 03, 2012	Sep. 02, 2013
Signal Generator Agilent	N5181A	MY49060347	July 24, 2012	July 23, 2013
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A02465	Feb. 27, 2012	Feb. 26, 2013
SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Apr. 06, 2012	Apr. 05, 2013
Horn_Antenna AISI	AIH.8018	0000220091110	Nov. 27, 2012	Nov. 26, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 26, 2012	Dec. 25, 2013
RF Cable	NA	CHHCAB_001	Oct. 07, 2012	Oct. 06, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
- 5 The CANADA Site Registration No. is IC 7450H-3.
- 6 Tested Date: Jan. 15, 2013



A D T

**For above 1GHz test:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250254	July 09, 2012	July 08, 2013
Pre-Selector Agilent	N9039A	MY46520311	July 09, 2012	July 08, 2013
Signal Generator Agilent	N5181A	MY49060517	July 09, 2012	July 08, 2013
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A02578	June 26, 2012	June 25, 2013
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Apr. 09, 2012	Apr. 08, 2013
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 19, 2012	Nov. 18, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 25, 2012	Dec. 24, 2013
RF Cable	NA	CHGCAB_001	Oct. 06, 2012	Oct. 05, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Jan. 17, 2013

#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

## 4.2.5 TEST SETUP

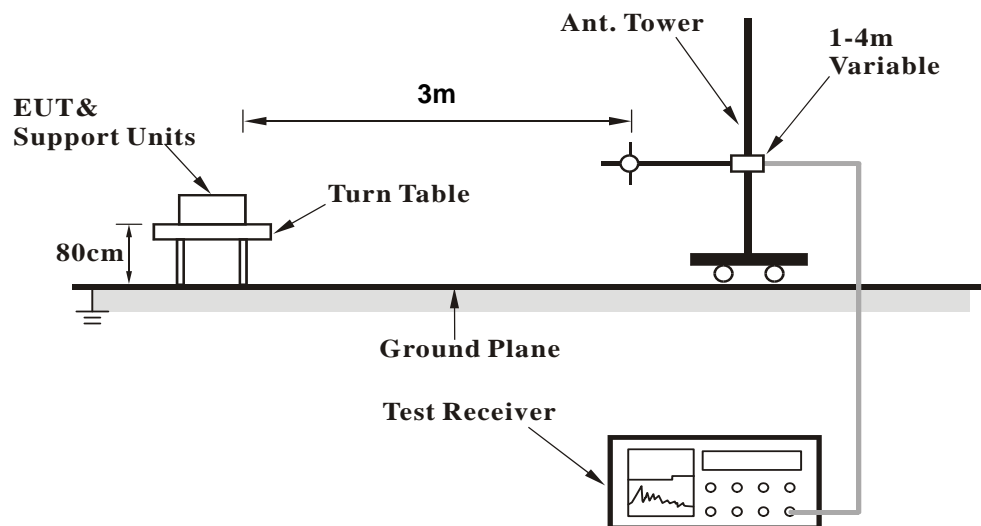

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

## 4.2.7 TEST RESULTS

### BELOW 1GHz WORST-CASE DATA

#### 802.11n (HT20)

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	199.94	29.3 QP	43.5	-14.2	1.50 H	262	18.27	11.05
2	374.97	41.1 QP	46.0	-4.9	1.00 H	311	23.98	17.15
3	459.87	33.1 QP	46.0	-12.9	2.00 H	118	14.01	19.12
4	500.02	34.5 QP	46.0	-11.5	1.50 H	112	14.42	20.10
5	624.96	37.9 QP	46.0	-8.1	1.00 H	276	15.29	22.61
6	750.01	37.8 QP	46.0	-8.2	1.00 H	90	13.13	24.64
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	43.74	32.2 QP	40.0	-7.8	1.00 V	263	18.06	14.10
2	58.66	29.6 QP	40.0	-10.4	1.00 V	265	16.00	13.57
3	374.97	36.8 QP	46.0	-9.2	1.50 V	80	19.69	17.15
4	500.02	32.3 QP	46.0	-13.7	1.00 V	256	12.17	20.10
5	624.96	33.7 QP	46.0	-12.3	1.00 V	61	11.10	22.61
6	875.06	39.8 QP	46.0	-6.2	1.00 V	96	13.06	26.73

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

## ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.1 PK	74.0	-12.9	1.62 H	15	29.12	31.98
2	2390.00	52.4 AV	54.0	-1.6	1.62 H	15	20.42	31.98
3	*2412.00	109.3 PK			1.62 H	15	77.25	32.05
4	*2412.00	107.0 AV			1.62 H	15	74.95	32.05
5	4824.00	53.3 PK	74.0	-20.7	1.17 H	179	13.72	39.58
6	4824.00	50.6 AV	54.0	-3.4	1.17 H	179	11.02	39.58
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	1.23 V	103	27.32	31.98
2	2390.00	51.1 AV	54.0	-2.9	1.23 V	103	19.12	31.98
3	*2412.00	104.2 PK			1.23 V	103	72.15	32.05
4	*2412.00	102.1 AV			1.23 V	103	70.05	32.05
5	4824.00	50.1 PK	74.0	-23.9	1.21 V	76	10.52	39.58
6	4824.00	43.3 AV	54.0	-10.7	1.21 V	76	3.72	39.58

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.1 PK			1.60 H	16	75.98	32.12
2	*2437.00	105.6 AV			1.60 H	16	73.48	32.12
3	4874.00	53.8 PK	74.0	-20.2	1.11 H	174	14.10	39.70
4	4874.00	51.2 AV	54.0	-2.8	1.11 H	174	11.50	39.70
5	7311.00	59.6 PK	74.0	-14.4	1.02 H	102	12.01	47.59
6	7311.00	53.3 AV	54.0	-0.7	1.02 H	102	5.71	47.59

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.7 PK			1.24 V	88	71.58	32.12
2	*2437.00	101.1 AV			1.24 V	88	68.98	32.12
3	4874.00	50.1 PK	74.0	-23.9	1.17 V	85	10.40	39.70
4	4874.00	43.4 AV	54.0	-10.6	1.17 V	85	3.70	39.70
5	7311.00	56.5 PK	74.0	-17.5	1.69 V	143	8.91	47.59
6	7311.00	47.2 AV	54.0	-6.8	1.69 V	143	-0.39	47.59

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.3 PK			1.59 H	21	77.12	32.18
2	*2462.00	106.6 AV			1.59 H	21	74.42	32.18
3	2483.50	61.8 PK	74.0	-12.2	1.59 H	21	29.56	32.24
4	2483.50	52.6 AV	54.0	-1.4	1.59 H	21	20.36	32.24
5	4924.00	53.6 PK	74.0	-20.4	1.15 H	174	13.76	39.84
6	4924.00	50.8 AV	54.0	-3.2	1.15 H	174	10.96	39.84
7	7386.00	59.9 PK	74.0	-14.1	1.01 H	103	12.38	47.52
8	7386.00	52.9 AV	54.0	-1.1	1.01 H	103	5.38	47.52

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.2 PK			1.22 V	87	72.02	32.18
2	*2462.00	102.2 AV			1.22 V	87	70.02	32.18
3	2483.50	59.1 PK	74.0	-14.9	1.23 V	117	26.86	32.24
4	2483.50	50.9 AV	54.0	-3.1	1.23 V	117	18.66	32.24
5	4924.00	49.8 PK	74.0	-24.2	1.19 V	73	9.96	39.84
6	4924.00	43.1 AV	54.0	-10.9	1.19 V	73	3.26	39.84
7	7386.00	55.9 PK	74.0	-18.1	1.66 V	142	8.38	47.52
8	7386.00	46.8 AV	54.0	-7.2	1.66 V	142	-0.72	47.52

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



# 802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.9 PK	74.0	-7.1	1.63 H	17	34.92	31.98
2	2390.00	53.3 AV	54.0	-0.7	1.63 H	17	21.32	31.98
3	*2412.00	108.2 PK			1.63 H	17	76.15	32.05
4	*2412.00	97.2 AV			1.63 H	17	65.15	32.05
5	4824.00	50.1 PK	74.0	-23.9	1.25 H	77	10.52	39.58
6	4824.00	43.6 AV	54.0	-10.4	1.25 H	77	4.02	39.58
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.5 PK	74.0	-15.5	1.19 V	115	26.52	31.98
2	2390.00	50.5 AV	54.0	-3.5	1.19 V	115	18.52	31.98
3	*2412.00	98.1 PK			1.19 V	87	66.05	32.05
4	*2412.00	87.9 AV			1.19 V	87	55.85	32.05
5	4824.00	50.1 PK	74.0	-23.9	1.25 V	77	10.52	39.58
6	4824.00	43.6 AV	54.0	-10.4	1.25 V	77	4.02	39.58

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.8 PK	74.0	-9.2	1.60 H	18	32.82	31.98
2	2390.00	49.5 AV	54.0	-4.5	1.60 H	18	17.52	31.98
3	*2437.00	111.4 PK			1.60 H	18	79.28	32.12
4	*2437.00	101.2 AV			1.60 H	18	69.08	32.12
5	2483.50	71.5 PK	74.0	-2.5	1.60 H	18	39.26	32.24
6	2483.50	52.3 AV	54.0	-1.7	1.60 H	18	20.06	32.24
7	4874.00	55.9 PK	74.0	-18.1	1.66 H	142	16.20	39.70
8	4874.00	46.8 AV	54.0	-7.2	1.66 H	142	7.10	39.70
9	7311.00	63.4 PK	74.0	-10.6	1.02 H	102	15.81	47.59
10	7311.00	52.3 AV	54.0	-1.7	1.02 H	102	4.71	47.59
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.3 PK			1.22 V	85	69.18	32.12
2	*2437.00	91.2 AV			1.22 V	85	59.08	32.12
3	4874.00	50.2 PK	74.0	-23.8	1.29 V	77	10.50	39.70
4	4874.00	43.8 AV	54.0	-10.2	1.29 V	77	4.10	39.70
5	7311.00	55.5 PK	74.0	-18.5	1.69 V	146	7.91	47.59
6	7311.00	46.6 AV	54.0	-7.4	1.69 V	146	-0.99	47.59

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.3 PK			1.59 H	26	76.12	32.18
2	*2462.00	96.7 AV			1.59 H	26	64.52	32.18
3	2483.50	65.8 PK	74.0	-8.2	1.59 H	26	33.56	32.24
4	2483.50	53.3 AV	54.0	-0.7	1.59 H	26	21.06	32.24
5	4924.00	56.2 PK	74.0	-17.8	1.65 H	128	16.36	39.84
6	4924.00	47.0 AV	54.0	-7.0	1.65 H	128	7.16	39.84
7	7386.00	63.7 PK	74.0	-10.3	1.00 H	102	16.18	47.52
8	7386.00	52.7 AV	54.0	-1.3	1.00 H	102	5.18	47.52
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	96.2 PK			1.24 V	70	64.02	32.18
2	*2462.00	85.7 AV			1.24 V	70	53.52	32.18
3	2483.50	58.7 PK	74.0	-15.3	1.17 V	120	26.46	32.24
4	2483.50	50.7 AV	54.0	-3.3	1.17 V	120	18.46	32.24
5	4924.00	50.3 PK	74.0	-23.7	1.24 V	90	10.46	39.84
6	4924.00	43.9 AV	54.0	-10.1	1.24 V	90	4.06	39.84
7	7386.00	56.0 PK	74.0	-18.0	1.66 V	155	8.48	47.52
8	7386.00	46.9 AV	54.0	-7.1	1.66 V	155	-0.62	47.52

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.

# 802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.1 PK	74.0	-7.9	1.08 H	16	34.12	31.98
2	2390.00	53.1 AV	54.0	-0.9	1.08 H	16	21.12	31.98
3	*2412.00	106.9 PK			1.08 H	16	74.85	32.05
4	*2412.00	96.1 AV			1.08 H	16	64.05	32.05
5	4824.00	56.6 PK	74.0	-17.4	1.65 H	116	17.02	39.58
6	4824.00	47.2 AV	54.0	-6.8	1.65 H	116	7.62	39.58
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.8 PK	74.0	-11.2	1.00 V	194	30.82	31.98
2	2390.00	51.9 AV	54.0	-2.1	1.00 V	194	19.92	31.98
3	*2412.00	106.4 PK			1.00 V	194	74.35	32.05
4	*2412.00	95.9 AV			1.00 V	194	63.85	32.05
5	4824.00	50.0 PK	74.0	-24.0	1.23 V	106	10.42	39.58
6	4824.00	43.6 AV	54.0	-10.4	1.23 V	106	4.02	39.58

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.5 PK	74.0	-9.5	1.61 H	19	32.52	31.98
2	2390.00	50.3 AV	54.0	-3.7	1.61 H	19	18.32	31.98
3	*2437.00	111.5 PK			1.61 H	19	79.38	32.12
4	*2437.00	100.9 AV			1.61 H	19	68.78	32.12
5	2483.50	71.5 PK	74.0	-2.5	1.61 H	19	39.26	32.24
6	2483.50	53.1 AV	54.0	-0.9	1.61 H	19	20.86	32.24
7	4874.00	56.5 PK	74.0	-17.5	1.64 H	126	16.80	39.70
8	4874.00	47.0 AV	54.0	-7.0	1.64 H	126	7.30	39.70
9	7311.00	64.5 PK	74.0	-9.5	1.02 H	100	16.91	47.59
10	7311.00	52.2 AV	54.0	-1.8	1.02 H	100	4.61	47.59

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.1 PK			1.19 V	59	68.98	32.12
2	*2437.00	90.1 AV			1.19 V	59	57.98	32.12
3	4874.00	50.6 PK	74.0	-23.4	1.26 V	103	10.90	39.70
4	4874.00	44.2 AV	54.0	-9.8	1.26 V	103	4.50	39.70
5	7311.00	57.8 PK	74.0	-16.2	1.01 V	110	10.21	47.59
6	7311.00	47.0 AV	54.0	-7.0	1.01 V	110	-0.59	47.59

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.7 PK			1.59 H	19	74.52	32.18
2	*2462.00	96.0 AV			1.59 H	19	63.82	32.18
3	2483.50	65.5 PK	74.0	-8.5	1.59 H	19	33.26	32.24
4	2483.50	52.8 AV	54.0	-1.2	1.59 H	19	20.56	32.24
5	4924.00	56.3 PK	74.0	-17.7	1.59 H	142	16.46	39.84
6	4924.00	46.7 AV	54.0	-7.3	1.59 H	142	6.86	39.84
7	7386.00	64.2 PK	74.0	-9.8	1.00 H	108	16.68	47.52
8	7386.00	52.1 AV	54.0	-1.9	1.00 H	108	4.58	47.52
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.9 PK			1.06 V	187	74.72	32.18
2	*2462.00	96.3 AV			1.06 V	187	64.12	32.18
3	2483.50	63.2 PK	74.0	-10.8	1.04 V	186	30.96	32.24
4	2483.50	51.7 AV	54.0	-2.3	1.04 V	186	19.46	32.24
5	4924.00	50.5 PK	74.0	-23.5	1.19 V	99	10.66	39.84
6	4924.00	44.1 AV	54.0	-9.9	1.19 V	99	4.26	39.84
7	7386.00	56.2 PK	74.0	-17.8	1.68 V	170	8.68	47.52
8	7386.00	47.3 AV	54.0	-6.7	1.68 V	170	-0.22	47.52

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



A D T

## 802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

## ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.9 PK	74.0	-6.1	1.60 H	17	35.92	31.98
2	2390.00	53.2 AV	54.0	-0.8	1.60 H	17	21.22	31.98
3	*2422.00	101.9 PK			1.60 H	17	69.82	32.08
4	*2422.00	90.7 AV			1.60 H	17	58.62	32.08
5	4844.00	56.1 PK	74.0	-17.9	1.65 H	133	16.47	39.63
6	4844.00	46.5 AV	54.0	-7.5	1.65 H	133	6.87	39.63
7	7266.00	64.1 PK	74.0	-9.9	1.00 H	99	16.50	47.60
8	7266.00	52.1 AV	54.0	-1.9	1.00 H	99	4.50	47.60

## ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	1.00 V	273	33.32	31.98
2	2390.00	52.1 AV	54.0	-1.9	1.00 V	273	20.12	31.98
3	*2422.00	102.3 PK			1.00 V	273	70.22	32.08
4	*2422.00	90.4 AV			1.00 V	273	58.32	32.08
5	4844.00	51.0 PK	74.0	-23.0	1.14 V	93	11.37	39.63
6	4844.00	44.5 AV	54.0	-9.5	1.14 V	93	4.87	39.63
7	7266.00	56.2 PK	74.0	-17.8	1.65 V	179	8.60	47.60
8	7266.00	47.5 AV	54.0	-6.5	1.65 V	179	-0.10	47.60

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.2 PK	74.0	-7.8	1.61 H	17	34.22	31.98
2	2390.00	52.5 AV	54.0	-1.5	1.61 H	17	20.52	31.98
3	*2437.00	103.8 PK			1.61 H	17	71.68	32.12
4	*2437.00	92.4 AV			1.61 H	17	60.28	32.12
5	2483.50	66.9 PK	74.0	-7.1	1.61 H	17	34.66	32.24
6	2483.50	53.3 AV	54.0	-0.7	1.61 H	17	21.06	32.24
7	4874.00	56.4 PK	74.0	-17.6	1.67 H	132	16.70	39.70
8	4874.00	46.7 AV	54.0	-7.3	1.67 H	132	7.00	39.70
9	7311.00	63.9 PK	74.0	-10.1	1.00 H	104	16.31	47.59
10	7311.00	51.9 AV	54.0	-2.1	1.00 H	104	4.31	47.59

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.2 PK			1.01 V	288	71.08	32.12
2	*2437.00	91.6 AV			1.01 V	288	59.48	32.12
3	4874.00	50.9 PK	74.0	-23.1	1.12 V	108	11.20	39.70
4	4874.00	44.6 AV	54.0	-9.4	1.12 V	108	4.90	39.70
5	7311.00	56.2 PK	74.0	-17.8	1.65 V	193	8.61	47.59
6	7311.00	47.3 AV	54.0	-6.7	1.65 V	193	-0.29	47.59

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.





A D T

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	101.9 PK			1.56 H	16	69.74	32.16
2	*2452.00	90.3 AV			1.56 H	16	58.14	32.16
3	2497.00	66.9 PK	74.0	-7.1	1.56 H	16	34.63	32.27
4	<b>2497.00</b>	<b>53.4 AV</b>	<b>54.0</b>	<b>-0.6</b>	<b>1.56 H</b>	<b>16</b>	<b>21.13</b>	<b>32.27</b>
5	4904.00	56.2 PK	74.0	-17.8	1.61 H	135	16.43	39.77
6	4904.00	46.3 AV	54.0	-7.7	1.61 H	135	6.53	39.77
7	7356.00	64.2 PK	74.0	-9.8	1.01 H	99	16.65	47.55
8	7356.00	52.2 AV	54.0	-1.8	1.01 H	99	4.65	47.55

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	101.1 PK			1.00 V	268	68.94	32.16
2	*2452.00	89.6 AV			1.00 V	268	57.44	32.16
3	2483.50	64.6 PK	74.0	-9.4	1.00 V	268	32.36	32.24
4	2483.50	51.5 AV	54.0	-2.5	1.00 V	268	19.26	32.24
5	4904.00	51.0 PK	74.0	-23.0	1.16 V	83	11.23	39.77
6	4904.00	44.2 AV	54.0	-9.8	1.16 V	83	4.43	39.77
7	7356.00	56.7 PK	74.0	-17.3	1.68 V	167	9.15	47.55
8	7356.00	47.8 AV	54.0	-6.2	1.68 V	167	0.25	47.55

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.

### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Jan. 15, 2013


#### 4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP



#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 TEST RESULTS

##### 802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	7.98	0.5	PASS
6	2437	8.04	0.5	PASS
11	2462	8.18	0.5	PASS

##### 802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	14.50	0.5	PASS
6	2437	15.16	0.5	PASS
11	2462	15.18	0.5	PASS

##### 802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.14	15.10	0.5	PASS
6	2437	15.72	16.14	0.5	PASS
11	2462	15.14	15.10	0.5	PASS

##### 802.11n (HT40)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	36.49	36.53	0.5	PASS
6	2437	36.47	36.48	0.5	PASS
9	2452	36.47	36.49	0.5	PASS

## 4.4 CONDUCTED OUTPUT POWER MEASUREMENT

### 4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT  $\leq 4$ ;  
 Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any NANT;  
 Array Gain =  $5 \log(\text{NANT}/\text{NSS})$  dB or 3 dB, whichever is less for 20-MHz channel widths with NANT  $\geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(\text{NANT}/\text{NSS})$  dB.

### 4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 10, 2012	May 09, 2013
Power Sensor	MA2411B	0738172	May 10, 2012	May 09, 2013

**Note:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. Tested date : Jan. 15, 2013


### 4.4.3 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.4.5 TEST SETUP

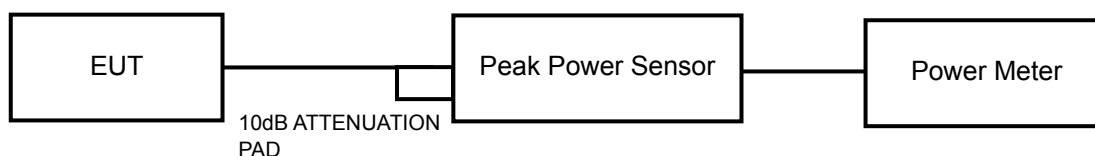

### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

#### 4.4.7 TEST RESULTS

##### 802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	138.038	21.40	30	PASS
6	2437	151.356	21.80	30	PASS
11	2462	131.826	21.20	30	PASS

##### 802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	257.040	24.10	30	PASS
6	2437	354.813	25.50	30	PASS
11	2462	239.883	23.80	30	PASS

##### 802.11n (HT20)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	21.80	21.90	306.238	24.86	30	PASS
6	2437	24.50	24.40	557.261	27.46	30	PASS
11	2462	21.70	21.60	292.455	24.66	30	PASS

##### 802.11n (HT40)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	21.40	21.70	285.949	24.56	30	PASS
6	2437	21.60	21.90	299.426	24.76	30	PASS
9	2452	19.80	20.40	205.147	23.12	30	PASS

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Jan. 15, 2013


### 4.5.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.5.5 TEST SETUP



### 4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

## 4.5.7 TEST RESULTS

### 802.11b

Channel	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-4.40	8	PASS
6	2437	-5.20	8	PASS
11	2462	-6.56	8	PASS

### 802.11g

Channel	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-11.81	8	PASS
6	2437	-3.90	8	PASS
11	2462	-11.35	8	PASS

### 802.11n (HT20)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-11.74	3.01	-8.73	7.22	PASS
	6	2437	-5.73	3.01	-2.72	7.22	PASS
	11	2462	-12.16	3.01	-9.15	7.22	PASS
1	1	2412	-12.59	3.01	-9.58	7.22	PASS
	6	2437	-6.98	3.01	-3.97	7.22	PASS
	11	2462	-11.76	3.01	-8.75	7.22	PASS

**NOTE:** Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 6.78\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8 - (6.78 - 6) = 7.22\text{dBm}$



A D T

#### 802.11n (HT40)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-16.69	3.01	-13.68	7.22	PASS
	6	2437	-15.49	3.01	-12.48	7.22	PASS
	9	2452	-17.61	3.01	-14.60	7.22	PASS
1	3	2422	-16.12	3.01	-13.11	7.22	PASS
	6	2437	-14.46	3.01	-11.45	7.22	PASS
	9	2452	-18.26	3.01	-15.25	7.22	PASS

**NOTE:** Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 6.78\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8-(6.78-6) = 7.22\text{dBm}$



## 4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

### 4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Jan. 15, 2013

### 4.6.3 TEST PROCEDURE

#### Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


#### Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

#### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.6.5 TEST SETUP



#### 4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

#### 4.6.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement




A D T

802.11b:


### CH 1

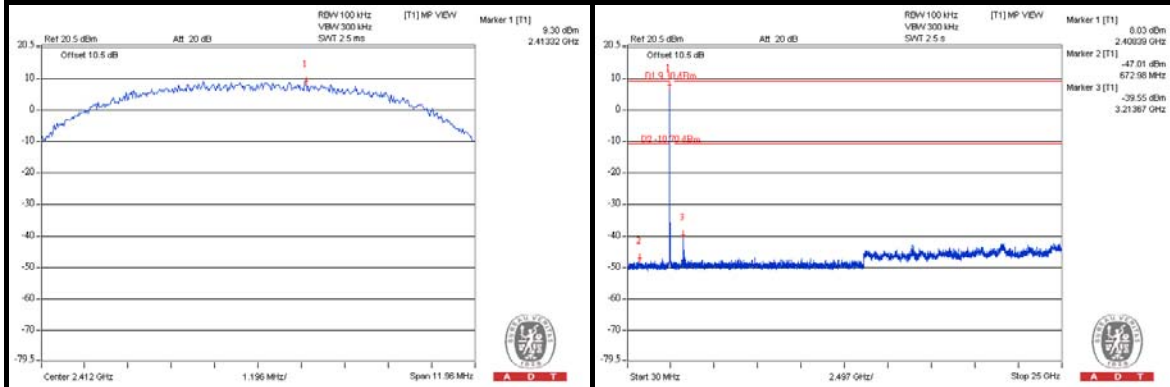

### CH 6

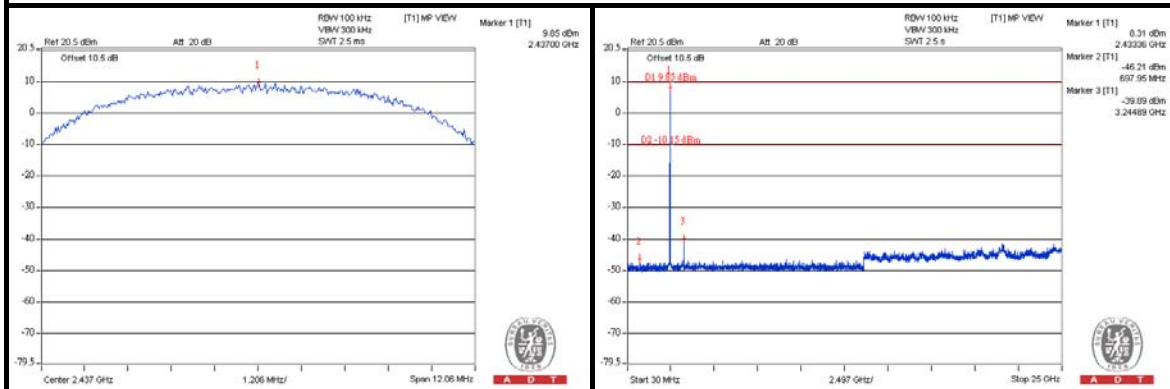

### CH 11

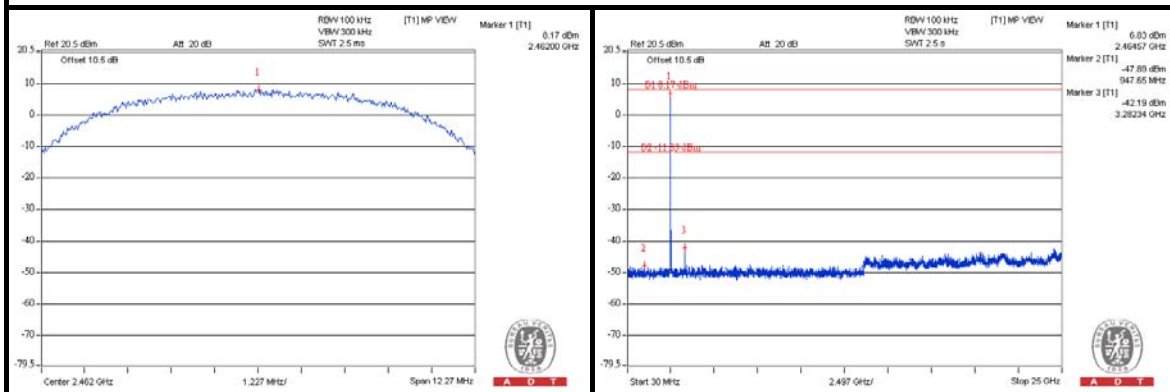





A D T

802.11g:


### CH 1

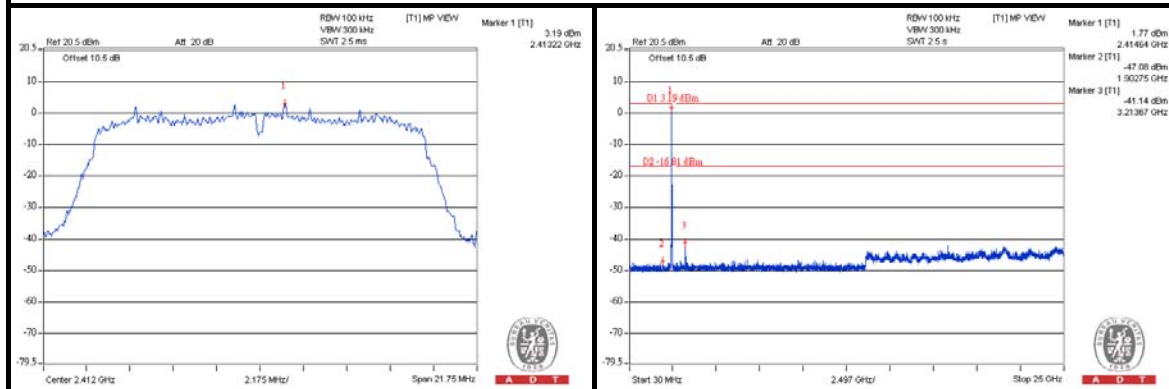

### CH 6

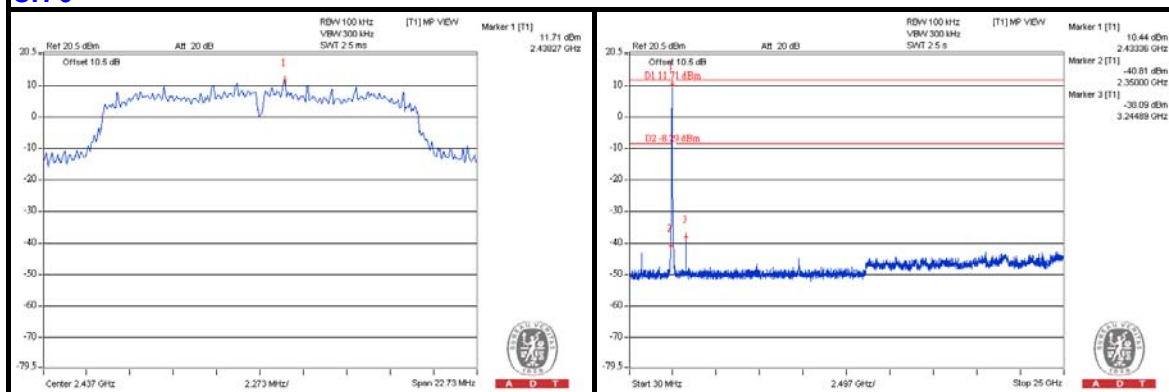

### CH 11

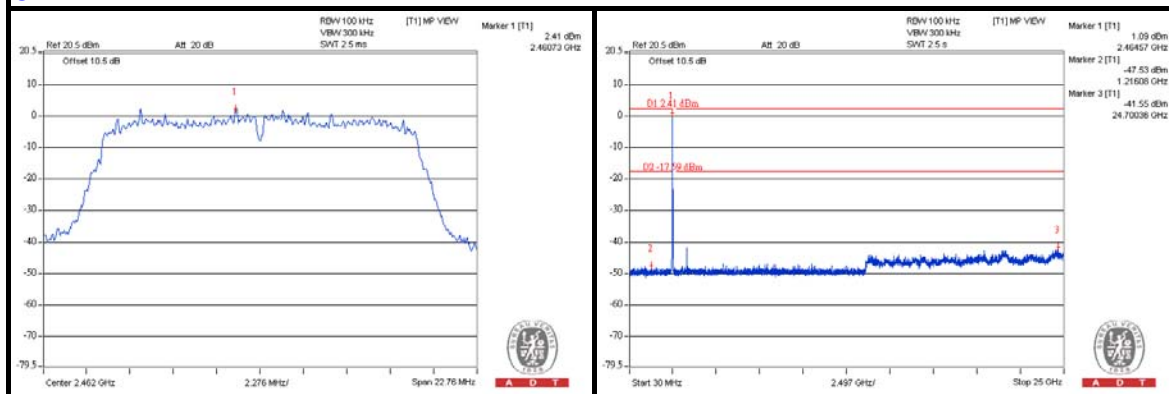





A D T



802.11n (HT20):

CHAIN (0)



CH 1

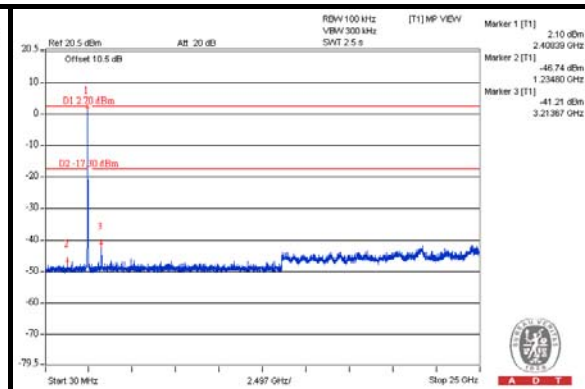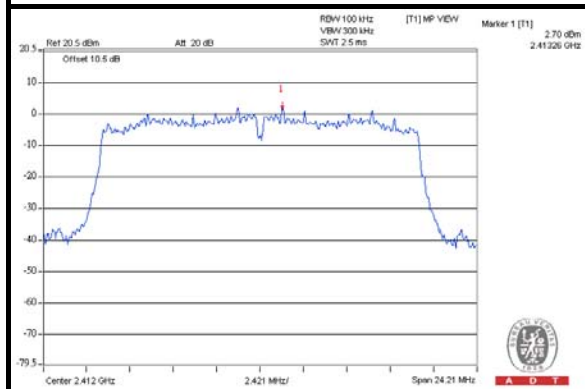

CH 6

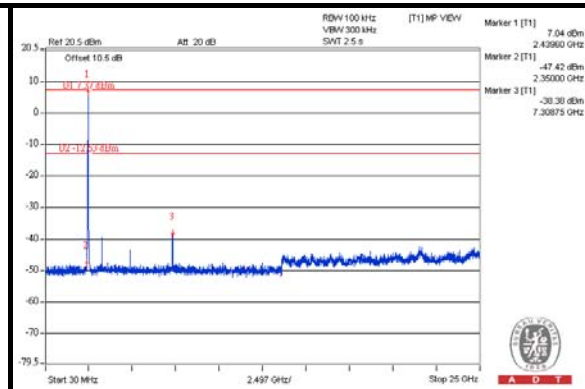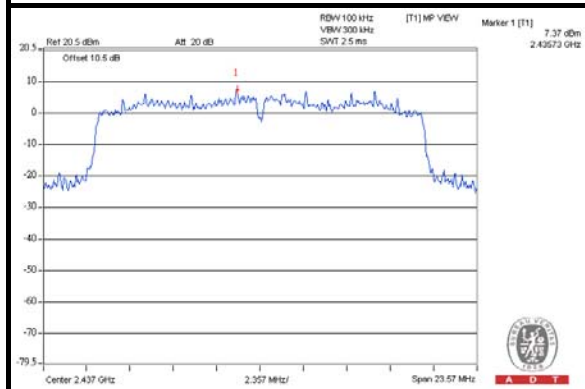

CH 11

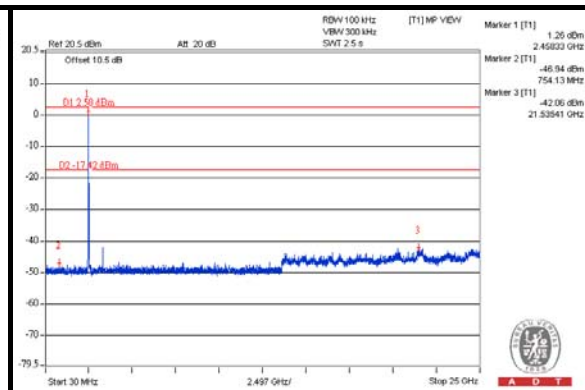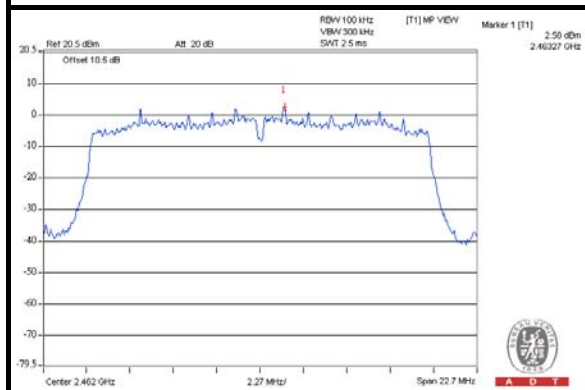





A D T

## CHAIN (1)


### CH 1

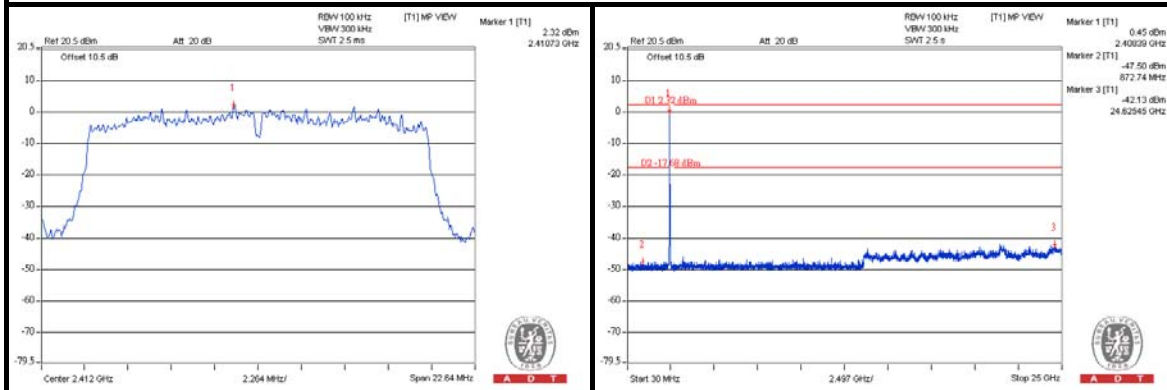

### CH 6

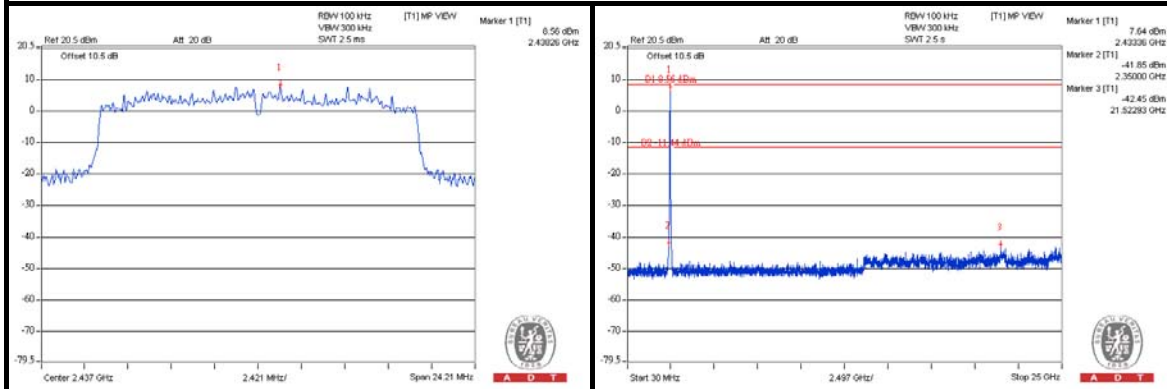

### CH 11

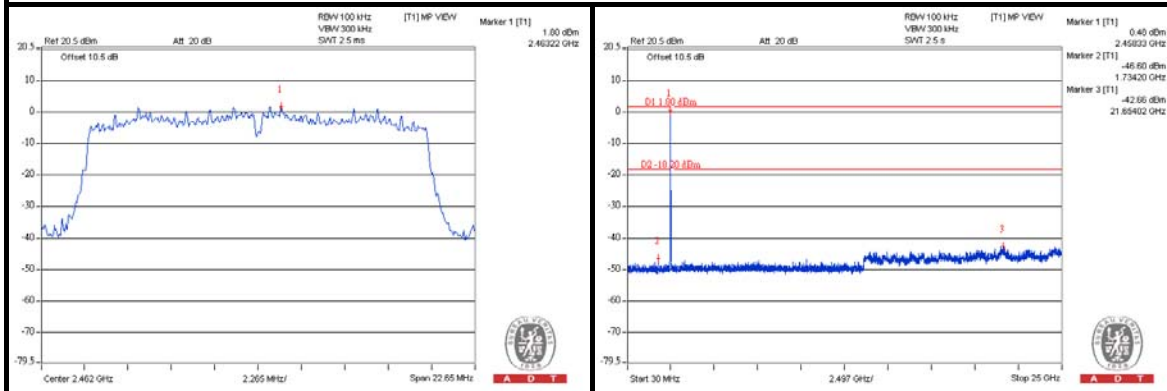




A D T


802.11n (HT40):

CHAIN (0)


CH 9

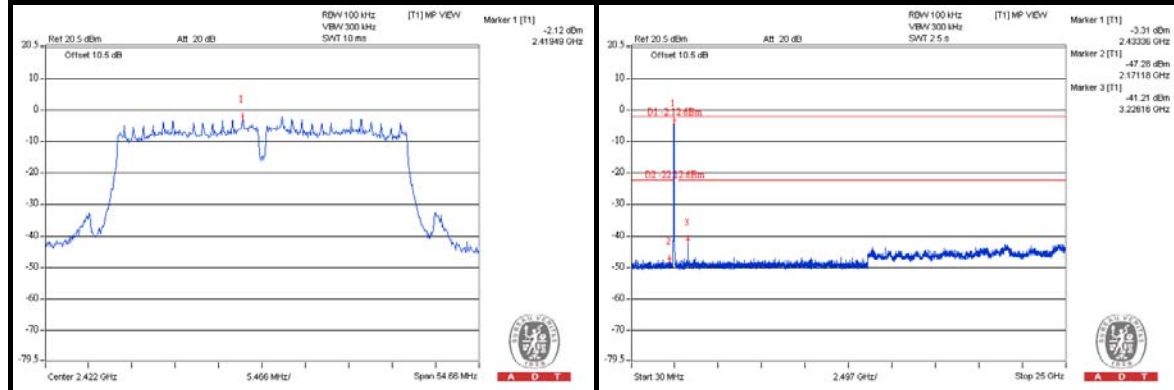

CH 6

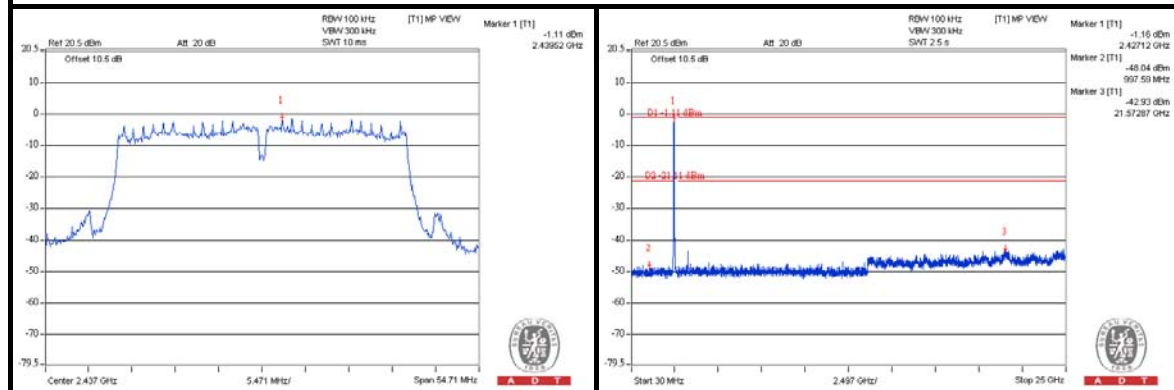

CH 9


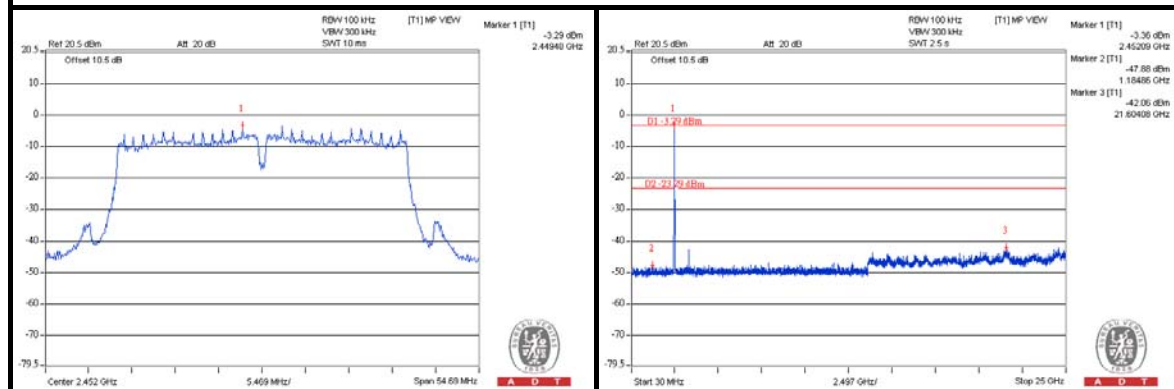






A D T

## CHAIN (1)



### CH 3

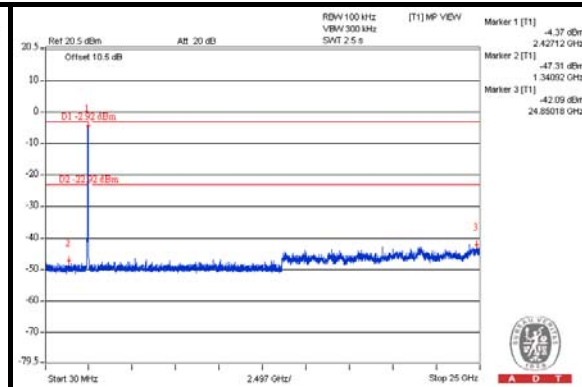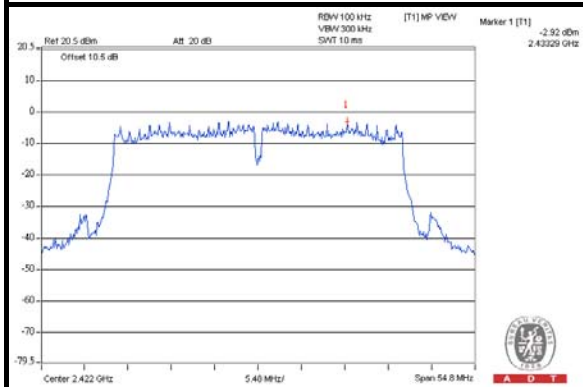

### CH 6

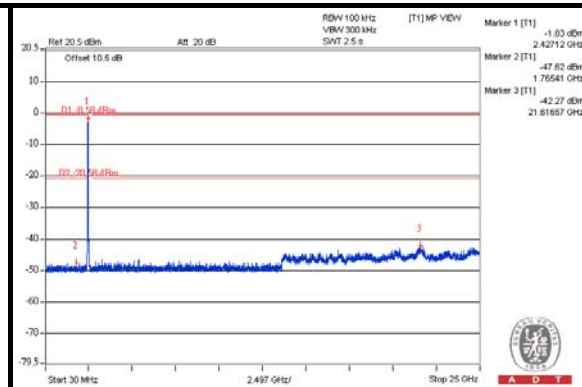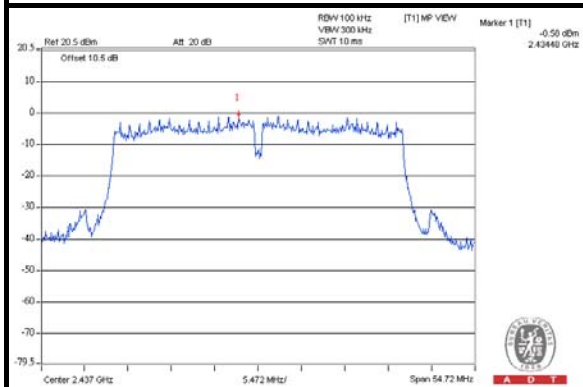

### CH 9

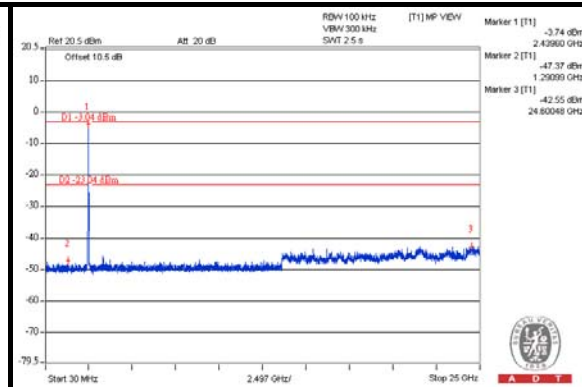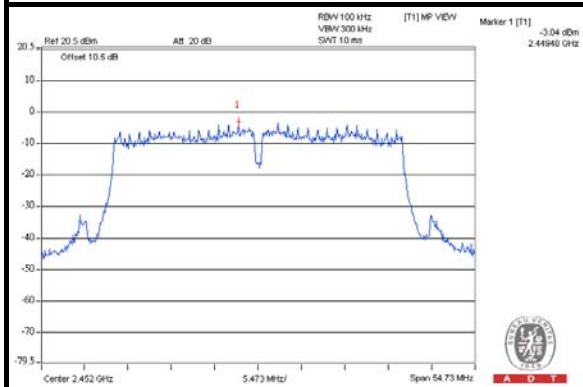



## 5. TEST TYPES AND RESULTS (FOR 5GHz, 5.725~5.850GHz Band)

### 5.1 CONDUCTED EMISSION MEASUREMENT

#### 5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

#### 5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 12, 2012	Mar.11, 2013
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 06, 2012	Sep. 05, 2013
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100072	June 08,2012	June 07,2013
RF Cable (JYEBAO)	5DFB	COCCAB-001	Aug. 28, 2012	Aug. 27, 2013
50 ohms Terminator	50	EMC-3	Sep. 25, 2012	Sep. 24, 2013
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

**Note:**

- The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
- The test was performed in Shielded Room No. C.
- The VCCI Con C Registration No. is C-3611.
- Tested Date: Jan. 25, 2013

### 5.1.3 TEST PROCEDURES

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) were not recorded.


#### NOTE:

- The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

### 5.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.1.5 TEST SETUP

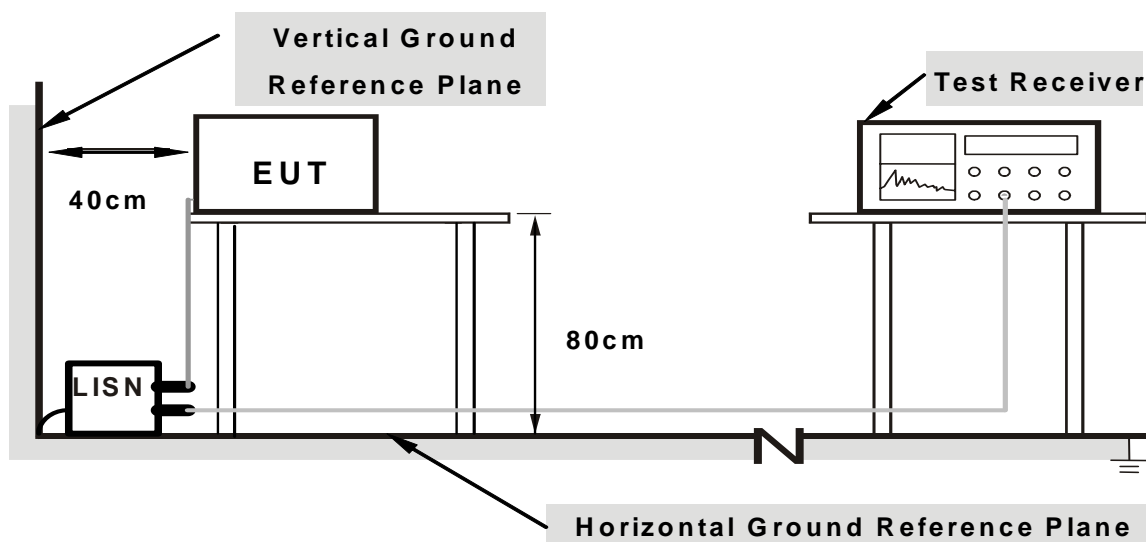

**Note: 1. Support units were connected to second LISN.**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 5.1.6 EUT OPERATING CONDITIONS

Same as the 4.1.6


## 5.1.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	----------------------	-----------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.11	59.82	45.50	59.93	45.61	65.79	55.79	-5.86	-10.18
2	0.17344	0.11	55.80	40.89	55.91	41.00	64.79	54.79	-8.88	-13.79
3	0.26328	0.13	52.28	40.72	52.41	40.85	61.33	51.33	-8.91	-10.47
4	0.32969	0.15	48.18	37.57	48.33	37.72	59.46	49.46	-11.13	-11.74
5	0.45078	0.16	48.54	37.92	48.70	38.08	56.86	46.86	-8.16	-8.78
6	0.51328	0.17	46.88	35.19	47.05	35.36	56.00	46.00	-8.95	-10.64
7	0.63047	0.17	45.84	33.56	46.01	33.73	56.00	46.00	-9.99	-12.27

### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

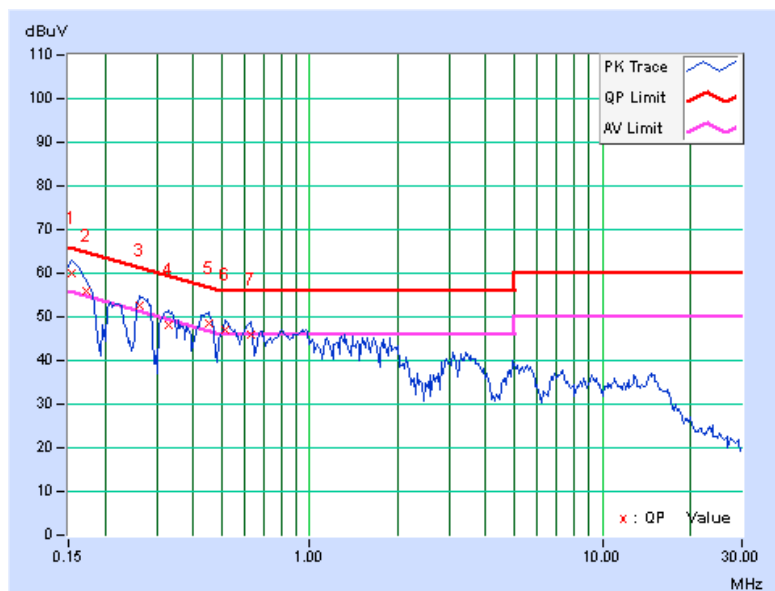


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.09	57.78	47.00	57.87	47.09	65.38	55.38	-7.51	-8.29
2	0.26719	0.12	52.38	39.67	52.50	39.79	61.20	51.20	-8.71	-11.42
3	0.33359	0.13	48.08	38.86	48.21	38.99	59.36	49.36	-11.15	-10.37
4	0.43516	0.15	48.08	35.83	48.23	35.98	57.15	47.15	-8.92	-11.17
5	0.52109	0.15	45.82	33.53	45.97	33.68	56.00	46.00	-10.03	-12.32
6	0.61875	0.16	45.86	36.23	46.02	36.39	56.00	46.00	-9.98	-9.61

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

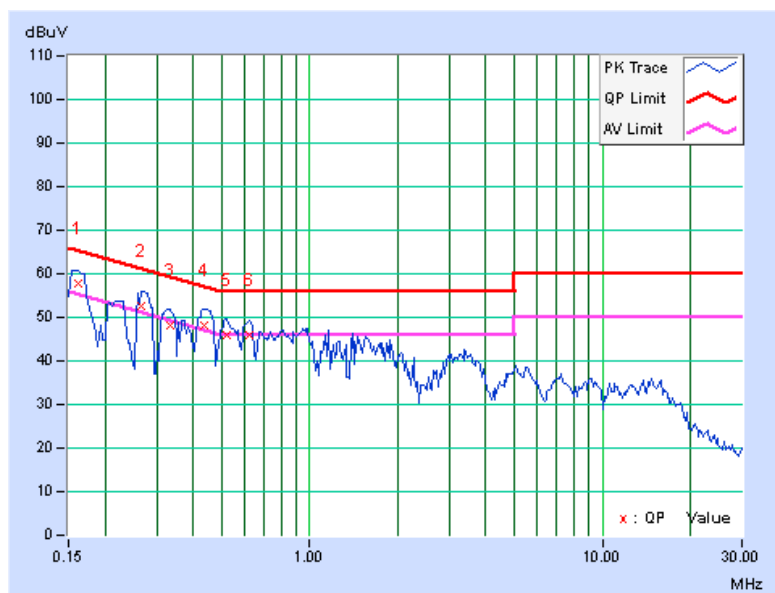

## 5.2 RADIATED AND BANDEGE EMISSION MEASUREMENT

### 5.2.1 LIMITS OF RADIATED AND BANDEGE EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

## 5.2.2 TEST INSTRUMENTS

For below 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Sep. 03, 2012	Sep. 02, 2013
Pre-Selector Agilent	N9039A	MY46520310	Sep. 03, 2012	Sep. 02, 2013
Signal Generator Agilent	N5181A	MY49060347	July 24, 2012	July 23, 2013
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A02465	Feb. 27, 2012	Feb. 26, 2013
SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Apr. 06, 2012	Apr. 05, 2013
Horn_Antenna AISI	AIH.8018	0000220091110	Nov. 27, 2012	Nov. 26, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 26, 2012	Dec. 25, 2013
RF Cable	NA	CHHCAB_001	Oct. 07, 2012	Oct. 06, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
- 5 The CANADA Site Registration No. is IC 7450H-3.
- 6 Tested Date: Jan. 15, 2013



A D T

**For above 1GHz test:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250254	July 09, 2012	July 08, 2013
Pre-Selector Agilent	N9039A	MY46520311	July 09, 2012	July 08, 2013
Signal Generator Agilent	N5181A	MY49060517	July 09, 2012	July 08, 2013
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A02578	June 26, 2012	June 25, 2013
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Apr. 09, 2012	Apr. 08, 2013
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 19, 2012	Nov. 18, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 25, 2012	Dec. 24, 2013
RF Cable	NA	CHGCAB_001	Oct. 06, 2012	Oct. 05, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Jan. 17, 2013



### 5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

### 5.2.4 DEVIATION FROM TEST STANDARD

No deviation

## 5.2.5 TEST SETUP

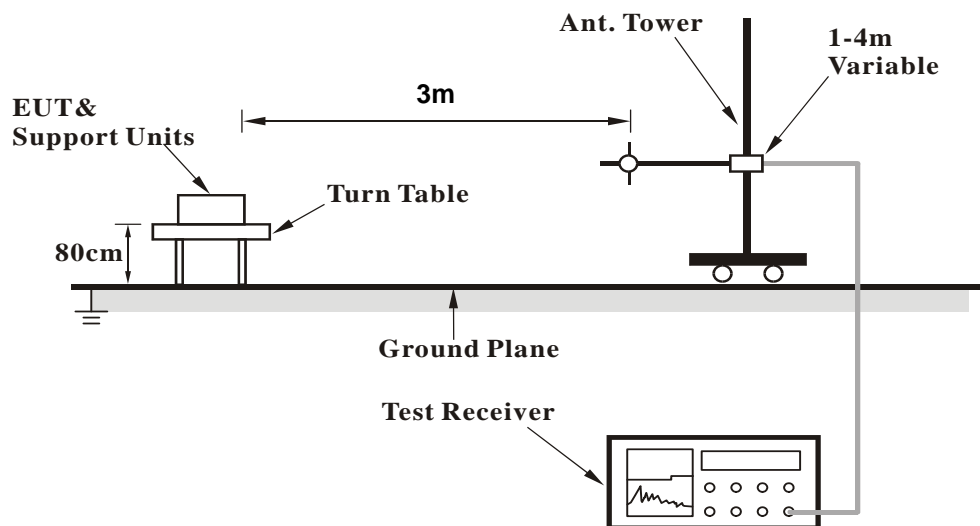

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 5.2.6 EUT OPERATING CONDITIONS

Same as the 4.1.6

## 5.2.7 TEST RESULTS

### BELOW 1GHz WORST-CASE DATA

#### 802.11n (HT20)

<b>CHANNEL</b>	TX Channel 165	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	197.00	29.2 QP	43.5	-14.3	1.00 H	245	17.85	11.32
2	345.00	40.4 QP	46.0	-5.6	1.25 H	100	23.97	16.42
3	460.00	32.7 QP	46.0	-13.3	1.63 H	154	13.59	19.13
4	500.00	33.8 QP	46.0	-12.2	1.42 H	71	13.71	20.10
5	625.00	37.8 QP	46.0	-8.2	1.45 H	135	15.18	22.61
6	750.00	37.5 QP	46.0	-8.5	1.34 H	124	12.85	24.64
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.00	32.1 QP	40.0	-7.9	1.45 V	67	19.02	13.05
2	58.65	29.4 QP	40.0	-10.6	1.34 V	85	15.83	13.57
3	374.92	36.8 QP	46.0	-9.3	1.23 V	21	19.60	17.15
4	500.00	32.2 QP	46.0	-13.8	1.32 V	187	12.08	20.10
5	624.95	33.6 QP	46.0	-12.4	1.02 V	245	11.02	22.61
6	875.03	39.7 QP	46.0	-6.3	1.34 V	187	12.99	26.73

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

## ABOVE 1GHz DATA

### 802.11a

<b>CHANNEL</b>	TX Channel 149	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	114.4 PK			1.00 H	100	72.03	42.37
2	*5745.00	104.4 AV			1.00 H	100	62.03	42.37
3	11490.00	58.6 PK	74.0	-15.4	1.00 H	137	9.84	48.76
4	11490.00	47.8 AV	54.0	-6.2	1.00 H	137	-0.96	48.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	108.8 PK			1.07 V	129	66.43	42.37
2	*5745.00	94.0 AV			1.07 V	129	51.63	42.37
3	11490.00	56.4 PK	74.0	-17.6	1.19 V	320	7.64	48.76
4	11490.00	46.4 AV	54.0	-7.6	1.19 V	320	-2.36	48.76

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	115.0 PK			1.05 H	108	72.56	42.44
2	*5785.00	104.7 AV			1.05 H	108	62.26	42.44
3	11570.00	58.9 PK	74.0	-15.1	1.00 H	139	10.19	48.71
4	11570.00	48.3 AV	54.0	-5.7	1.00 H	139	-0.41	48.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	108.8 PK			1.05 V	124	66.36	42.44
2	*5785.00	94.0 AV			1.05 V	124	51.56	42.44
3	11570.00	56.5 PK	74.0	-17.5	1.23 V	335	7.79	48.71
4	11570.00	46.7 AV	54.0	-7.3	1.23 V	335	-2.01	48.71

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	114.7 PK			1.02 H	123	72.13	42.57
2	*5825.00	104.3 AV			1.02 H	123	61.73	42.57
3	11650.00	58.6 PK	74.0	-15.4	1.00 H	148	9.68	48.92
4	11650.00	47.9 AV	54.0	-6.1	1.00 H	148	-1.02	48.92
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	108.8 PK			1.06 V	144	66.23	42.57
2	*5825.00	93.9 AV			1.06 V	144	51.33	42.57
3	11650.00	57.0 PK	74.0	-17.0	1.18 V	321	8.08	48.92
4	11650.00	46.7 AV	54.0	-7.3	1.18 V	321	-2.22	48.92

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. The limit value is defined as per 15.247.

# 802.11n (HT20)

<b>CHANNEL</b>	TX Channel 149	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	113.2 PK			1.53 H	138	70.83	42.37
2	*5745.00	103.9 AV			1.53 H	138	61.53	42.37
3	11490.00	59.2 PK	74.0	-14.8	1.00 H	148	10.44	48.76
4	11490.00	48.3 AV	54.0	-5.7	1.00 H	148	-0.46	48.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	108.4 PK			1.01 V	129	66.03	42.37
2	*5745.00	93.5 AV			1.01 V	129	51.13	42.37
3	11490.00	57.2 PK	74.0	-16.8	1.14 V	331	8.44	48.76
4	11490.00	47.1 AV	54.0	-6.9	1.14 V	331	-1.66	48.76

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	113.4 PK			1.57 H	139	70.96	42.44
2	*5785.00	103.9 AV			1.57 H	139	61.46	42.44
3	11570.00	58.9 PK	74.0	-15.1	1.00 H	160	10.19	48.71
4	11570.00	48.3 AV	54.0	-5.7	1.00 H	160	-0.41	48.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	108.2 PK			1.06 V	131	65.76	42.44
2	*5785.00	93.3 AV			1.06 V	131	50.86	42.44
3	11570.00	56.8 PK	74.0	-17.2	1.09 V	316	8.09	48.71
4	11570.00	46.7 AV	54.0	-7.3	1.09 V	316	-2.01	48.71

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. The limit value is defined as per 15.247.





A D T

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	113.0 PK			1.62 H	152	70.43	42.57
2	*5825.00	103.7 AV			1.62 H	152	61.13	42.57
3	11650.00	58.4 PK	74.0	-15.6	1.06 H	143	9.48	48.92
4	11650.00	47.7 AV	54.0	-6.3	1.06 H	143	-1.22	48.92

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	108.5 PK			1.09 V	118	65.93	42.57
2	*5825.00	93.5 AV			1.09 V	118	50.93	42.57
3	11650.00	56.5 PK	74.0	-17.5	1.23 V	306	7.58	48.92
4	11650.00	46.6 AV	54.0	-7.4	1.23 V	306	-2.32	48.92

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

## 802.11n (HT40)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	110.0 PK			1.58 H	144	67.61	42.39
2	*5755.00	100.2 AV			1.58 H	144	57.81	42.39
3	11510.00	58.3 PK	74.0	-15.7	1.11 H	155	9.56	48.74
4	11510.00	47.6 AV	54.0	-6.4	1.11 H	155	-1.14	48.74
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	109.0 PK			1.11 V	120	66.61	42.39
2	*5755.00	94.0 AV			1.11 V	120	51.61	42.39
3	11510.00	56.3 PK	74.0	-17.7	1.25 V	301	7.56	48.74
4	11510.00	46.2 AV	54.0	-7.8	1.25 V	301	-2.54	48.74

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	110.0 PK			1.58 H	143	67.55	42.45
2	*5795.00	100.2 AV			1.58 H	143	57.75	42.45
3	11590.00	58.5 PK	74.0	-15.5	1.15 H	154	9.80	48.70
4	11590.00	47.8 AV	54.0	-6.2	1.15 H	154	-0.90	48.70

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	108.7 PK			1.10 V	134	66.25	42.45
2	*5795.00	94.0 AV			1.10 V	134	51.55	42.45
3	11590.00	56.0 PK	74.0	-18.0	1.21 V	294	7.30	48.70
4	11590.00	46.1 AV	54.0	-7.9	1.21 V	294	-2.60	48.70

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. The limit value is defined as per 15.247.

### 5.3 6dB BANDWIDTH MEASUREMENT

#### 5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 5.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Jan. 15, 2013


#### 5.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 5.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 5.3.5 TEST SETUP



#### 5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 5.3.7 TEST RESULTS

#### 802.11a

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
149	5745	15.16	0.5	PASS
157	5785	15.18	0.5	PASS
165	5825	15.18	0.5	PASS

#### 802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	15.12	15.92	0.5	PASS
157	5785	15.12	15.75	0.5	PASS
165	5825	15.45	16.30	0.5	PASS

#### 802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
151	5755	36.12	36.36	0.5	PASS
159	5795	36.32	35.78	0.5	PASS

## 5.4 CONDUCTED OUTPUT POWER MEASUREMENT

### 5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725 –5850 MHz band: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT  $\leq$  4;  
 Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq$  40 MHz for any NANT;  
 Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT  $\geq$  5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

### 5.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 10, 2012	May 09, 2013
Power Sensor	MA2411B	0738172	May 10, 2012	May 09, 2013

- Note:** 3. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 4. Tested date : Jan. 15, 2013


### 5.4.3 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

### 5.4.4 DEVIATION FROM TEST STANDARD

No deviation.

### 5.4.5 TEST SETUP

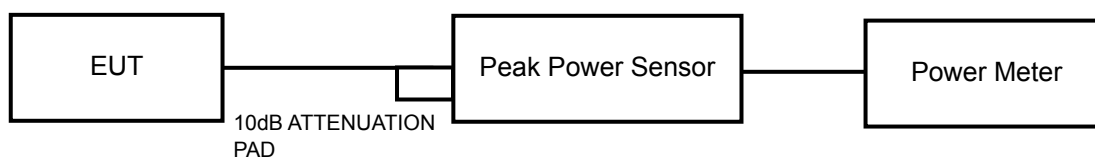

### 5.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6

## 5.4.7 TEST RESULTS

### 802.11a

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
149	5745	251.768	24.01	30	PASS
157	5785	251.189	24.00	30	PASS
165	5825	257.040	24.10	30	PASS

### 802.11n (HT20)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	23.37	23.45	438.579	26.42	30	PASS
157	5785	23.40	23.51	443.164	26.47	30	PASS
165	5825	23.81	23.71	475.399	26.77	30	PASS

### 802.11n (HT40)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
151	5755	23.30	23.38	431.567	26.35	30	PASS
159	5795	23.20	23.50	432.802	26.36	30	PASS

## 5.5 POWER SPECTRAL DENSITY MEASUREMENT

### 5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 5.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Jan. 07, 2013


### 5.5.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW = 10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

### 5.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.5.5 TEST SETUP



### 5.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



## 5.5.7 TEST RESULTS

### 802.11a

Channel	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
149	5745	-7.42	8	PASS
157	5785	-6.49	8	PASS
165	5825	-5.50	8	PASS

### 802.11n (HT20)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	-6.07	3.01	-3.06	5.67	PASS
	157	5785	-6.11	3.01	-3.10	5.67	PASS
	165	5825	-6.20	3.01	-3.19	5.67	PASS
1	149	5745	-5.82	3.01	-2.81	5.67	PASS
	157	5785	-6.37	3.01	-3.36	5.67	PASS
	165	5825	-5.97	3.01	-2.96	5.67	PASS

**NOTE:** Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 8.33\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8 - (8.33 - 6) = 5.67\text{dBm}$

### 802.11n (HT40)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	151	5755	-10.14	3.01	-7.13	5.67	PASS
	159	5795	-7.53	3.01	-4.52	5.67	PASS
1	151	5755	-9.75	3.01	-6.74	5.67	PASS
	159	5795	-9.62	3.01	-6.61	5.67	PASS

**NOTE:** Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 8.33\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8 - (8.33 - 6) = 5.67\text{dBm}$

## 5.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

### 5.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 5.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Jan. 15, 2013

### 5.6.3 TEST PROCEDURE

#### Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


#### Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

#### 5.6.4 DEVIATION FROM TEST STANDARD

No deviation

#### 5.6.5 TEST SETUP



#### 5.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

#### 5.6.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11a


CH 149

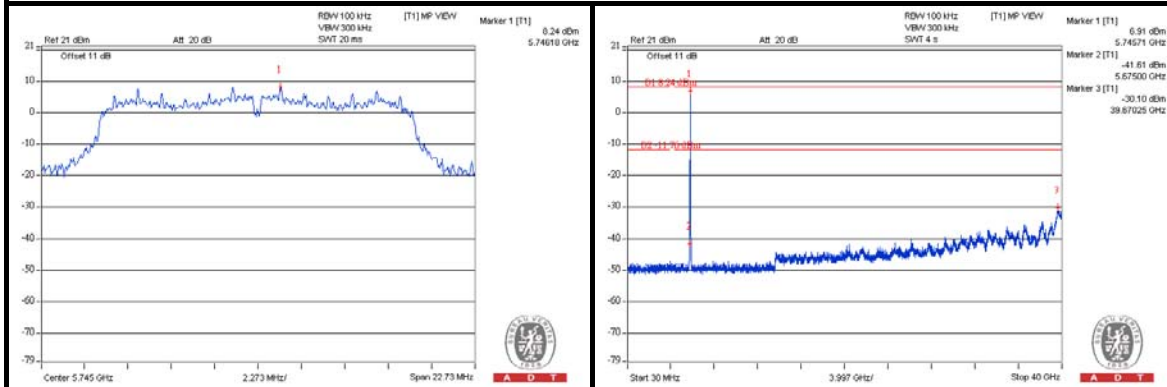

CH 157

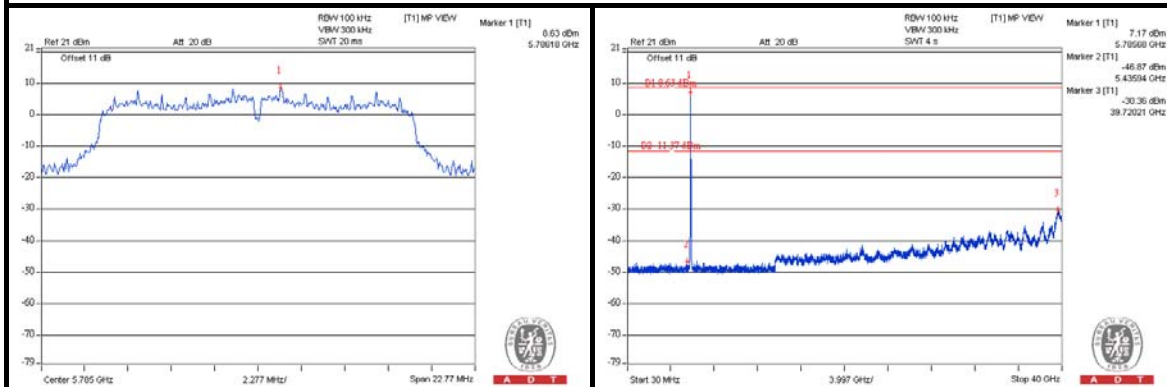

CH 165

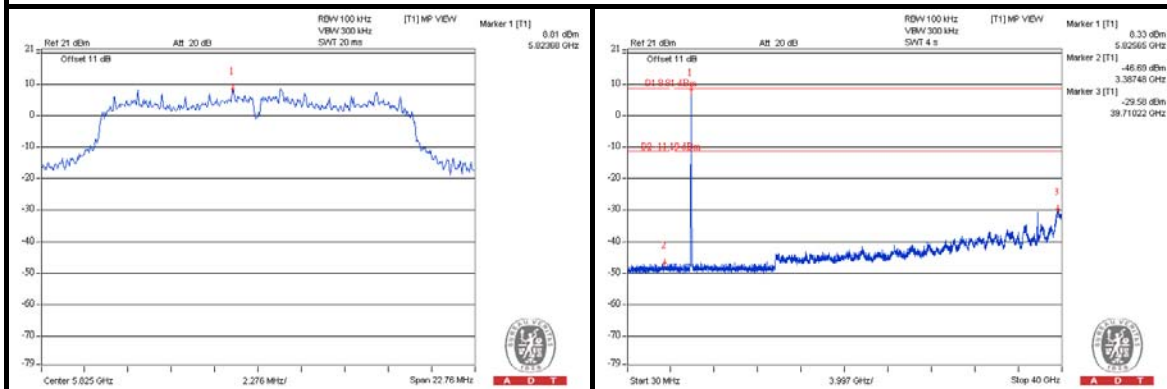





A D T



802.11n (HT20)

CHAIN (0)



CH 149

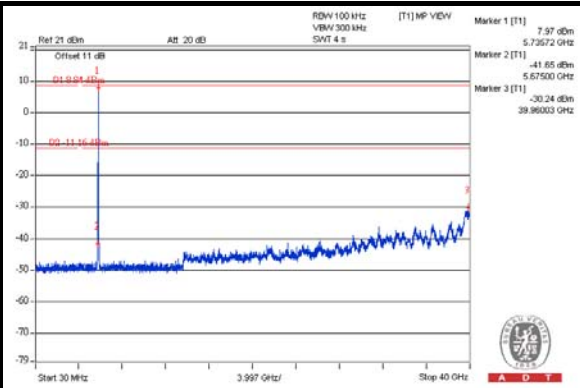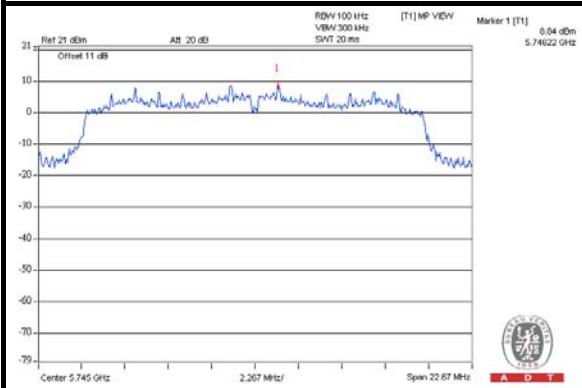

CH 157

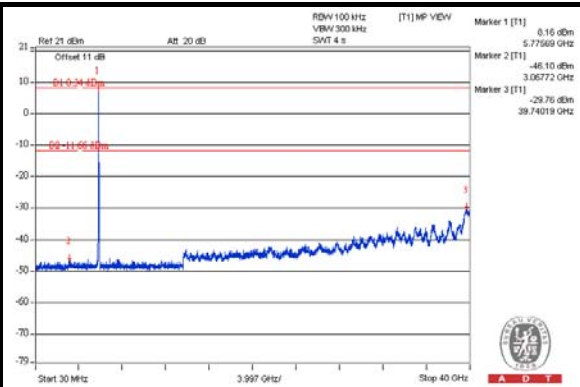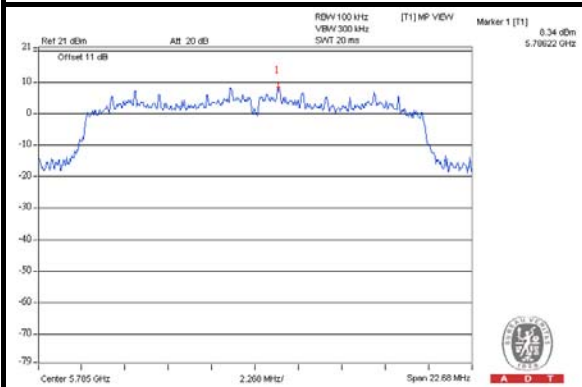


CH 165

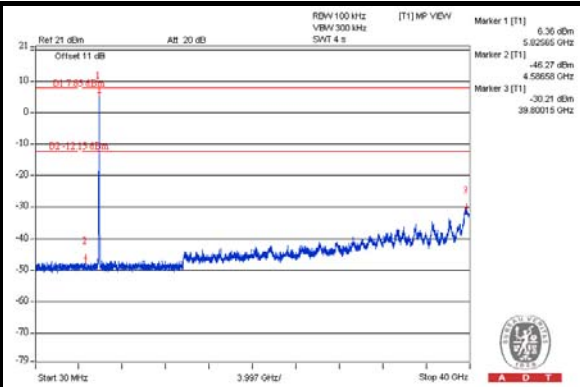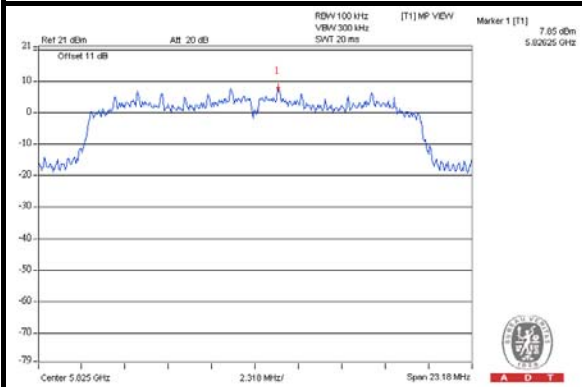




A D T


## CHAIN (1) CH 149

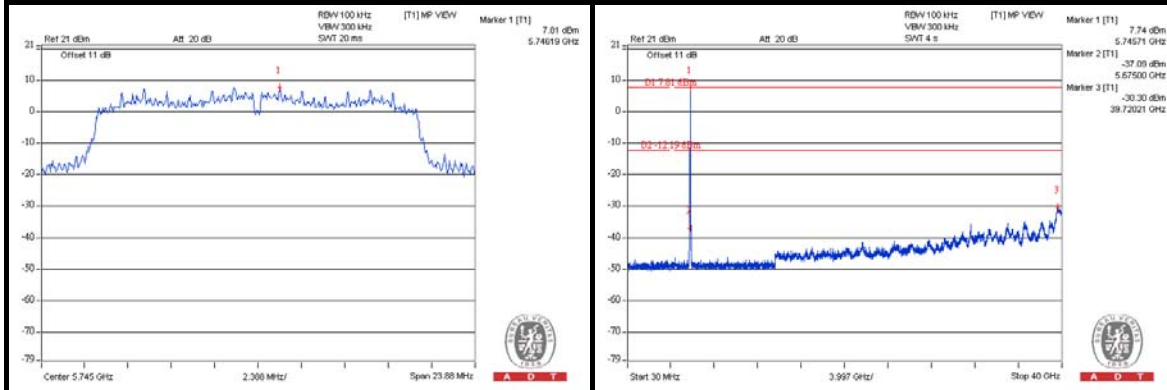

## CH 157

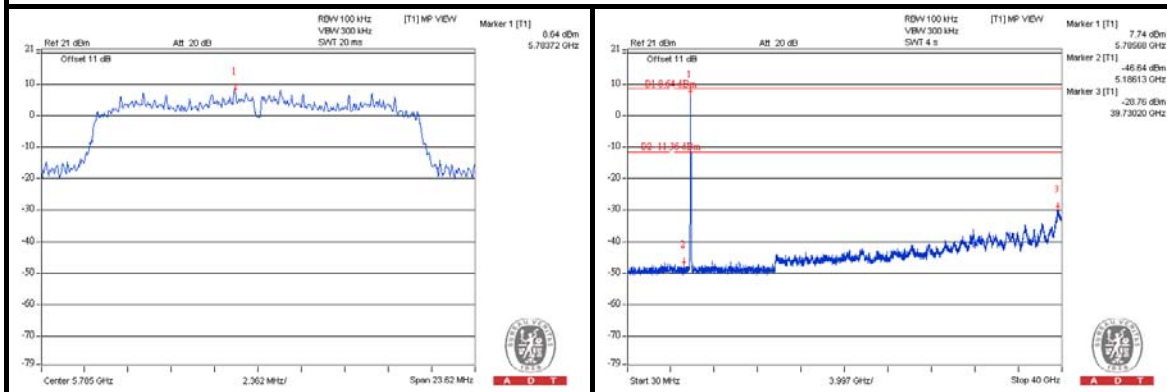

## CH 165

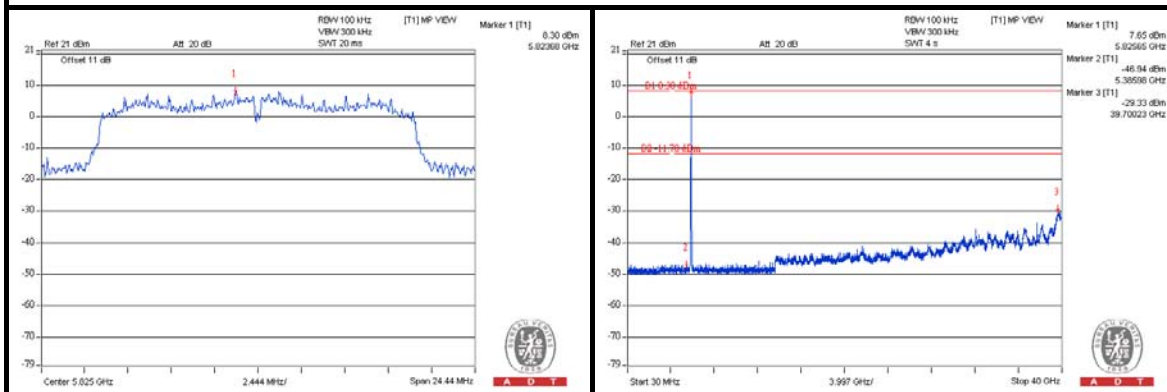




A D T


802.11n (HT40)

CHAIN (0)

CH 151

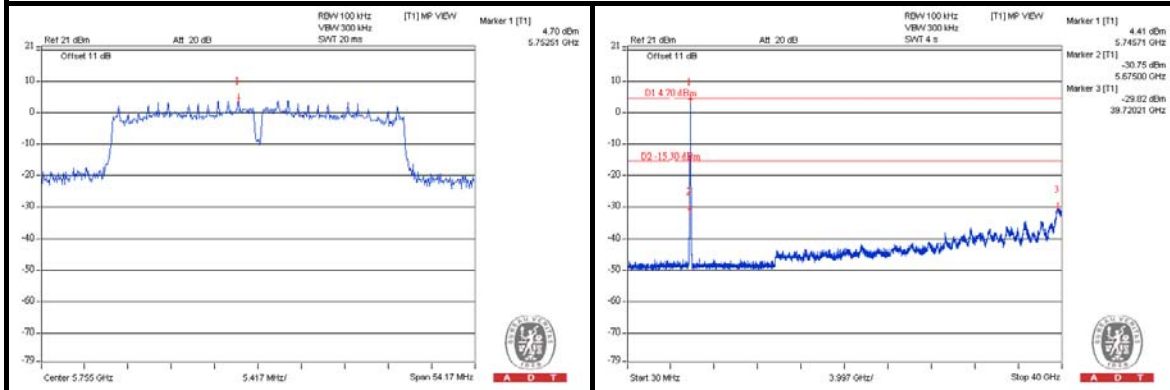

CH 159

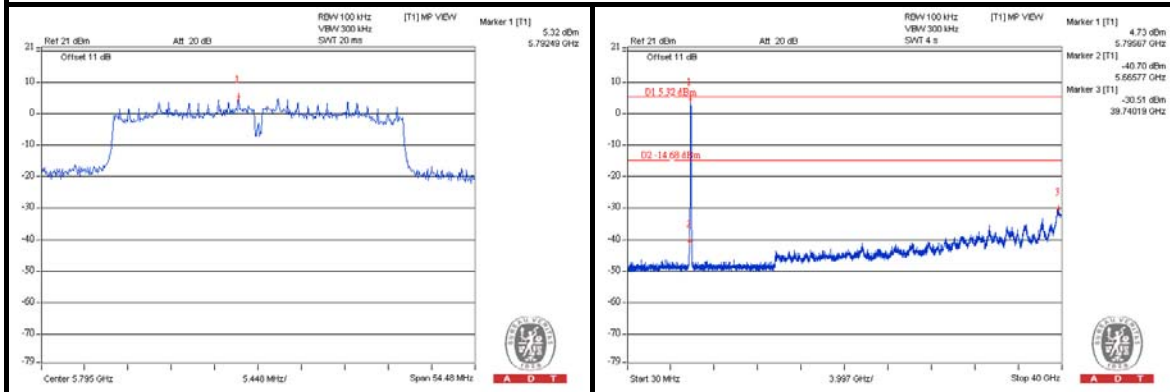





A D T

## CHAIN (1)

### CH 151

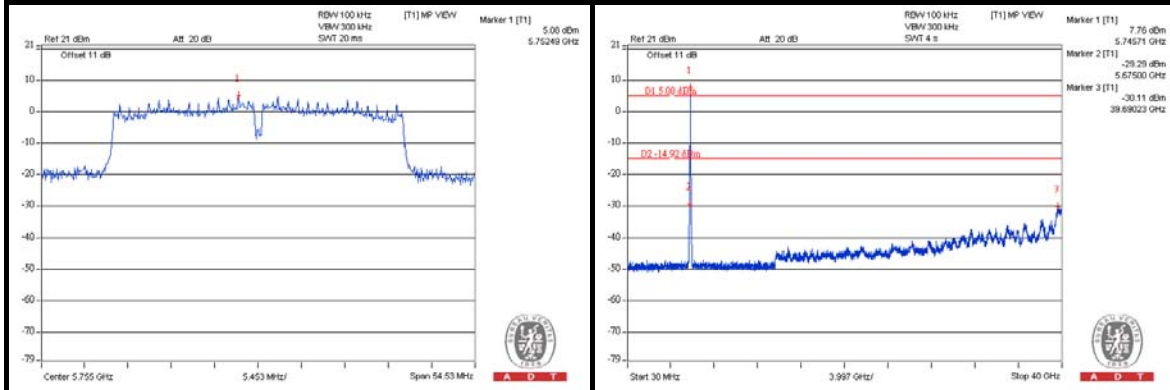

### CH 159

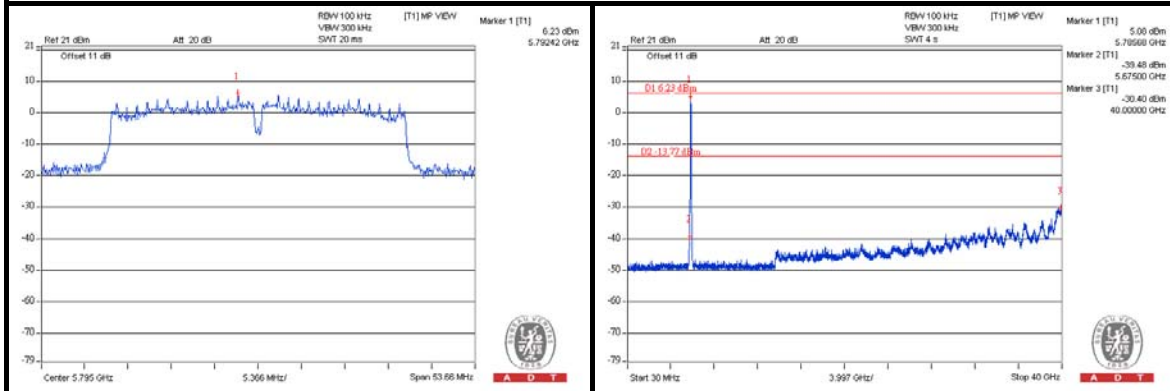



## 6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

## 7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.



A D T

## **8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No modifications were made to the EUT by the lab during the test.

**--- END ---**