




D		C		B		A
REV.	MARK	ECR/ECN NO.	DATE	UPDATE	DESCRIPTION	SIGNATURE
0.0	N/A	N/A	2011.10.07	First	Release	Longli

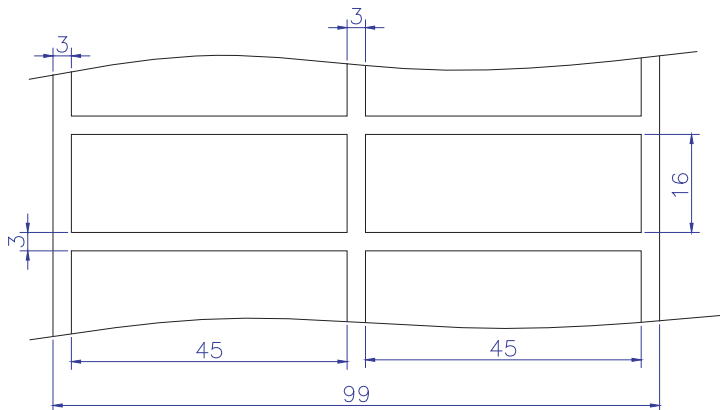

Package style

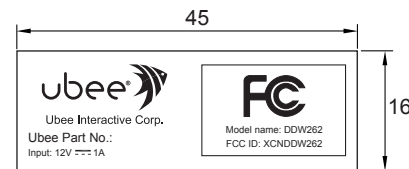

Scale: 1/1  
Vendor provide

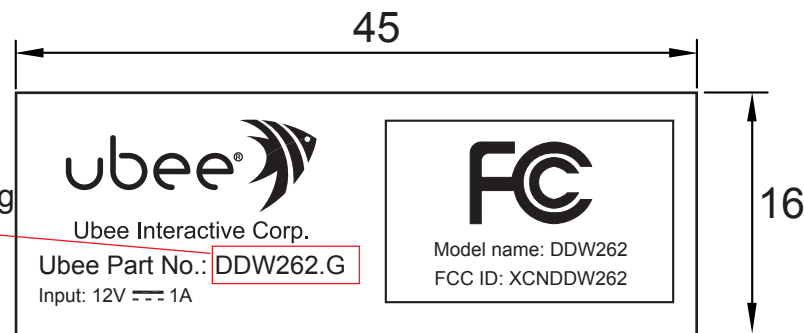

Scale: 2/1

When label in below environment condition it must be fine  
(adhesived on the housing smooth face(material ABS)):  
Temperature: -20℃ ~ 80℃, Humidity: 5% ~ 95%R.H.

### NOTES:

- 1.Material: #50 Mylar + 25# PET(matte, printable)
- 2.Adhesive: Acrylic
- 3.Adhesive thickness :  
50#Mylar: 0.024+/-0.003mm  
25#PET: 0.018+/-0.003mm
- 4.Printing Color:Black
- 5.Background: White
- 6.Packaging Style: Reel
- 7.The part must be RoHS compliant

標籤製作黏貼方式/U10C054.00/ 01 /3 OF 6

MATERIAL (SPEC.)										SCALE	<div>FOXCONN</div> <div>HON HAI PRECISION IND. CO., LTD.</div> <div>CNSBG</div>		
FINISH										SHEET			
Select								*		UNIT	PART NAME		
Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	Label	MM	PTT Label		
0~6	0.05	0.05	0.10	0.10	0.50	0.50	3.00	0.20	0.20				
6~30	0.10	0.15	0.20	0.50	0.50	5.00	2.00	0.25	0.20				
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.20				
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.20				
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20				
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20				
DRAFT TOLERANCE													