



FCC Test Report

FOR:

Manufacturer: System Planning Corporation

Model #: VERSA 203133-01

FCC ID: XDY-VERSA-01

47 CFR Part 15.247

TEST REPORT #: EMC_SYSTE_004_11001_DTS

DATE: 2013-03-22



**FCC
Accredited**

**IC recognized #
3462B**

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

TABLE OF CONTENTS

1	Assessment	4
2	Administrative Data.....	5
2.1	Identification of the Testing Laboratory Issuing the Test Report.....	5
2.2	Identification of the Client	5
2.3	Identification of the Manufacturer	5
3	Equipment under Test (EUT)	6
3.1	Specification of the Equipment under Test	6
3.2	Identification of the Equipment Under Test (EUT).....	6
3.3	Environmental conditions during Test:.....	7
3.4	Dates of Testing:	7
4	Subject of Investigation	8
5	Summary of Measurement Results.....	9
6	Measurements.....	10
6.1	Measurement Method:	10
6.2	Radiated Measurement Procedure	10
6.3	Sample Calculations for Radiated Measurements	12
6.3.1	Field Strength Measurements:	12
6.4	Conducted Measurement Procedure	13
6.5	Maximum Conducted Peak Output Power.....	14
6.5.1	Limits:.....	14
6.5.2	Test Conditions:.....	14
6.5.3	Test Procedure:	14
6.5.4	Test Result:	15
6.5.5	Test Data/plots:	16
6.6	Emission Bandwidth	18
6.6.1	Limits:.....	18
6.6.2	Test Conditions:.....	18
6.6.3	Test Procedure:	18
6.6.4	Test Result:	18
6.6.5	Test Data/plots:	19
6.7	Maximum Power Spectral Density Level in the Fundamental Emission	22
6.7.1	Limits:.....	22
6.7.2	Test Conditions:.....	22
6.7.3	Test procedure:.....	22
6.7.4	Test results:	22
6.7.5	Test Data/plots:	23
6.8	Unwanted Emissions into Non-Restricted Frequency Bands- Conducted.....	25
6.8.1	Reference and Limits:.....	25

6.8.2	Test Conditions:.....	25
6.8.3	Test procedure:.....	25
6.8.4	Test data/ plots:	25
6.8.5	Test data/ plots:	26
6.9	Unwanted Emissions into Restricted Frequency Bands- Radiated.....	28
6.9.1	Limits: §15.247/15.205.....	28
6.9.2	Test Conditions:.....	29
6.9.3	Measurement Procedure:	29
6.9.4	Test Data/plots:	30
6.10	Transmitter Spurious Emissions- Radiated.....	32
6.10.1	Limits:	32
6.10.2	Test Result:	32
6.10.3	Test data/ plots:	33
7	Test Equipment and Ancillaries used for tests.....	41
8	Radiated Test Setup Diagrams	42
9	Revision History	43

1 Assessment

The following device was tested against the applicable criteria specified in FCC rules Parts 15.247 of Title 47 of the Code of Federal Regulations

No deviations were ascertained during the course of the tests performed.

Company	Description	Model #
System Planning Corporation	Local Control for remote installations	VERSA 203133-01

Responsible for Testing Laboratory:

Sajay Jose

2013-03-22 Compliance

(Test Lab Manager)

Date	Section	Name	Signature
------	---------	------	-----------

Responsible for the Report:

Tunji Yusuf

2013-03-22 Compliance

(EMC Engineer)

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Section3.

CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Test Lab Manager:	Sajay Jose
Test Engineer:	Tunji Yusuf

2.2 Identification of the Client

Client:	System Planning Corporation
Street Address:	3601 Wilson Blvd, Suite 500
City/Zip Code	Arlington VA 22201
Country	USA
Contact Person:	Ronald Martin
Phone No.	703-351-8203
e-mail:	martin@sysplan.com

2.3 Identification of the Manufacturer

Same as Client.

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Model No./Name:	VERSA 203133-01
Product Description:	Local Control for remote installations.
Hardware Version :	203133 -05
Software Version:	7.45.1 (SV08)
FCC ID:	XDY-VERSA-01
Mode and Frequency Range of Test:	IEEE 802.15.4 (ZigBee) 2.405- 2.480 GHz
No. of Channels:	16
Type(s) of Modulation:	O-QPSK
Other Radios included in the device:	Sierra Wireless Q2687: GSM 850/900/1800/1900 MHz Satellite Transmitter: 1610-1625 MHz GPS: Rx only 1575 MHz
Antenna Info:	Internal Ceramic Antenna Model: Johanson 2450AT18B100 Manufacturer reported peak gain (dBi):0.5
Max Output Power (dBm):	Conducted (Measured): 0.39 Radiated (Calculated): 0.89
Rated Operating Voltage (V DC):	3.6
Rated Operating Temperature Range:	-40°C ~ +85°C
Test Sample Status:	Pre-Production

3.2 Identification of the Equipment Under Test (EUT)

EUT #	Serial Number/IMEI	HW Version	SW Version
1	35242104127809608	203133 -05	7.45.1 (SV08)

3.3 Environmental conditions during Test:

The following environmental conditions were maintained during the course of testing:

Ambient Temperature: 20-25°C

Relative humidity: 40-60%

3.4 Dates of Testing:

Jan 16, Mar 16 2012.

Jan 25, 2013 for conducted measurements.

4 Subject of Investigation

The objective of the measurements applied by CETECOM Inc. was to establish compliance of the EUT as described under Ch. 3 of this Test Report, with the applicable criteria specified in

- FCC CFR47 Parts 15.247, 15.207, 15.209

This test report is to support a request for new equipment authorization under FCC ID: XDY-VERSA-01.

During the testing process the EUT was tested on low, mid and high channels in IEEE 802.15.4 (ZigBee) mode.

For radiated measurements, all data in this report shows the worst case between horizontal and vertical antenna polarizations and for all 3 orthogonal orientations of the EUT.

5 Summary of Measurement Results

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	Fail	NA	NP	Result
§15.247(e)	Power Spectral Density	Nominal	IEEE 802.15.4 (ZigBee)	■	□	□	□	Complies
§15.247(a)(1)	Carrier Frequency Separation	Nominal	IEEE 802.15.4 (ZigBee)	□	□	■	□	Note 1
§15.247(a)(1)	Number of Hopping Channels	Nominal	IEEE 802.15.4 (ZigBee)	□	□	■	□	Note 1
§15.247(a)(1)(iii)	Time of occupancy	Nominal	IEEE 802.15.4 (ZigBee)	□	□	■	□	Note 1
§15.247(a)(1)	Spectrum Bandwidth	Nominal	IEEE 802.15.4 (ZigBee)	■	□	□	□	Complies
§15.247(b)(1)	Maximum Output Power	Nominal	IEEE 802.15.4 (ZigBee)	■	□	□	□	Complies
§15.247(d)	Band edge compliance-Conducted	Nominal	IEEE 802.15.4 (ZigBee)	□	□	□	■	Note 2
§15.247(d)	Band edge compliance-Radiated	Nominal	IEEE 802.15.4 (ZigBee)	■	□	□	□	Complies
§15.247(d)	TX Spurious emissions-Conducted	Nominal	IEEE 802.15.4 (ZigBee)	■	□	□	□	Complies
§15.247(d)	TX Spurious emissions-Radiated	Nominal	IEEE 802.15.4 (ZigBee)	■	□	□	□	Complies
§15.209(a)	TX Spurious Emissions Radiated<30MHz	Nominal	IEEE 802.15.4 (ZigBee)	■	□	□	□	Complies
§15.207(a)	Conducted Emissions <30MHz	Nominal	IEEE 802.15.4 (ZigBee)	□	□	■	□	Note 3

Note: NA= Not Applicable; NP= Not Performed.

1. Only applicable for Hopping transmitters
2. Band Edge compliance-conducted is NOT PERFORMED as the device passes radiated measurement.
3. EUT is an internal battery operated vehicular device.

6 Measurements

6.1 Measurement Method:

All radiated and conducted testing is performed according to guidelines in FCC publication KDB558074 D01Meas Guidance v02: Measurement Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) operating under 15.247, Oct 2012.

6.2 Radiated Measurement Procedure

ANSI C63.4:2003 Section 8.3.1.1: Exploratory radiated emission measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT. At near distances, for EUTs of comparably small size, it is relatively easy to determine the spectrum signature of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. A shielded room may be used for exploratory testing, but may have anomalies that can lead to significant errors in amplitude measurements.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of testing. It is recommended that either a headset or loudspeaker be connected as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT when the exploratory and final testing is performed in an OATS with strong ambient signals. Caution should be taken if either antenna height between 1 and 4 meters or EUT azimuth is not fully explored. Not fully exploring these parameters during exploratory testing may require complete testing at the OATS or semi-anechoic chamber when the final full spectrum testing is conducted.

The EUT should be set up in its typical configuration and arrangement, and operated in its various modes. For tabletop systems, cables or wires should be manipulated within the range of likely arrangements. For floor-standing equipment, the cables or wires should be located in the same manner as the user would install them and no further manipulation is made. For combination EUTs, the tabletop and floor-standing portions of the EUT shall follow the procedures for their respective setups and cable manipulation. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions.

For each mode of operation required to be tested, the frequency spectrum shall be monitored. Variations in antenna height between 1 and 4 m, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) shall be explored to produce the emission that has the highest amplitude relative to the limit. A step-by-step technique for determining this emission can be found in Annex C.

When measuring emissions above 1 GHz, the frequencies of maximum emission shall be determined by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display. It will be advantageous to have prior knowledge of the frequencies of emissions above 1 GHz. If the EUT is a device with dimensions approximately equal to that of the measurement antenna beamwidth, the measurement antenna shall be aligned with the EUT.

ANSI C63.4:2003 Section 8.3.1.2: Final radiated emission measurements

Based on the measurement results in 8.3.1.1, the one EUT, cable and wire arrangement, and mode of operation that produces the emission that has the highest amplitude relative to the limit is selected for the final measurement. The final measurement is then performed on a site meeting the requirements of 5.3, 5.4, or 5.5 as appropriate without variation of the EUT arrangement or EUT mode of operation. If the EUT is relocated from an exploratory test site to a final test site, the highest emission shall be remaximized at the final test location before final radiated emissions measurements are performed. However, antenna height and polarity and EUT azimuth are to be varied. In addition, the full frequency spectrum (for the range to be checked for meeting compliance) shall be investigated.

This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. During the full frequency spectrum investigation, particular focus should be made on those frequencies found in exploratory testing that were used to find the final test configuration, mode of operation, and arrangement (associated with achieving the least margin with respect to the limit). This full spectrum test constitutes the compliance measurement.

For measurements above 1 GHz, use the cable, EUT arrangement, and mode of operation determined in the exploratory testing to produce the emission that has the highest amplitude relative to the limit. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the antenna in the “cone of radiation” from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response. The antenna may have to be higher or lower than the EUT, depending on the EUT’s size and mounting height, but the antenna should be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. If the transmission line for the measurement antenna restricts its range of height and polarization, the steps needed to ensure the correct measurement of the maximum emissions, shall be described in detail in the report of measurements. Data collected shall satisfy the report requirements of Clause 10.

NOTES

- 1— Where limits are specified by agencies for both average and peak (or quasi-peak) detection, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.
- 2—Use of waveguide and flexible waveguide may be necessary at frequencies above 10 GHz to achieve usable signal-to noise ratios at required measurement distances. If so, it may be necessary to restrict the height search of the antenna, and special care should be taken to ensure that maximum emissions are correctly measured.
- 3—All presently known devices causing emissions above 10 GHz are physically small compared with the beam-widths of typical horn antennas used for EMC measurements. For such EUTs and frequencies, it may be preferable to vary the height and polarization of the EUT instead of the receiving antenna to maximize the measured emissions.

Measurement Uncertainty: $\pm 3\text{dB}$

6.3 Sample Calculations for Radiated Measurements

6.3.1 Field Strength Measurements:

Measurements from the Spectrum Analyzer/ Receiver are used to calculate the Field Strength, taking into account the following parameters:

1. Measured reading in dB μ V
2. Cable Loss between the receiving antenna and SA in dB and
3. Antenna Factor in dB/m


FS (dB μ V/m) = Measured Value on SA (dB μ V) + Cable Loss (dB) + Antenna Factor (dB/m)

Eg:

Frequency (MHz)	Measured SA (dB μ V)	Cable Loss (dB)	Antenna Factor Correction (dB)	Field Strength Result (dB μ V/m)
1000	80.5	3.5	14	98.0

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the above equation.

6.4 Conducted Measurement Procedure

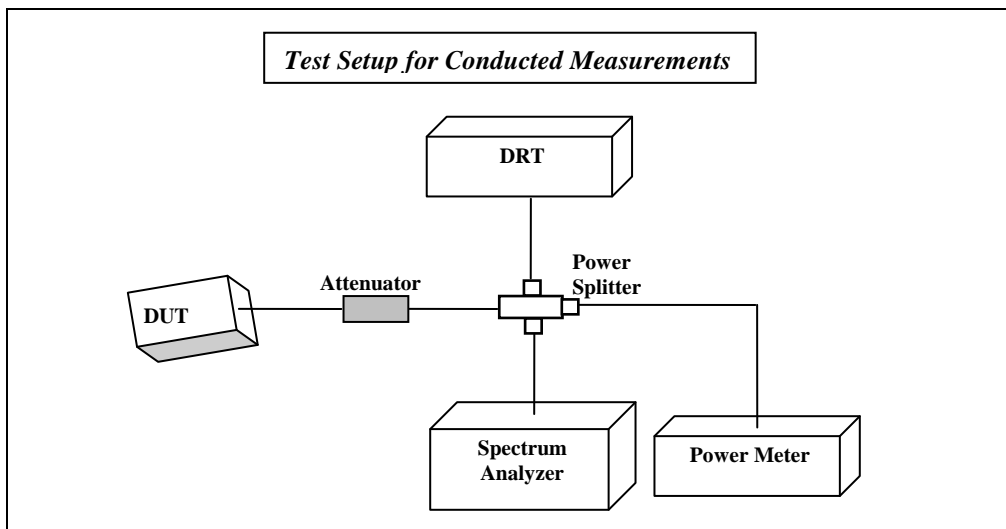

1. Connect the equipment as shown in the above diagram.
 2. Adjust the settings of the Digital Radio Communication Tester (DRT) to connect the EUT at the required channel (OR) alternatively use the EUT to set to transmit at a specific mode.
 3. Measurements are to be performed with the EUT set to the low, middle and high channels.
- Measurement Uncertainty: $\pm 0.5\text{dB}$

6.5 Maximum Conducted Peak Output Power

6.5.1 Limits:

6.5.1.1 §15.247 (b)(3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

6.5.2 Test Conditions:

Tnom: 23°C; Vnom: 3.6V DC

6.5.3 Test Procedure:

Measurement according to FCC KDB 558074 D01 DTS Meas Guidance v02, section 8.1.1- Option 1

Spectrum Analyzer settings:

RBW=2MHz, VBW=6MHz, Detector: Peak- Max Hold.

Sweep Time: Auto

Span=4MHz

Reported Antenna Gain (dBi): 0.5 dBi for all channels.

6.5.4 Test Result:

Measured Maximum Peak Conducted Output Power (dBm)			
Mode	Frequency (MHz)		
	2405 Channel 11	2440 Channel 18	2480 Channel 26
	Peak	Peak	Peak
IEEE 802.15.4 (ZigBee)	0.39	0.10	-0.14


Calculated Maximum Peak Radiated Output Power (dBm)			
Mode	Frequency (MHz)		
	2405 Channel 11	2440 Channel 18	2480 Channel 26
IEEE 802.15.4 (ZigBee)	0.89	0.60	0.36

Note: Radiated EIRP = *Conducted Measurement* + *Antenna Gain*


6.5.4.1 Measurement Verdict:
Pass.

6.5.5 Test Data/plots:

Conducted Peak Power 2405 MHz

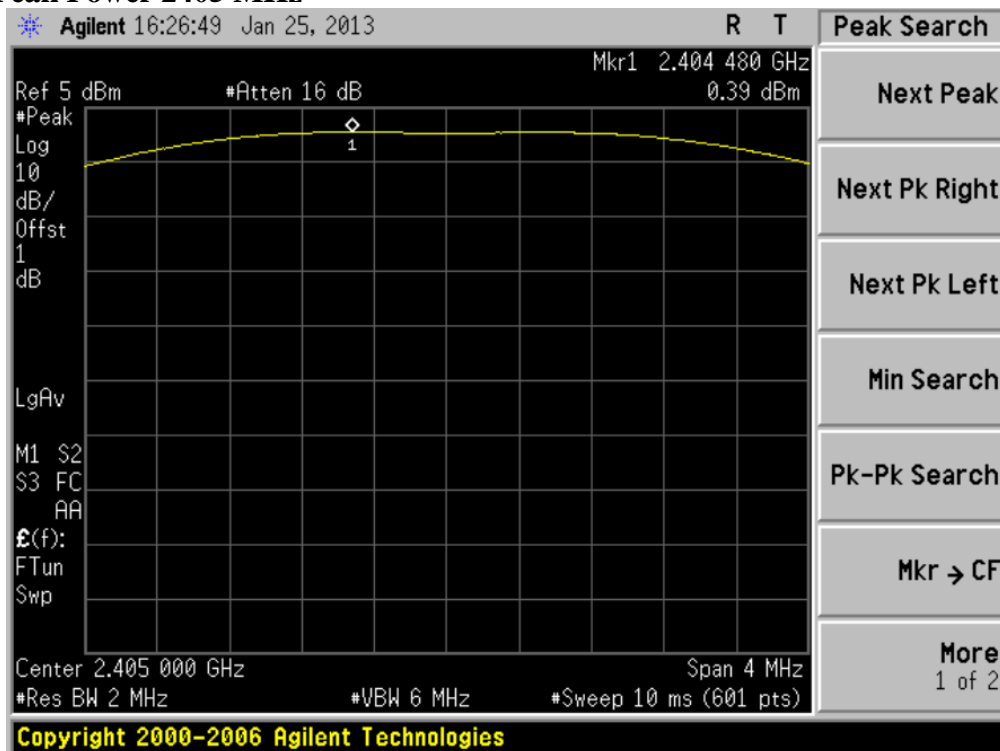


Conducted Peak Power 2440 MHz

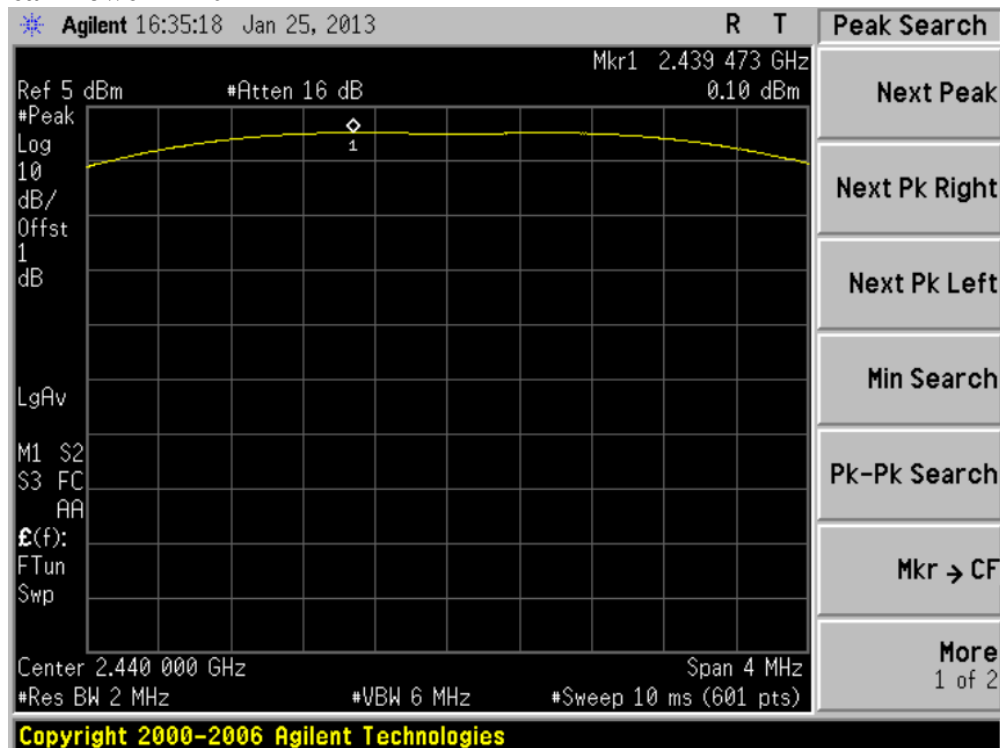



Conducted Peak Power 2480 MHz

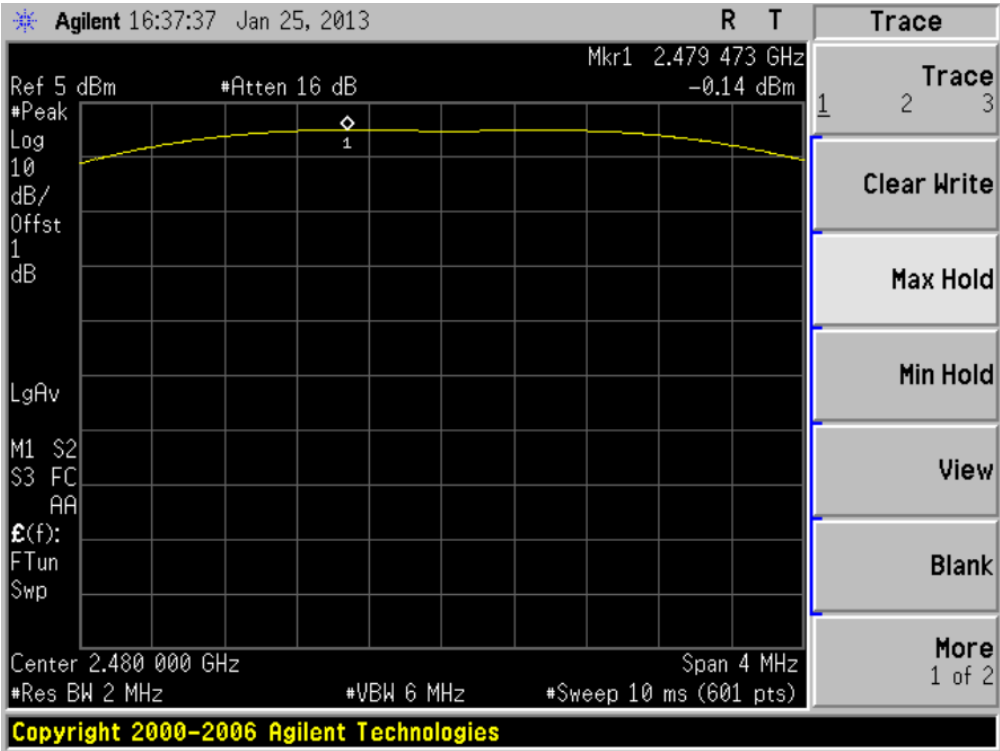

6.6 Emission Bandwidth

6.6.1 Limits:

6.6.1.1 §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.6.2 Test Conditions:

Tnom: 23°C; Vnom: 3.6V

6.6.3 Test Procedure:

Measurement according to FCC KDB 558074 D01 Meas Guidance

Spectrum Analyzer settings:

RBW=100 kHz, VBW=300 kHz, Detector: Peak- Max hold;

Sweep Time: Auto

Span=50 MHz

Measurement Uncertainty: ±10 kHz

6.6.4 Test Result:


Emission Bandwidth (MHz)						
Mode	Frequency (MHz)					
	2405 Channel 11		2440 Channel 18		2480 Channel 26	
	6dB	20dB/ 99%	6dB	20dB/ 99%	6dB	20dB/ 99%
IEEE 802.15.4 (ZigBee)	1.282	2.484	1.282	2.404	1.282	2.484

6.6.4.1 Measurement Verdict:

Pass.


6.6.5 Test Data/plots:

6dB Bandwidth 2405 MHz

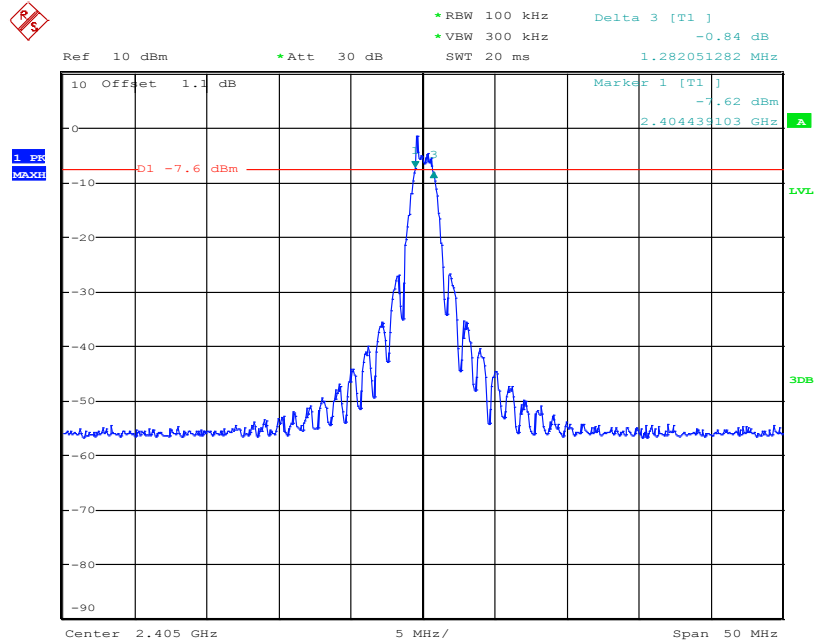


Date: 16.MAR.2012 12:58:32

6dB Bandwidth 2440 MHz

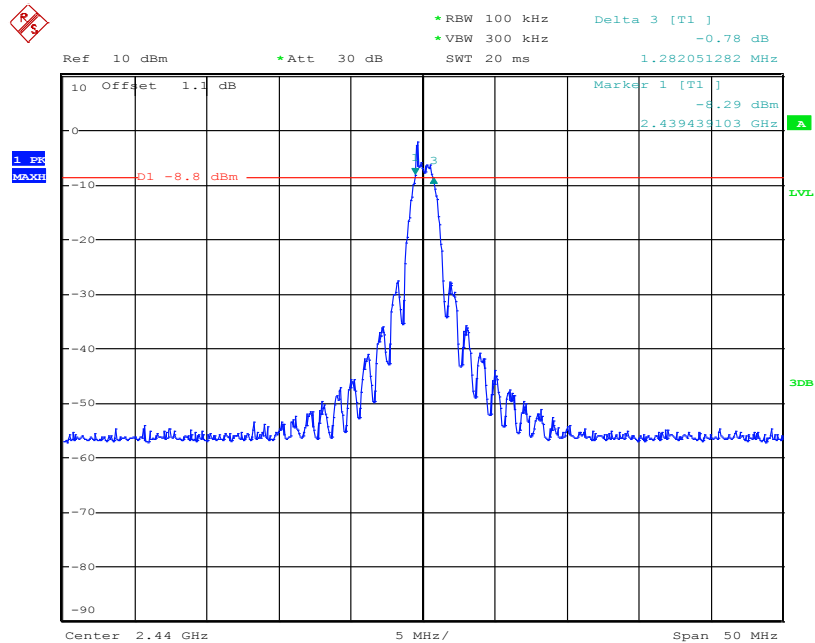


Date: 16.MAR.2012 13:10:41

6dB Bandwidth 2480 MHz

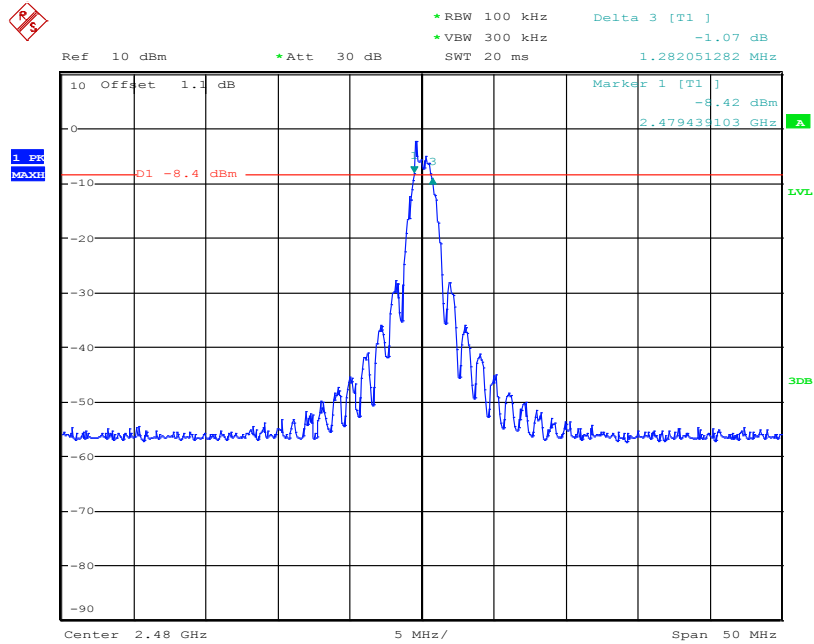


Date: 16.MAR.2012 13:14:25

20dB Bandwidth 2405 MHz

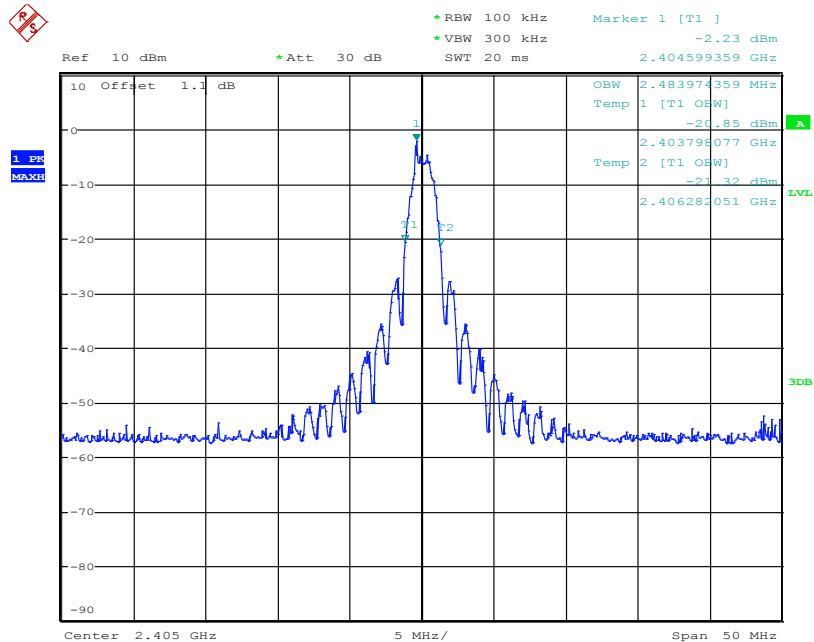


Date: 16.MAR.2012 13:03:02

20dB Bandwidth 2440 MHz

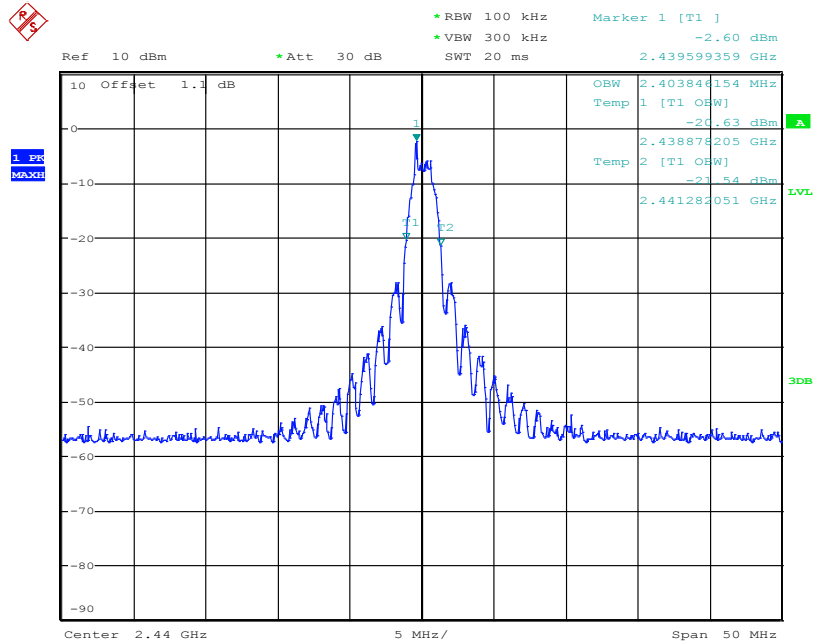

Date: 16.MAR.2012 13:05:54

20dB Bandwidth 2480 MHz

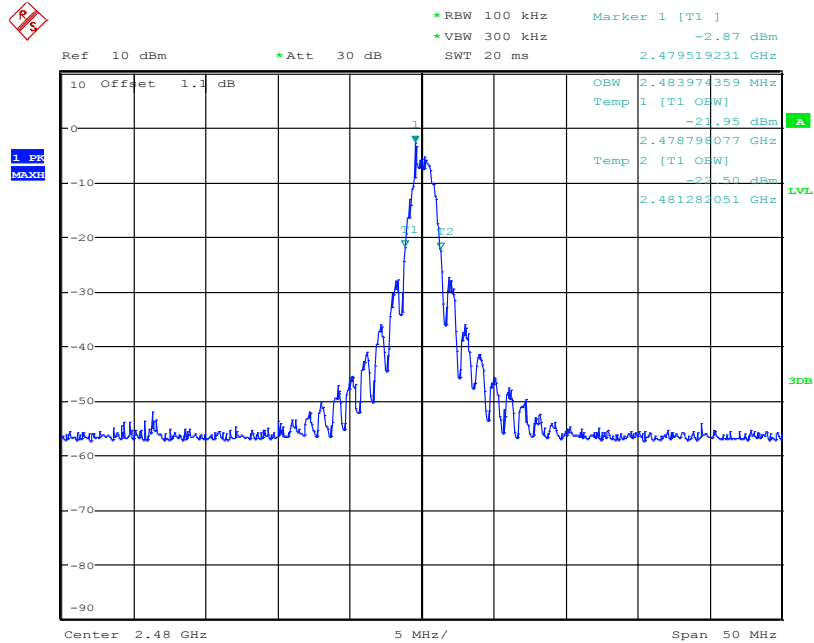

Date: 16.MAR.2012 13:16:46

6.7 Maximum Power Spectral Density Level in the Fundamental Emission

6.7.1 Limits:

6.7.1.1 § 15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

6.7.2 Test Conditions:

Tnom: 23°C; Vnom: 3.6V

6.7.3 Test procedure:

1. Determine the highest peak level for a sweep with RBW=100kHz VBW=300kHz and Span = 5-30% greater than the EBW.
2. Scale the max. observed peak power level to an equivalent level in 3 kHz by adjusting the measured power by a bandwidth correction factor (BWCF).
 $BWCF = 10\log(3\text{kHz}/100\text{kHz}) = -15.2 \text{ dB}.$

6.7.4 Test results:

Measured Conducted Power Spectral Density (dBm)			
Mode	Frequency (MHz)		
	2405 Channel 11	2440 Channel 18	2480 Channel 26
IEEE 802.15.4 (ZigBee)	-0.56	-0.80	-1.06
Measurement Uncertainty: ±0.5dB			


Corrected Power Spectral Density (dBm)			
Mode	Frequency (MHz)		
	2405 Channel 11	2440 Channel 18	2480 Channel 26
IEEE 802.15.4 (ZigBee)	-15.76	-16.00	-16.26
Measurement Uncertainty: ±0.5dB			

6.7.4.1 Measurement Verdict


Pass.


6.7.5 Test Data/plots:

Power Spectral Density: 2405 MHz

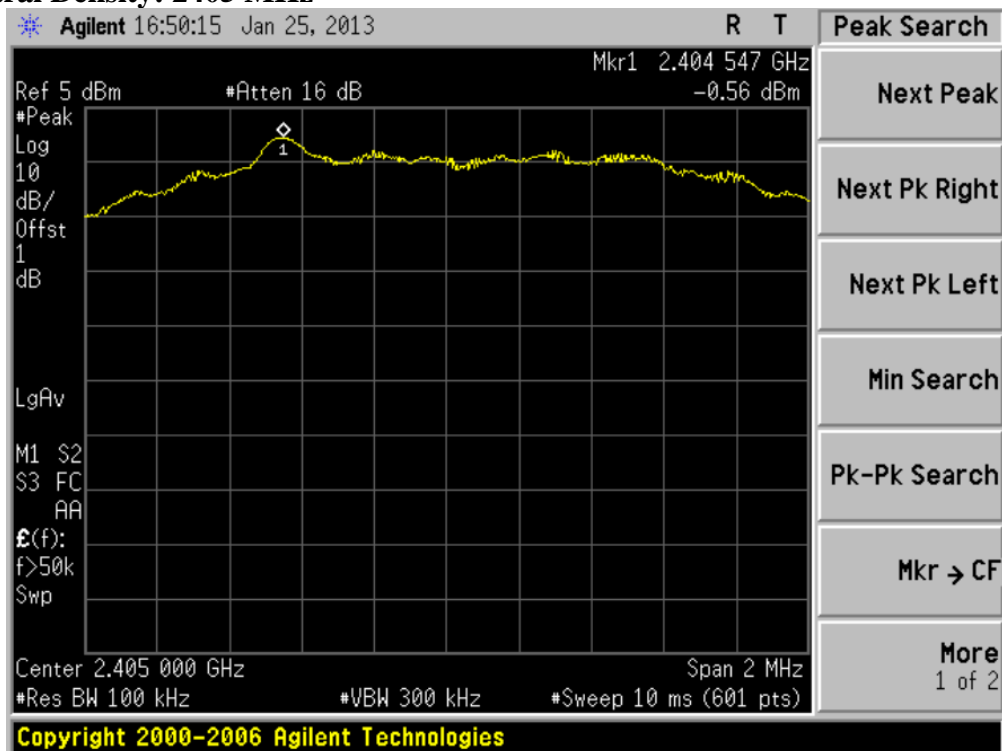

Power Spectral Density: 2440 MHz

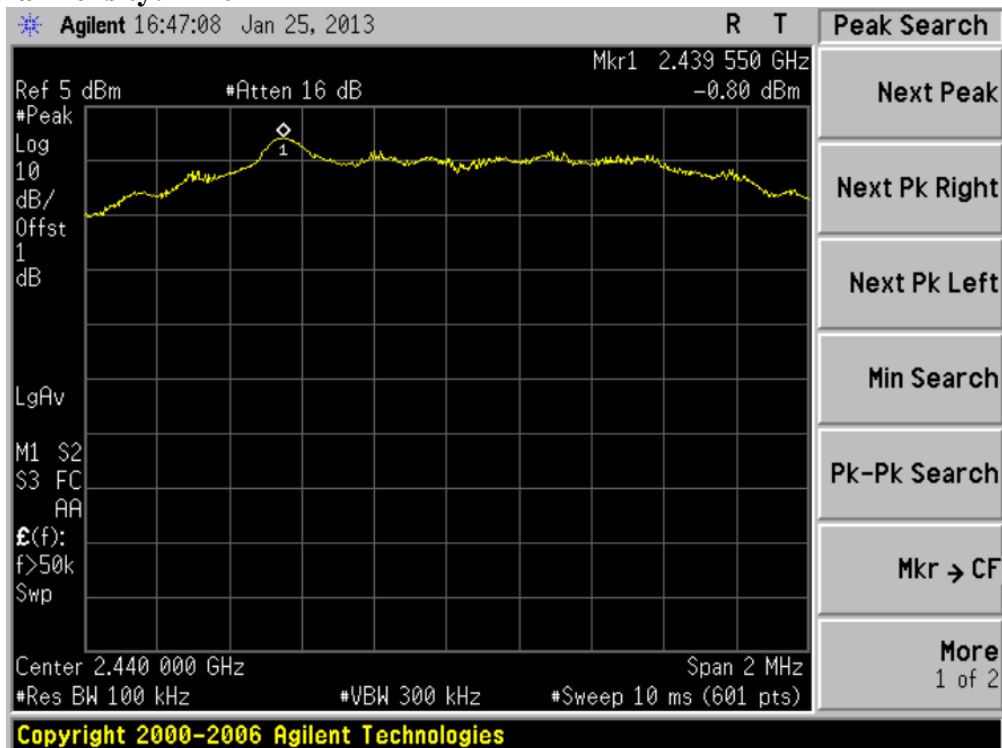

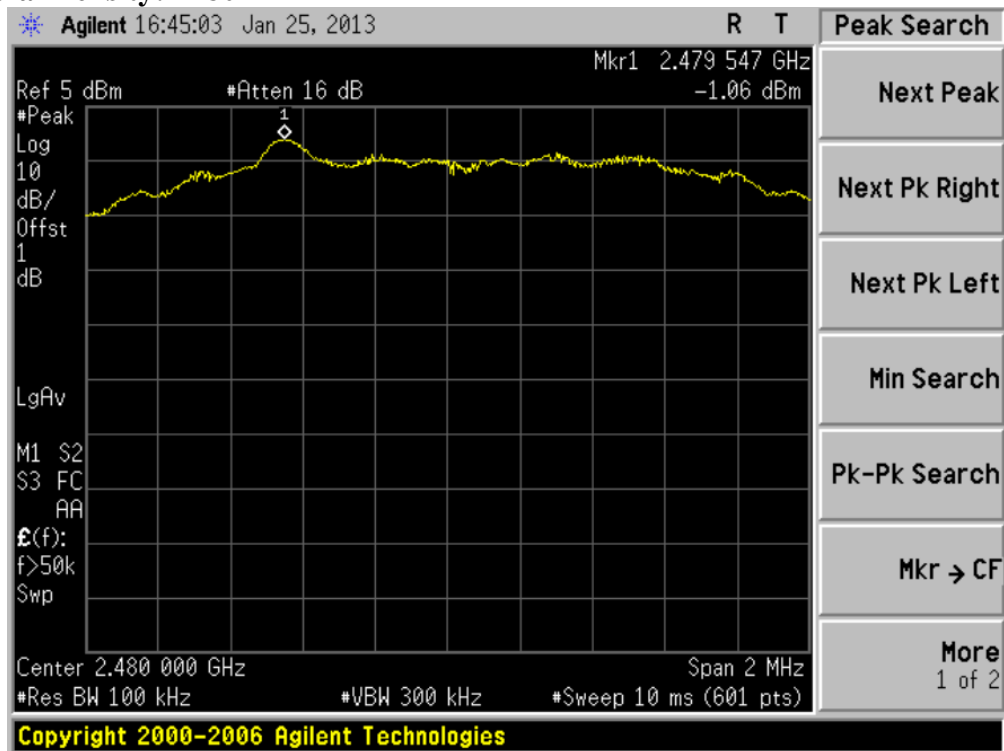Power Spectral Density: 2480 MHz

6.8 Unwanted Emissions into Non-Restricted Frequency Bands- Conducted

6.8.1 Reference and Limits:

6.8.1.1 § 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

6.8.2 Test Conditions:

Tnom: 23°C; Vnom: 3.6V

6.8.3 Test procedure:

Spectrum Analyzer settings:

RBW=100kHz, VBW=300kHz, Detector: Peak- Max hold;

Sweep Time: Auto

Span=30MHz- 25 GHz (to cover x10 Fundamental Transmit frequency)

6.8.4 Test data/ plots:


Conducted Spurious Emissions			
Channel	Frequency (MHz)	Amplitude of spurious emissions	Limits
Low	Spurious	All emissions >20dB below reference Peak	-20dBc
Mid	Spurious	All emissions >20dB below reference Peak	-20dBc
High	Spurious	All emissions >20dB below reference Peak	-20dBc
Measurement Uncertainty: ±1.0 dB			

6.8.4.1 Measurement Result

Pass.


6.8.5 Test data/ plots:

Conducted Spurious Emission 2405 MHz

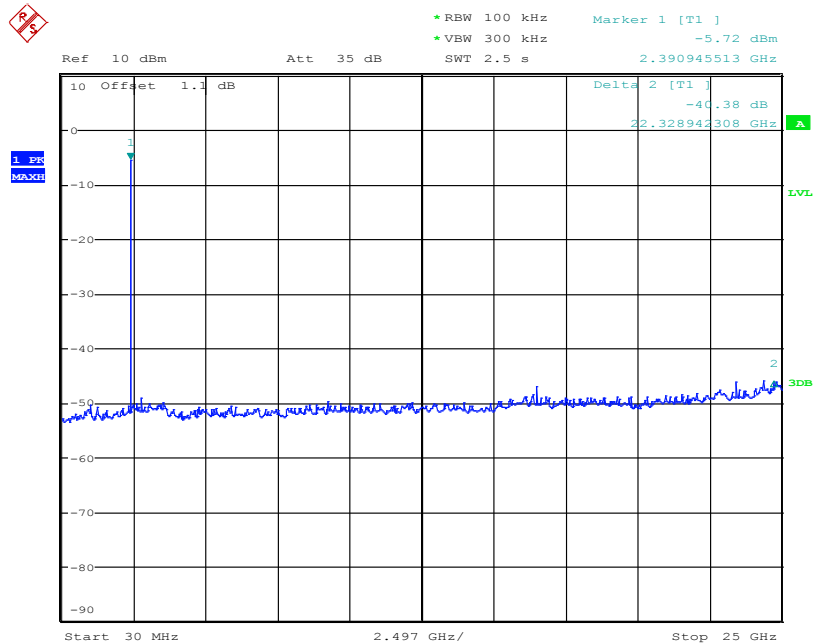


Date: 16.MAR.2012 14:02:55

Conducted Spurious Emission 2440 MHz

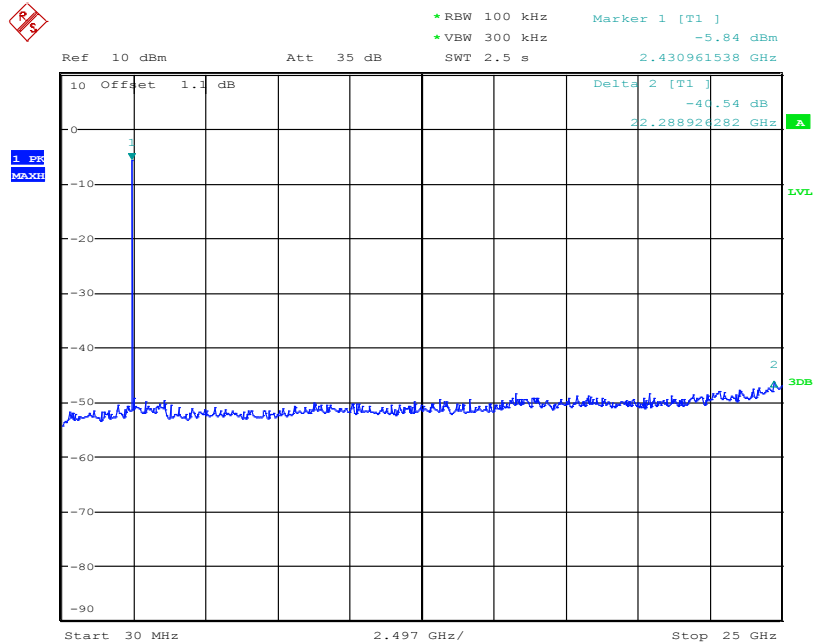

Date: 16.MAR.2012 14:06:51

Conducted Spurious Emission 2480 MHz

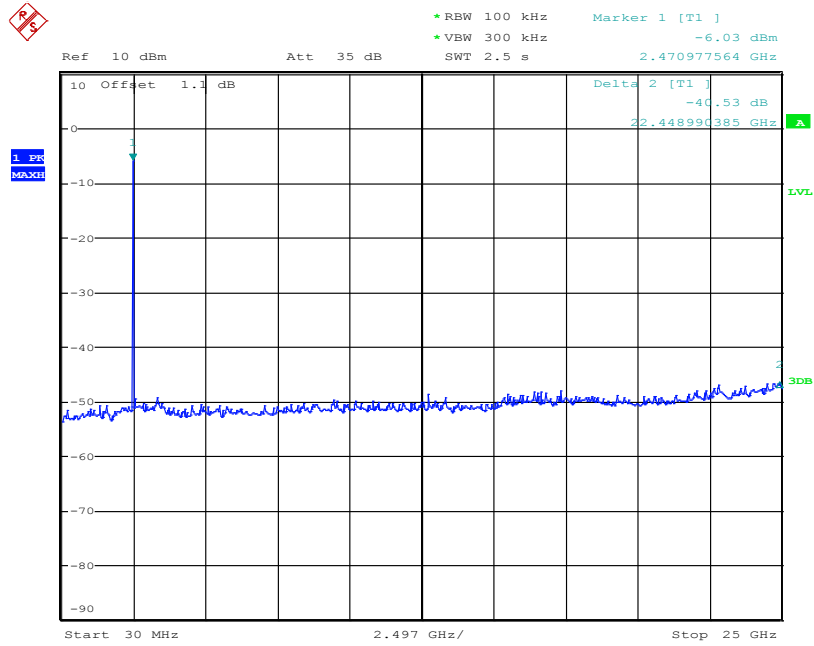

Date: 16.MAR.2012 14:14:59

6.9 Unwanted Emissions into Restricted Frequency Bands- Radiated

6.9.1 Limits: §15.247/15.205

15.247 (d) Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

15.205 (a) Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

15.209 (a) Emission Limits:

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

6.9.2 Test Conditions:

Tnom: 23°C; Vnom: 3.6V

6.9.3 Measurement Procedure:

Peak measurements are made using a peak detector and RBW=1MHz.

*PEAK LIMIT= 74dB μ V/m

Average measurements performed using a peak detector and according to video averaging procedure with RBW=1MHz and VBW=10Hz.

*AVG. LIMIT= 54dB μ V/m

Test Mode: IEEE 802.15.4 (ZigBee)


Measurement Uncertainty: ± 3.0 dB

6.9.3.1 Measurement Verdict


Pass.

6.9.4 Test Data/plots:


Lower band edge peak

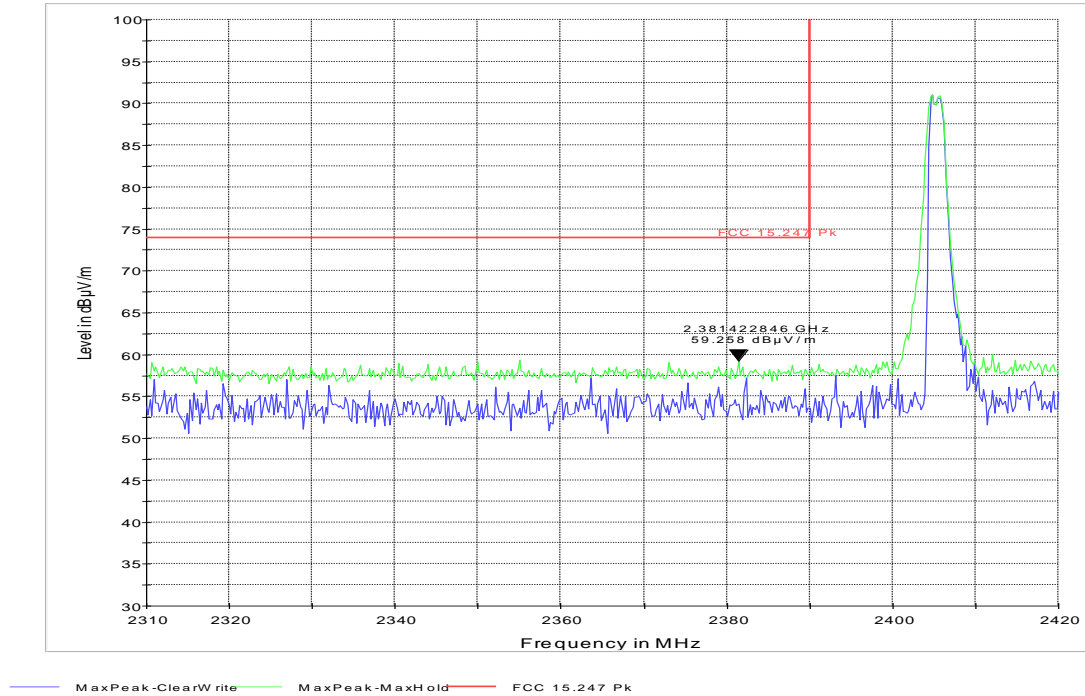


Lower band edge average

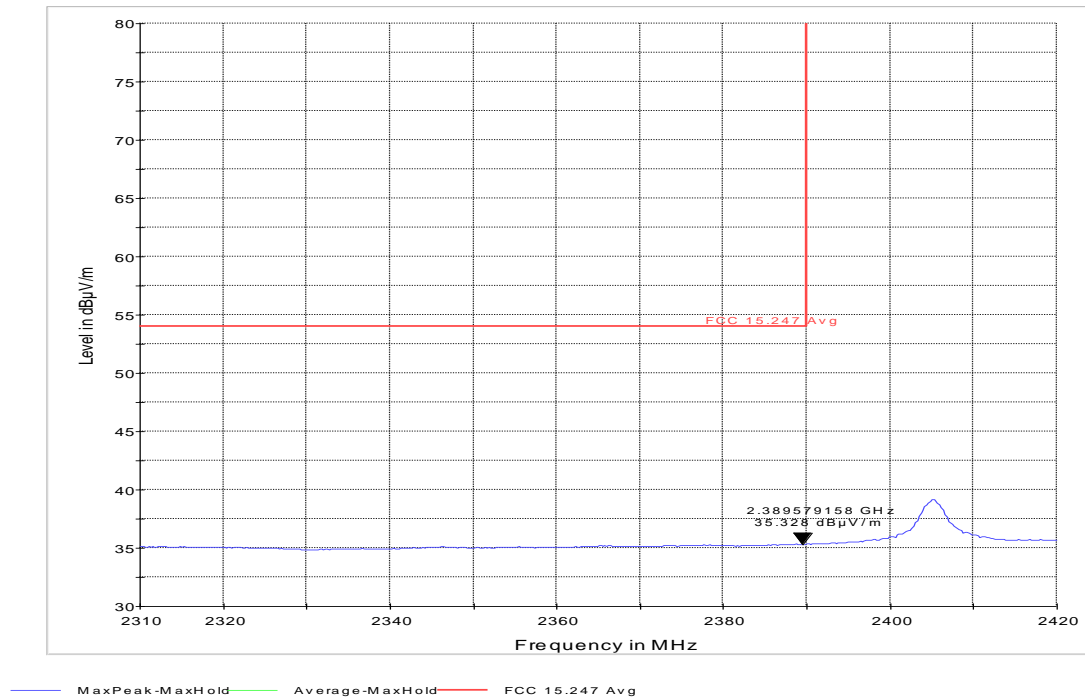

Higher band edge peak

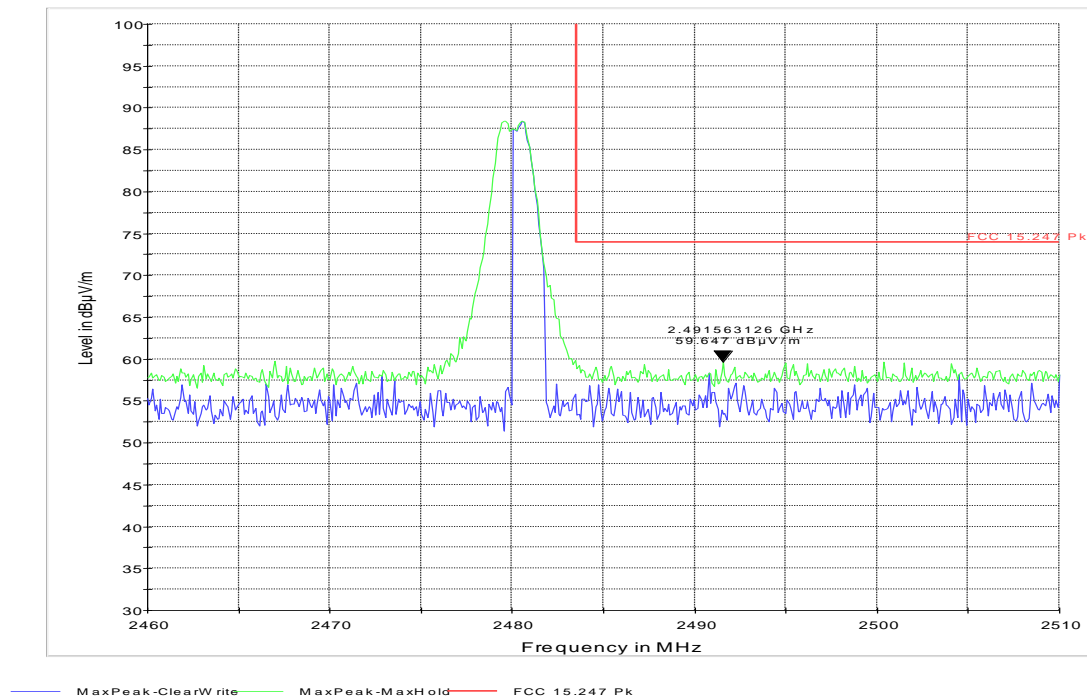

Higher band edge average

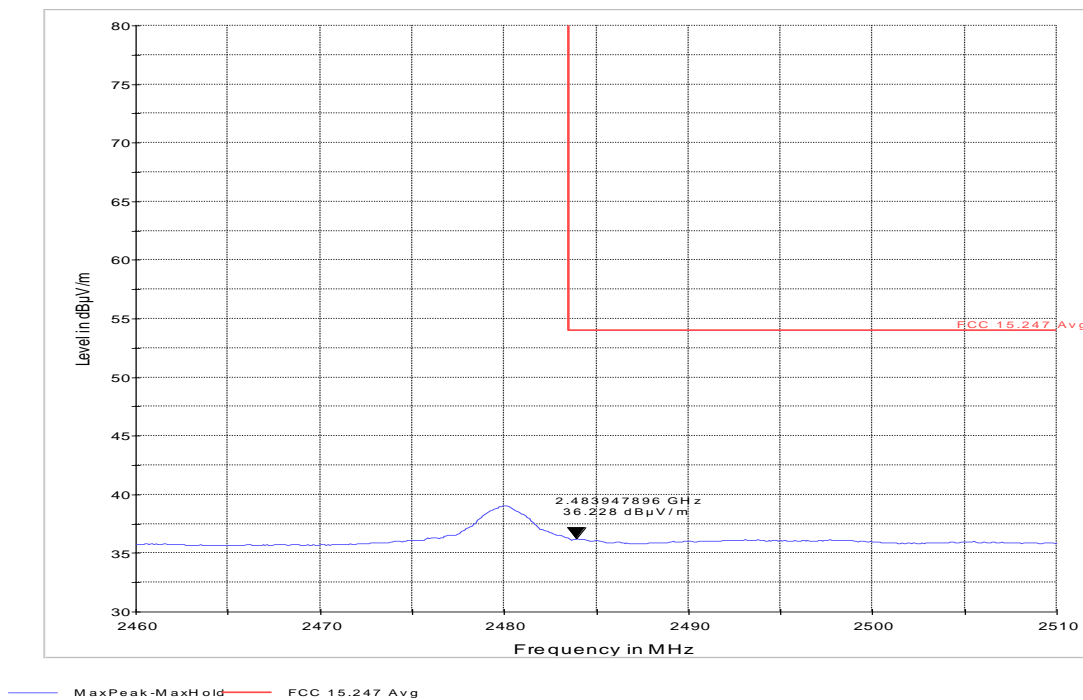

6.10 Transmitter Spurious Emissions- Radiated

6.10.1 Limits:

§15.247/15.205

RSS 210-A8.5

Frequency of emission (MHz)	Field strength (μV/m)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30

Frequency of emission (MHz)	Field strength (μV/m)
30–88	100 (40dBμV/m)
88–216	150 (43.5 dBμV/m)
216–960	200 (46 dBμV/m)
Above 960	500 (54 dBμV/m)

6.10.2 Test Result:

Test mode: IEEE 802.15.4 (ZigBee) Mode

Unless mentioned otherwise, the emissions outside the limit lines in the plots are from the transmit signal.

Plots reported here represent the worst case emissions for horizontal and vertical antenna polarizations and for three orientations of the EUT.

Measurement procedure according to ANSI C63.4 (2003).

Measurement Uncertainty: ±3.0dB

6.10.2.1 Measurement Result


Pass.

6.10.3 Test data/ plots:

Transmitter Radiated Spurious Emission:<30MHz


Note: Worst case representation for all Channels of operation in this frequency range-

Limits adjusted for 3m measurement.

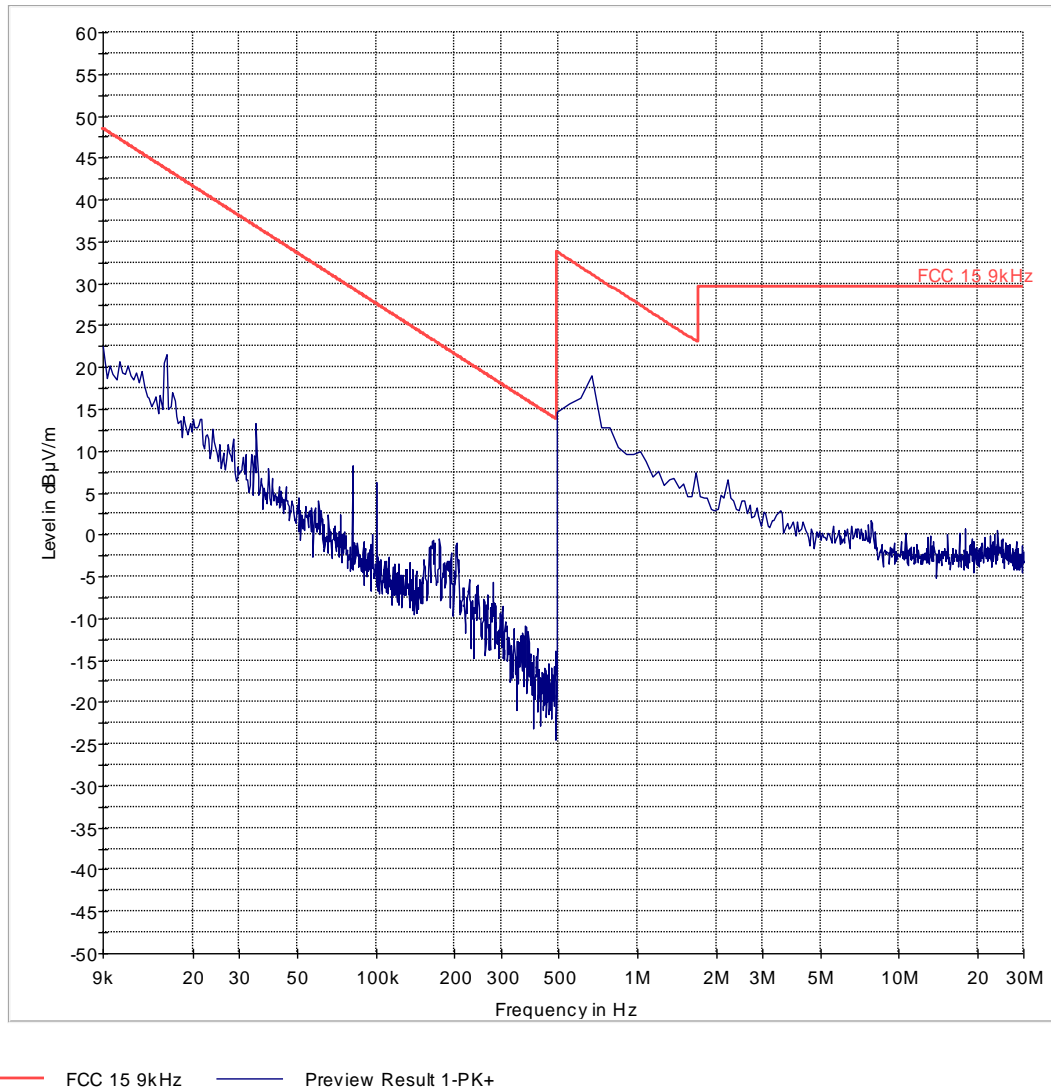


Transmitter Radiated Spurious Emission- Ch 11- 30M-1GHz

Frequency (MHz)	MaxPeak-ClearWrite (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)
44.128257	29.1	120.0	V	90.0	6.0
102.525050	32.0	120.0	V	0.0	9.6
117.595190	31.4	120.0	H	0.0	9.4
132.665331	40.6	120.0	H	180.0	9.4
486.813627	31.3	120.0	V	90.0	21.0
501.002004	31.4	120.0	V	90.0	21.4
814.629259	30.3	120.0	V	0.0	25.4
823.647295	30.7	120.0	H	90.0	25.9

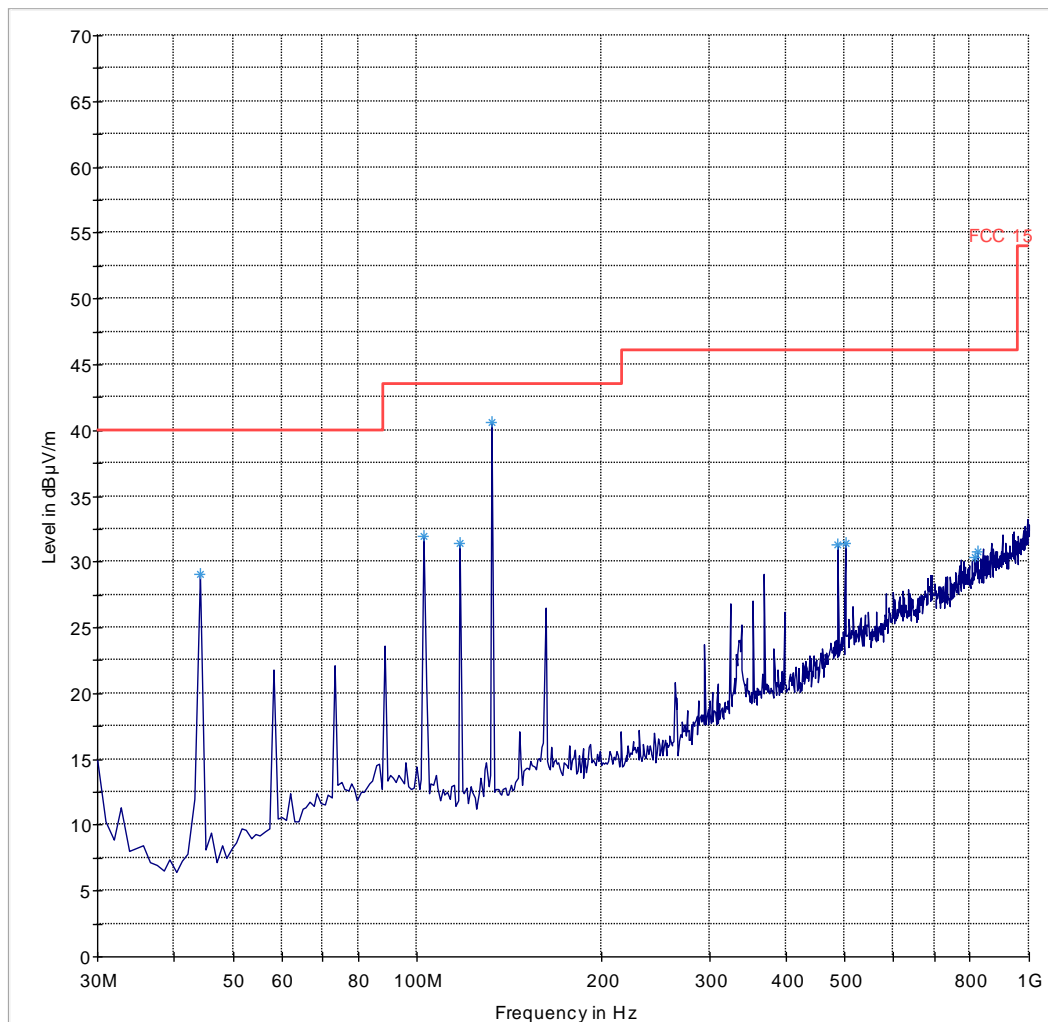

— FCC 15 — Preview Result 1-PK+ * Data Reduction Result 1 [3]-PK+


Transmitter Radiated Spurious Emission- Ch 11- 1G-18GHz

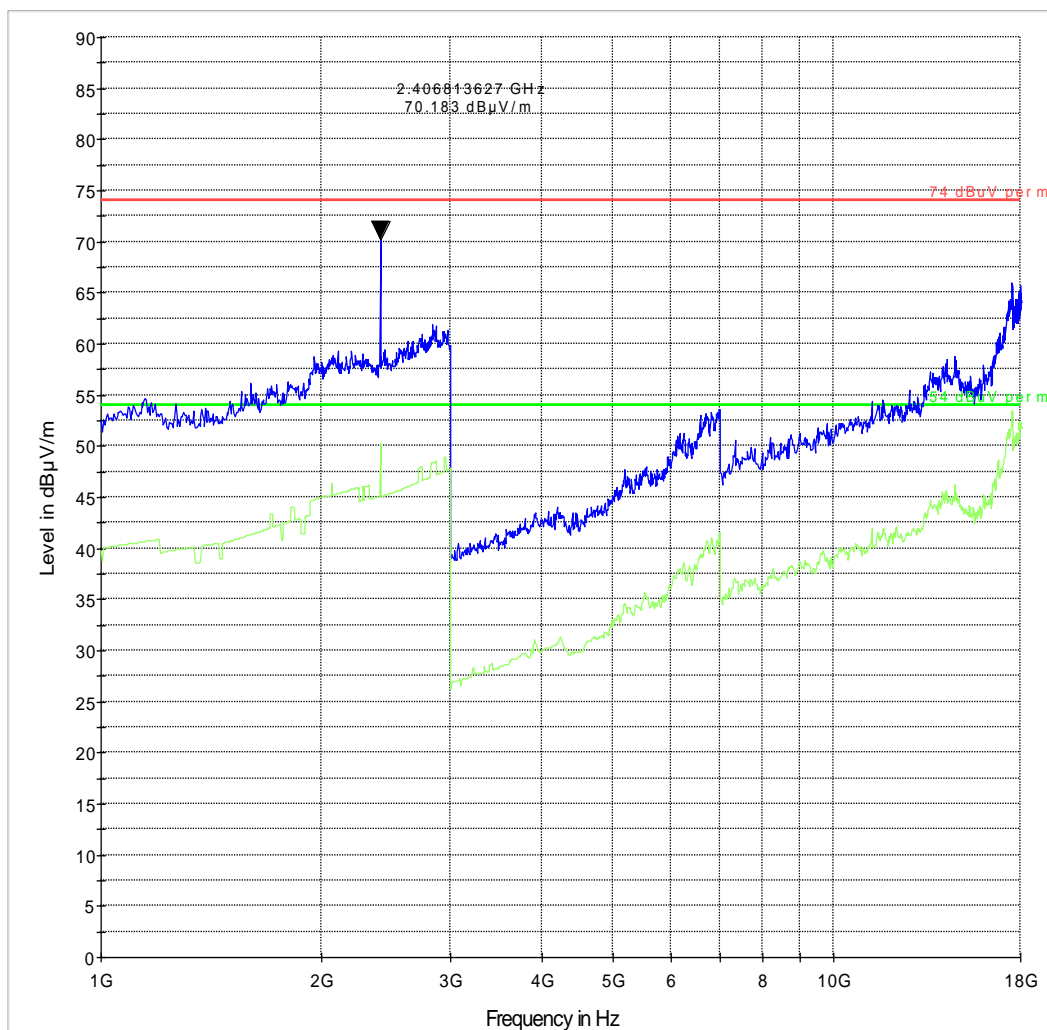


74 dBuV per m.LimitLine 54 dBuV per m.LimitLine Preview Result 1 Preview Result 2

Transmitter Radiated Spurious Emission- Ch 18- 30M-1GHz

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
44.236568	27.2	20.0	120.000	120.0	V	116.0	6.0	12.8	40.0
103.218447	32.8	20.0	120.000	120.0	V	22.0	9.5	10.7	43.5
117.966372	33.7	20.0	120.000	180.0	H	0.0	9.4	9.8	43.5
132.711855	41.4	20.0	120.000	216.0	H	171.0	9.5	2.1	43.5
324.402805	28.5	20.0	120.000	120.0	H	0.0	16.8	17.5	46.0
486.594119	31.2	20.0	120.000	120.0	V	124.0	21.0	14.8	46.0
818.215729	23.9	20.0	120.000	139.0	V	108.0	25.6	22.1	46.0
833.284057	24.4	20.0	120.000	173.0	H	57.0	26.1	21.6	46.0

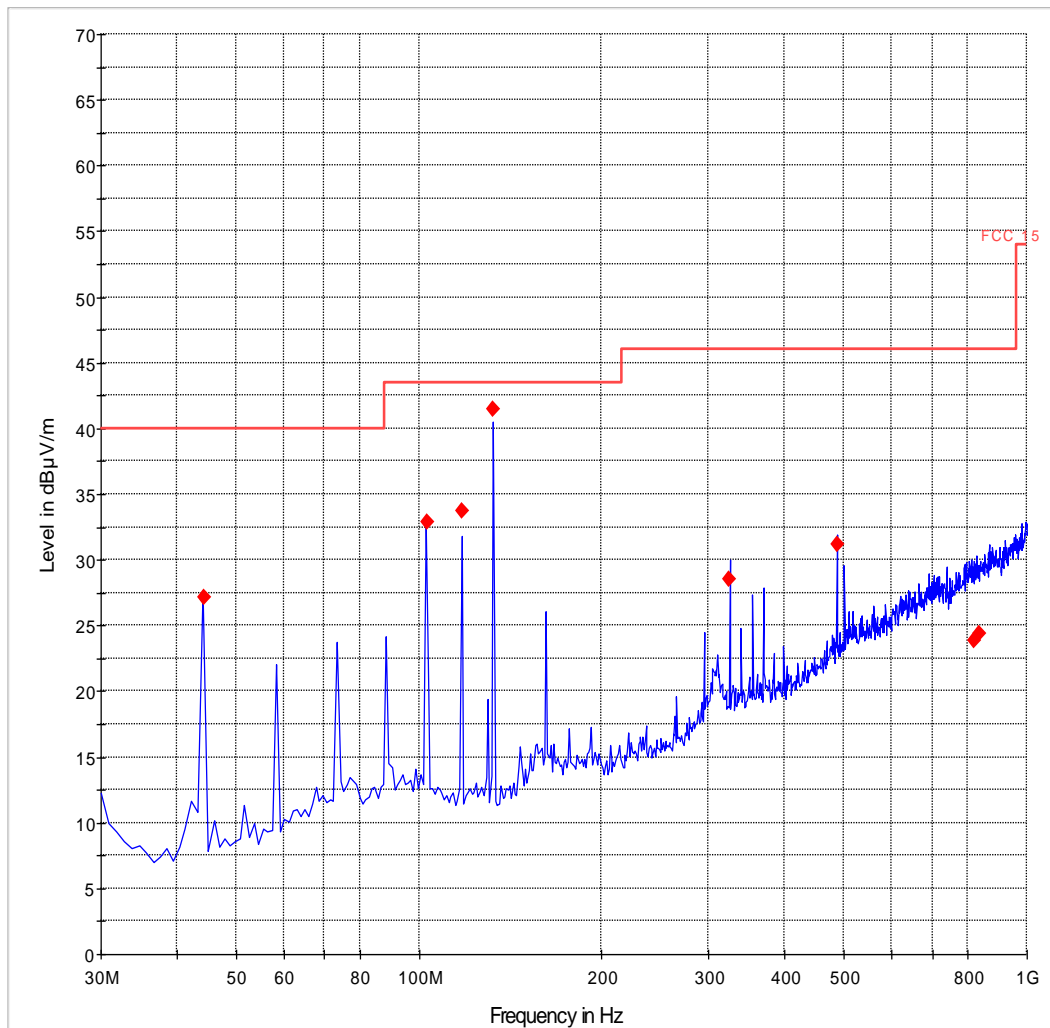


— FCC 15.LimitLine — Preview Result 1 ◆ Final Result 1

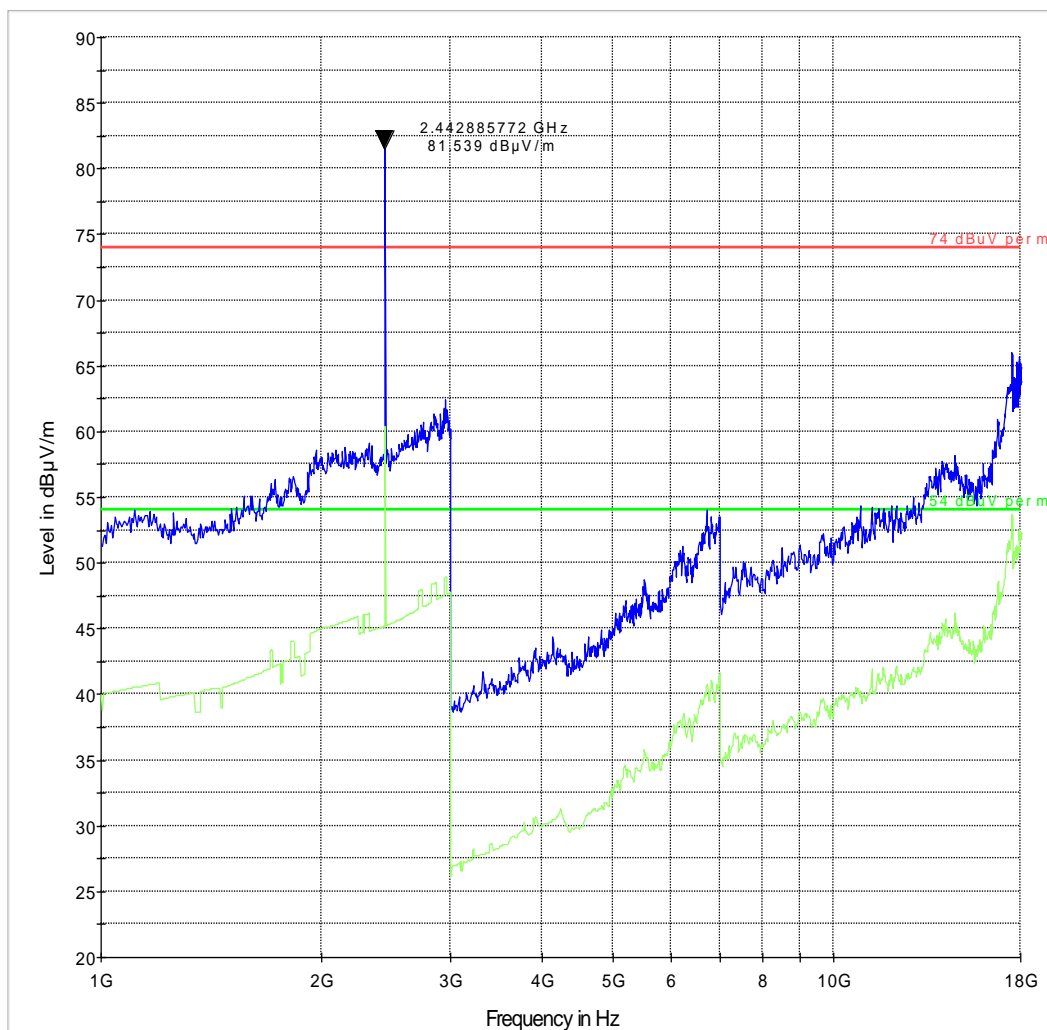Transmitter Radiated Spurious Emission- Ch 18- 1G-18GHz

74 dBμV per m.LimitLine 54 dBμV per m.LimitLine Preview Result 1 Preview Result 2


Transmitter Radiated Spurious Emission- CH 18- 18G-26GHz

Note: Worst case representation for all Channels of operation in this frequency range-

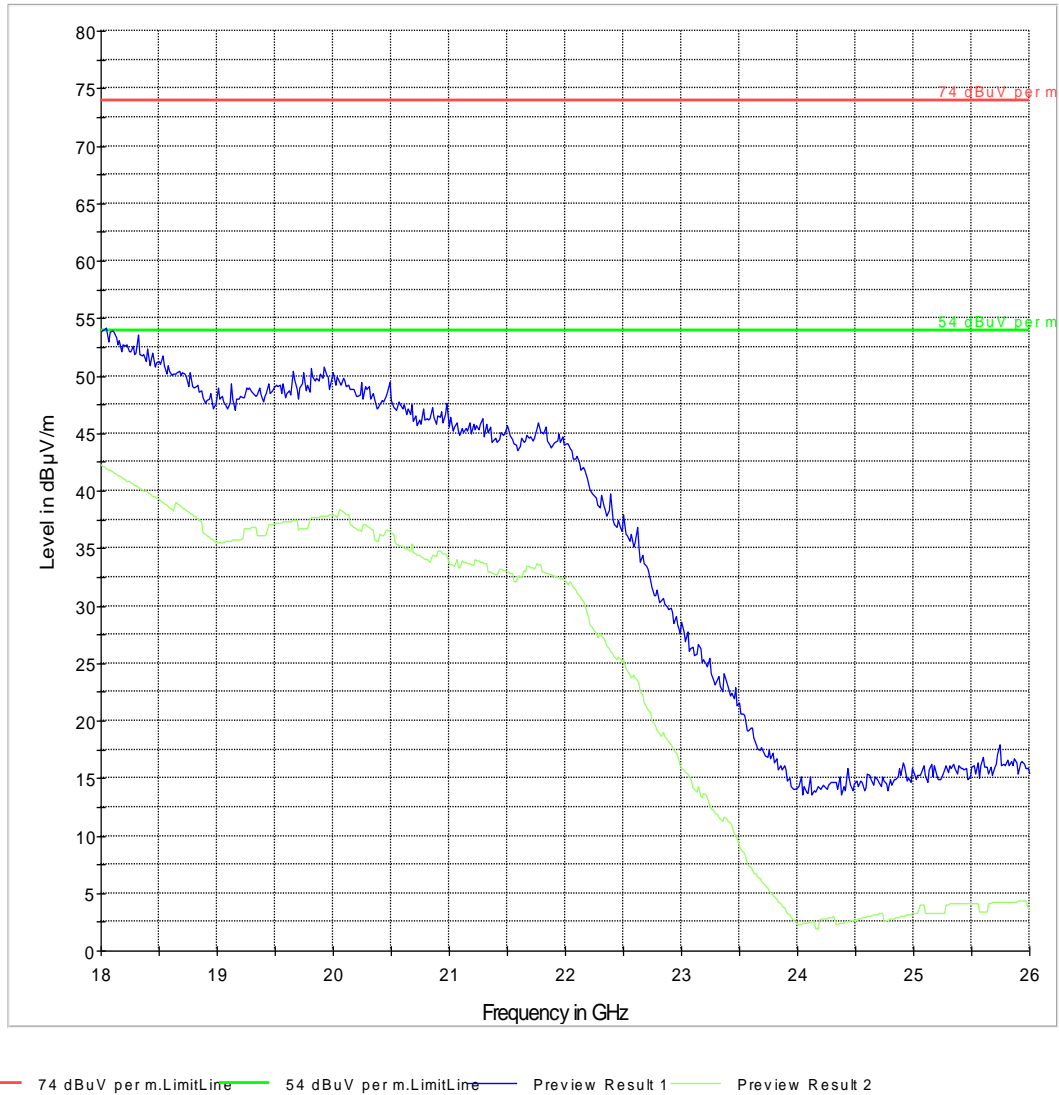


Transmitter Radiated Spurious Emission- Ch 26- 30M-1GHz

Frequency (MHz)	MaxPeak-ClearWrite (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)
44.128257	28.8	120.0	V	90.0	6.0
102.525050	32.0	120.0	V	0.0	9.6
117.595190	31.3	120.0	H	0.0	9.4
132.665331	40.7	120.0	H	180.0	9.4
486.813627	31.8	120.0	H	0.0	20.2
501.002004	30.8	120.0	V	90.0	21.4
821.643287	30.0	120.0	H	0.0	25.9
825.651303	29.9	120.0	H	90.0	25.9

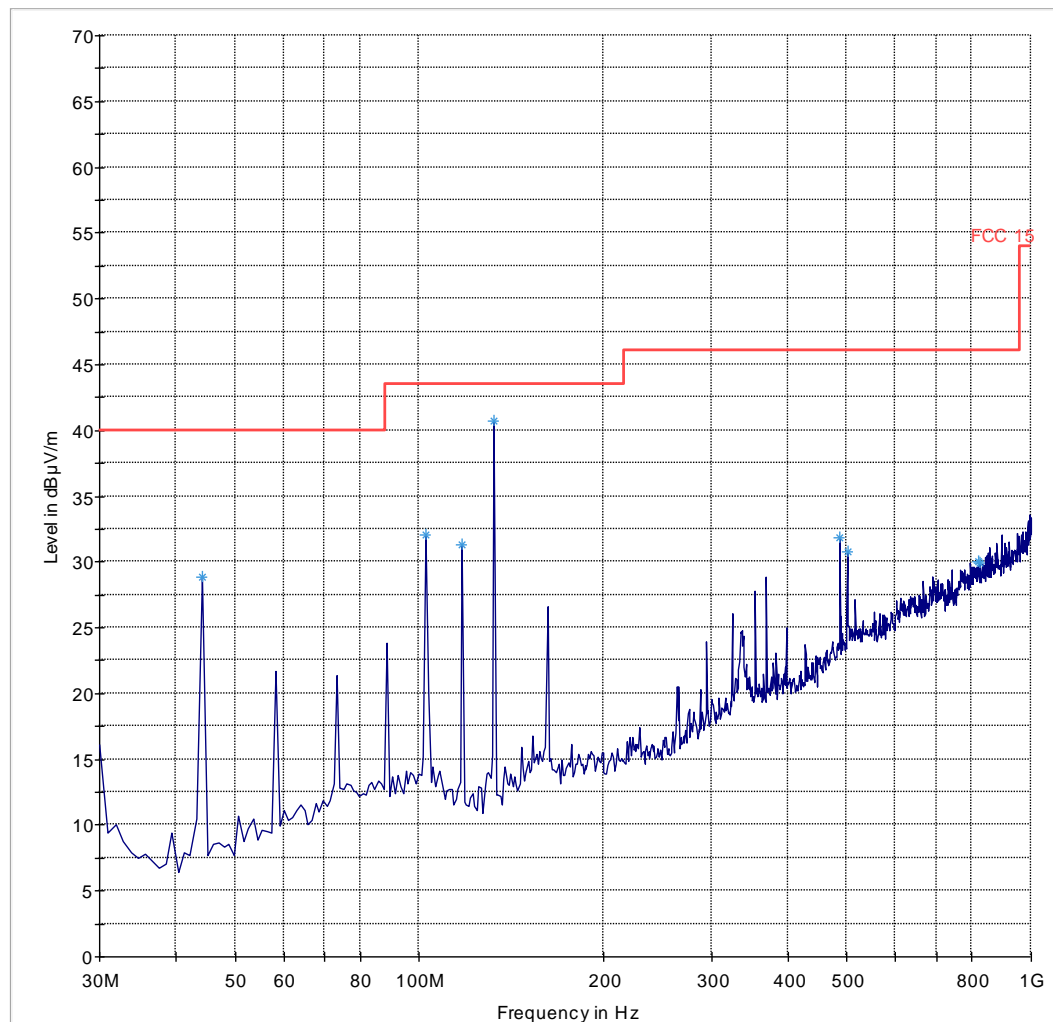

— FCC 15 — Preview Result 1-PK+ * Data Reduction Result 1 [3]-PK+

Transmitter Radiated Spurious Emission- Ch 26- 1G-18GHz

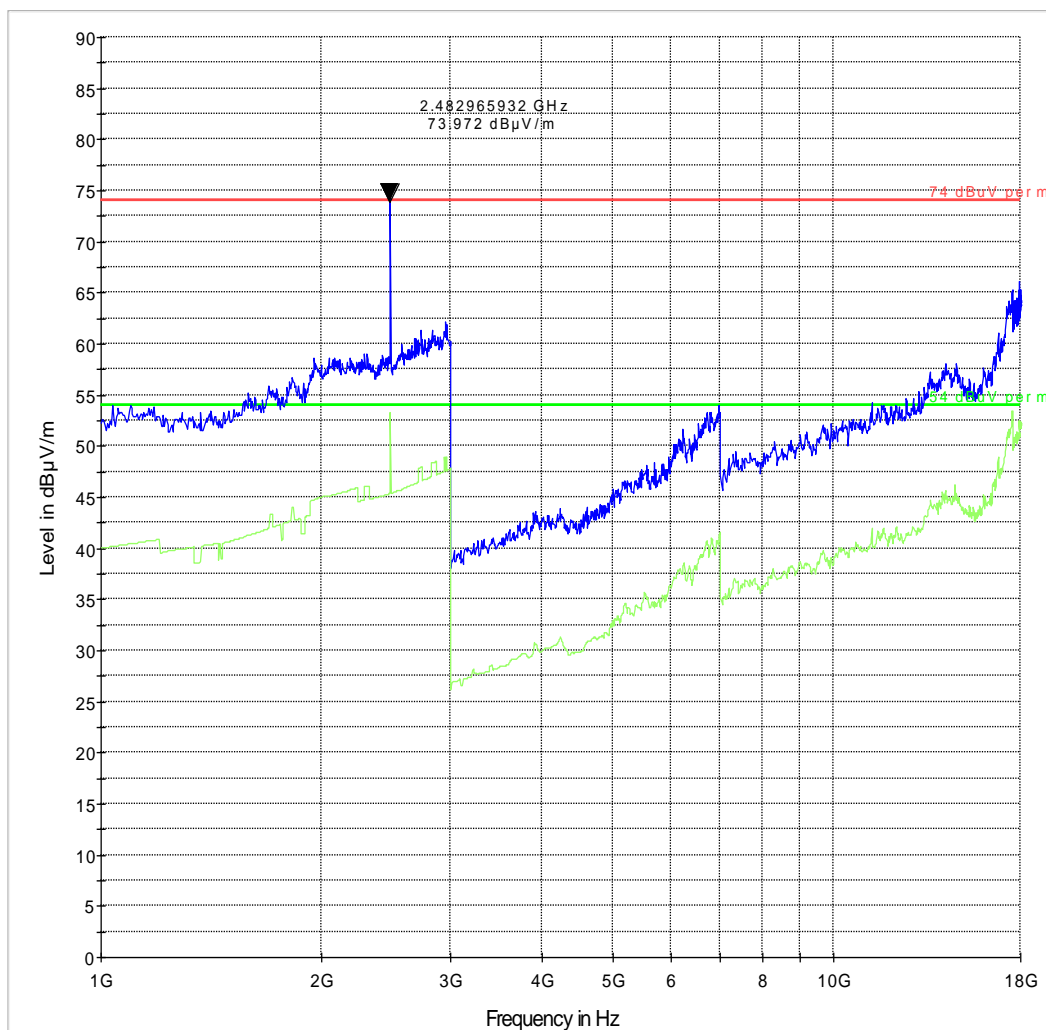

74 dBuV per m.LimitLine 54 dBuV per m.LimitLine Preview Result 1 Preview Result 2

7 Test Equipment and Ancillaries used for tests

Test equipment calibration status at the time of testing shown below.



No.	Equipment Name	Manufacturer	Type/model	Serial No.	Cal Date	Cal Interval
3m Semi- Anechoic Chamber:						
	Turn table	EMCO	2075	N/A	N/A	N/A
	MAPS Position Controller	ETS Lindgren	2092	0004-1510	N/A	N/A
	Antenna Mast	EMCO	2075	N/A	N/A	N/A
	Relay Switch Unit	Rohde&Schwarz	RSU	338964/001	N/A	N/A
	EMI Receiver/Analyzer	Rohde&Schwarz	ESIB 40	100107	May 2011	2 Years
	Spectrum Analyzer	Rohde&Schwarz	FSU	200302	May 2011	2 Years
	1500MHz HP Filter	Filtek	HP12/1700	14c48	N/A	N/A
	2800 MHz HP Filter	Filtek	HP12/2800	14C47	N/A	N/A
	Pre-Amplifier	Miteq	JS40010260	340125	N/A	N/A
	Binconilog Antenna	EMCO	3141	0005-1186	Jun 2009	3 Years
	Horn Antenna	EMCO	3115	35114	Mar 2009	3 Years
	LISN	FCC	50-25-2-08	08014	Jul 2011	1 Year
Ancillary equipment						
	Multimeter	Klein Tools	MM200	001	Apr 2011	2 Years
	Humidity Temperature Logger	Dickson	TM320	03280063	Mar 2011	1 Year
	Digital Barometer	VWR	35519-055	91119547	Nov 2011	2 Years
	DC Power Supply	HP	E3610A	KR83023316	N/A	N/A
	DC Power Supply	Protek	3003B	H012771	N/A	N/A
	Communication Antenna	IBP5-900/1940	Kathrein	N/A	N/A	N/A

Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels.

Calibration due dates, unless defined specifically, falls on the last day of the month.

Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.

8 **Radiated Test Setup Diagrams**

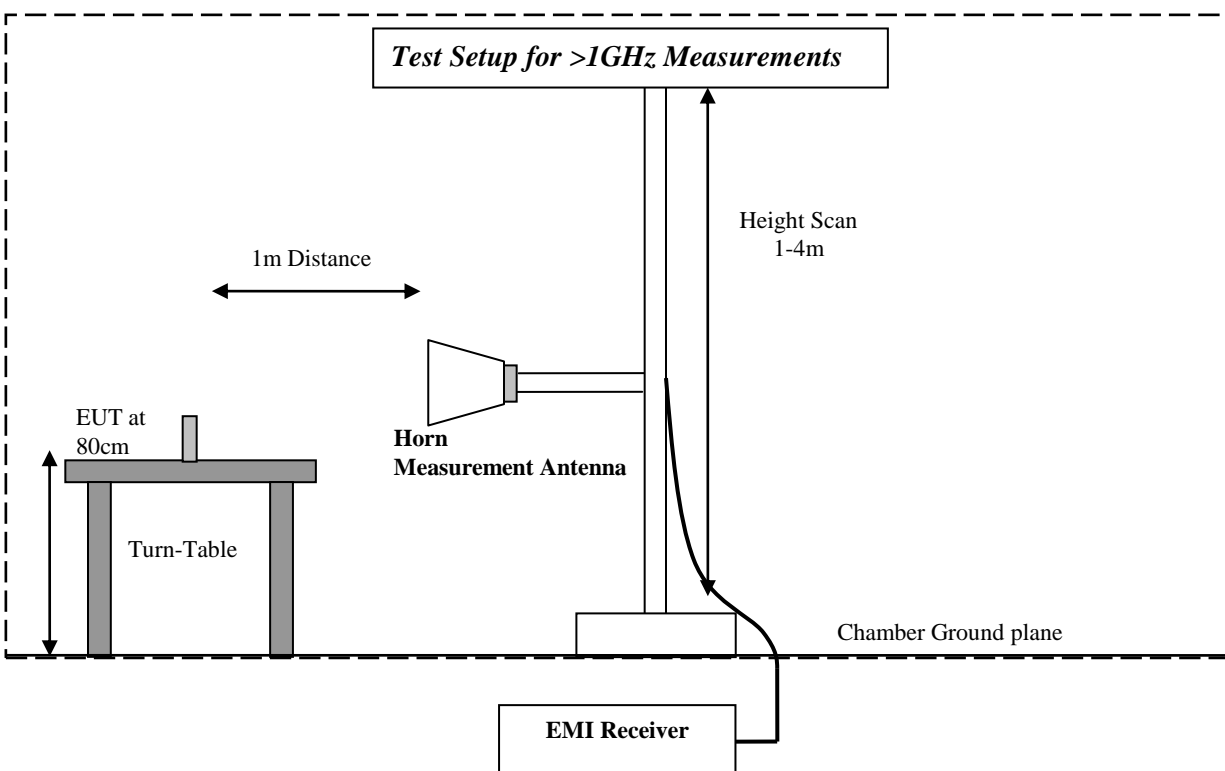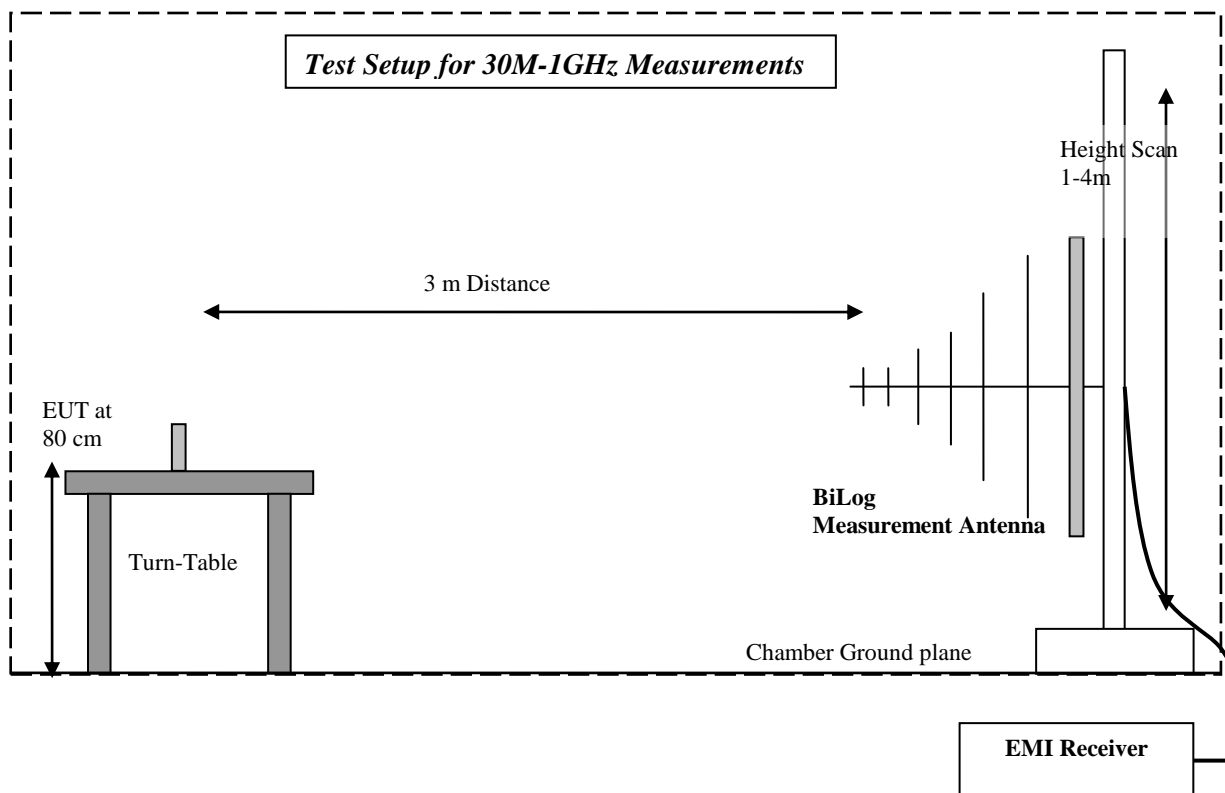

9 Revision History

Date	Report Name	Changes to report	Report prepared by
2013-03-22	EMC_SYSTE_004_11001_DTS	First Version	Tunji Yusuf