



TEST REPORT nr. R18277601

Federal Communication Commission (FCC)

Test item

Description: CARD READER
Trademark: SCHINDLER
Model/Type: PCR2-TWN4LF
FCC ID: XFIPCR2TWN4LF

Test Specification

Standard: FCC Rules & Regulations, Title 47:2017
Part 15 paragraph(s): 203, 204, 205, 207 and 209

Client's name: TECNOLAB del Lago Maggiore S.r.l.

Address: Via dell'Industria, 20 – 28924 Verbania (VB) – ITALY

Manufacturer's name : SCHINDLER ELEVATOR Ltd

Address: Via della Pace, 22 – 6600 Locarno (CH) – SWITZERLAND



Report

Tested by: A. Bertezolo

Approved by: R. Beghetto – Laboratory Manager

Date of issue: 04.06.19

Contents: 30 pages

This test report shall not be reproduced except in full without the written approval of CMC.
The test results presented in this report relate only to the item tested.



Index

1.	SUMMARY.....	3
2.	DESCRIPTION OF EQUIPMENT UNDER TEST (EUT).....	4
2.1	TEST SITE	4
3.	TESTING AND SAMPLING	4
4.	OPERATIVE CONDITIONS.....	4
5.	PHOTOGRAPH(S) OF EUT	5
5.1	PHOTOGRAPH(S) OF EUT	5
6.	EQUIPMENT LIST.....	6
7.	MEASUREMENT UNCERTAINTY	7
8.	REFERENCE DOCUMENTS.....	9
9.	DEVIATION FROM TEST SPECIFICATION.....	10
10.	TEST CASE VERDICTS.....	10
11.	RESULTS.....	11
11.1	CONDUCTED EMISSIONS.....	12
11.2	RADIATED EMISSIONS.....	18



1. Summary

Standard:

FCC Rules & Regulations, Title 47:2017
Part 15 paragraph(s): 203, 204, 205, 207 and 209



Test specifications	Environmental Phenomena	Tests sequence	Result
Part 15.207	Conducted emissions	1	Complies
Part 15.209	Radiated emissions	2	Complies

The Test Report was given to the Client representatives for necessary documentation of ratification of the tested equipment and it is valid for the FCC certification



5. Photograph(s) of EUT

5.1 Photograph(s) of EUT

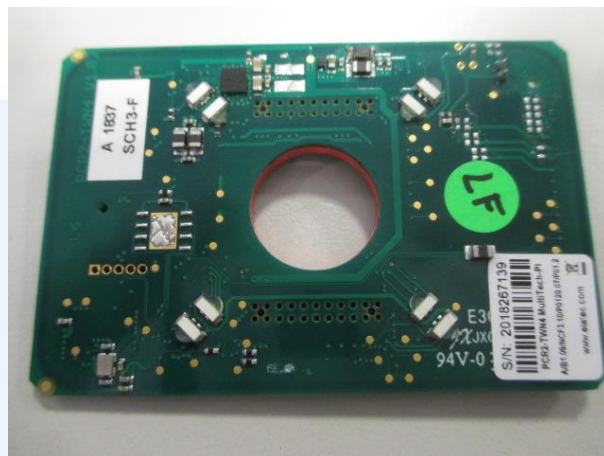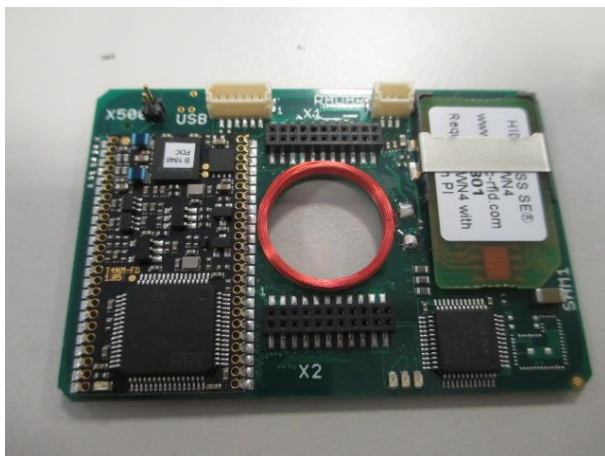



6. Equipment list

<i>Id. number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>	<i>Serial number</i>	<i>Last calibration</i>	<i>Due date calibration</i>
CMC S127	Schaffner	HLA6120	Loop Antenna	1191	March '17	March '20
CMC S164	Rohde & Schwarz	ESU26	EMC receiver	100052	January '19	January '20
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses Limiting Device	- - -	January '19	January '20
CMC S200	Schwarzbeck	NSLK 8128	V-LISN	8128-273	January '19	January '20
CMC S206	Rohde & Schwarz	ESCI 7	EMC Receiver 9KHz-7GHz	100781	January '19	January '20
CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Biconical Antenna (30-300MHz)	831	June '16	June '19
CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna	9111B-203	June '16	June '19



7. Measurement uncertainty

Test	Test Setup	Expanded uncertainty	Note
Conducted emission CISPR 16 LISN 50uH 0,009-0,0150MHz	PE001_01	3,4 dB	1
Conducted emission CISPR 16 LISN 50uH 0,150-30,0MHz	PE001_01	3,0 dB	1
Conducted emission CISPR 16 Voltage Probe 0,15-30MHz	PE001_02	2,9 dB	1
Conducted emission CISPR 16 Current Probe 0,15-30MHz	PE001_03	2,6 dB	1
Conducted emission CISPR 16 ISN 0,15-30MHz	PE001_04	4,7 dB	1
Clic CISPR 16 LISN 50uH 0,150-30,0MHz	PE001_05	3,1 dB	1
Disturbance Power 30-300 MHz	PE002_01	3,6 dB	1
Radiated Emission LAS 0,15-30MHz	PE003_01	2,0 dB	1
Radiated Emission CISPR 16 Loop Ant. 0,15-30MHz	PE004_01	4,0 dB	1
Radiated Emission CISPR 16 Bicon. Ant. 30-300MHz	PE004_02	3,9 dB	1
Radiated Emission CISPR 16 LogP. Ant. 300-1000MHz	PE004_03	3,8 dB	1
Radiated Emission CISPR 16 Horn Ant. 1-18GHz	PE004_04	4,2 dB	1
Human Exposure to electromagnetic fields	PE005_01	23,6 %	1
Harmonic current emissions test	PE006_01	10 mA + 2,6 %	1
Voltage fluctuation and flicker test	PE007_01	4,8 %	1
Radiated Immunity 80MHz-6GHz	PE102_XX	2,1 dB 0,82 V/m a 3V/m	1
Conducted Immunity 0,15-230MHz	PE105_XX	1,2 dB 0,44 V a 3V	1
AC Magnetic field	PE106_01	1,55 % 0,15 A/m a 10A/m	1
Pulse Magnetic field	PE107_01	6,25 % 18,7 A/m a 300A/m	1
Dumped Magnetic field	PE108_01	6,25 % 1,87 A/m a 30A/m	1
Common mode conducted immunity	PE112_01	2,21 % 0,22 V a 10V	1



Test	Test Setup	Expanded uncertainty	Note
Power/Spurious 9kHz-30MHz	PR001_01	4,0 dB	1
Power/Spurious ERP 30-1000MHz d=10m	PR001_02+03	4,7 dB	1
Misura della potenza EIRP 1-18GHz d=3m	PR001_04	4,7 dB	1
Misura della potenza EIRP 18-40GHz d=3m	PR001_05	5,4 dB	1
Frequency error	PR002_01+02	$< 1 \times 10^{-7}$	1
Timing zero span (1001pts.)	PR002_01+02	0,2 % SWT	1
Modulation bandwidth	PR002_01+02	$< 1 \times 10^{-7}$	1
Conducted RF power and spurious emission	PR002_01+02	1,1 dB	1
Adjacent channel power	PR002_01+02	1,1 dB	1
Blocking	PR002_01+02	1,1 dB	1

Test	Test Setup	Expanded uncertainty	Note
Electrostatic discharge immunity test	PE101_0X		2
Electrical fast transients / burst immunity test	PE103_0X		2
Surge immunity test	PE104_0X		2
Short interruption immunity test	PE109_01		2
Rev_19_01 date 14/01/2019			

Note 1:

The expanded uncertainty reported according to the document EA-4-02 is based on a standard uncertainty multiplied by a coverage factor of $K=2$, providing a level of confidence of $p = 95\%$

Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor $k = 2$



8. Reference documents

Reference no.	Description
FCC Rules and Regulation Title 47 part 15:2017	--
ANSI C63.4:2014	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Internal Procedure PM001 rev. 3.0 (Quality Manual)	Measure Procedure
Internal procedure INC_M rev. 9.1 (Quality Manual)	Measurement uncertainty calculation



9. Deviation from test specification

None

10. Test case verdicts

Test case does not apply to the test object : N.A.

Test item does meet the requirement : Complies

Test item does not meet the requirement : Does not comply

Test not performed : N.E.







11. Results

In this clause tests results are reported.

Measurement uncertainty is in accordance with document CMC INC_M rev. 9.1.

Judgement of compliance:

Case 1	Case 2	Case 3	Case 4
			
The sample complies with the requirement.	The sample complies with the requirement.	The sample does not comply with the requirement.	The sample does not comply with the requirement.
The measurement results is within the specification limit when the measurement uncertainty is taken into account.	It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.	It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.	The measurement results is outside the specification limit when the measurement uncertainty is taken into account.

In agreement with ILAC-G8: 03/2009 Guidelines on the Reporting of Compliance with Specification.



11.1 Conducted emissions

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.207
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Shielded chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S010, CMC S200, CMC S206
Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Main port
Frequency range: 150 kHz – 30 MHz

Environmental conditions


Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
22	101	45

Acceptance limits

Frequency range (MHz)	dB(μV) Quasi-peak	dB(μV) Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50



Setup

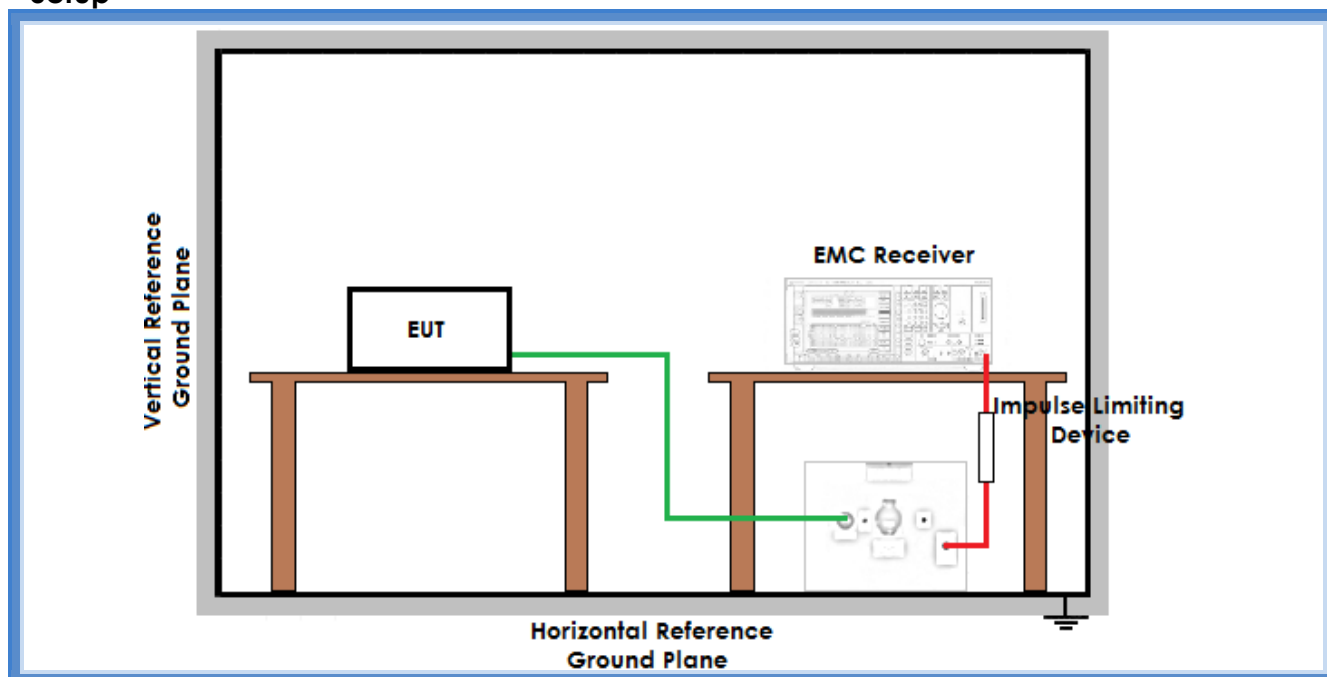

Result


Line	Graphs	Remarks	Result
L1	G18277608	--	Complies
N	G18277609	--	Complies
Remarks: Tests performed on 120 Vac side of PC			

Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +
AV: Average; AV [1s] (average at 1 second) values are marked with a X



Graphs

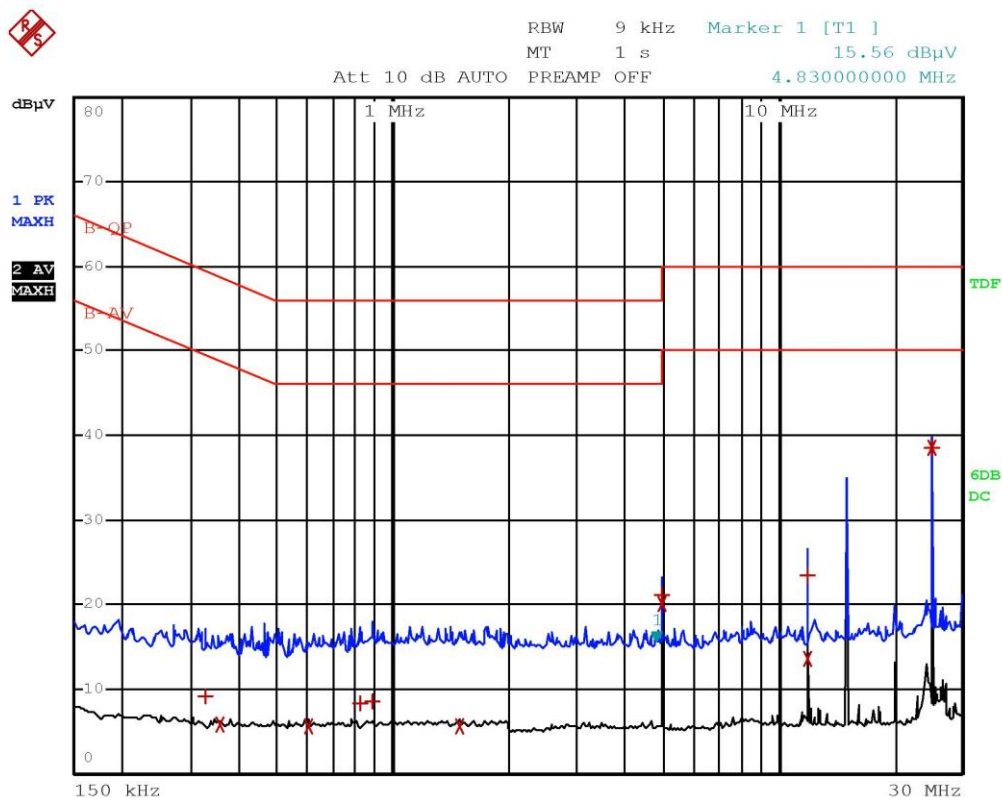


Bertezzo 18277608



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	B-QP		
Trace2:	B-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1 Quasi Peak	326 kHz	9.17	-50.38
2 Average	354 kHz	5.75	-43.11
2 Average	602 kHz	5.58	-40.41
1 Quasi Peak	826 kHz	8.31	-47.68
1 Quasi Peak	886 kHz	8.49	-47.50
2 Average	1.498 MHz	5.53	-40.46
1 Quasi Peak	4.998 MHz	21.15	-34.84
2 Average	4.998 MHz	20.12	-25.87
1 Quasi Peak	11.934 MHz	23.42	-36.57
2 Average	11.934 MHz	13.55	-36.44
1 Quasi Peak	24.998 MHz	38.46	-21.54
2 Average	24.998 MHz	38.55	-11.44

Bertezzolo 18277608

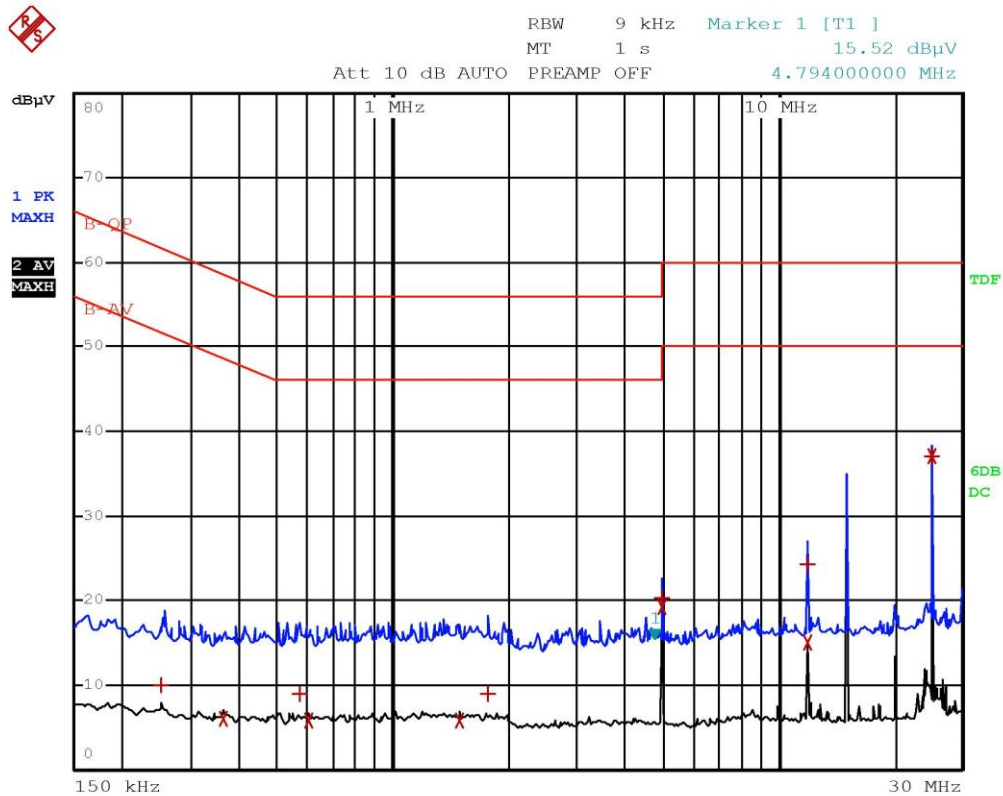

Bertezzo 18277609



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	B-QP		
Trace2:	B-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1 Quasi Peak	254 kHz	9.87	-51.75
2 Average	362 kHz	6.01	-42.66
1 Quasi Peak	570 kHz	8.92	-47.07
2 Average	602 kHz	5.79	-40.20
2 Average	1.494 MHz	5.85	-40.14
1 Quasi Peak	1.762 MHz	8.92	-47.07
1 Quasi Peak	4.998 MHz	20.31	-35.68
2 Average	4.998 MHz	19.14	-26.85
1 Quasi Peak	11.942 MHz	24.31	-35.68
2 Average	11.942 MHz	15.02	-34.97
1 Quasi Peak	24.998 MHz	37.03	-22.96
2 Average	24.998 MHz	37.12	-12.87

Bertezzo 18277609

Result: The requirements are met



11.2 Radiated emissions

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part. 15.209
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Semi-anechoic chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S127, CMC S164, CMC S271, CMC S287
Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Enclosure
Frequency range: 0,009 MHz – 300 MHz
Antenna polarization: Horizontal (H) – Vertical (V)
EUT – Antenna distance: 10 m
EUT height about the floor: 80 cm

Environmental conditions

Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
22	100	45




Acceptance limits

Frequency range (MHz)	Test distance (m)	Limits [dB(μV/m)]	
0,009 to 0,490	300	48,5 to 13,8	
0,490 to 1,705	30	33,8 to 22,9	
1,705 to 30	30	29,5	
30 to 88	3	40	
88 to 216	3	43,5	
216 to 960	3	46,0	
Above 960	3	53,9	
	Test distance (m)	Linear average detector [dB(μV/m)]	Peak detector [dB(μV/m)]
Above 1000	3	53,9	73,9

Remarks: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

Setup

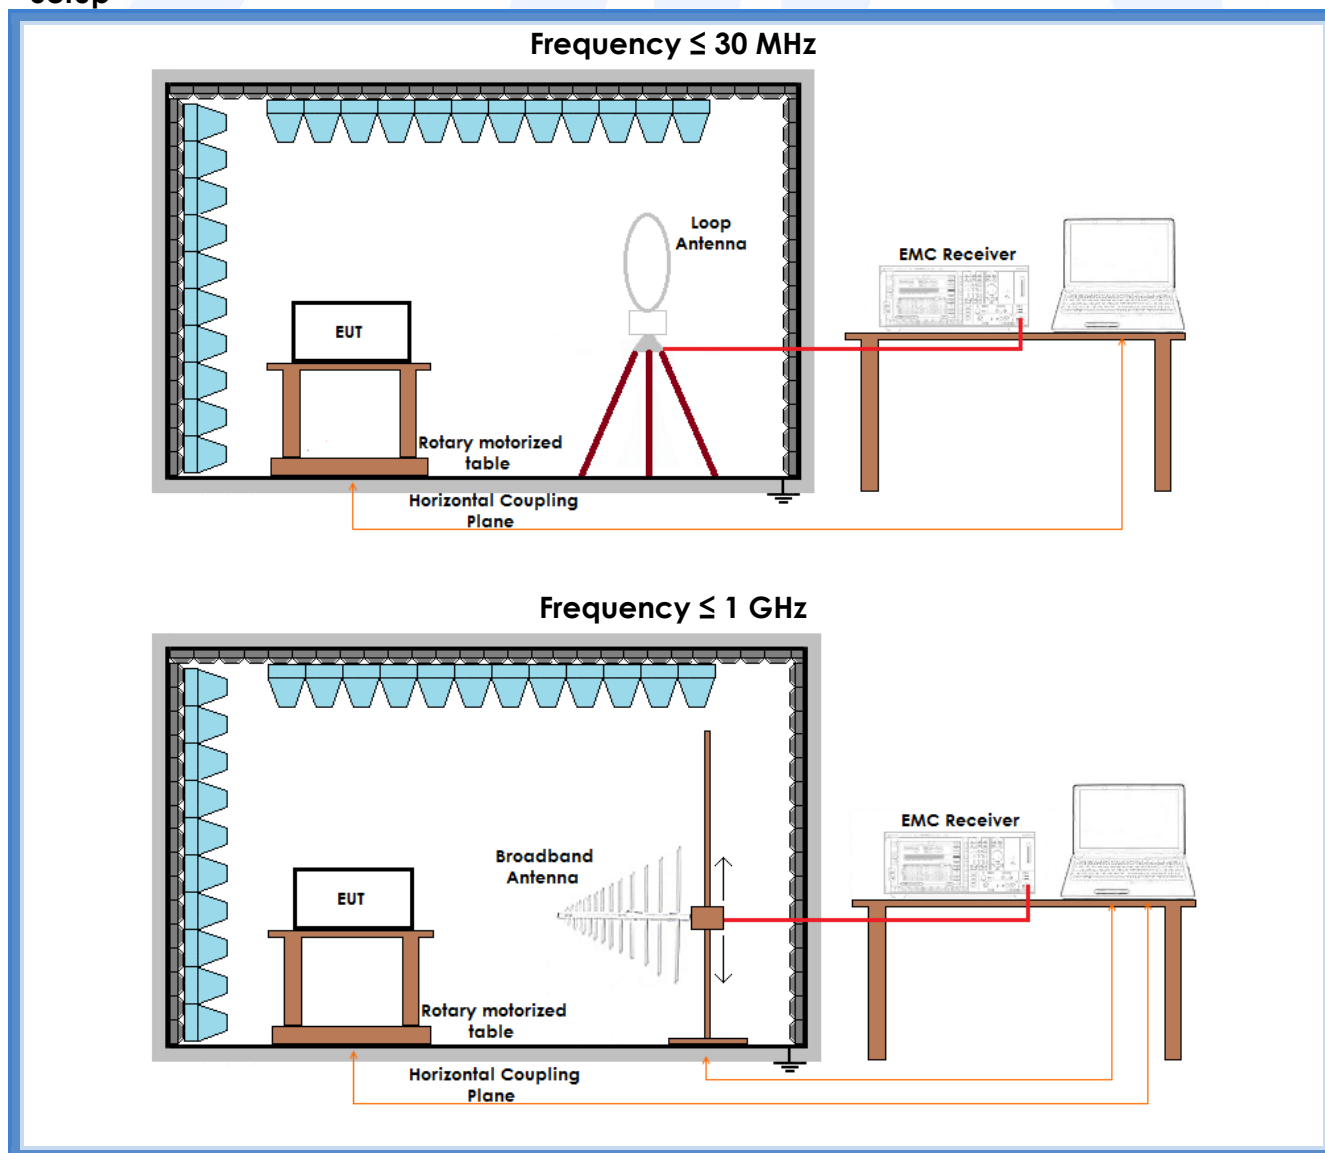



Result

Polarization	Frequency Range (MHz)	Graphs	Remarks	Result
Loop	0,009 – 30	G18277603	--	Complies
V	30 – 300	G18277604	--	Complies
H	30 – 300	G18277605	--	Complies
H	300 – 1000	G18277606	--	Complies
V	300 – 1000	G18277607	--	Complies


Remarks: Measurements have been performed with an EUT – antenna distance of 10 m.
Measured values have been corrected with different conversion factors, based on the measuring distance provided by the standard.
Checks carried out in the open field area show that the values measured in the semi-anechoic chamber are worse in the frequency range 0,009 - 30 MHz

Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +
AV: Average; AV [1s] (average at 1 second) values are marked with a x



Graphs

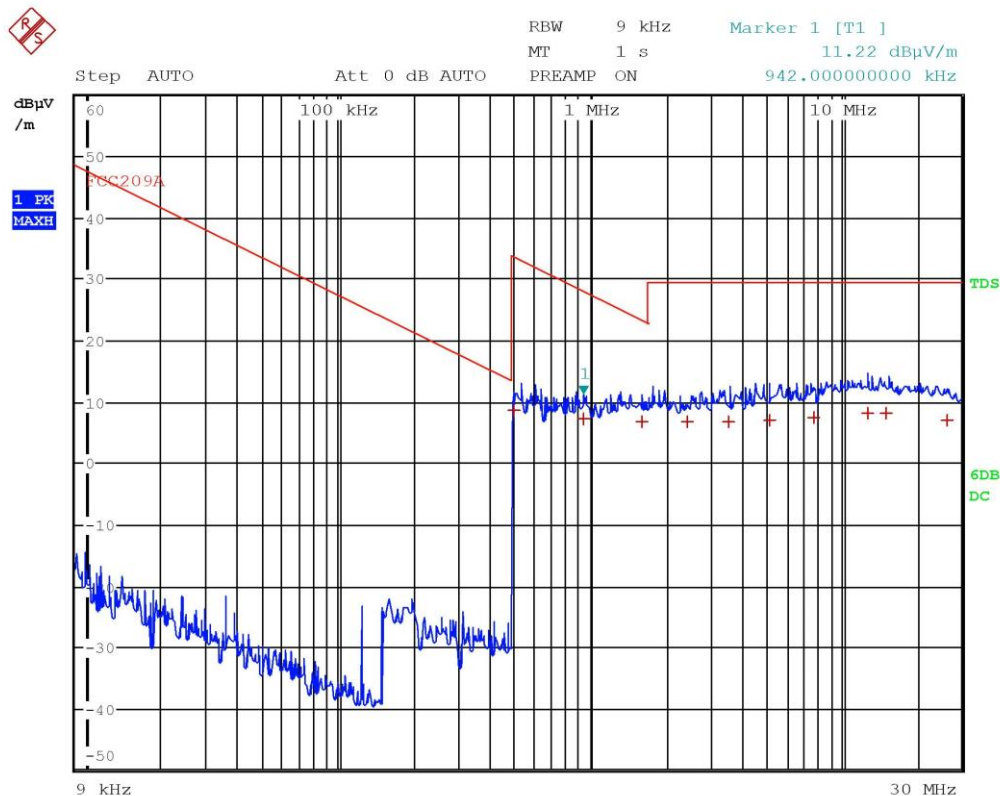


Bertezzo 18277603



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209A		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	498 kHz	8.54	-25.11
1 Quasi Peak	942 kHz	7.14	-20.98
1 Quasi Peak	1.61 MHz	6.83	-16.62
1 Quasi Peak	2.43 MHz	6.66	-22.87
1 Quasi Peak	3.562 MHz	6.61	-22.92
1 Quasi Peak	5.158 MHz	6.88	-22.65
1 Quasi Peak	7.722 MHz	7.47	-22.06
1 Quasi Peak	12.742 MHz	8.19	-21.34
1 Quasi Peak	15.022 MHz	8.12	-21.41
1 Quasi Peak	26.19 MHz	6.99	-22.54

Bertezzolo 18277603

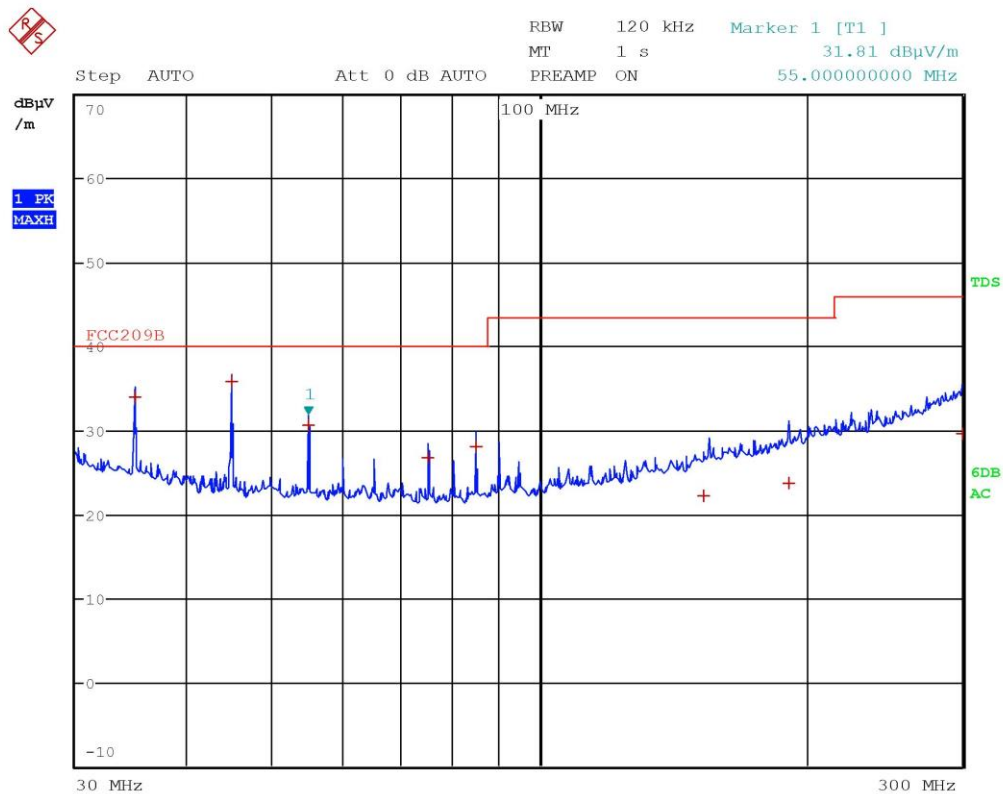


Bertezzo 18277604



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	35 MHz	33.90	-6.09
1 Quasi Peak	45 MHz	35.82	-4.17
1 Quasi Peak	55 MHz	30.62	-9.37
1 Quasi Peak	75 MHz	26.69	-13.30
1 Quasi Peak	85 MHz	28.04	-11.95
1 Quasi Peak	153.12 MHz	22.16	-21.35
1 Quasi Peak	191 MHz	23.70	-19.81
1 Quasi Peak	299.84 MHz	29.61	-16.40

Bertezzolo 18277604

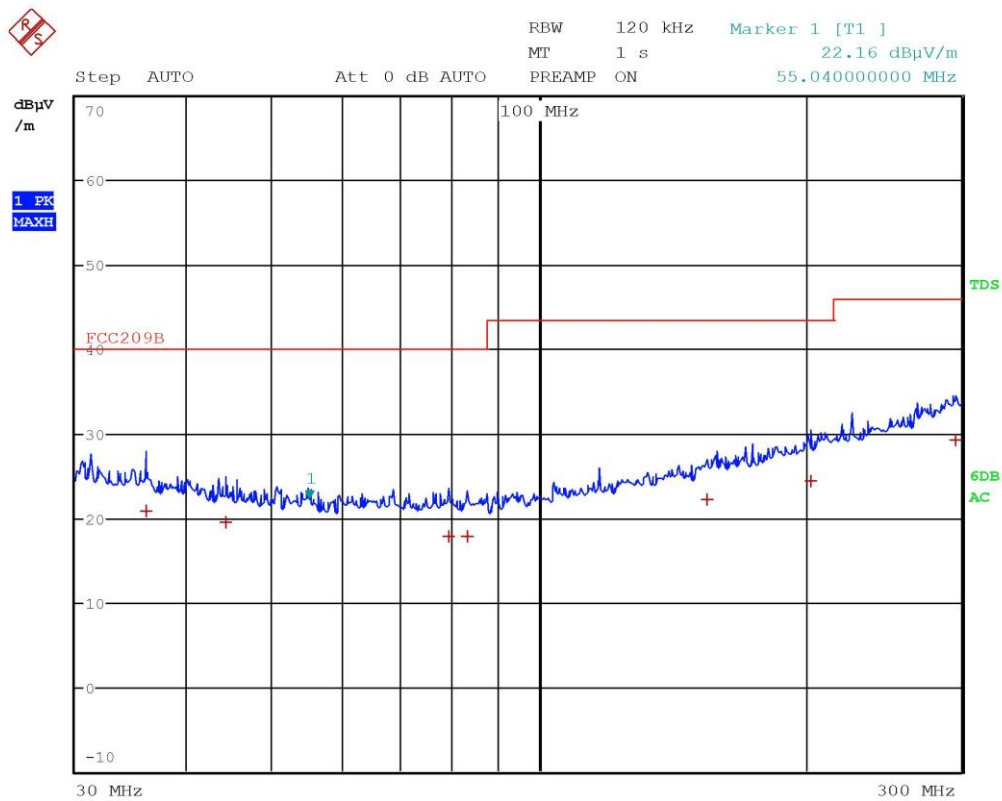


Bertezzo 18277605



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	36 MHz	20.87	-19.12
1 Quasi Peak	44.32 MHz	19.47	-20.52
1 Quasi Peak	79.2 MHz	17.88	-22.11
1 Quasi Peak	83.08 MHz	17.77	-22.22
1 Quasi Peak	154.8 MHz	22.23	-21.28
1 Quasi Peak	202.96 MHz	24.36	-19.15
1 Quasi Peak	295.52 MHz	29.25	-16.76

Bertezzo 18277605

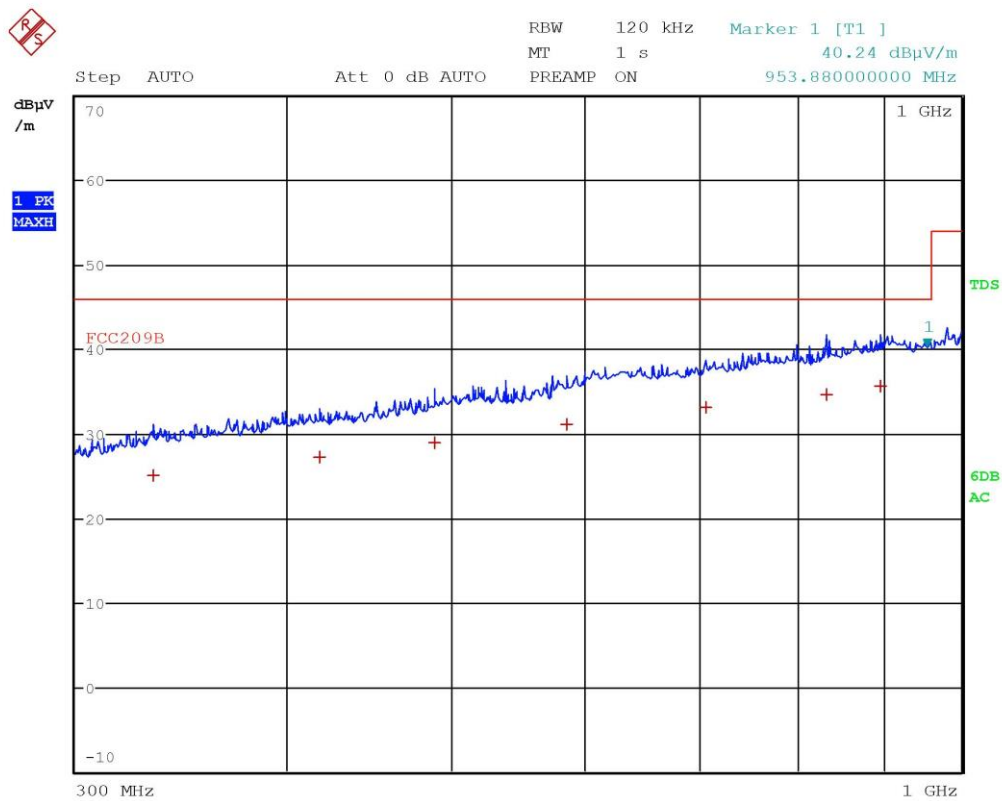


Bertezzolo 18277606



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	333.84 MHz	25.07	-20.94
1 Quasi Peak	418.4 MHz	27.22	-18.79
1 Quasi Peak	488.4 MHz	28.95	-17.06
1 Quasi Peak	585.12 MHz	31.11	-14.90
1 Quasi Peak	706.72 MHz	33.06	-12.95
1 Quasi Peak	831.72 MHz	34.54	-11.47
1 Quasi Peak	896.36 MHz	35.65	-10.36

Bertezzo 18277606

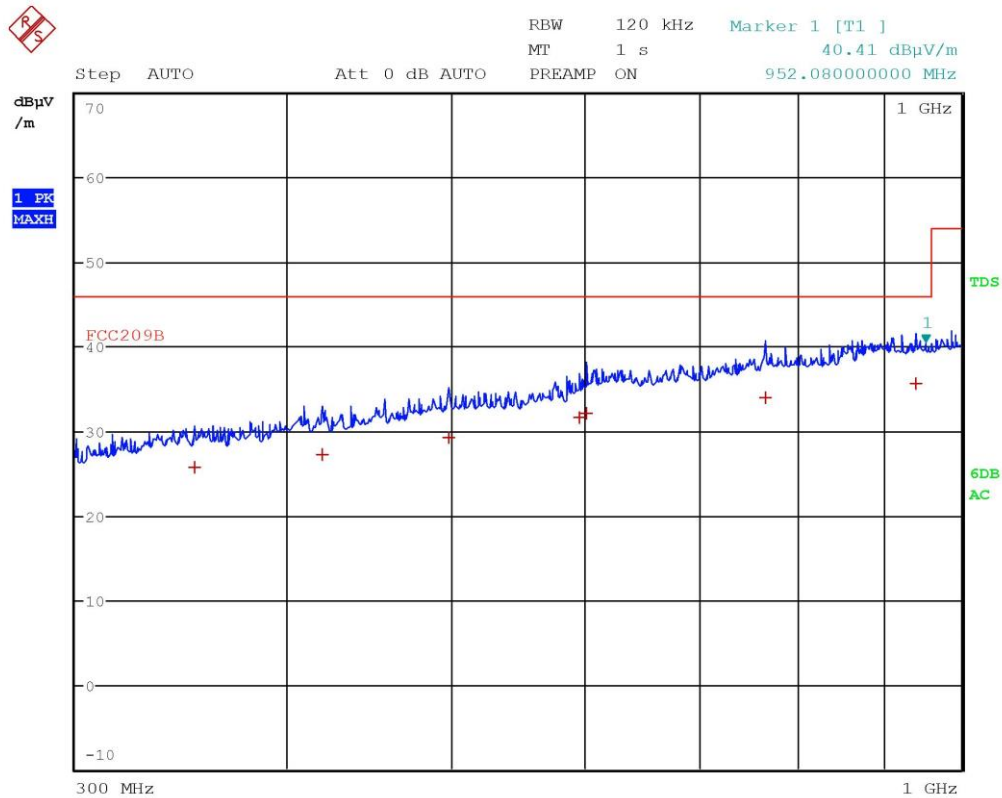

Bertezzolo 18277607



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	352.84 MHz	25.76	-20.25
1 Quasi Peak	419.88 MHz	27.24	-18.77
1 Quasi Peak	497.92 MHz	29.25	-16.76
1 Quasi Peak	594.92 MHz	31.53	-14.48
1 Quasi Peak	601.16 MHz	32.14	-13.87
1 Quasi Peak	766.28 MHz	33.87	-12.14
1 Quasi Peak	940.4 MHz	35.62	-10.39

Bertezzolo 18277607

Result: The requirements are met