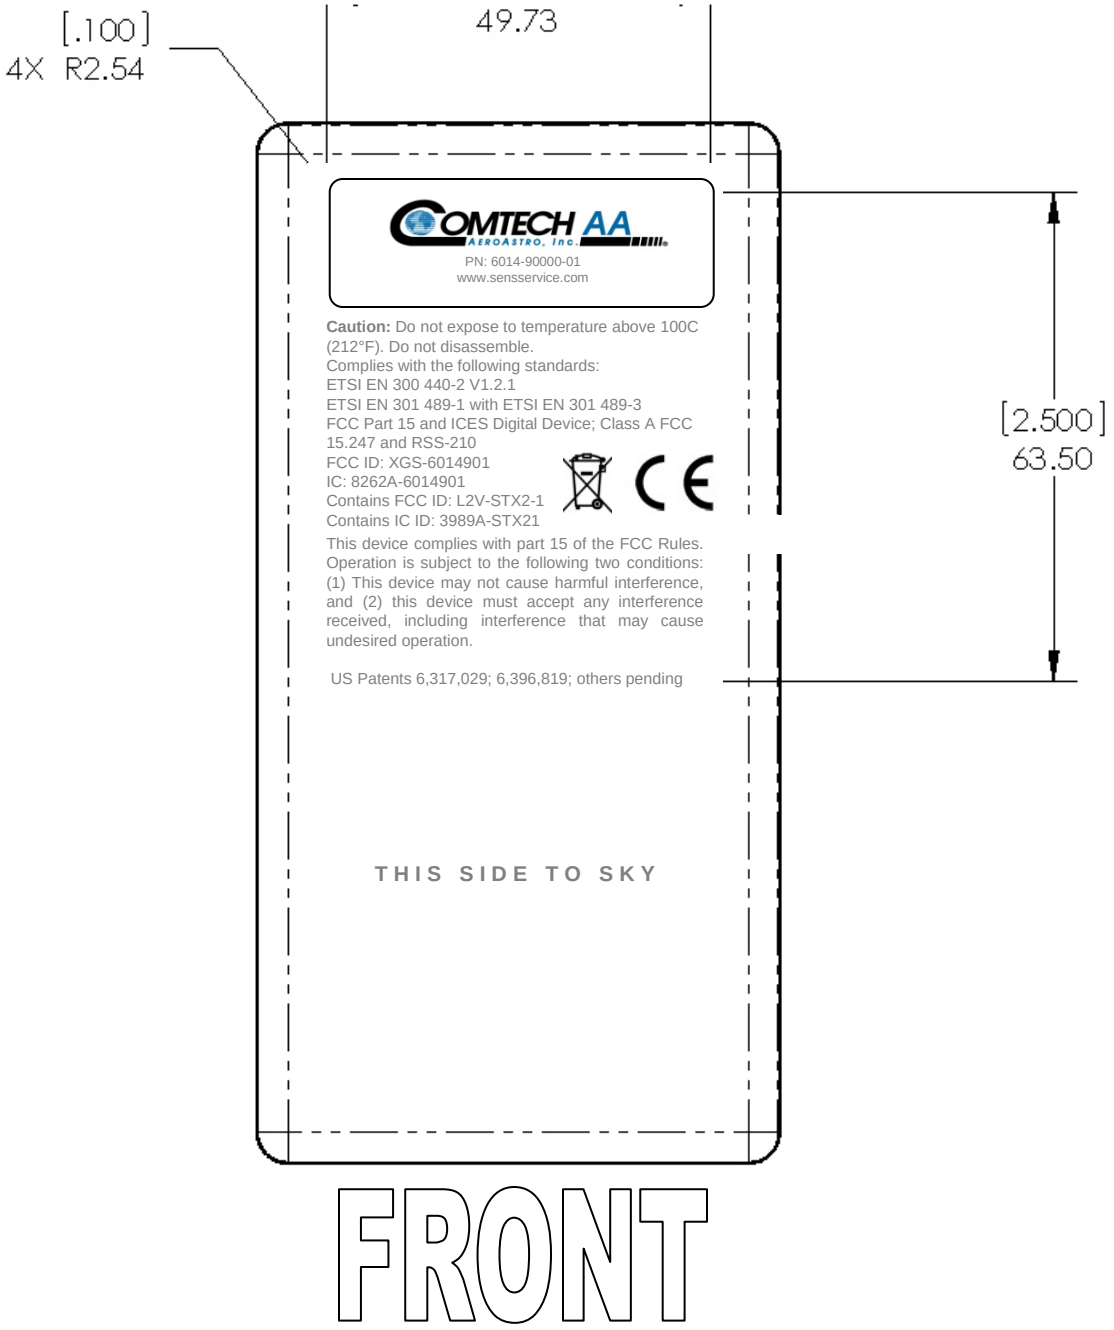
[.100]
4X R2.54
49.73
COMTECH AA
AEROASTRO, Inc.
PN: 6014-90000-01
www.sensservice.com
Caution: Do not expose to temperature above 100C (212°F). Do not disassemble.
Complies with the following standards:
ETSI EN 300 440-2 V1.2.1
ETSI EN 301 489-1 with ETSI EN 301 489-3
FCC Part 15 and ICES Digital Device; Class A FCC 15.247 and RSS-210
FCC ID: XGS-6014901
IC: 8262A-6014901
Contains FCC ID: L2V-STX2-1
Contains IC ID: 3989A-STX21
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
US Patents 6,317,029; 6,396,819; others pending
[2.500]
63.50
THIS SIDE TO SKY
FRONT

OPTION 1

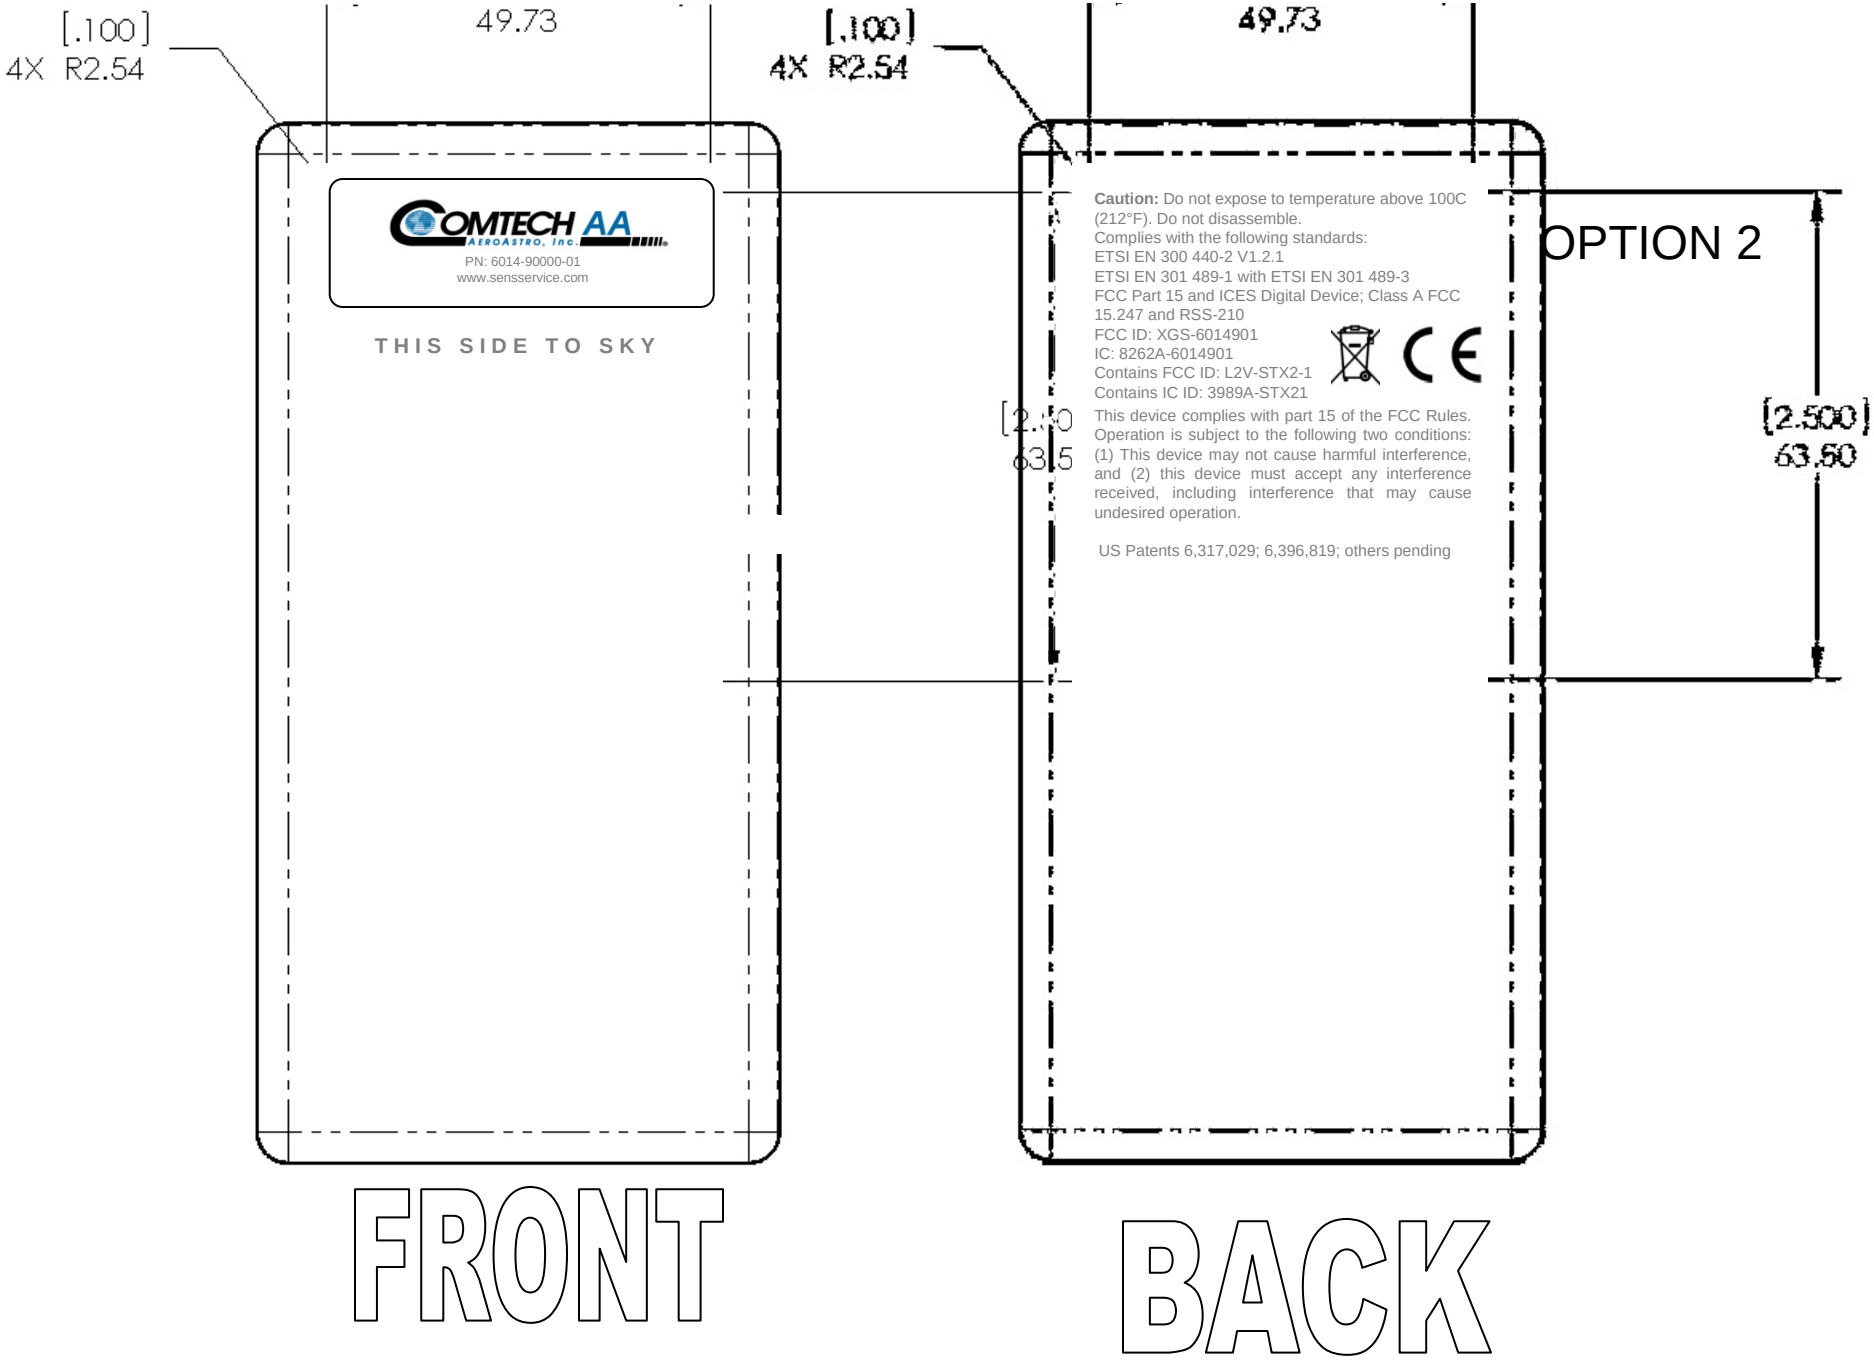
[.100]
4X R2.54
49.73
COMTECH AA AEROASTRO, Inc.
PN: 6014-90000-01
www.sensservice.com
THIS SIDE TO SKY
FRONT
[.100]
4X R2.54
49.73
Caution: Do not expose to temperature above 100C (212°F). Do not disassemble.
Complies with the following standards:
ETSI EN 300 440-2 V1.2.1
ETSI EN 301 489-1 with ETSI EN 301 489-3
FCC Part 15 and ICES Digital Device; Class A FCC 15.247 and RSS-210
FCC ID: XGS-6014901
IC: 8262A-6014901
Contains FCC ID: L2V-STX2-1
Contains IC ID: 3989A-STX21
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
US Patents 6,317,029; 6,396,819; others pending
OPTION 2
[2.500]
63.50
BACK