

# FCC RF Test Report

APPLICANT : Barnes&Noble.com  
EQUIPMENT : NOOKcolor  
BRAND NAME : Nook  
MODEL NAME : BNTV600  
FCC ID : XHHBNTV600-A  
STANDARD : FCC Part 15 Subpart C §15.247  
IC RSS-210 Issue 8  
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Aug. 09, 2012 and completely tested on Sep. 08, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



---

Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## TABLE OF CONTENTS

<b>REVISION HISTORY .....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1 Applicant .....	5
1.2 Feature of Equipment Under Test .....	5
1.3 Testing Site .....	6
1.4 Applied Standards .....	7
1.5 Ancillary Equipment List .....	7
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
2.1 Carrier Frequency Channel .....	8
2.2 Pre-Scanned RF Power .....	9
2.3 Test Mode .....	10
2.4 Connection Diagram of Test System .....	11
2.5 RF Utility .....	11
<b>3 TEST RESULT .....</b>	<b>12</b>
3.1 6dB and 99% Bandwidth Measurement .....	12
3.2 Output Power Measurement .....	25
3.3 Power Spectral Density Measurement .....	28
3.4 Conducted Band Edges and Spurious Emission Measurement .....	35
3.5 Radiated Emission Measurement .....	48
3.6 AC Conducted Emission Measurement .....	68
3.7 Antenna Requirements .....	72
<b>4 LIST OF MEASURING EQUIPMENT .....</b>	<b>73</b>
<b>5 UNCERTAINTY OF EVALUATION .....</b>	<b>74</b>

## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR280907B	Rev. 01	Initial issue of report	Oct. 09, 2012

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	Gen 4.6.1	99% Bandwidth	-	Pass	-
3.2	15.247(b)	A8.4	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	A8.5	Radiated Band Edges	15.209(a) & 15.247(d)	Pass	-
			Radiated Spurious Emission		Pass	Under limit 3.92 dB at 2386.680 MHz
3.6	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 10.00 dB at 0.478 MHz
3.7	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

**Barnes&Noble.com**

76 Ninth Avenue, 9th Floor, New York, NY 10011

## 1.2 Feature of Equipment Under Test

Product Feature	
Equipment	NOOKcolor
Brand Name	Nook
Model Name	BNTV600
Sample A1	SKU A1 3022960040764306
Sample B1	SKU B1 3022930035984312
Sample B2	SKU B2 3022950040194313
FCC ID	XHHBNTV600-A
EUT supports Radios application	WLAN 11bgn / Bluetooth
HW Version	EVT2
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2412 MHz ~ 2462 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Maximum Output Power to Antenna	802.11b : 19.73 dBm (0.0940 W) 802.11g : 22.51 dBm (0.1782 W) 802.11n HT20 : 22.15 dBm (0.1641 W)
99% Occupied Bandwidth	802.11b : 14.00MHz 802.11g : 17.95MHz 802.11n HT20 : 19.00MHz
Antenna Type	PIFA Antenna with gain -0.32 dBi
Type of Modulation	802.11b : DSSS (BPSK / QPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

	Sample A1	Sample B1	Sample B2
<b>PCBA SKU #</b>	<b>SKU 3</b>	<b>SKU 4</b>	<b>SKU 4</b>
<b>Model Number</b>	BNTV600	BNTV600	BNTV600
<b>CPU</b>	1.5GHz	1.5GHz	1.5GHz
<b>Memory</b>	1GB DDR2 for PoP @ 533 Mhz	1GB DDR2 for PoP @ 533 Mhz	1GB DDR2 for PoP @ 533 Mhz
<b>eMMC/Managed NAND Flash</b>	16GB	32GB	32GB
<b>Wireless</b>	Combo, Wlan 802.11b/g/n, Bluetooth 2.1+EDR	Combo, Wlan 802.11b/g/n, Bluetooth 2.1+EDR	Combo, Wlan 802.11b/g/n, Bluetooth 2.1+EDR
<b>Battery</b>	Li-Ion Rechargeable Battery	Li-Ion Rechargeable Battery	Li-Ion Rechargeable Battery
<b>Display</b>	9" LCM	9" LCM	9" LCM
<b>Touch Function</b>	Yes	Yes	Yes

### 1.3 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.			
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC/IC Registration No.</b>
	TH02-HY	CO05-HY	03CH07-HY	722060/4086B-1

## 1.4 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v01
- ♦ FCC TCB Workshop 2012, April
- ♦ ANSI C63.4-2003 and ANSI C63.10-2009
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 1.5 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-605	KA2DIR605B1	N/A	Unshielded, 1.8 m
2.	Notebook	DELL	Latitude E6320	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
4.	iPod Earphone	Apple	N/A	FCC DoC	Unshielded, 1.0 m	N/A

## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 KHz to 30 MHz) and radiated emission (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and antenna configurations as following table and the highest power data rates were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

2.4GHz 802.11b mode				
Data Rate (MHz)	1M bps	2M bps	5.5M bps	11M bps
Peak Power (dBm)	19.73	19.72	19.45	19.46

2.4GHz 802.11g mode								
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
Peak Power (dBm)	22.51	22.49	22.46	22.43	22.5	22.47	22.33	22.27

2.4GHz 802.11n HT20 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Peak Power (dBm)	22.15	22.09	21.95	21.83	21.8	22.03	21.8	21.33


## 2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
Conducted TCs	Test Items	Mode	Data Rate	Test Channel
	6dB and 99% BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
	Conducted Band EDGE	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
Radiated TCs	Radiated Band EDGE	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN Link + H Pattern + TC + Adapter 1 for Sample A1			
Remark:				
1. TC stands for Test Configuration, and consists of iPod earphone and SD card.				
2. Manufacturer of Adapter 1 is Foxlink.				

## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>

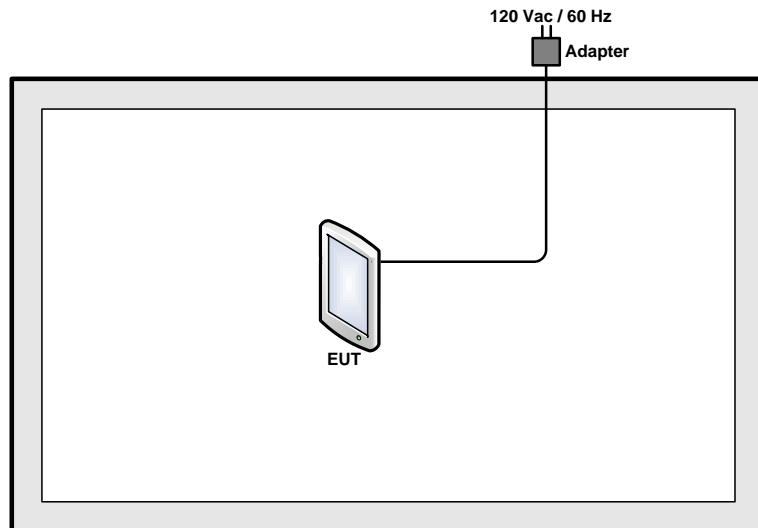

### <AC Conducted Emission Mode>

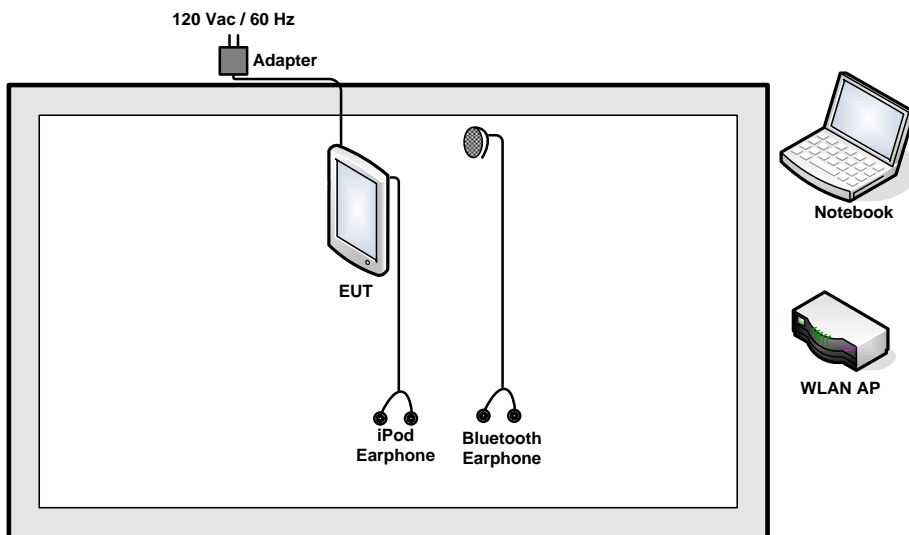

## 2.5 RF Utility

For WLAN function, programmed RF utility, "Command" installed in the notebook make the EUT provides functions like channel selection and power level for continuous transmitting and receiving signals.

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 KHz.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance and TCB Workshop 2012, April.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1-5% of the emission bandwidth (EBW). Set the Video bandwidth (VBW)  $\geq 3 * RBW$ . In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.

##### 3.1.4 Test Setup

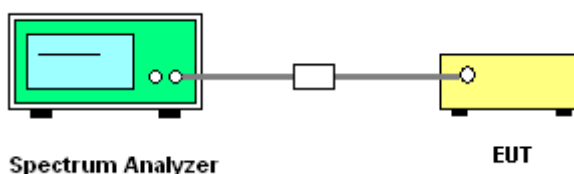


### 3.1.5 Test Result of 6dB Bandwidth

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Bill Kuo	<b>Relative Humidity :</b>	52~55%

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	9.16	0.5	Pass
06	2437	9.16	0.5	Pass
11	2462	9.16	0.5	Pass


**6 dB Bandwidth Plot on 802.11b Channel 01**

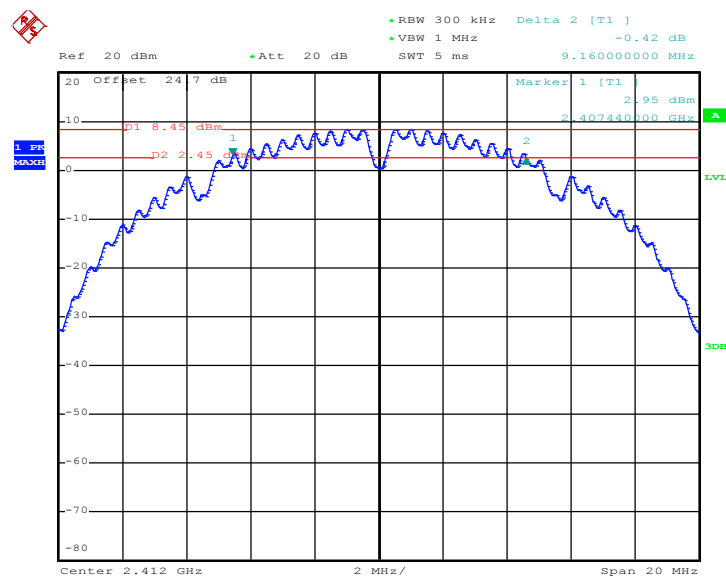

Date: 31.AUG.2012 22:29:41




6 dB Bandwidth Plot on 802.11b Channel 06

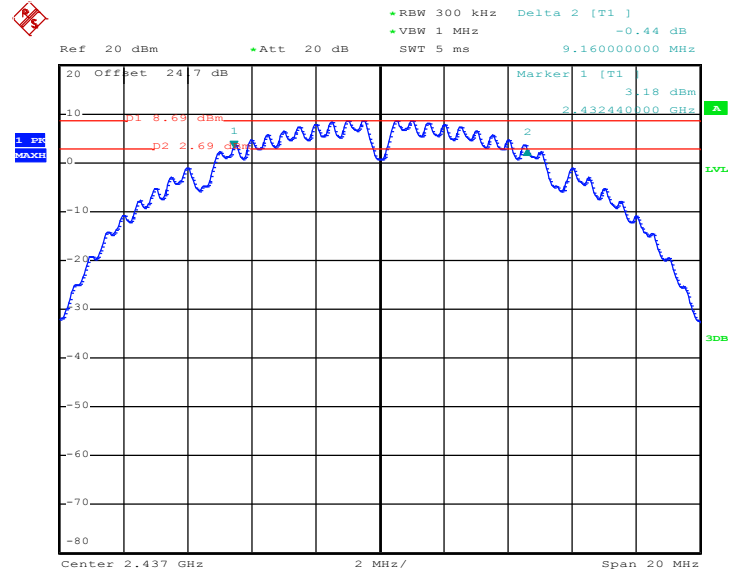

Date: 31.AUG.2012 22:33:58

6 dB Bandwidth Plot on 802.11b Channel 11

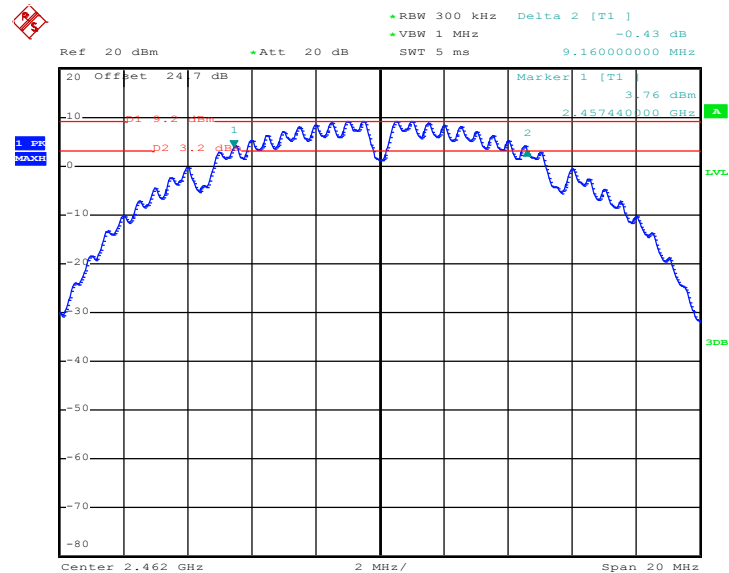


Date: 31.AUG.2012 22:47:46






6 dB Bandwidth Plot on 802.11g Channel 06

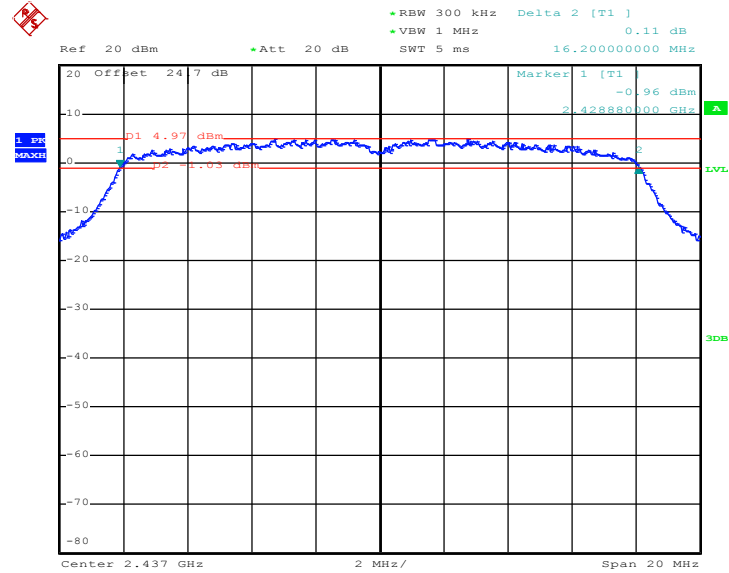

Date: 31.AUG.2012 22:56:33


6 dB Bandwidth Plot on 802.11g Channel 11

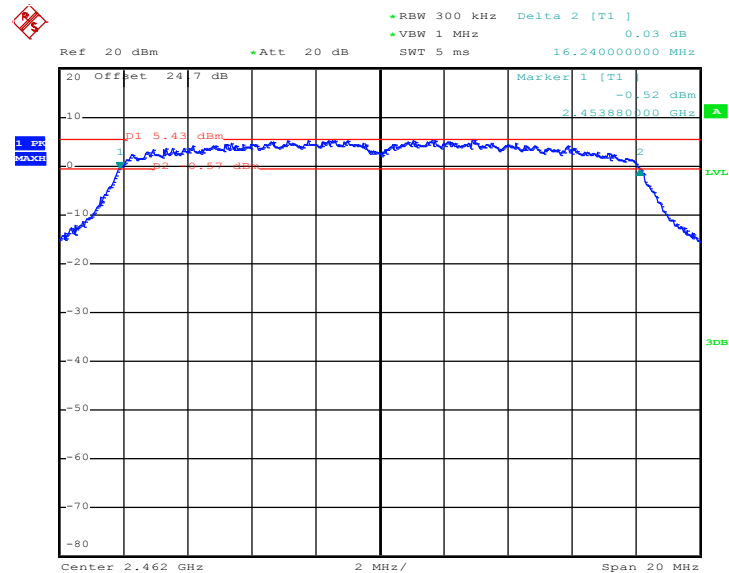


Date: 31.AUG.2012 22:52:15



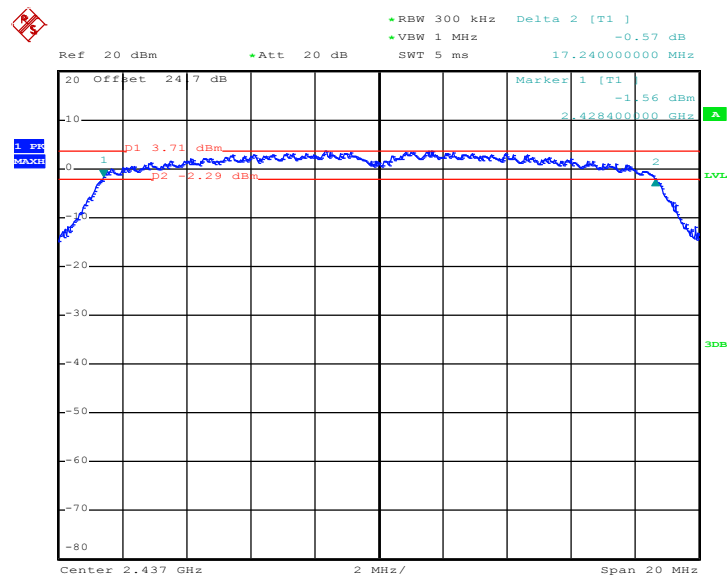

**6 dB Bandwidth Plot on 802.11n HT20 Channel 06**


Date: 31.AUG.2012 23:11:02

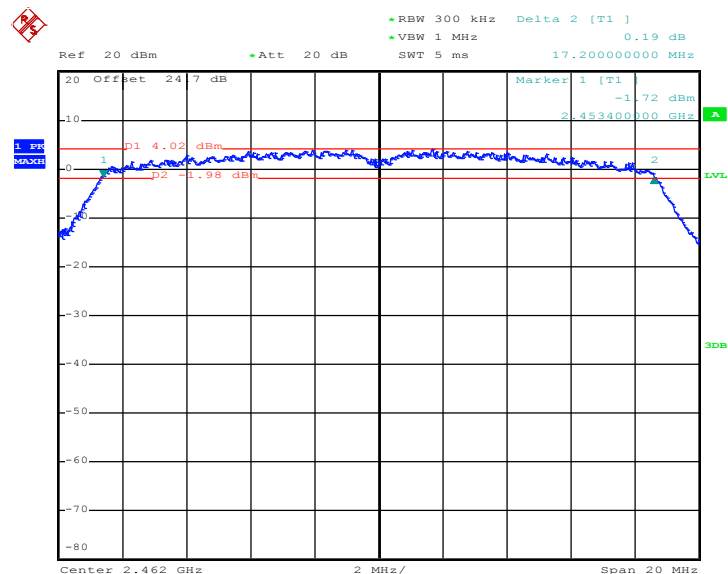**6 dB Bandwidth Plot on 802.11n HT20 Channel 11**


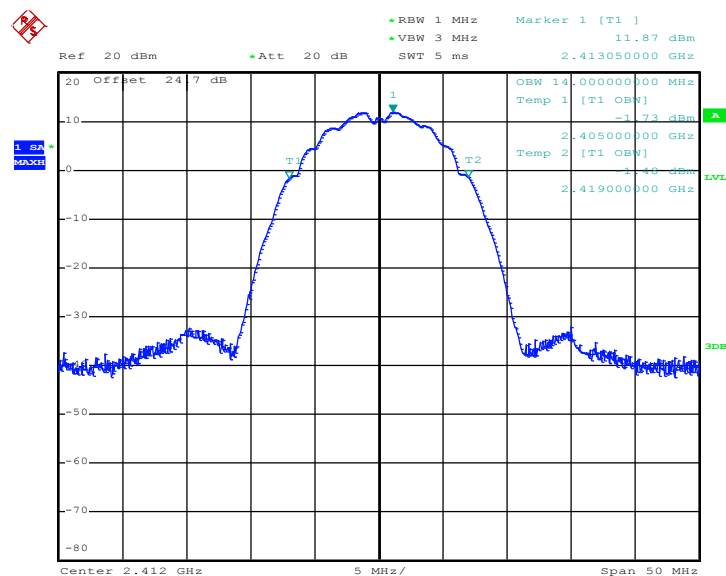
Date: 31.AUG.2012 23:14:02

### 3.1.6 Test Result of 99% Occupied Bandwidth

Test Mode :	802.11b	Temperature :	24~26°C
Test Engineer :	Bill Kuo	Relative Humidity :	52~55%

Channel	Frequency (MHz)	802.11b 99% Occupied Bandwidth (MHz)	Pass/Fail
01	2412	14.00	Pass
06	2437	14.00	Pass
11	2462	14.00	Pass


**99% Occupied Bandwidth Plot on 802.11b Channel 01**



Date: 31.AUG.2012 22:32:14




99% Occupied Bandwidth Plot on 802.11b Channel 06

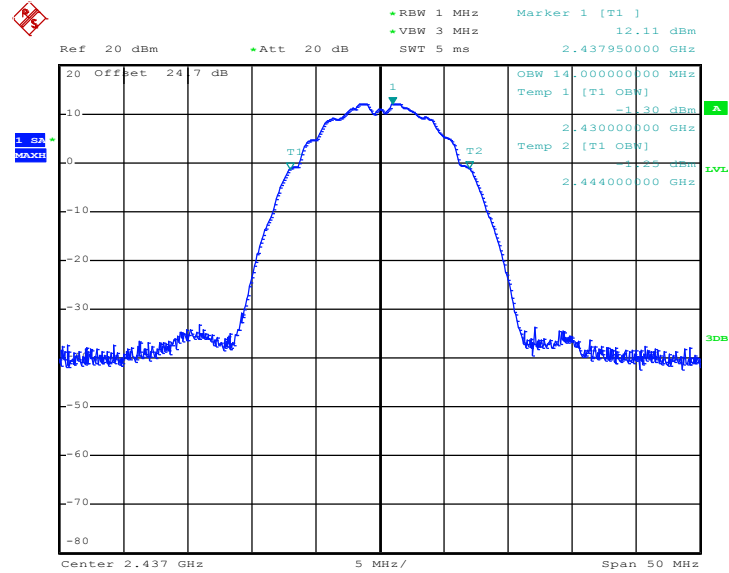

Date: 31.AUG.2012 22:36:22

99% Occupied Bandwidth Plot on 802.11b Channel 11

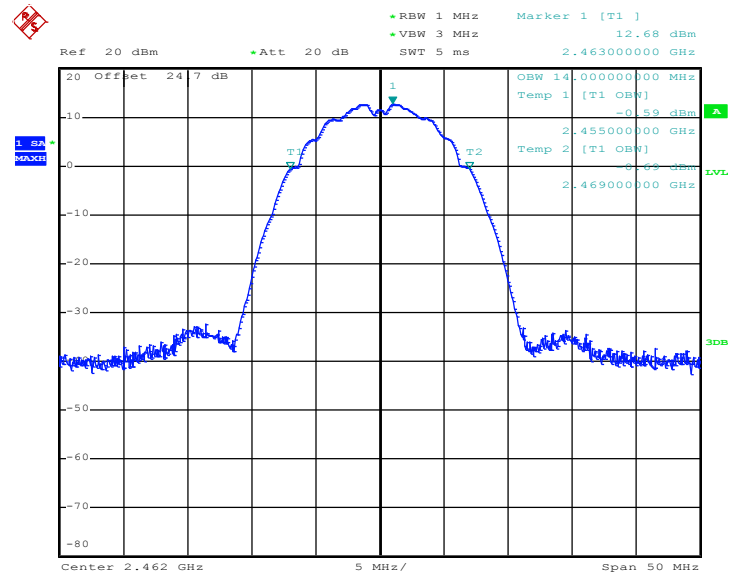


Date: 31.AUG.2012 22:49:35




<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Bill Kuo	<b>Relative Humidity :</b>	52~55%

Channel	Frequency (MHz)	802.11g 99% Occupied Bandwidth (MHz)	Pass/Fail
01	2412	17.95	Pass
06	2437	17.80	Pass
11	2462	17.95	Pass


**99% Occupied Bandwidth Plot on 802.11g Channel 01**

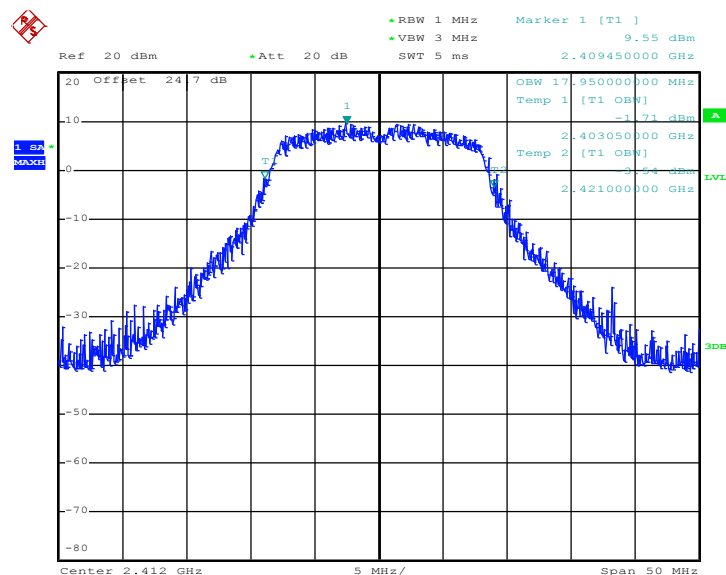

Date: 31.AUG.2012 23:03:55

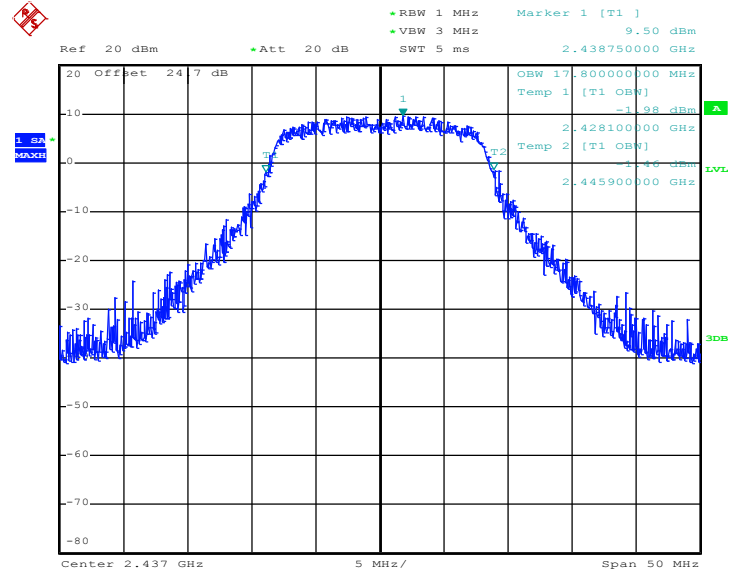**99% Occupied Bandwidth Plot on 802.11g Channel 06**


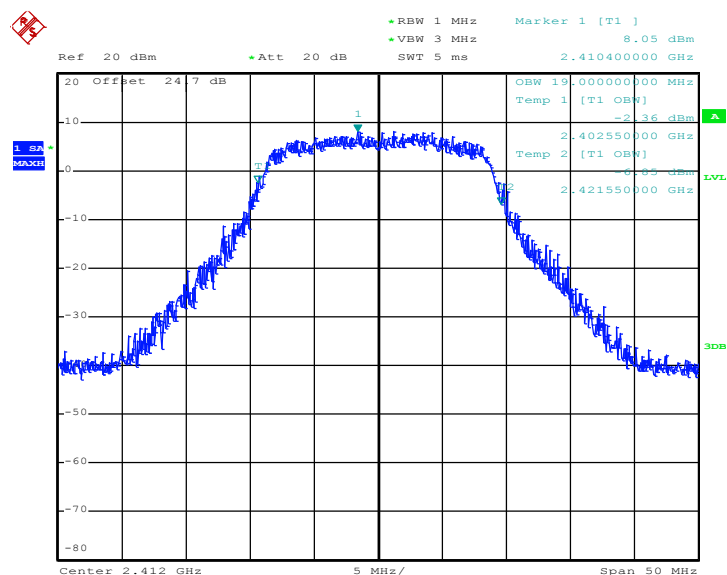
Date: 31.AUG.2012 22:57:59

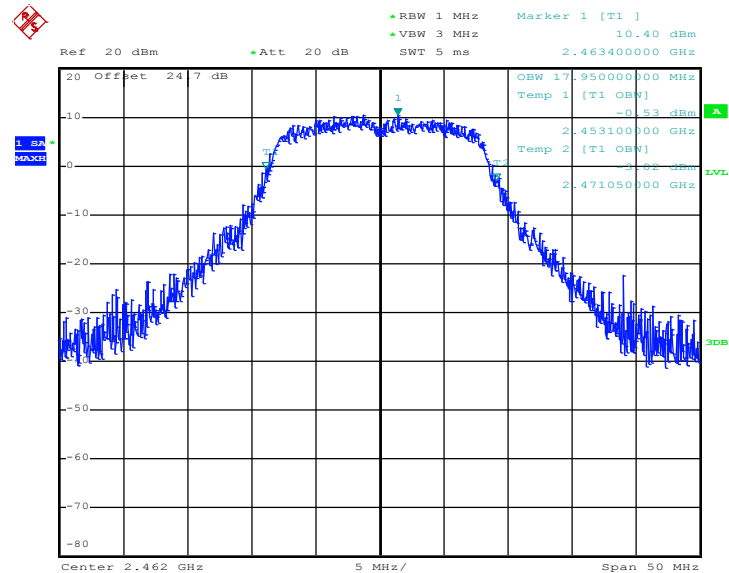**99% Occupied Bandwidth Plot on 802.11g Channel 11**


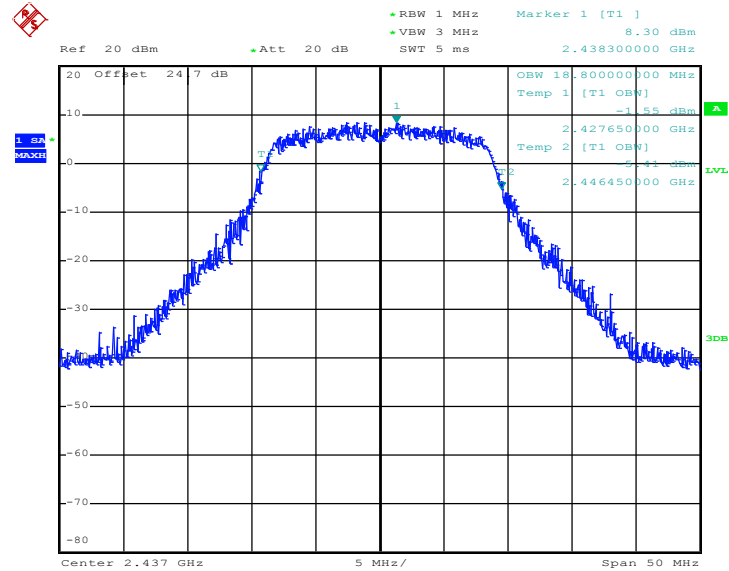
Date: 31.AUG.2012 22:54:16

<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Bill Kuo	<b>Relative Humidity :</b>	52~55%


Channel	Frequency (MHz)	2.4GHz 802.11n HT20 99% Occupied Bandwidth (MHz)	Pass/Fail
01	2412	19.00	Pass
06	2437	18.80	Pass
11	2462	18.85	Pass

**99% Occupied Bandwidth Plot 802.11n HT20 Channel 01**


Date: 31.AUG.2012 23:08:35

**99% Occupied Bandwidth Plot 802.11n HT20 Channel 06**


Date: 31.AUG.2012 23:12:23

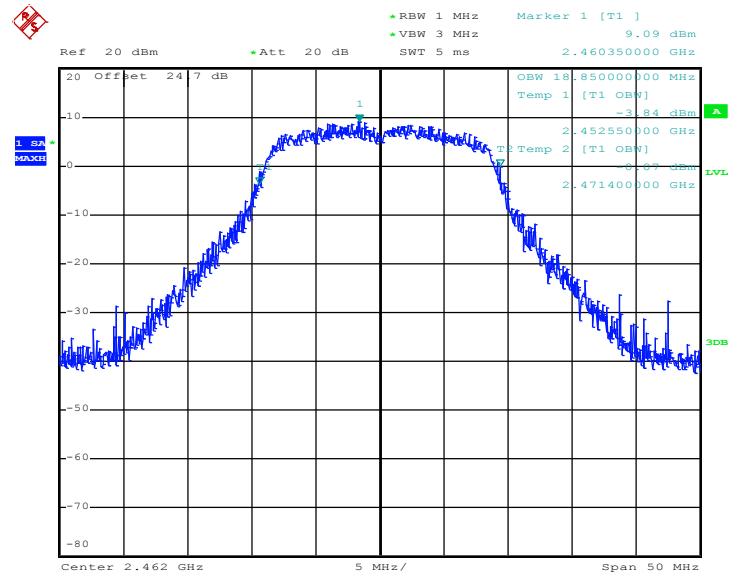**99% Occupied Bandwidth Plot 802.11n HT20 Channel 11**


Date: 31.AUG.2012 23:16:00



## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance and TCB Workshop 2012, April.
2. The RF output of EUT was connected to the power meter by a low loss cable
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

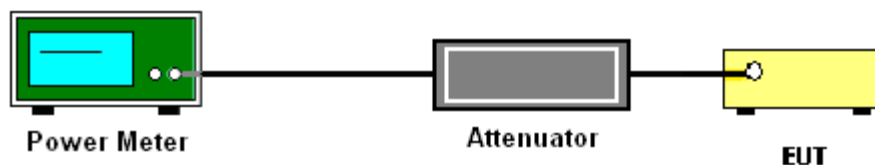

**3.2.5 Test Result of Peak Output Power**

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Bill Kuo	<b>Relative Humidity :</b>	52~55%

Channel	Frequency (MHz)	802.11b Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	19.48	30	Pass
06	2437	19.66	30	Pass
11	2462	19.73	30	Pass

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Bill Kuo	<b>Relative Humidity :</b>	52~55%

Channel	Frequency (MHz)	802.11g Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	22.47	30	Pass
06	2437	22.51	30	Pass
11	2462	22.30	30	Pass

<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Bill Kuo	<b>Relative Humidity :</b>	52~55%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	21.88	30	Pass
06	2437	22.15	30	Pass
11	2462	22.05	30	Pass

**3.2.6 Test Result of Average output Power (Reporting Only)**

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~26
<b>Test Engineer :</b>	Bill Kuo	<b>Relative Humidity :</b>	52~55
<b>Duty Cycle:</b>	100.00%	<b>Duty Factor:</b>	0.00dB

Channel	Frequency (MHz)	802.11b Average Output Power (dBm)
01	2412	17.18
06	2437	17.40
11	2462	17.49

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~26
<b>Test Engineer :</b>	Bill Kuo	<b>Relative Humidity :</b>	52~55
<b>Duty Cycle:</b>	98.09%	<b>Duty Factor:</b>	0.08dB

Channel	Frequency (MHz)	802.11g Average Output Power (dBm)
01	2412	12.88
06	2437	13.16
11	2462	13.06

<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	24~26
<b>Test Engineer :</b>	Bill Kuo	<b>Relative Humidity :</b>	52~55
<b>Duty Cycle:</b>	97.85%	<b>Duty Factor:</b>	0.09dB

Channel	Frequency (MHz)	802.11n HT20 Average Output Power (dBm)
01	2412	11.74
06	2437	11.98
11	2462	11.97

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3KHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 5.3.1 (Peak PSD) of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance and TCB Workshop 2012, April.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 KHz. Video bandwidth (VBW)  $\geq$  300 KHz In order to make an accurate measurement, set the span to 5-30% greater than Emission Bandwidth (EBW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
6. Record the measurement data derived from spectrum analyzer.
7. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$ .

#### 3.3.4 Test Setup

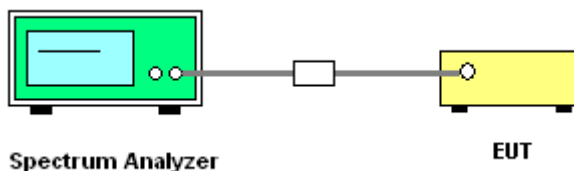

### 3.3.5 Test Result of Power Spectral Density


<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~26℃
<b>Test Engineer :</b>	Bill Kuo	<b>Relative Humidity :</b>	52~55%

Channel	Frequency (MHz)	802.11b Power Density		Max. Limits (dBm)	Pass/Fail
		Measured PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	7.80	-7.40	8	Pass
06	2437	7.91	-7.29	8	Pass
11	2462	8.52	-6.68	8	Pass


**Note:**

1. Measured power density (dBm) has offset with cable loss.
2.  $BWCF (dB) = 10 \log (3k/100k) = -15.2 \text{ dB}$
3.  $\text{Power Density/ 3kHz (dBm)} = \text{Measured power density/ 100KHz (dBm)} + BWCF (dB)$


#### PSD Plot on 802.11b Channel 01

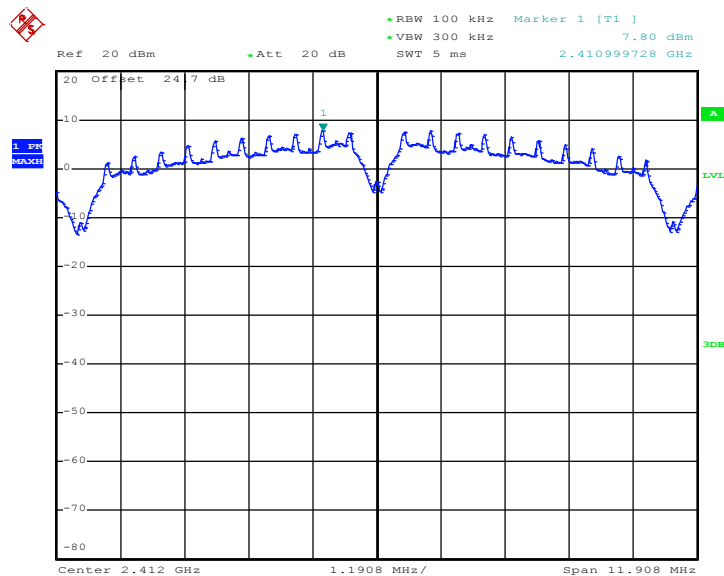

Date: 31.AUG.2012 22:30:22

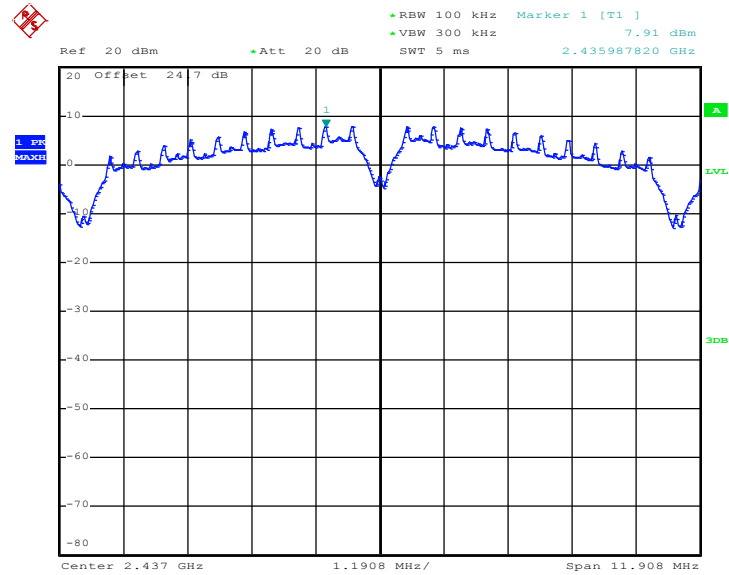**PSD Plot on 802.11b Channel 06**


Date: 31.AUG.2012 22:34:37

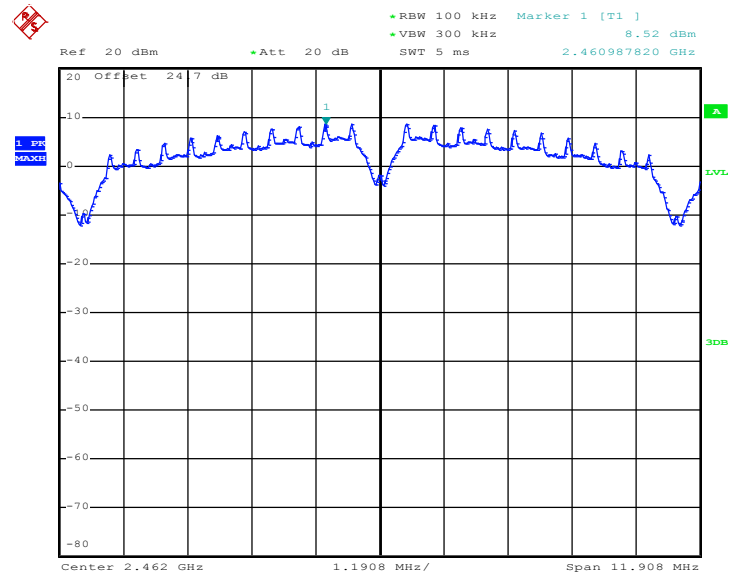**PSD Plot on 802.11b Channel 11**


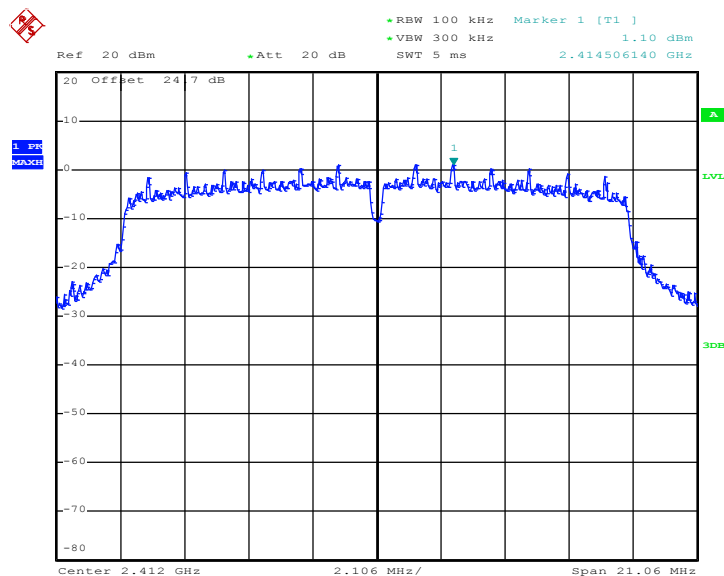
Date: 31.AUG.2012 22:48:19

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Bill Kuo	<b>Relative Humidity :</b>	52~55%

Channel	Frequency (MHz)	802.11g Power Density		Max. Limits (dBm)	Pass/Fail
		Measured PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	1.10	-14.10	8	Pass
06	2437	1.49	-13.71	8	Pass
11	2462	2.03	-13.17	8	Pass

**Note:**

1. Measured power density (dBm) has offset with cable loss.
2.  $BWCF (dB) = 10 \log (3k/100k) = -15.2 \text{ dB}$
3.  $\text{Power Density/ 3KHz (dBm)} = \text{Measured power density/ 100KHz (dBm)} + BWCF (dB)$

**PSD Plot on 802.11g Channel 01**


Date: 31.AUG.2012 23:01:12



Ref 20 dBm Att 20 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Marker 1 [T1] 1.49 dBm 2.438263600 GHz

1.56 MHz

20 Offset 24.7 dB

1

Center 2.437 GHz 2.106 MHz/ Span 21.06 MHz

Date: 31.AUG.2012 22:57:09

Ref 20 dBm Att 20 dB SWT 5 ms 2.463266720 GHz

RBW 100 kHz VBW 300 kHz Marker 1 [T1] 2.03 dBm

1.5% MAG

20 Offset 24.7 dB

Center 2.462 GHz 2.1112 MHz/ Span 21.112 MHz

Date: 31.AUG.2012 22:53:02




<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Bill Kuo	<b>Relative Humidity :</b>	52~55%


Channel	Frequency (MHz)	802.11n HT20 Power Density		Max. Limits (dBm)	Pass/Fail
		Measured PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	0.15	-15.05	8	Pass
06	2437	0.43	-14.77	8	Pass
11	2462	0.69	-14.51	8	Pass

**Note:**


1. Measured power density (dBm) has offset with cable loss.
2.  $BWCF (dB) = 10 \log (3k/100k) = -15.2 \text{ dB}$
3.  $\text{Power Density/ 3KHz (dBm)} = \text{Measured power density/ 100KHz (dBm)} + BWCF (dB)$

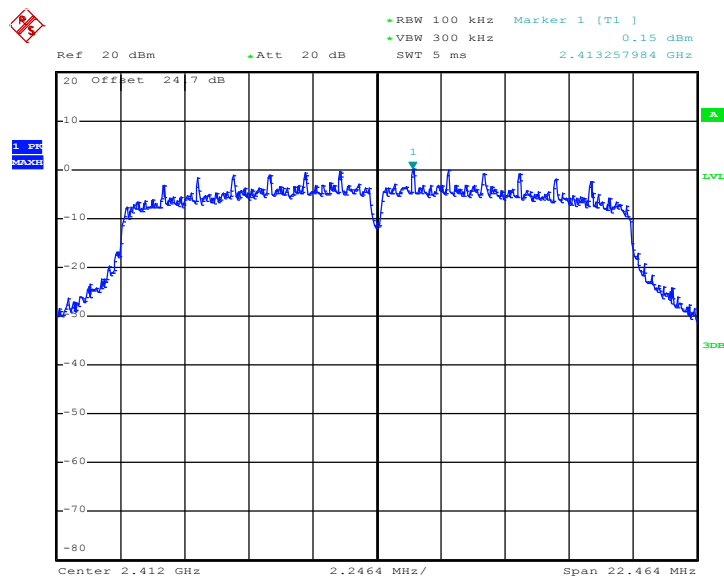**PSD Plot on 802.11n HT20 Channel 01**


Date: 31.AUG.2012 23:06:59

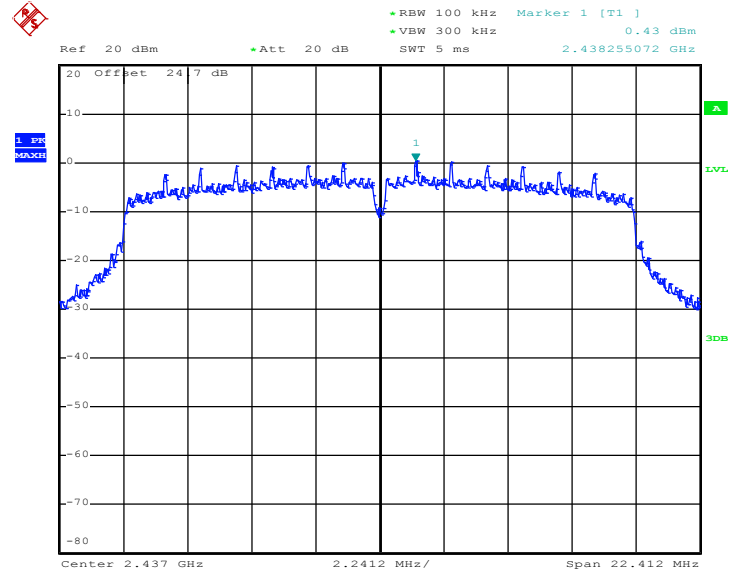**PSD Plot on 802.11n HT20 Channel 06**


Date: 31.AUG.2012 23:11:31

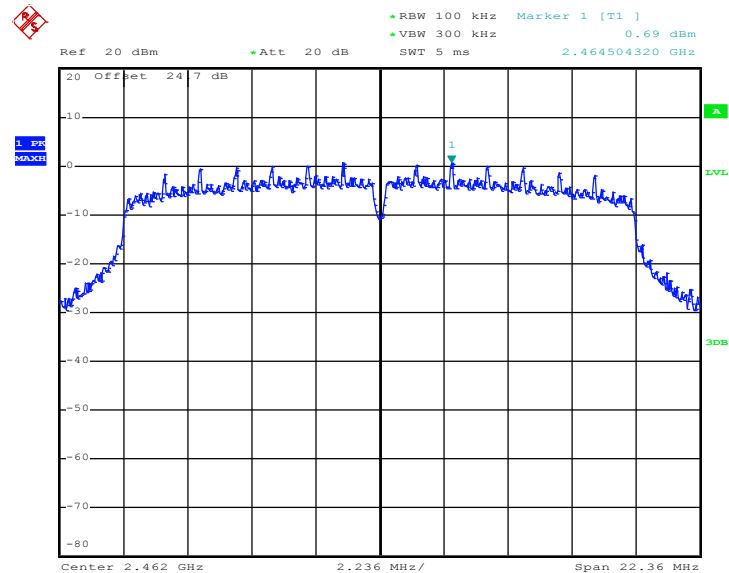**PSD Plot on 802.11n HT20 Channel 11**


Date: 31.AUG.2012 23:14:36

### 3.4 Conducted Band Edges and Spurious Emission Measurement

#### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

1. The testing follows the guidelines in the Measurement Procedure of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance and TCB Workshop 2012, April.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100 KHz, VBW=300 KHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz, when maximum peak conducted output power procedure is used. The attenuation is set to 30dB, when maximum conducted output power procedure is used.
4. Measure and record the results in the test report.


#### 3.4.4 Test Setup

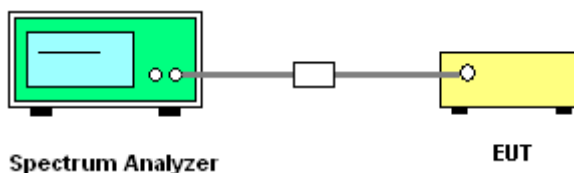

### 3.4.5 Test Plots of Conducted Band Edges


<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~26°C
<b>Test Band :</b>	Low and High	<b>Relative Humidity :</b>	52~55%
<b>Test Channel :</b>	01 and 11	<b>Test Engineer :</b>	Bill Kuo

**Low Band Edge Plot on 802.11b Channel 01**

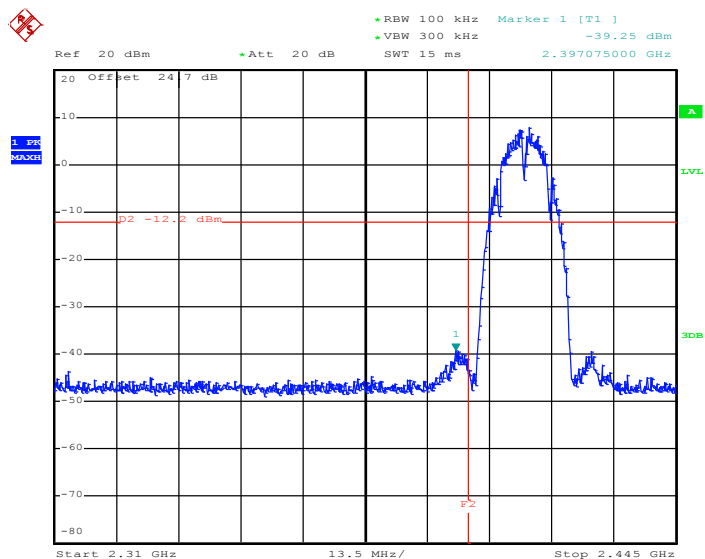

Date: 31.AUG.2012 22:30:36


**High Band Edge Plot on 802.11b Channel 11**

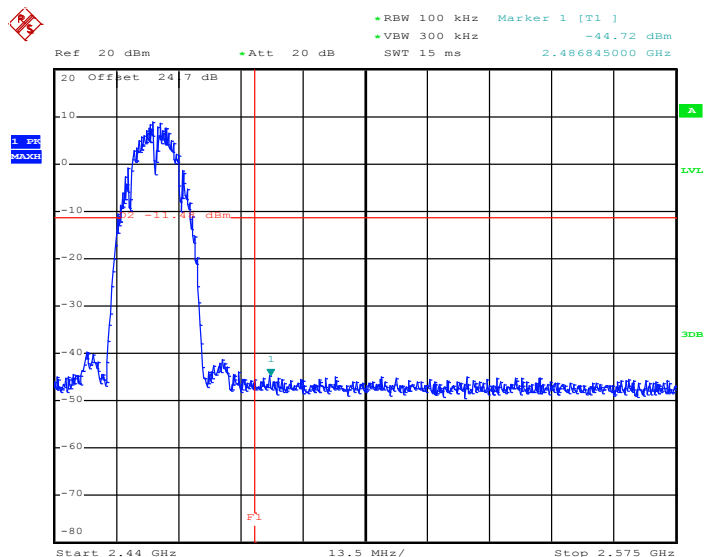


Date: 31.AUG.2012 22:48:36



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	Low and High	Relative Humidity :	52~55%
Test Channel :	01 and 11	Test Engineer :	Bill Kuo

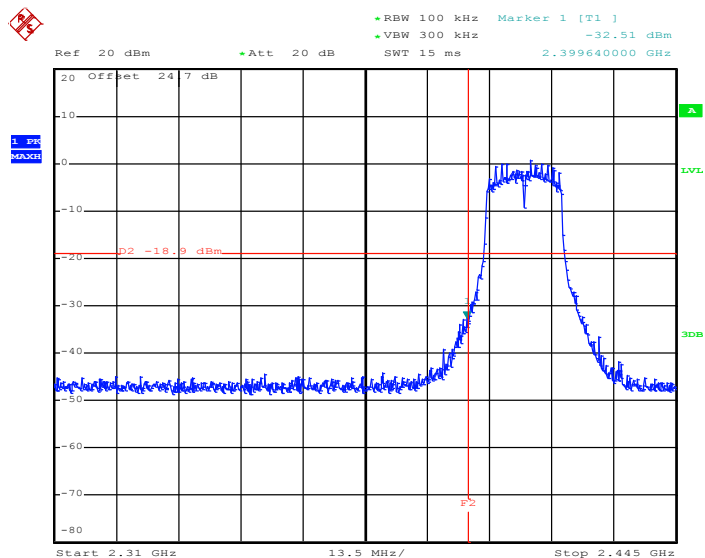
**Low Band Edge Plot on 802.11g Channel 01**

Date: 31.AUG.2012 23:03:00

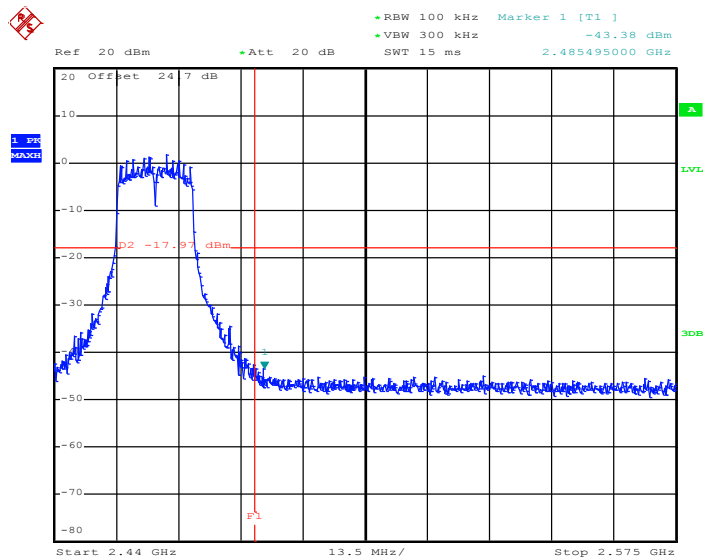
**High Band Edge Plot on 802.11g Channel 11**

Date: 31.AUG.2012 22:53:20

<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	24~26°C
<b>Test Band :</b>	Low and High	<b>Relative Humidity :</b>	52~55%
<b>Test Channel :</b>	01 and 11	<b>Test Engineer :</b>	Bill Kuo

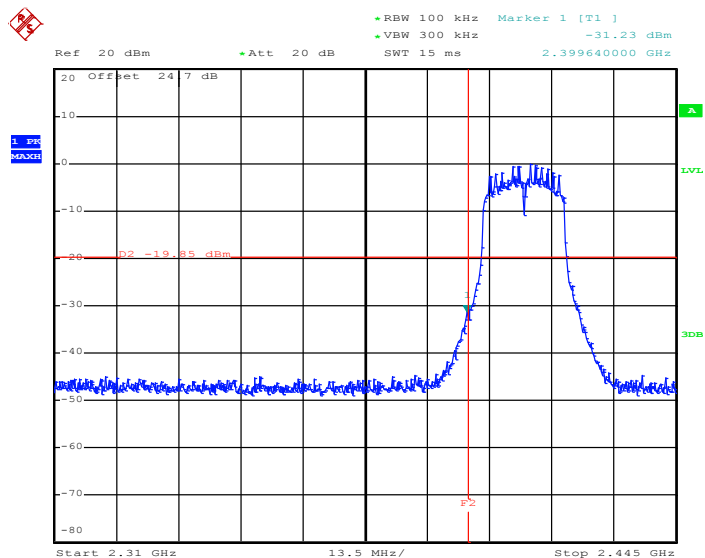**Low Band Edge Plot on 802.11n HT20 Channel 01**


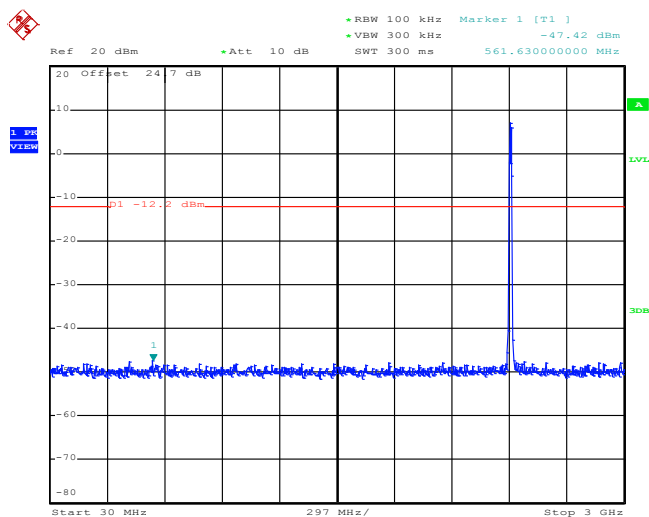
Date: 31.AUG.2012 23:07:44

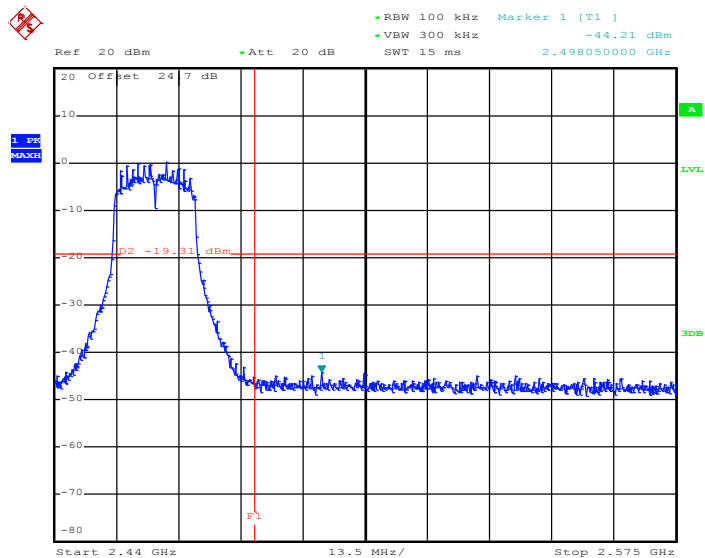**High Band Edge Plot on 802.11n HT20 Channel 11**


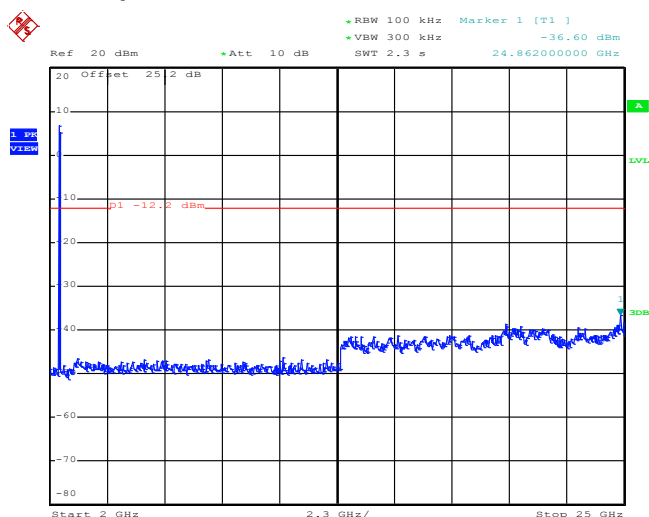
Date: 31.AUG.2012 23:15:09




<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~26℃
<b>Test Band :</b>	30MHz-3GHz and 2G-25GHz	<b>Relative Humidity :</b>	52~55%
<b>Test Channel :</b>	01, 06, 11	<b>Test Engineer :</b>	Bill Kuo




Date: 31.AUG.2012 22:30:56



Date: 31.AUG.2012 22:31:13

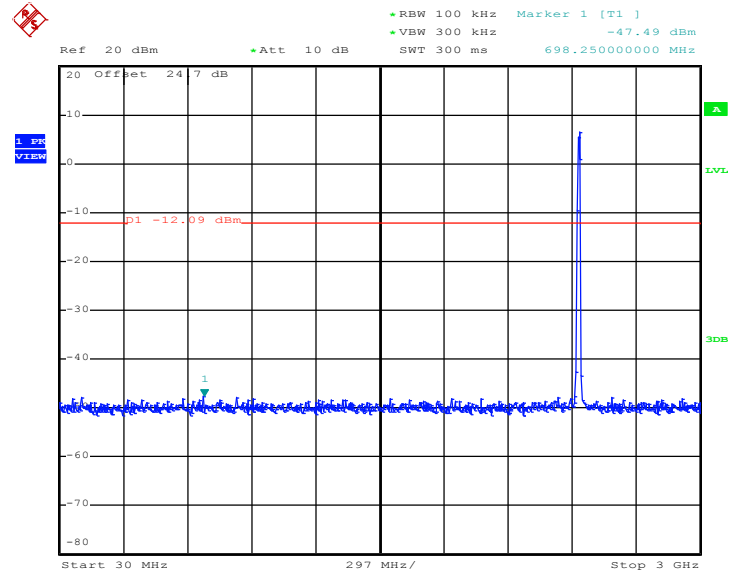
**802.11b 30 MHz~3 GHz**
**Conducted Spurious Emission Plot on Channel 06**


Date: 31.AUG.2012 22:35:40

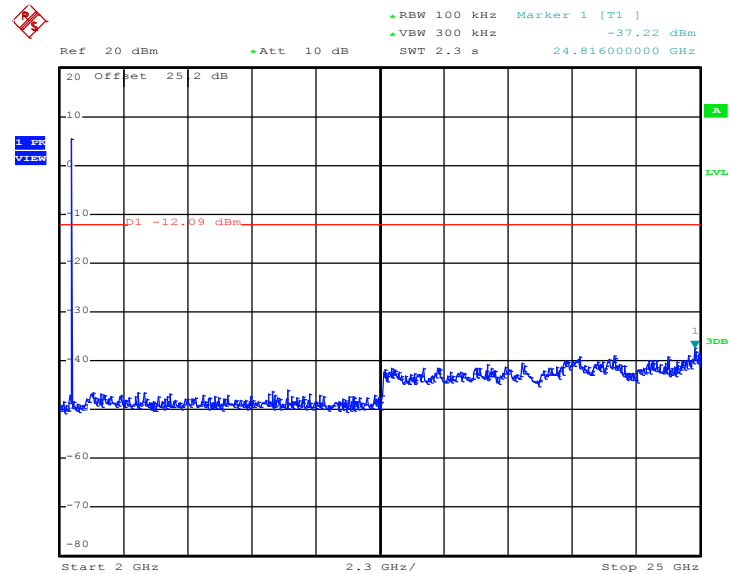
**802.11b 2 GHz~25 GHz**
**Conducted Spurious Emission Plot on Channel 06**


Date: 31.AUG.2012 22:35:57

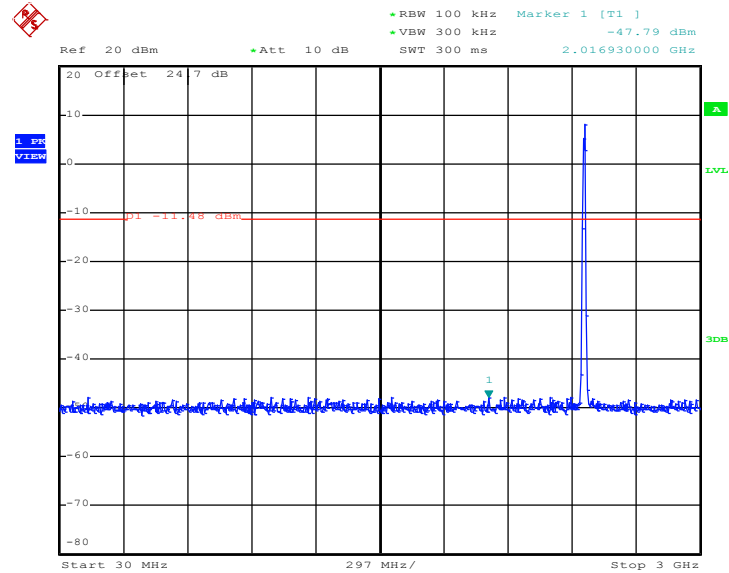


**802.11b 30 MHz~3 GHz**
**Conducted Spurious Emission Plot on Channel 11**


Date: 31.AUG.2012 22:49:02

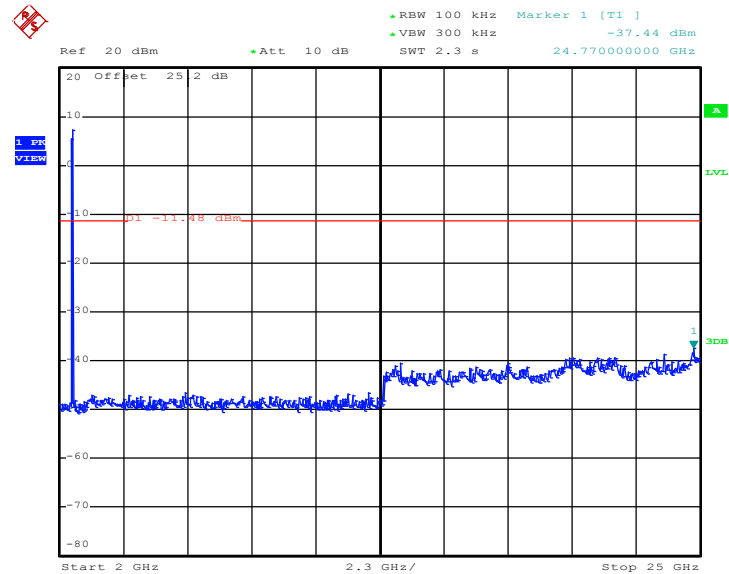
**802.11b 2 GHz~25 GHz**
**Conducted Spurious Emission Plot on Channel 11**


Date: 31.AUG.2012 22:49:19


<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~26°C
<b>Test Band :</b>	30MHz-3GHz and 2G-25GHz	<b>Relative Humidity :</b>	52~55%
<b>Test Channel :</b>	01, 06, 11	<b>Test Engineer :</b>	Bill Kuo

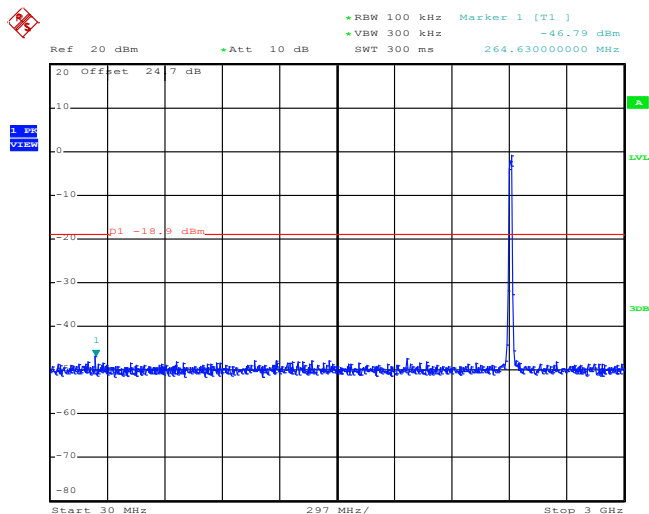**802.11g 30 MHz~3 GHz**
**Conducted Spurious Emission Plot on Channel 01**


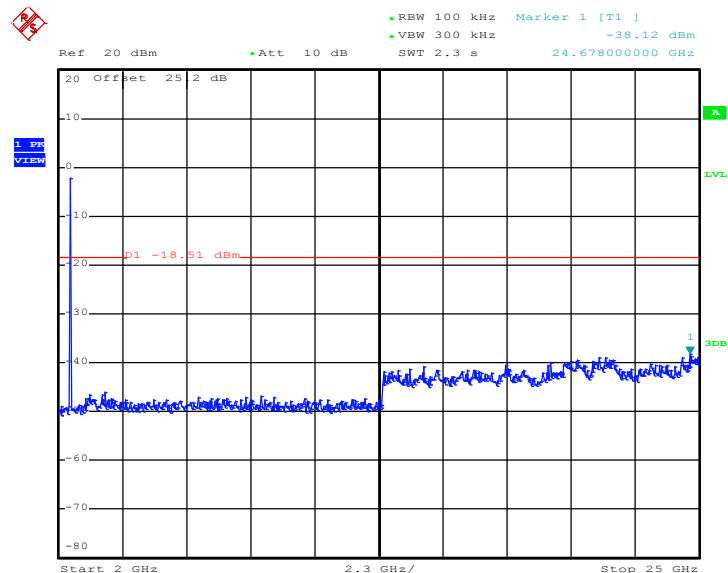
Date: 31.AUG.2012 23:03:25

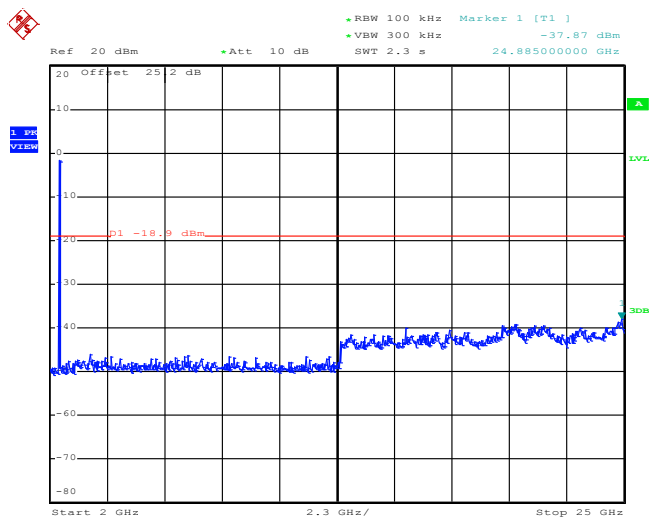**802.11g 2 GHz~25 GHz**
**Conducted Spurious Emission Plot on Channel 01**


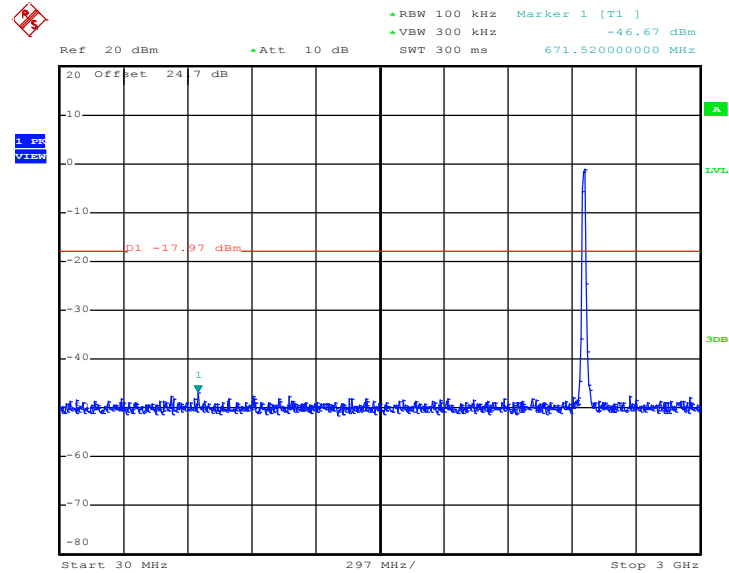
Date: 31.AUG.2012 23:03:43

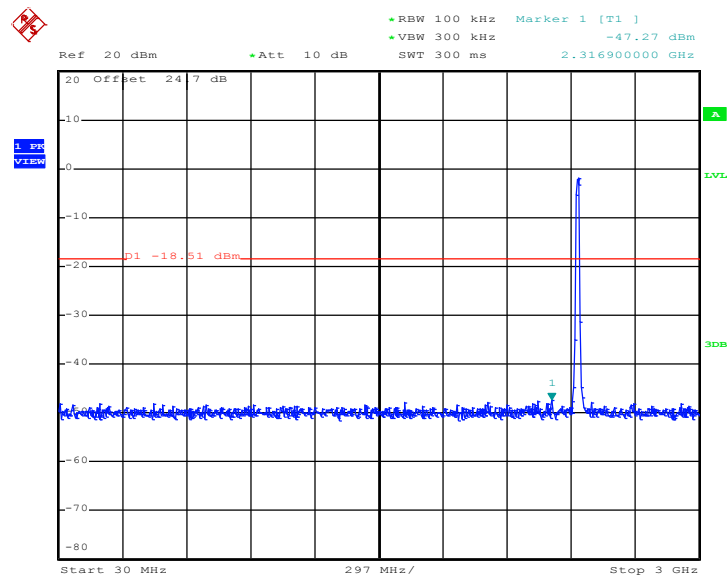**802.11g 30 MHz~3 GHz**
**Conducted Spurious Emission Plot on Channel 06**


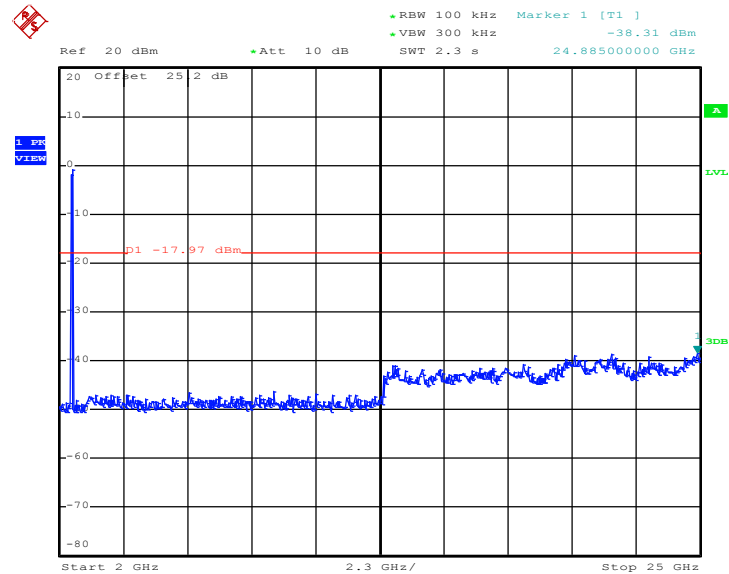
Date: 31.AUG.2012 22:57:29

**802.11g 2 GHz~25 GHz**
**Conducted Spurious Emission Plot on Channel 06**


Date: 31.AUG.2012 22:57:47


**802.11g 30 MHz~3 GHz**
**Conducted Spurious Emission Plot on Channel 11**


Date: 31.AUG.2012 22:53:42


**802.11g 2 GHz~25 GHz**
**Conducted Spurious Emission Plot on Channel 11**


Date: 31.AUG.2012 22:54:00


<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	24~26°C
<b>Test Band :</b>	30MHz-3GHz and 2G-25GHz	<b>Relative Humidity :</b>	52~55%
<b>Test Channel :</b>	01, 06, 11	<b>Test Engineer :</b>	Bill Kuo

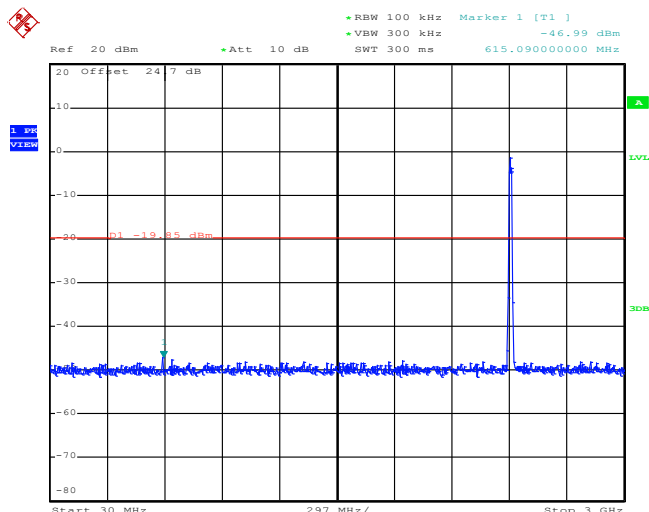**802.11n HT20 30 MHz~3 GHz**
**Conducted Spurious Emission Plot on Channel 01**


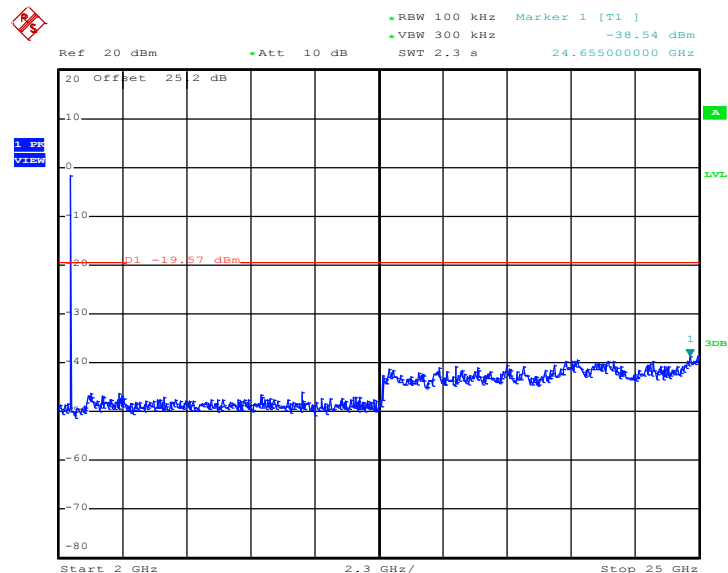
Date: 31.AUG.2012 23:08:05

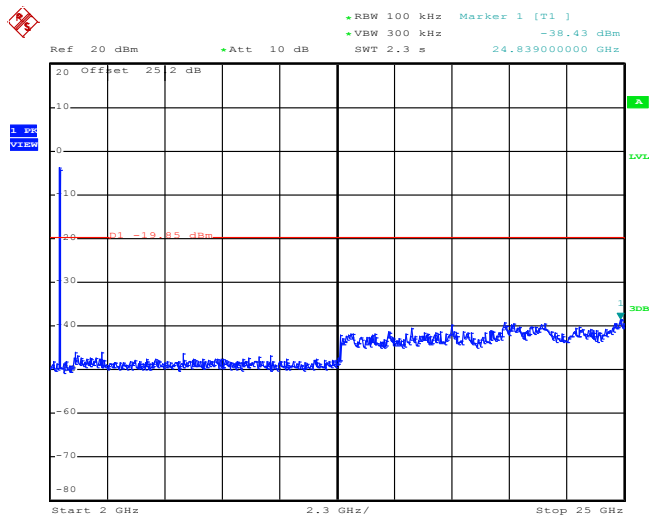**802.11n HT20 2 GHz~25 GHz**
**Conducted Spurious Emission Plot on Channel 01**


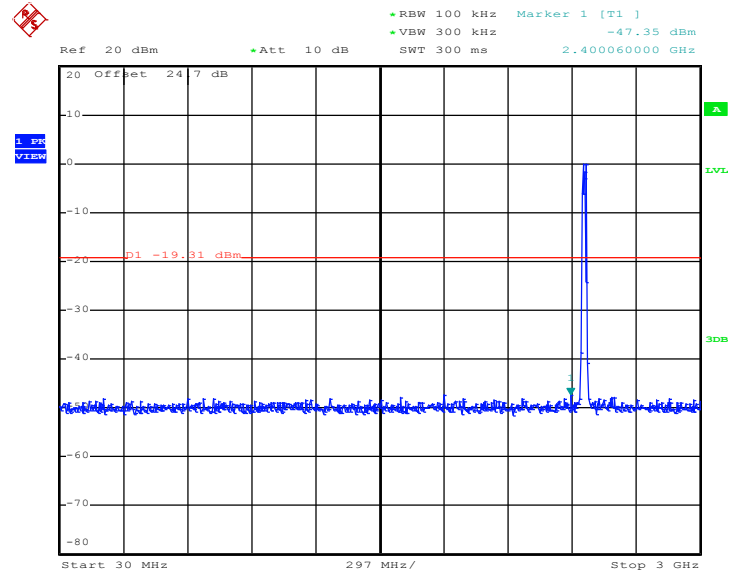
Date: 31.AUG.2012 23:08:23

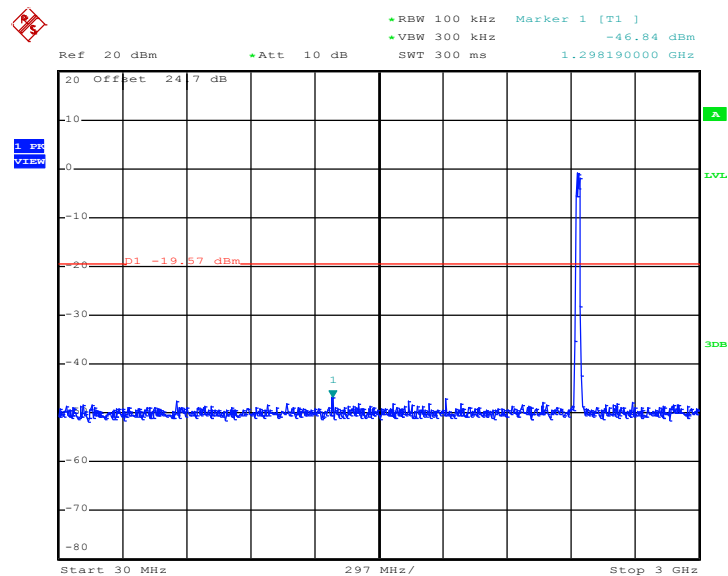**802.11n HT20 30 MHz~3 GHz**
**Conducted Spurious Emission Plot on Channel 06**


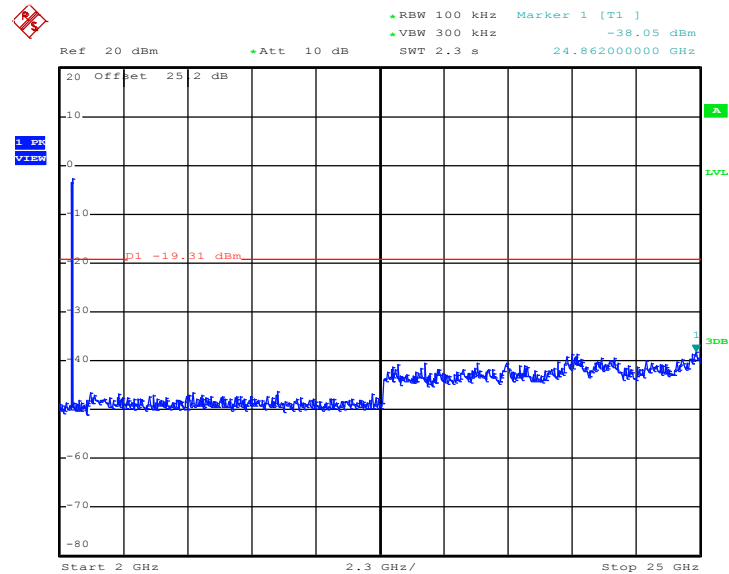
Date: 31.AUG.2012 23:11:52

**802.11n HT20 2 GHz~25 GHz**
**Conducted Spurious Emission Plot on Channel 06**


Date: 31.AUG.2012 23:12:10

**802.11n HT20 30 MHz~3 GHz**
**Conducted Spurious Emission Plot on Channel 11**


Date: 31.AUG.2012 23:15:31

**802.11n HT20 2 GHz~25 GHz**
**Conducted Spurious Emission Plot on Channel 11**


Date: 31.AUG.2012 23:15:48

### 3.5 Radiated Emission Measurement

#### 3.5.1 Limit of Radiated Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.



### 3.5.3 Test Procedures

1. The testing follows the guidelines in ANSI C63. 10-2009
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 KHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz,  $VBW = 3$  MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:


  - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
  - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(us)	1/T(KHz)	VBW Setting
802.11b	100.00	-	-	10Hz
802.11g	98.09	-	-	10Hz
802.11n HT20	97.85	1310.897	0.762	1KHz


**Note:** For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

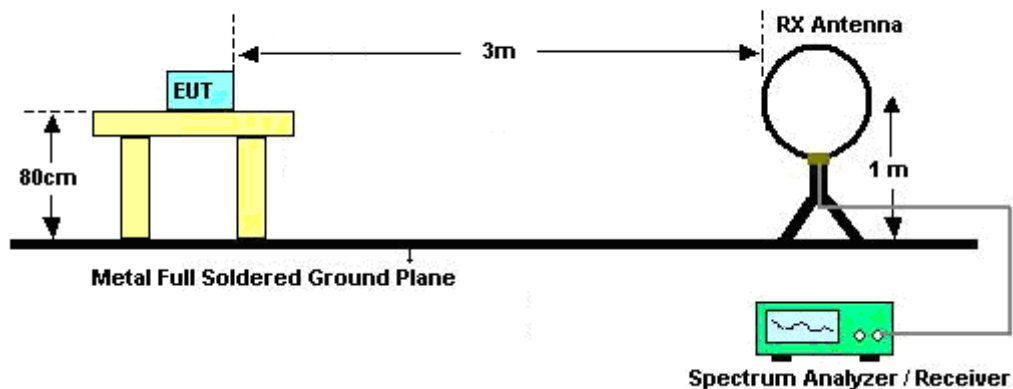

For radiated emissions from 30MHz to 1GHz

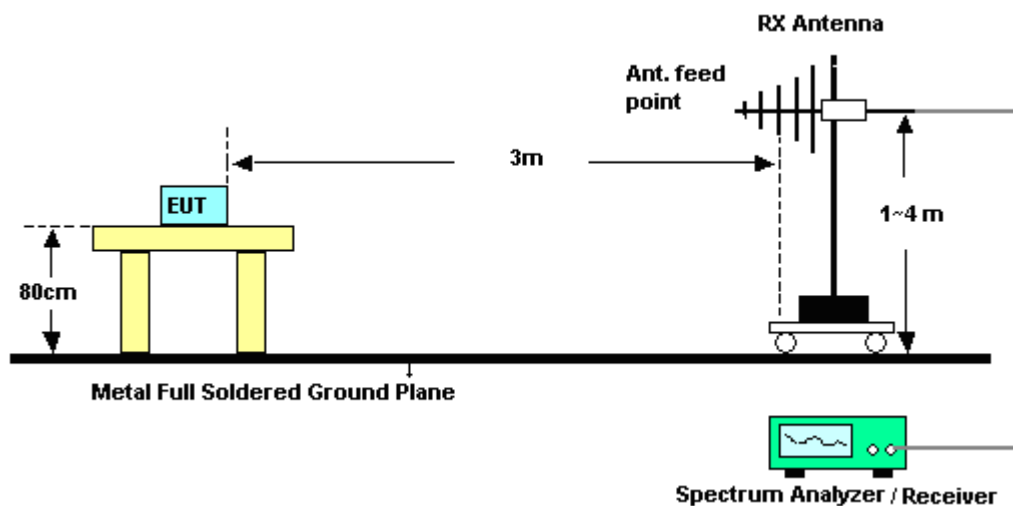

For radiated emissions above 1GHz

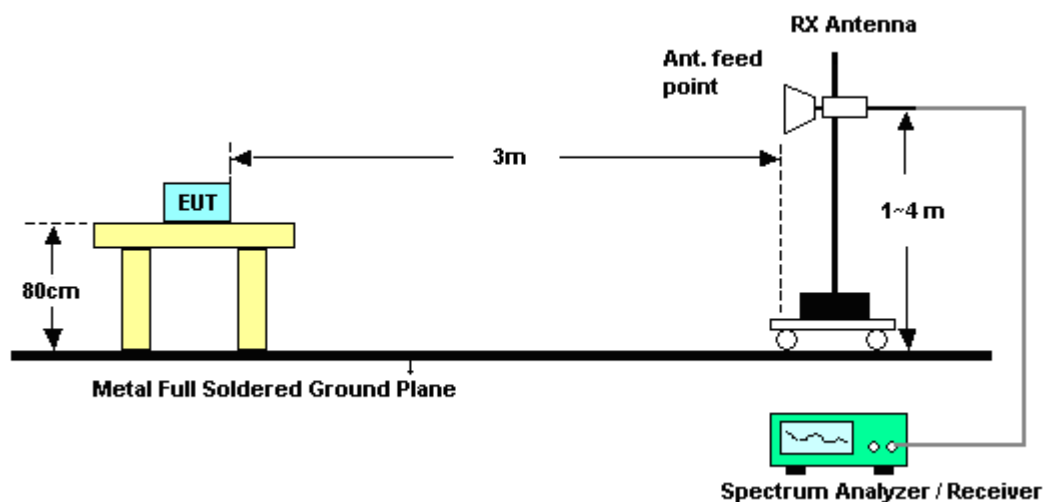

### 3.5.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.5.6 Test Result of Radiated Band Edges

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~26℃
<b>Test Band :</b>	Low	<b>Relative Humidity :</b>	50~52%
<b>Test Channel :</b>	01	<b>Test Engineer :</b>	Kyle Jhuang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2385.96	49.73	-24.27	74	45.36	32.3	6.03	33.96	100	62	Peak
2385.51	40.05	-13.95	54	35.68	32.3	6.03	33.96	100	62	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2384.52	57.97	-16.03	74	53.62	32.28	6.03	33.96	100	350	Peak
2386.68	50.08	-3.92	54	45.71	32.3	6.03	33.96	100	350	Average

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~26℃
<b>Test Band :</b>	High	<b>Relative Humidity :</b>	50~52%
<b>Test Channel :</b>	11	<b>Test Engineer :</b>	Kyle Jhuang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2489.78	49.6	-24.4	74	45.02	32.4	6.18	34	100	52	Peak
2488.18	37.02	-16.98	54	32.44	32.4	6.18	34	100	52	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2487.94	55.25	-18.75	74	50.67	32.4	6.18	34	100	327	Peak
2486.78	46.16	-7.84	54	41.6	32.38	6.18	34	100	327	Average

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~26°C
<b>Test Band :</b>	Low	<b>Relative Humidity :</b>	50~52%
<b>Test Channel :</b>	01	<b>Test Engineer :</b>	Kyle Jhuang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.65	53.95	-20.05	74	49.58	32.3	6.03	33.96	100	61	Peak
2390	37.5	-16.5	54	33.13	32.3	6.03	33.96	100	61	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.11	64.05	-9.95	74	59.68	32.3	6.03	33.96	100	350	Peak
2390	45.38	-8.62	54	41.01	32.3	6.03	33.96	100	350	Average

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~26°C
<b>Test Band :</b>	High	<b>Relative Humidity :</b>	50~52%
<b>Test Channel :</b>	11	<b>Test Engineer :</b>	Kyle Jhuang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.7	49.3	-24.7	74	44.74	32.38	6.18	34	196	128	Peak
2483.5	34.76	-19.24	54	30.2	32.38	6.18	34	196	128	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.56	61.59	-12.41	74	57.03	32.38	6.18	34	100	332	Peak
2483.52	43.25	-10.75	54	38.69	32.38	6.18	34	100	332	Average



<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	24~26°C
<b>Test Band :</b>	Low	<b>Relative Humidity :</b>	50~52%
<b>Test Channel :</b>	01	<b>Test Engineer :</b>	Kyle Jhuang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.92	51.97	-22.03	74	47.6	32.3	6.03	33.96	100	63	Peak
2390	37.27	-16.73	54	32.9	32.3	6.03	33.96	100	63	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.74	64.42	-9.58	74	60.05	32.3	6.03	33.96	100	353	Peak
2390	44.94	-9.06	54	40.57	32.3	6.03	33.96	100	353	Average

<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	24~26°C
<b>Test Band :</b>	High	<b>Relative Humidity :</b>	50~52%
<b>Test Channel :</b>	11	<b>Test Engineer :</b>	Kyle Jhuang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2487.18	50.9	-23.1	74	46.34	32.38	6.18	34	100	53	Peak
2490.38	35.39	-18.61	54	30.81	32.4	6.18	34	100	53	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2484.74	60.34	-13.66	74	55.78	32.38	6.18	34	100	331	Peak
2483.56	43.42	-10.58	54	38.86	32.38	6.18	34	100	331	Average

**3.5.7 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)**

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~26℃
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz and 9648 MHz are not within a restricted band, and their limit lines are 20dB below the highest emission level. For example, 102.13 dBuV/m - 20dB = 82.13 dBuV/m.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	97.36	-	-	92.95	32.31	6.07	33.97	100	62	Average
2412	102.13	-	-	97.72	32.31	6.07	33.97	100	62	Peak
4824	45.9	-28.1	74	60.28	33.97	9.12	57.47	100	0	Peak
7236	44.17	-37.96	82.13	56.57	35.55	10.03	57.98	100	0	Peak
9648	46.98	-35.15	82.13	56.7	36.52	11.99	58.23	100	0	Peak
12057	46.77	-27.23	74	53.4	38.84	13.44	58.91	100	0	Peak
14475	49.79	-4.21	54	54.43	39.67	13.99	58.3	105	39	Average
14475	54.06	-19.94	74	58.7	39.67	13.99	58.3	105	39	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz and 9654 MHz are not within a restricted band, and their limit lines are 20dB below the highest emission level.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	105.07	-	-	100.66	32.31	6.07	33.97	100	350	Average
2412	109.87	-	-	105.46	32.31	6.07	33.97	100	350	Peak
4824	43.45	-30.55	74	57.83	33.97	9.12	57.47	100	0	Peak
7236	40.76	-49.11	89.87	53.16	35.55	10.03	57.98	100	0	Peak
9654	44.64	-45.23	89.87	54.37	36.52	11.98	58.23	100	0	Peak
12060	42.83	-31.17	74	49.47	38.86	13.44	58.94	100	0	Peak
14472	50.97	-23.03	74	55.69	39.64	13.99	58.35	100	0	Peak



<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. 9747 MHz and 14622 MHz are not within a restricted band, and their limit lines are 20dB below the highest emission level.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	21.09	-18.91	40	32.43	20	0.53	31.87	-	-	Peak
178.5	21.59	-21.91	43.5	42.57	8.97	1.25	31.2	-	-	Peak
234.93	19.3	-26.7	46	37.48	11.52	1.5	31.2	-	-	Peak
320.3	22.16	-23.84	46	37.62	13.85	1.81	31.12	-	-	Peak
447	27.48	-18.52	46	39.34	16.99	2.29	31.14	-	-	Peak
913.2	34.56	-11.44	46	38.72	23.3	3.37	30.83	100	138	Peak
2437	95.76	-	-	91.28	32.35	6.11	33.98	100	60	Average
2437	100.5	-	-	96.02	32.35	6.11	33.98	100	60	Peak
4875	46.69	-27.31	74	61.09	33.95	9.13	57.48	100	0	Peak
7311	43.98	-30.02	74	56.4	35.54	10.06	58.02	100	0	Peak
9747	46.92	-33.58	80.5	56.56	36.66	11.94	58.24	100	0	Peak
12186	48.09	-25.91	74	54.84	38.95	13.49	59.19	100	0	Peak
14622	52.97	-27.53	80.5	57.3	39.82	14.05	58.2	100	0	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. 9747 MHz and 14622 MHz are not within a restricted band, and their limit lines are 20dB below the highest emission level.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
42.69	33.1	-6.9	40	52.51	11.7	0.64	31.75	100	28	Peak
97.5	25.68	-17.82	43.5	46.8	9.56	0.99	31.67	-	-	Peak
232.23	22.58	-23.42	46	40.98	11.32	1.49	31.21	-	-	Peak
326.6	19.71	-26.29	46	35.06	14.03	1.84	31.22	-	-	Peak
498.8	22.64	-23.36	46	33.03	18.06	2.44	30.89	-	-	Peak
914.6	31.49	-14.51	46	35.62	23.32	3.38	30.83	-	-	Peak
2437	103.2	-	-	98.72	32.35	6.11	33.98	100	335	Average
2437	108.11	-	-	103.63	32.35	6.11	33.98	100	335	Peak
4875	44.72	-29.28	74	59.12	33.95	9.13	57.48	100	0	Peak
7311	40.29	-33.71	74	52.71	35.54	10.06	58.02	100	0	Peak
9747	45.33	-42.78	88.11	54.97	36.66	11.94	58.24	100	0	Peak
12186	43.7	-30.3	74	50.45	38.95	13.49	59.19	100	0	Peak
14622	49.73	-38.38	88.11	54.06	39.82	14.05	58.2	100	0	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. 9846 MHz and 14722 MHz are not within a restricted band, and their limit lines are 20dB below the highest emission level.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	96.76	-	-	92.24	32.37	6.14	33.99	100	52	Average
2462	100.86	-	-	96.34	32.37	6.14	33.99	100	52	Peak
4923	45.93	-28.07	74	60.34	33.93	9.14	57.48	100	0	Peak
7386	43.8	-30.2	74	56.26	35.52	10.1	58.08	100	0	Peak
9846	49.51	-31.35	80.86	59.1	36.78	11.88	58.25	100	0	Peak
12309	47.39	-26.61	74	54.24	39.05	13.53	59.43	100	0	Peak
14772	51.3	-29.56	80.86	55.33	39.97	14.12	58.12	100	0	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. 9846 MHz and 14775 MHz are not within a restricted band, and their limit lines are 20dB below the highest emission level.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	102.8	-	-	98.28	32.37	6.14	33.99	100	327	Average
2462	107.56	-	-	103.04	32.37	6.14	33.99	100	327	Peak
4926	43.47	-30.53	74	57.87	33.93	9.15	57.48	100	0	Peak
7386	41.37	-32.63	74	53.83	35.52	10.1	58.08	100	0	Peak
9846	46.44	-41.12	87.56	56.03	36.78	11.88	58.25	100	0	Peak
12306	44.27	-29.73	74	51.12	39.05	13.53	59.43	100	0	Peak
14775	51.01	-36.55	87.56	55.04	39.97	14.12	58.12	100	0	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2414 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2414	88.5	-	-	84.09	32.31	6.07	33.97	100	61	Average
2414	100.98	-	-	96.57	32.31	6.07	33.97	100	61	Peak
4824	41.46	-32.54	74	55.84	33.97	9.12	57.47	100	0	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	95.51	-	-	91.1	32.31	6.07	33.97	100	350	Average
2412	107.68	-	-	103.27	32.31	6.07	33.97	100	350	Peak
4824	42.85	-31.15	74	57.23	33.97	9.12	57.47	100	0	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
33.24	24.82	-15.18	40	38.3	17.84	0.56	31.88	-	-	Peak
178.5	21.56	-21.94	43.5	42.54	8.97	1.25	31.2	-	-	Peak
216.3	16.9	-29.1	46	36.56	10.24	1.4	31.3	-	-	Peak
304.2	21.07	-24.93	46	37.1	13.43	1.78	31.24	-	-	Peak
608.7	23.97	-22.03	46	31.89	19.87	2.72	30.51	-	-	Peak
913.2	33.22	-12.78	46	37.38	23.3	3.37	30.83	100	28	Peak
2437	87.14	-	-	82.66	32.35	6.11	33.98	100	47	Average
2437	100.11	-	-	95.63	32.35	6.11	33.98	100	47	Peak
4875	42.26	-31.74	74	56.66	33.95	9.13	57.48	100	0	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	28.68	-11.32	40	40.02	20	0.53	31.87	100	247	Peak
200.91	20.94	-22.56	43.5	41.77	9.17	1.32	31.32	-	-	Peak
278.67	21.63	-24.37	46	38.38	13	1.64	31.39	-	-	Peak
322.4	19.44	-26.56	46	34.87	13.9	1.82	31.15	-	-	Peak
493.9	22.4	-23.6	46	32.92	17.96	2.43	30.91	-	-	Peak
913.2	30.79	-15.21	46	34.95	23.3	3.37	30.83	-	-	Peak
2437	94.53	-	-	90.05	32.35	6.11	33.98	100	338	Average
2437	106.32	-	-	101.84	32.35	6.11	33.98	100	338	Peak
4875	43.44	-30.56	74	57.84	33.95	9.13	57.48	100	0	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	88.23	-	-	83.71	32.37	6.14	33.99	196	128	Average
2462	101.14	-	-	96.62	32.37	6.14	33.99	196	128	Peak
4923	43.17	-30.83	74	57.58	33.93	9.14	57.48	100	0	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	94.59	-	-	90.07	32.37	6.14	33.99	100	332	Average
2462	107.48	-	-	102.96	32.37	6.14	33.99	100	332	Peak
4923	42.72	-31.28	74	57.13	33.93	9.14	57.48	100	0	Peak

<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	89.2	-	-	84.79	32.31	6.07	33.97	100	63	Average
2412	99.08	-	-	94.67	32.31	6.07	33.97	100	63	Peak
4824	41.84	-32.16	74	56.22	33.97	9.12	57.47	100	0	Peak

<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	95.68	-	-	91.27	32.31	6.07	33.97	100	353	Average
2412	105.49	-	-	101.08	32.31	6.07	33.97	100	353	Peak
4824	42.1	-31.9	74	56.48	33.97	9.12	57.47	100	0	Peak



<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
49.17	25.78	-14.22	40	48.22	8.5	0.69	31.63	-	-	Peak
158.52	23.16	-20.34	43.5	42.69	10.64	1.22	31.39	-	-	Peak
241.14	18.94	-27.06	46	36.62	11.99	1.53	31.2	-	-	Peak
324.5	19.59	-26.41	46	34.96	13.98	1.83	31.18	-	-	Peak
609.4	23.53	-22.47	46	31.45	19.87	2.72	30.51	-	-	Peak
913.9	35.12	-10.88	46	39.28	23.3	3.37	30.83	100	27	Peak
2437	87.16	-	-	82.68	32.35	6.11	33.98	100	51	Average
2437	97.84	-	-	93.36	32.35	6.11	33.98	100	51	Peak
4875	43.16	-30.84	74	57.56	33.95	9.13	57.48	100	0	Peak

<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
47.01	29.94	-10.06	40	51.65	9.3	0.67	31.68	100	97	Peak
175.53	19.05	-24.45	43.5	39.96	9.07	1.24	31.22	-	-	Peak
236.28	22.13	-23.87	46	40.16	11.66	1.51	31.2	-	-	Peak
324.5	19.74	-26.26	46	35.11	13.98	1.83	31.18	-	-	Peak
456.8	23.4	-22.6	46	35.06	17.19	2.31	31.16	-	-	Peak
913.2	33.01	-12.99	46	37.17	23.3	3.37	30.83	-	-	Peak
2437	94.8	-	-	90.32	32.35	6.11	33.98	100	328	Average
2437	104.67	-	-	100.19	32.35	6.11	33.98	100	328	Peak
4875	43.42	-30.58	74	57.82	33.95	9.13	57.48	100	0	Peak

<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	88.02	-	-	83.5	32.37	6.14	33.99	100	53	Average
2462	97.84	-	-	93.32	32.37	6.14	33.99	100	53	Peak
4923	42.88	-31.12	74	57.29	33.93	9.14	57.48	100	0	Peak

<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	24~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	50~52%
<b>Test Engineer :</b>	Kyle Jhuang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	91.99	-	-	87.47	32.37	6.14	33.99	100	331	Average
2462	103.91	-	-	99.39	32.37	6.14	33.99	100	331	Peak
4923	42.09	-31.91	74	56.5	33.93	9.14	57.48	100	0	Peak

## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.6.4 Test Setup

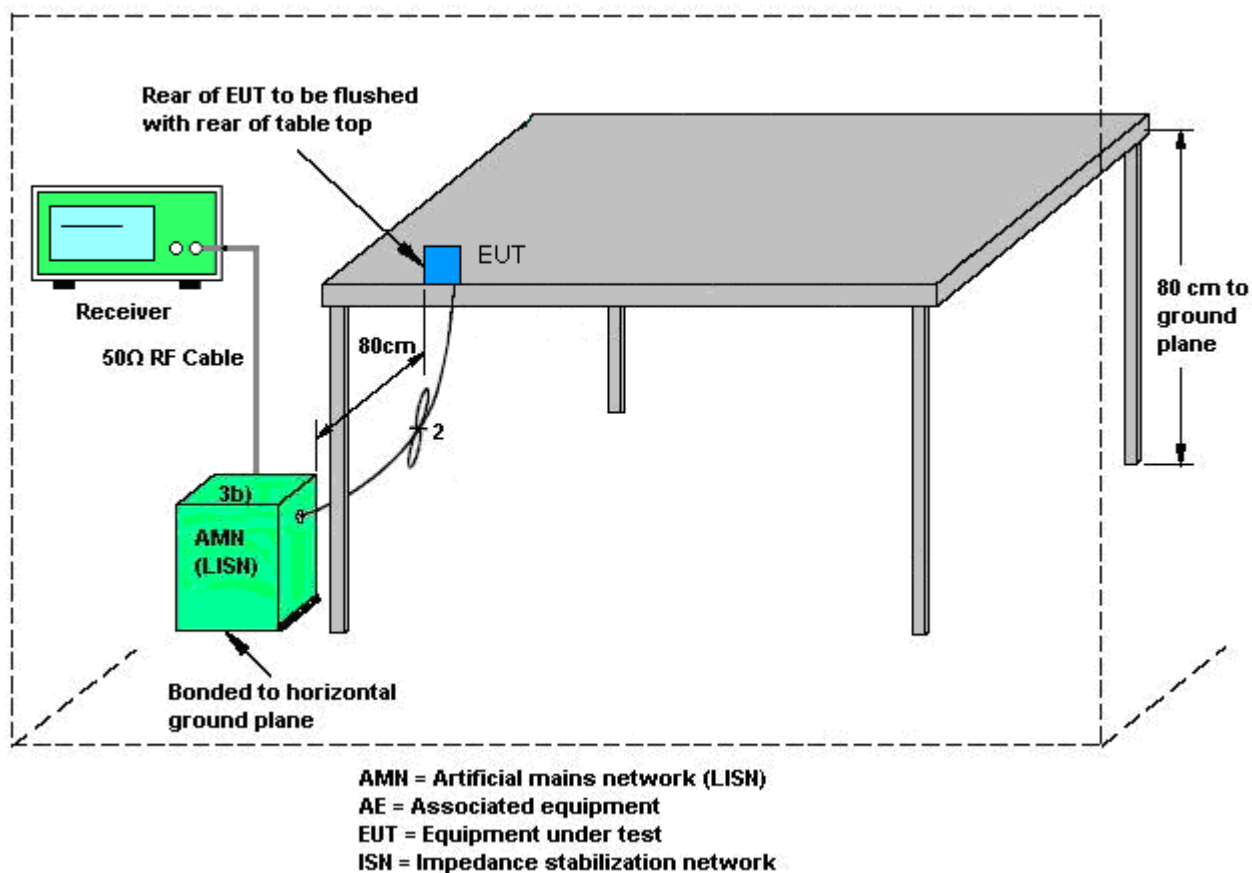

### 3.6.5 Test Result of AC Conducted Emission

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	20~22°C
<b>Test Engineer :</b>	Slash Huang	<b>Relative Humidity :</b>	45~47%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Line
<b>Function Type :</b>	Bluetooth Link + WLAN Link + H Pattern + TC + Adapter 1 for Sample A1		
<b>Remark :</b>	All emissions not reported here are more than 10 dB below the prescribed limit.		

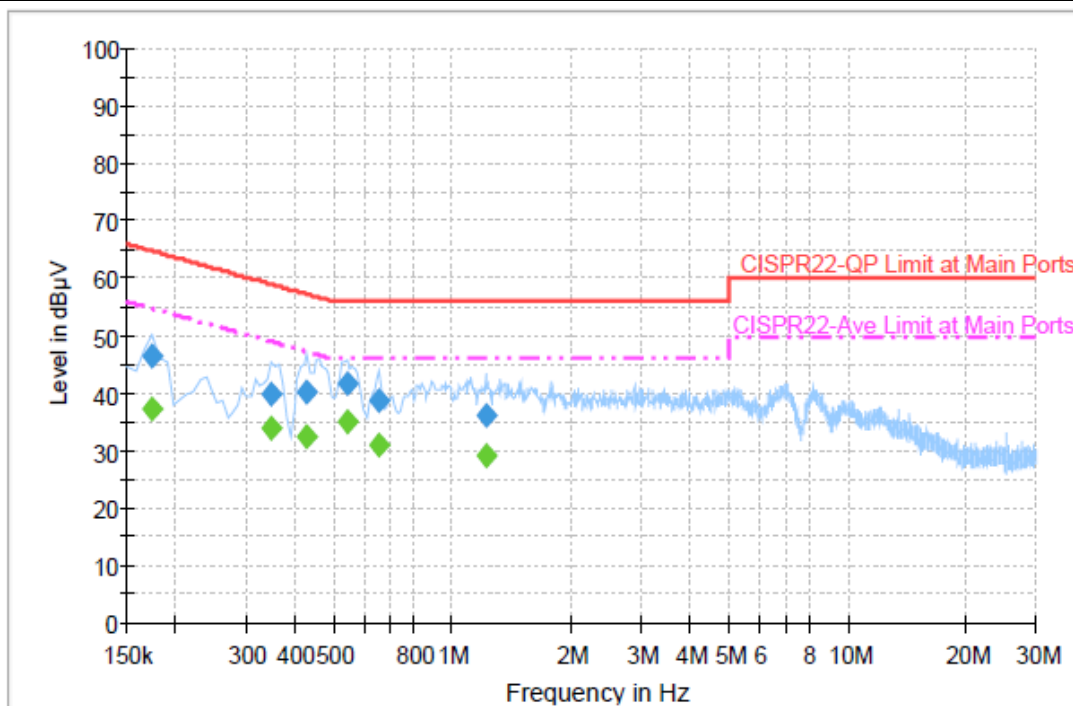


#### Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.174000	46.5	Off	L1	19.3	18.3	64.8
0.350000	39.9	Off	L1	19.3	19.1	59.0
0.430000	40.0	Off	L1	19.4	17.3	57.3
0.542000	41.7	Off	L1	19.4	14.3	56.0
0.654000	38.7	Off	L1	19.4	17.3	56.0
1.214000	36.3	Off	L1	19.5	19.7	56.0

#### Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.174000	37.1	Off	L1	19.3	17.7	54.8
0.350000	34.0	Off	L1	19.3	15.0	49.0
0.430000	32.6	Off	L1	19.4	14.7	47.3
0.542000	35.0	Off	L1	19.4	11.0	46.0
0.654000	30.9	Off	L1	19.4	15.1	46.0
1.214000	29.1	Off	L1	19.5	16.9	46.0

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	20~22°C
<b>Test Engineer :</b>	Slash Huang	<b>Relative Humidity :</b>	45~47%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral
<b>Function Type :</b>	Bluetooth Link + WLAN Link + H Pattern + TC + Adapter 1 for Sample A1		
<b>Remark :</b>	All emissions not reported here are more than 10 dB below the prescribed limit.		

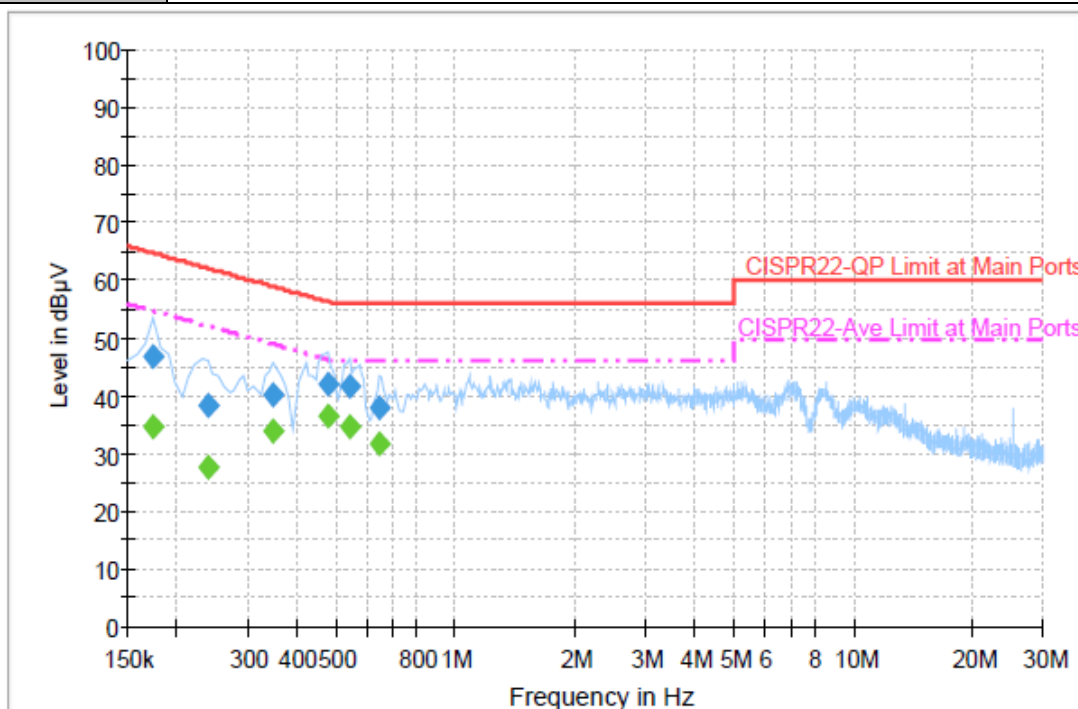
**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.174000	46.7	Off	N	19.3	18.1	64.8
0.238000	38.4	Off	N	19.4	23.8	62.2
0.350000	40.3	Off	N	19.3	18.7	59.0
0.478000	42.0	Off	N	19.5	14.4	56.4
0.542000	41.8	Off	N	19.4	14.2	56.0
0.646000	38.2	Off	N	19.4	17.8	56.0

**Final Result : Average**

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.174000	34.5	Off	N	19.3	20.3	54.8
0.238000	27.8	Off	N	19.4	24.4	52.2
0.350000	33.8	Off	N	19.3	15.2	49.0
0.478000	36.4	Off	N	19.5	10.0	46.4
0.542000	34.9	Off	N	19.4	11.1	46.0
0.646000	31.6	Off	N	19.4	14.4	46.0



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Connected Construction**

Non-standard connector used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 06, 2012	Aug. 29, 2012 ~ Sep. 08, 2012	Jun. 05, 2013	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 18, 2011	Aug. 29, 2012 ~ Sep. 08, 2012	Sep. 17, 2012	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	0846202	N/A	Sep. 18, 2011	Aug. 29, 2012 ~ Sep. 08, 2012	Sep. 17, 2012	Conducted (TH02-HY)
EMI Test Receiver	R&S	ESCS 30	100356	9KHz ~ 2.75GHz	Oct. 27, 2011	Aug. 28, 2012	Oct. 26, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz ~ 30MHz	Dec. 09, 2011	Aug. 28, 2012	Dec. 08, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz ~ 30MHz	Dec. 06, 2011	Aug. 28, 2012	Dec. 05, 2012	Conduction (CO05-HY)
AC Power Source	APC	APC-1000 W	N/A	N/A	N/A	Aug. 28, 2012	N/A	Conduction (CO05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 22, 2011	Sep. 07, 2012 ~ Sep. 08, 2012	Oct. 21, 2012	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP30	101067	9KHz ~ 30GHz	Dec. 06, 2011	Sep. 07, 2012 ~ Sep. 08, 2012	Dec. 05, 2012	Radiation (03CH07-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz ~ 18GHz	Aug. 01, 2012	Sep. 07, 2012 ~ Sep. 08, 2012	Jul. 31, 2013	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz ~ 26.5GHz	Dec. 05, 2011	Sep. 07, 2012 ~ Sep. 08, 2012	Dec. 04, 2012	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32 dB.GAIN	Feb. 27, 2012	Sep. 07, 2012 ~ Sep. 08, 2012	Feb. 26, 2013	Radiation (03CH07-HY)
Signal Analyzer	Rohde & Schwarz	FSQ	200578/026	20Hz~26.5GHz	Feb. 06, 2012	Sep. 07, 2012 ~ Sep. 08, 2012	Feb. 05, 2013	Radiation (03CH07-HY)
Pre Amplifier	MITEQ	AMF-7D-00 101800-30-10P	159088	1GHz ~ 18GHz	Mar. 10, 2012	Sep. 07, 2012 ~ Sep. 08, 2012	Mar. 09, 2013	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917025 1	15GHz ~ 40GHz	Oct. 21, 2011	Sep. 07, 2012 ~ Sep. 08, 2012	Oct. 20, 2012	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9KHz ~ 30MHz	Jul. 03, 2012	Sep. 07, 2012 ~ Sep. 08, 2012	Jul. 02, 2014	Radiation (03CH07-HY)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.54
---	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.72
---	------