



# FCC Part 15C Test Report

## FCC ID: XHWEWT125

Product Name:	11.6 inch laptop
Trademark:	<b>E-matic</b>
Model Name :	EWT125 EWT125SL, EWT125BL, EWT125BU, EWT125PR, EWT125PN, EWT125TL.
Prepared For :	<b>E-matic</b>
Address :	3435 Ocean Park Blvd # 107 PMB#444 Santa Monica CA 90405 Los Angeles, CA 90405.
Prepared By :	<b>Shenzhen BCTC Technology Co., Ltd.</b>
Address :	No.101, Yousong Road, Longhua New District, Shenzhen, China
Test Date:	<b>Jun. 21- Jun. 28, 2017</b>
Date of Report :	<b>Jun. 28, 2017</b>
Report No.:	<b>BCTC-FY170805108E</b>



## TEST RESULT CERTIFICATION

**Applicant's name**..... : **E-matic**

**Address**..... : 3435 Ocean Park Blvd # 107 PMB#444 Santa Monica CA 90405  
Los Angeles, CA 90405.

**Manufacture's Name**..... : **Shaghal Ltd**

**Address**..... : 2231 Colby Ave. L.A., C.A., 90064 U.S.A

**Product description**

**Product name**..... : 11.6 inch laptop

**Trademark:** **E-matic**

**Model Name:** EWT125

**Standards**..... : FCC Part15.247

ANSI C63.10:2013

KDB 558074 D01 DTS Meas Guidance v04

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Eric Yang

Reviewer(Supervisor): Jade Yang

Approved(Manager): Carson Zhang



**Table of Contents**

	<b>Page</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2 . GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
<b>3 . EMC EMISSION TEST</b>	<b>13</b>
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS	20
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	21
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	22
3.2.8 TEST RESULTS (1GHZ~25GHZ)	24
3.3 RADIATED BAND EMISSION MEASUREMENT	28
3.3.1 TEST REQUIREMENT:	28
3.3.2 TEST PROCEDURE	28
3.3.3 DEVIATION FROM TEST STANDARD	29
3.3.4 TEST SETUP	29
3.3.5 EUT OPERATING CONDITIONS	29
<b>4 . POWER SPECTRAL DENSITY TEST</b>	<b>31</b>



<b>Table of Contents</b>	<b>Page</b>
<b>4.1 APPLIED PROCEDURES / LIMIT</b>	<b>31</b>
4.1.1 TEST PROCEDURE	31
4.1.2 DEVIATION FROM STANDARD	31
4.1.3 TEST SETUP	31
4.1.4 EUT OPERATION CONDITIONS	31
4.1.5 TEST RESULTS	32
<b>5 . BANDWIDTH TEST</b>	<b>40</b>
5.1 APPLIED PROCEDURES / LIMIT	40
5.1.1 TEST PROCEDURE	40
5.1.2 DEVIATION FROM STANDARD	40
5.1.3 TEST SETUP	40
5.1.4 EUT OPERATION CONDITIONS	40
5.1.5 TEST RESULTS	41
<b>6 . PEAK OUTPUT POWER TEST</b>	<b>49</b>
6.1 APPLIED PROCEDURES / LIMIT	49
6.1.1 TEST PROCEDURE	49
6.1.2 DEVIATION FROM STANDARD	49
6.1.3 TEST SETUP	49
6.1.4 EUT OPERATION CONDITIONS	49
6.1.5 TEST RESULTS	50
<b>7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE</b>	<b>51</b>
7.1 DEVIATION FROM STANDARD	52
7.2 TEST SETUP	52
7.3 EUT OPERATION CONDITIONS	52
<b>8 . DUTY CYCLE OF TEST SIGNAL</b>	<b>57</b>
8.1 STANDARD REQUIREMENT	57
8.2 FORMULA:	57
<b>9 . ANTENNA REQUIREMENT</b>	<b>58</b>
9.1 STANDARD REQUIREMENT	58
9.2 EUT ANTENNA	58
<b>10 . EUT TEST PHOTO</b>	<b>59</b>
<b>11 . EUT PHOTO</b>	<b>61</b>
<b>APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Restricted Band of Operation	PASS	
15.247 (d)	Band Edge (Out of Band Emissions)	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



## 1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.

Add. : No.101,Yousong Road,Longhua New District, Shenzhen,China

FCC Registered No.: 187086

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	11.6 inch laptop	
Trade Name	<b>E-matic</b>	
Model Name	EWT125	
Serial Model	EWT125SL, EWT125BL, EWT125BU, EWT125PR, EWT125PN, EWT125TL.	
Model Difference	All the models are the same circuit and RF module, except the model names.	
Product Description	Operation Frequency:	802.11b/g/n20MHz:2412~2462MHz 802.11n40MHz:2422~2452MHz
	Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n(20/40): DSSS (CCK, DQPSK,DBPSK)+OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1Mbps 802.11g: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps 802.11n: Up to 150Mbps
	Number Of Channel	802.11b/g/n20MHz:11CH 802.11n40MHz:7CH
	Antenna Designation:	Please see Note 3.
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Adapter	Model: TEKA036-1203000UK I/P:AC 100-240V 50/60Hz 1.2A O/P: DC 12V 3A	
Battery	DC 3.8V	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel List for 802.11b/g/n(20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	06	2437	09	2452		
04	2427	07	2442				
05	2432	08	2447				

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	FPCB Antenna	N/A	1.0	





## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode

For Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9


Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) IEEE 802.11b mode: 11Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 54Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n(20) mode: 6.5Mbps data rate (worst case) were chosen for full testing. IEEE 802.11n(40) mode: 6.5Mbps data rate (worst case) were chosen for full testing.




## 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

### Conducted Emission Test



### Radiated Spurious Emission Test





## 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	11.6 inch laptop	<b>E-matic</b>	EWT125	N/A	EUT
E-2	Adapter	N/A	TEKA036-1203000UK	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.2M	DC cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45108040	2016.08.27	2017.08.26
2	Test Receiver (9kHz-7GHz)	R&S	ESPI	101318	2016.08.27	2017.08.26
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB 9168	VULB91 68-438	2016.08.27	2017.08.26
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1201	2016.09.03	2017.09.03
5	Horn Antenna (14GHz-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	2016.09.03	2017.09.03
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	2016.08.27	2017.08.26
7	Amplifier (1GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	2016.08.27	2017.08.26
8	Amplifier (18GHz-40GHz)	SCHWARZBECK	BBV 9721	9721-205	2016.08.27	2017.08.26
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	00014	2016.09.03	2017.09.03
10	RF cables1 (9kHz-1GHz)	R&S	R203	R20X	2016.08.27	2017.08.26
11	RF cables2 (1GHz-40GHz)	R&S	R204	R21X	2016.08.27	2017.08.26
12	Antenna connector	Florida RF Labs	N/A	RF 01#	2016.08.27	2017.08.26
13	Power Metter	ANRITSU	ML2487A	6K00001568	2016.08.27	2017.08.26
14	Power Sensor (AV)	ANRITSU	ML2491A	030989	2016.08.27	2017.08.26
15	Signal Analyzer 9kHz-26.5GHz	Agilent	N9010A	MY48030494	2016.08.27	2017.08.26
16	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	2016.08.27	2017.08.26
17	D.C. Power Supply	LongWei	PS-305D	010964729	2016.08.27	2017.08.26

### Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-1011 65-ha	2016.08.27	2017.08.26
2	LISN	SCHWARZBECK	NSLK8127	8127739	2016.08.27	2017.08.26
3	LISN	R&S	NSLK8126	8126487	2016.08.27	2017.08.26
4	RF cables	R&S	R204	R20X	2016.08.27	2017.08.26
5	Attenuator	R&S	ESH3-Z2	143206	2016.08.27	2017.08.26



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


### 3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

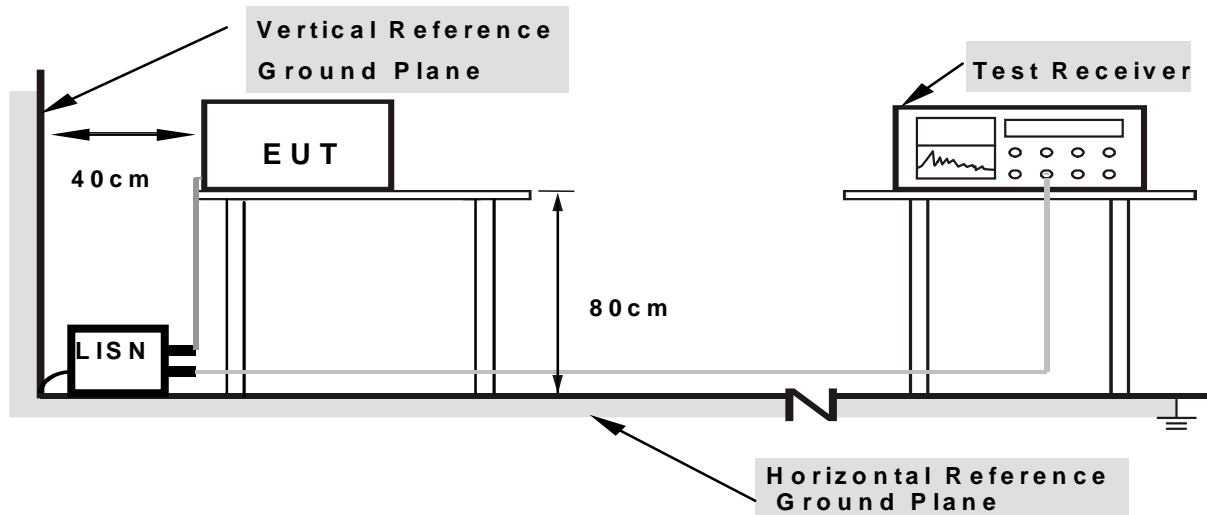

Note: 1.Support units were connected to second LISN .

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

### 3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.



### 3.1.6 TEST RESULTS

EUT :	11.6 inch laptop	Model Name. :	EWT125
Temperature :	25°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC120V/60Hz	Test Mode :	Link Mode

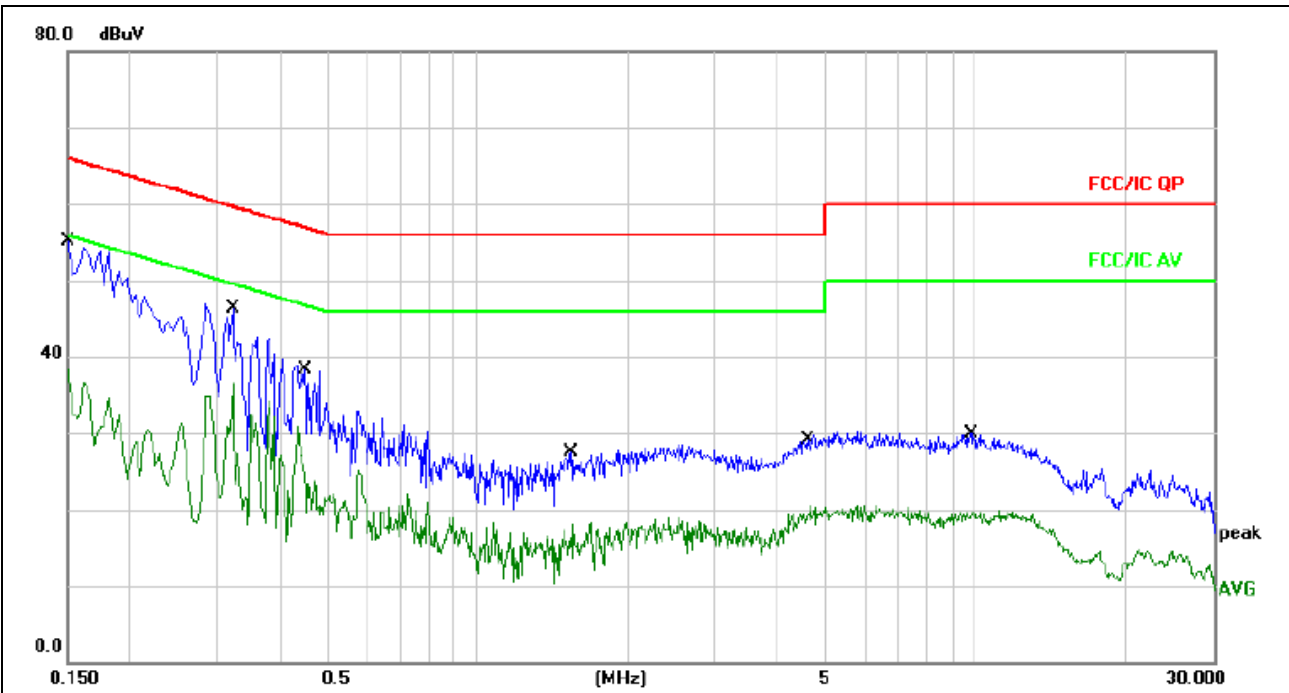


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1500	45.35	9.67	55.02	65.99	-10.97	QP	
2		0.1500	28.71	9.67	38.38	55.99	-17.61	AVG	
3		0.3220	37.32	9.66	46.98	59.65	-12.67	QP	
4		0.3220	26.85	9.66	36.51	49.65	-13.14	AVG	
5		0.4500	28.53	9.67	38.20	56.87	-18.67	QP	
6		0.4500	21.19	9.67	30.86	46.87	-16.01	AVG	
7		1.5420	17.71	9.70	27.41	56.00	-28.59	QP	
8		1.5420	8.66	9.70	18.36	46.00	-27.64	AVG	
9		4.6180	19.46	9.73	29.19	56.00	-26.81	QP	
10		4.6180	10.83	9.73	20.56	46.00	-25.44	AVG	
11		9.7739	20.09	9.82	29.91	60.00	-30.09	QP	
12		9.7739	10.16	9.82	19.98	50.00	-30.02	AVG	



EUT :	11.6 inch laptop	Model Name. :	EWT125
Temperature :	25°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC120V/60Hz	Test Mode :	Link Mode

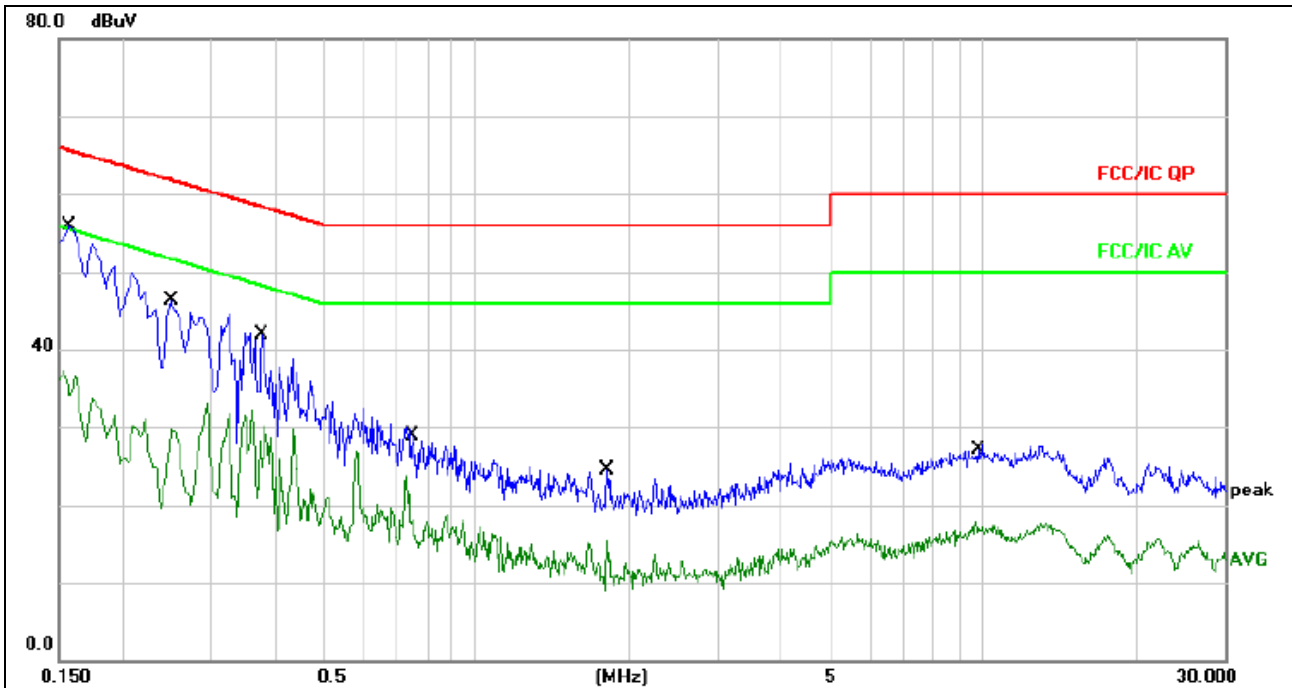

## Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1580	46.16	9.67	55.83	65.56	-9.73	QP	
2		0.1580	27.55	9.67	37.22	55.56	-18.34	AVG	
3		0.2500	36.67	9.65	46.32	61.75	-15.43	QP	
4		0.2500	23.45	9.65	33.10	51.75	-18.65	AVG	
5		0.3780	32.25	9.67	41.92	58.32	-16.40	QP	
6		0.3780	22.37	9.67	32.04	48.32	-16.28	AVG	
7		0.7500	19.13	9.68	28.81	56.00	-27.19	QP	
8		0.7500	13.96	9.68	23.64	46.00	-22.36	AVG	
9		1.8180	14.86	9.71	24.57	56.00	-31.43	QP	
10		1.8180	5.74	9.71	15.45	46.00	-30.55	AVG	
11		9.8060	17.21	9.82	27.03	60.00	-32.97	QP	
12		9.8060	8.06	9.82	17.88	50.00	-32.12	AVG	





### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



### 3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 1.5 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

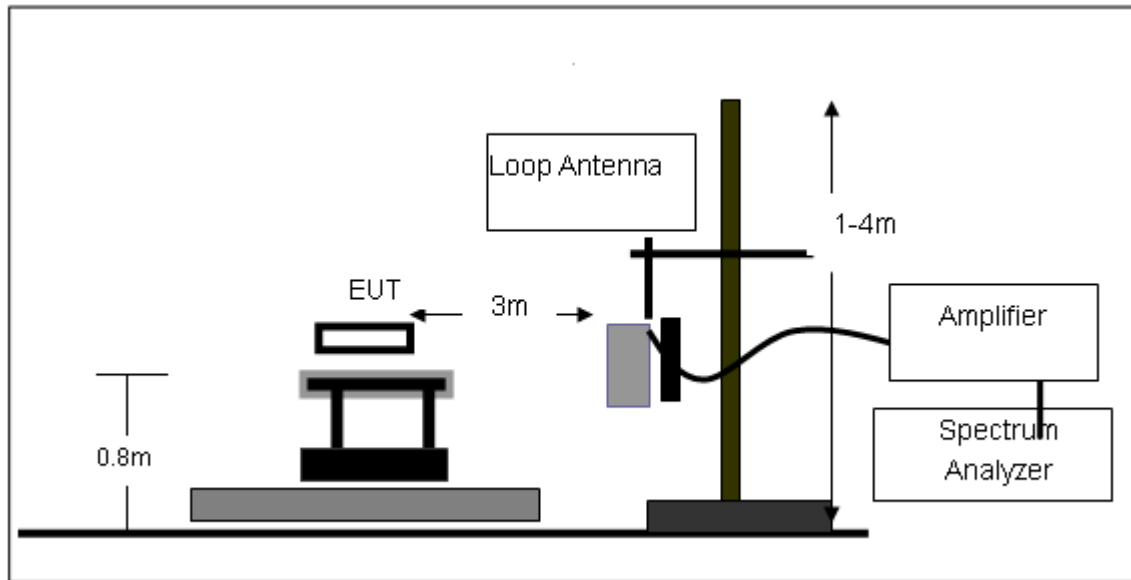

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

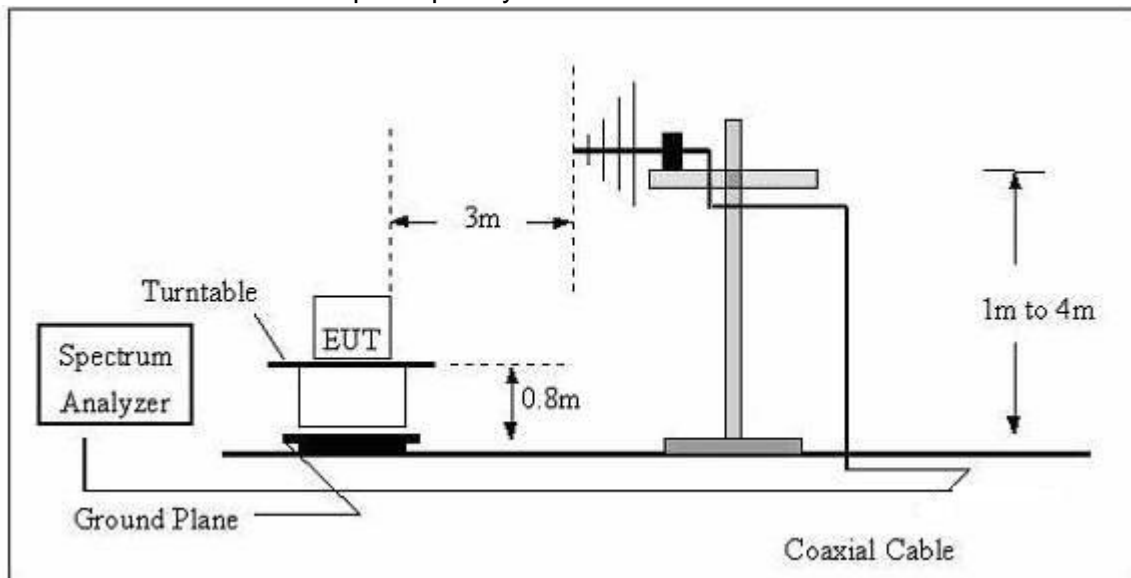

(C) Radiated Emission Test-Up Frequency Above 1GHz

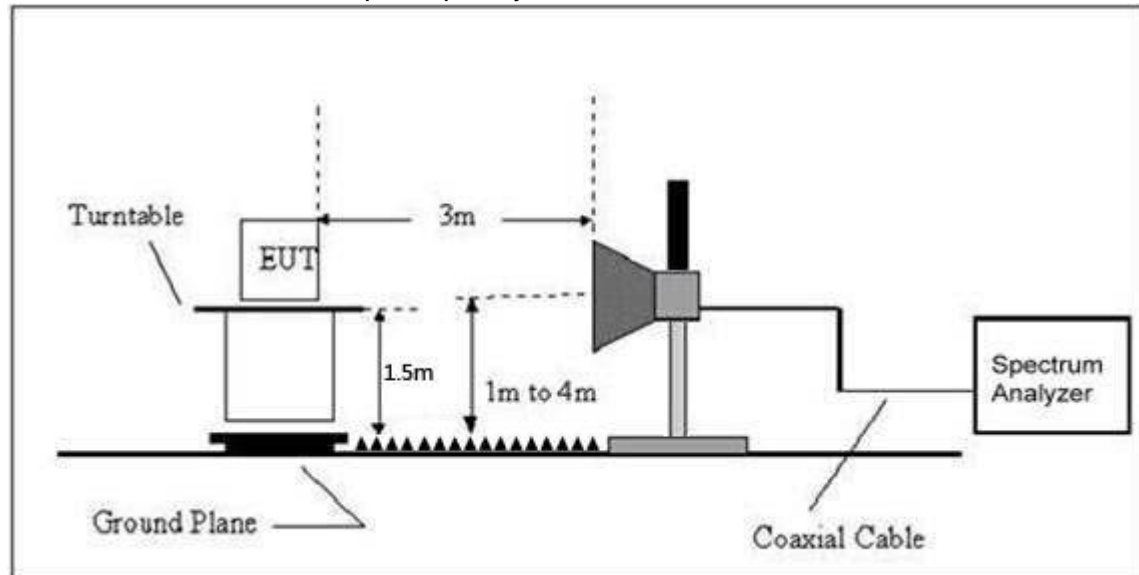

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

EUT:	11.6 inch laptop	Model Name. :	EWT125
Temperature:	25℃	Relative Humidity:	54%
Pressure:	1010 hPa	Test Voltage :	AC120V/60Hz
Test Mode :	Link Mode	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

**3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

EUT :	11.6 inch laptop	Model Name :	EWT125
Temperature :	25℃	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.8V From Battery		
Test Mode :	Link Mode		

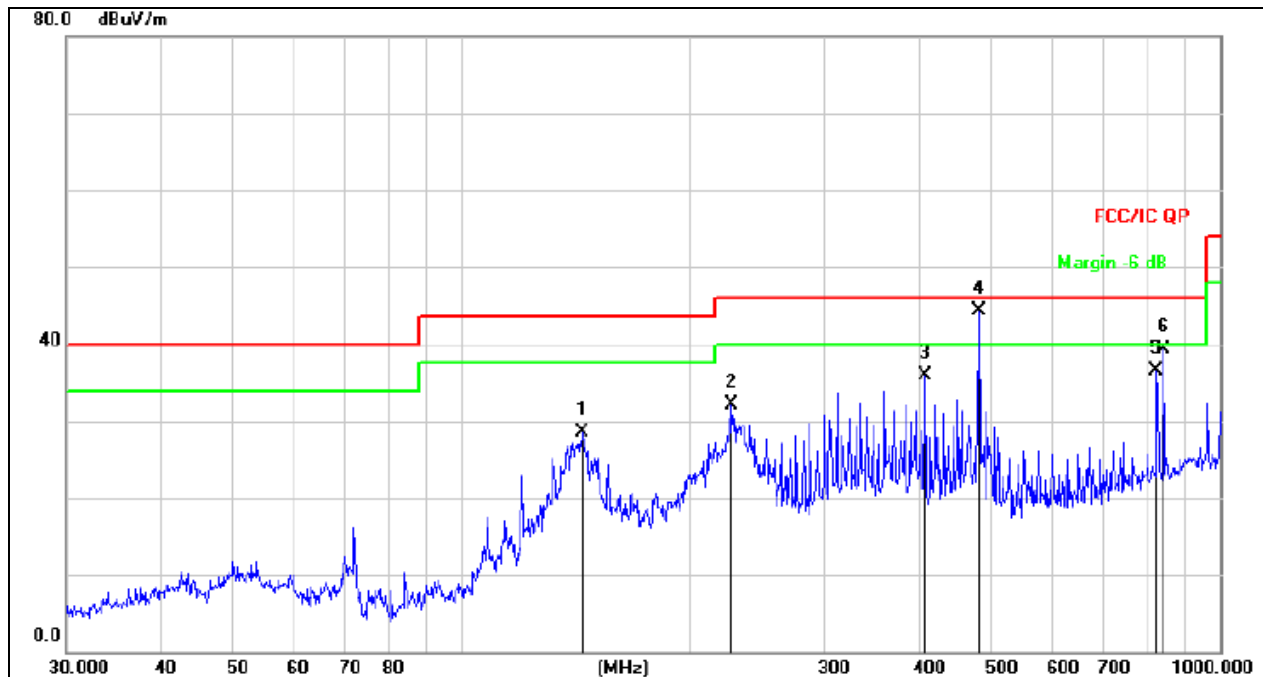


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		143.8295	48.47	-19.89	28.58	43.50	-14.92	QP
2		226.0994	47.07	-14.88	32.19	46.00	-13.81	QP
3		408.9460	45.09	-9.13	35.96	46.00	-10.04	QP
4	*	480.5276	52.01	-7.68	44.33	46.00	-1.67	QP
5		824.5968	37.37	-0.80	36.57	46.00	-9.43	QP
6		842.1296	39.74	-0.47	39.27	46.00	-6.73	QP



EUT :	11.6 inch laptop	Model Name :	EWT125
Temperature :	25°C	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3.8V From Battery		
Test Mode :	Link Mode		

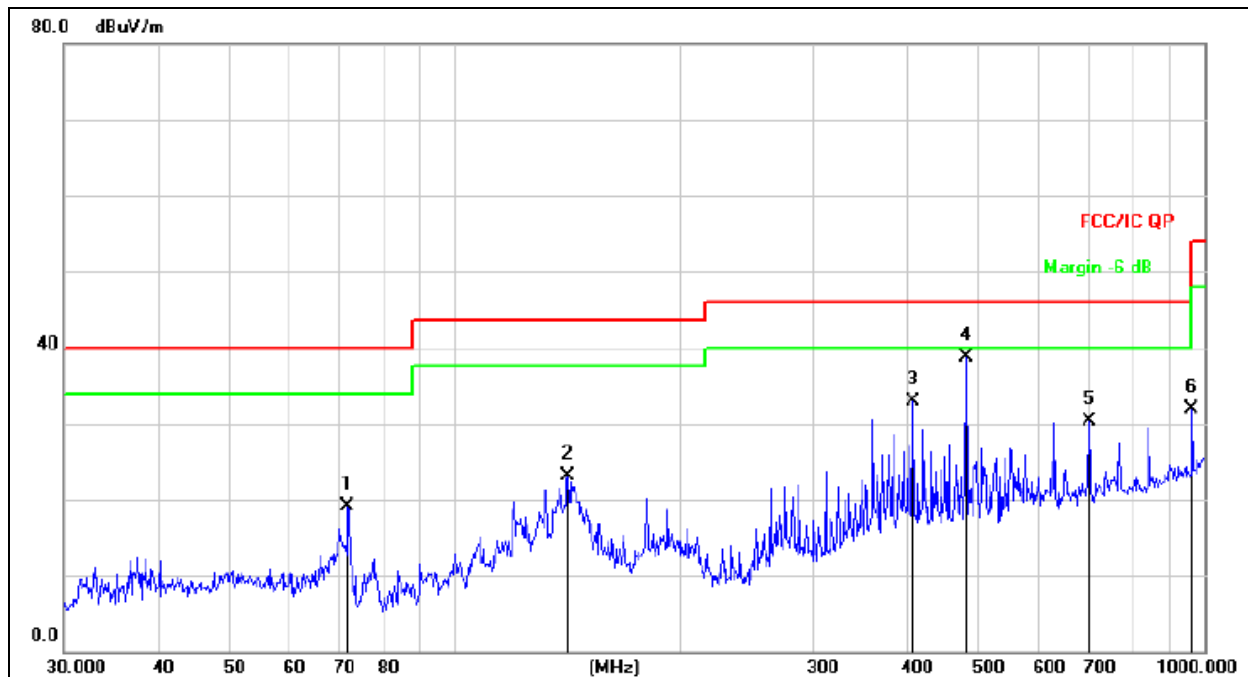

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		71.8320	38.70	-19.62	19.08	40.00	-20.92	QP
2		141.3298	42.98	-19.90	23.08	43.50	-20.42	QP
3		408.9460	42.10	-9.13	32.97	46.00	-13.03	QP
4	*	480.5276	46.44	-7.68	38.76	46.00	-7.24	QP
5		701.7610	33.37	-2.98	30.39	46.00	-15.61	QP
6		962.1623	30.39	1.43	31.82	54.00	-22.18	QP



### 3.2.8 TEST RESULTS (1GHZ~25GHZ)

#### 802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		Low Channel:2412							
V	4824.00	66.04	39.55	7.85	25.66	60.00	74.00	-14.00	PK
V	4824.00	47.85	39.55	7.85	25.66	41.81	54.00	-12.19	AV
V	7236.00	67.20	38.33	7.52	24.55	60.94	74.00	-13.06	PK
V	7236.00	49.07	38.33	7.52	24.55	42.81	54.00	-11.19	AV
V	15450.00	46.57	35.23	6.75	26.59	44.68	74.00	-29.32	PK
H	4824.00	67.88	39.55	7.85	25.66	61.84	74.00	-12.16	PK
H	4824.00	49.91	39.55	7.85	25.66	43.87	54.00	-10.13	AV
H	7236.00	66.27	38.33	7.52	23.55	59.01	74.00	-14.99	PK
H	7236.00	47.41	38.33	7.52	23.22	39.82	54.00	-14.18	AV
H	15450.00	46.08	35.45	6.75	27.88	45.26	74.00	-28.74	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		Middle Channel:2437							
V	4874.00	65.51	38.89	7.57	25.45	59.64	74.00	-14.36	PK
V	4874.00	49.23	38.89	7.57	25.45	43.36	54.00	-10.64	AV
V	7311.00	66.83	38.78	7.35	24.78	60.18	74.00	-13.82	PK
V	7311.00	46.33	38.78	7.35	24.78	39.68	54.00	-14.32	AV
V	15450.00	46.11	35.89	6.42	26.47	43.11	74.00	-30.89	PK
H	4874.00	65.10	38.89	7.57	25.45	59.23	74.00	-14.77	PK
H	4874.00	48.34	38.89	7.57	25.45	42.47	54.00	-11.53	AV
H	7311.00	66.91	38.78	7.35	24.78	60.26	74.00	-13.74	PK
H	7311.00	44.87	38.78	7.35	24.78	38.22	54.00	-15.78	AV
H	15450.00	43.74	36.68	6.42	26.65	40.13	74.00	-33.87	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		High Channel:2462							
V	4924.00	67.17	38.75	7.46	25.45	61.33	74.00	-12.67	PK
V	4924.00	44.80	38.75	7.46	25.45	38.96	54.00	-15.04	AV
V	7386.00	65.65	38.65	7.22	24.78	59.00	74.00	-15.00	PK
V	7386.00	42.96	38.65	7.22	24.78	36.31	54.00	-17.69	AV
V	15450.00	47.69	35.58	6.35	26.47	44.93	74.00	-29.07	PK
H	4924.00	66.33	38.75	7.46	25.45	60.49	74.00	-13.51	PK
H	4924.00	43.77	38.75	7.46	25.45	37.93	54.00	-16.07	AV
H	7386.00	62.09	38.65	7.22	24.78	55.44	74.00	-18.56	PK
H	7386.00	75.47	38.65	7.22	24.78	68.82	54.00	14.82	AV
H	15450.00	45.34	36.42	6.32	26.65	41.89	74.00	-32.11	PK

#### Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.





## 802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		Low Channel:2412							
V	4824.00	66.82	39.55	7.85	25.66	60.78	74.00	-13.22	PK
V	4824.00	48.96	39.55	7.85	25.66	42.92	54.00	-11.08	AV
V	7236.00	66.61	38.33	7.52	24.55	60.35	74.00	-13.65	PK
V	7236.00	47.74	38.33	7.52	24.55	41.48	54.00	-12.52	AV
V	15450.00	46.65	35.23	6.75	26.59	44.76	74.00	-29.24	PK
H	4824.00	66.45	39.55	7.85	25.66	60.41	74.00	-13.59	PK
H	4824.00	50.00	39.55	7.85	25.66	43.96	54.00	-10.04	AV
H	7236.00	68.74	38.33	7.52	23.55	61.48	74.00	-12.52	PK
H	7236.00	43.83	38.33	7.52	23.22	36.24	54.00	-17.76	AV
H	15450.00	46.99	35.45	6.75	27.88	46.17	74.00	-27.83	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		Middle Channel:2437							
V	4874.00	67.44	38.89	7.57	25.45	61.57	74.00	-12.43	PK
V	4874.00	49.55	38.89	7.57	25.45	43.68	54.00	-10.32	AV
V	7311.00	67.50	38.78	7.35	24.78	60.85	74.00	-13.15	PK
V	7311.00	48.11	38.78	7.35	24.78	41.46	54.00	-12.54	AV
V	15450.00	51.84	35.89	6.42	26.47	48.84	74.00	-25.16	PK
H	4874.00	65.72	38.89	7.57	25.45	59.85	74.00	-14.15	PK
H	4874.00	49.21	38.89	7.57	25.45	43.34	54.00	-10.66	AV
H	7311.00	68.10	38.78	7.35	24.78	61.45	74.00	-12.55	PK
H	7311.00	45.64	38.78	7.35	24.78	38.99	54.00	-15.01	AV
H	15450.00	44.80	36.68	6.42	26.65	41.19	74.00	-32.81	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		High Channel:2462							
V	4924.00	66.93	38.75	7.46	25.45	61.09	74.00	-12.91	PK
V	4924.00	48.63	38.75	7.46	25.45	42.79	54.00	-11.21	AV
V	7386.00	66.63	38.65	7.22	24.78	59.98	74.00	-14.02	PK
V	7386.00	48.99	38.65	7.22	24.78	42.34	54.00	-11.66	AV
V	15450.00	46.43	35.58	6.35	26.47	43.67	74.00	-30.33	PK
H	4924.00	47.04	38.75	7.46	25.45	41.20	74.00	-32.80	PK
H	4924.00	47.48	38.75	7.46	25.45	41.64	54.00	-12.36	AV
H	7386.00	64.17	38.65	7.22	24.78	57.52	74.00	-16.48	PK
H	7386.00	47.08	38.65	7.22	24.78	40.43	54.00	-13.57	AV
H	15450.00	46.19	36.42	6.32	26.65	42.74	74.00	-31.26	PK

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11n(20MHz)

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		Low Channel:2412							
V	4824.00	65.51	39.55	7.85	25.66	59.47	74.00	-14.53	PK
V	4824.00	46.62	39.55	7.85	25.66	40.58	54.00	-13.42	AV
V	7236.00	64.67	38.33	7.52	24.55	58.41	74.00	-15.59	PK
V	7236.00	45.85	38.33	7.52	24.55	39.59	54.00	-14.41	AV
V	15450.00	70.58	35.23	6.75	26.59	68.69	74.00	-5.31	PK
H	4824.00	64.58	39.55	7.85	25.66	58.54	74.00	-15.46	PK
H	4824.00	47.59	39.55	7.85	25.66	41.55	54.00	-12.45	AV
H	7236.00	76.38	38.33	7.52	23.55	69.12	74.00	-4.88	PK
H	7236.00	48.54	38.33	7.52	23.22	40.95	54.00	-13.05	AV
H	15450.00	45.04	35.45	6.75	27.88	44.22	74.00	-29.78	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		Middle Channel:2437							
V	4874.00	67.41	38.89	7.57	25.45	61.54	74.00	-12.46	PK
V	4874.00	48.02	38.89	7.57	25.45	42.15	54.00	-11.85	AV
V	7311.00	66.63	38.78	7.35	24.78	59.98	74.00	-14.02	PK
V	7311.00	46.69	38.78	7.35	24.78	40.04	54.00	-13.96	AV
V	15450.00	45.96	35.89	6.42	26.47	42.96	74.00	-31.04	PK
H	4874.00	65.59	38.89	7.57	25.45	59.72	74.00	-14.28	PK
H	4874.00	47.43	38.89	7.57	25.45	41.56	54.00	-12.44	AV
H	7311.00	68.75	38.78	7.35	24.78	62.10	74.00	-11.90	PK
H	7311.00	47.67	38.78	7.35	24.78	41.02	54.00	-12.98	AV
H	15450.00	44.41	36.68	6.42	26.65	40.80	74.00	-33.20	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
		High Channel:2462							
V	4924.00	66.62	38.75	7.46	25.45	60.78	74.00	-13.22	PK
V	4924.00	49.30	38.75	7.46	25.45	43.46	54.00	-10.54	AV
V	7386.00	65.40	38.65	7.22	24.78	58.75	74.00	-15.25	PK
V	7386.00	47.70	38.65	7.22	24.78	41.05	54.00	-12.95	AV
V	15450.00	61.92	35.58	6.35	26.47	59.16	74.00	-14.84	PK
H	4924.00	63.19	38.75	7.46	25.45	57.35	74.00	-16.65	PK
H	4924.00	48.73	38.75	7.46	25.45	42.89	54.00	-11.11	AV
H	7386.00	68.42	38.65	7.22	24.78	61.77	74.00	-12.23	PK
H	7386.00	46.17	38.65	7.22	24.78	39.52	54.00	-14.48	AV
H	15450.00	45.77	36.42	6.32	26.65	42.32	74.00	-31.68	PK

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11n(40MHz)

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2422									
V	4844.000	66.22	39.55	7.77	25.66	60.10	74	-13.90	PK
V	4844.000	48.22	39.55	7.77	25.66	42.10	54	-11.90	AV
V	7266.000	65.08	38.33	7.30	24.55	58.60	74	-15.40	PK
V	7266.000	44.89	38.33	7.30	24.55	38.41	54	-15.59	AV
V	15450.00	46.04	35.23	6.60	26.59	44.00	74	-30.00	PK
H	4844.000	66.03	39.55	7.77	25.66	59.91	74	-14.09	PK
H	4844.000	43.00	39.55	7.77	25.66	36.88	54	-17.12	AV
H	7266.000	63.73	38.33	7.30	23.55	56.25	74	-17.75	PK
H	7266.000	45.91	38.33	7.30	23.22	38.10	54	-15.90	AV
H	15450.00	45.09	35.45	6.60	27.88	44.12	74	-29.88	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2437									
V	4874.00	66.49	38.89	7.57	25.45	60.62	74.00	-13.38	PK
V	4874.00	48.01	38.89	7.57	25.45	42.14	54.00	-11.86	AV
V	7311.00	67.48	38.78	7.35	24.78	60.83	74.00	-13.17	PK
V	7311.00	47.72	38.78	7.35	24.78	41.07	54.00	-12.93	AV
V	15450.00	47.88	35.89	6.42	26.47	44.88	74.00	-29.12	PK
H	4874.00	66.53	38.89	7.57	25.45	60.66	74.00	-13.34	PK
H	4874.00	47.55	38.89	7.57	25.45	41.68	54.00	-12.32	AV
H	7311.00	65.42	38.78	7.35	24.78	58.77	74.00	-15.23	PK
H	7311.00	49.61	38.78	7.35	24.78	42.96	54.00	-11.04	AV
H	15450.00	47.85	36.68	6.42	26.65	44.24	74.00	-29.76	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2452									
V	4904.00	67.60	38.75	7.38	25.45	61.68	74	-12.32	PK
V	4904.00	47.48	38.75	7.38	25.45	41.56	54	-12.44	AV
V	7356.00	64.67	38.65	7.15	24.78	57.95	74	-16.05	PK
V	7356.00	46.45	38.65	7.15	24.78	39.73	54	-14.27	AV
V	15450.00	47.59	35.58	6.25	26.47	44.73	74	-29.27	PK
H	4904.00	67.01	38.75	7.38	25.45	61.09	74	-12.91	PK
H	4904.00	45.67	38.75	7.38	25.45	39.75	54	-14.25	AV
H	7356.00	60.86	38.65	7.15	24.78	54.14	74	-19.86	PK
H	7356.00	46.61	38.65	7.15	24.78	39.89	54	-14.11	AV
H	15450.00	45.44	36.42	6.25	26.65	41.92	74	-32.08	PK

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



### 3.3 RADIATED BAND EMISSION MEASUREMENT

#### 3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

#### 3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

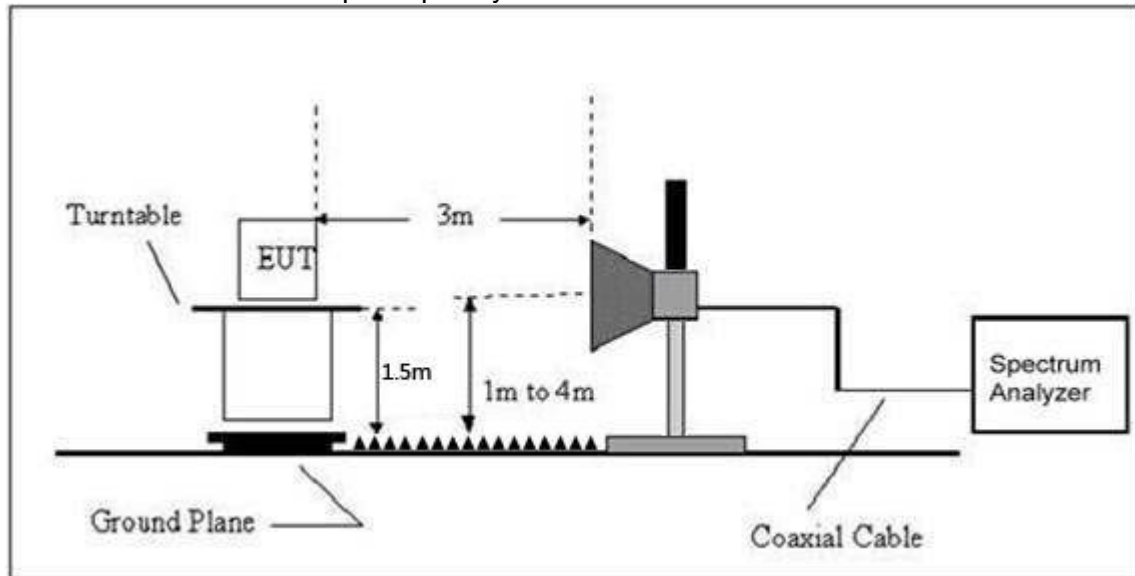

### 3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



### 3.3.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission evel (dBuV/m)	Limits (dBuV/m)		Result
							PK	PK	AV	
802.11b	Low Channel 2412MHz									
	H	2390.00	59.42	38.06	7.42	20.15	48.93	74.00	54.00	PASS
	H	2400.00	60.54	38.06	7.42	20.15	50.05	74.00	54.00	PASS
	V	2390.00	59.26	38.06	7.42	20.15	48.77	74.00	54.00	PASS
	V	2400.00	59.79	38.06	7.42	20.15	49.30	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	59.76	38.17	7.45	20.54	49.58	74.00	54.00	PASS
	H	2485.50	58.56	38.17	7.45	20.54	48.38	74.00	54.00	PASS
	V	2483.50	59.34	38.20	7.45	20.54	49.13	74.00	54.00	PASS
V	2485.50	59.18	38.20	7.45	20.54	48.97	74.00	54.00	PASS	
802.11g	Low Channel 2412MHz									
	H	2390.00	58.26	38.06	7.42	20.15	47.77	74.00	54.00	PASS
	H	2400.00	59.32	38.06	7.42	20.15	48.83	74.00	54.00	PASS
	V	2390.00	58.49	38.06	7.42	20.15	48.00	74.00	54.00	PASS
	V	2400.00	59.75	38.06	7.42	20.15	49.26	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	59.25	38.17	7.45	20.54	49.07	74.00	54.00	PASS
	H	2485.50	57.95	38.17	7.45	20.54	47.77	74.00	54.00	PASS
	V	2483.50	60.23	38.20	7.45	20.54	50.02	74.00	54.00	PASS
V	2485.50	58.77	38.20	7.45	20.54	48.56	74.00	54.00	PASS	
802.11N20	Low Channel 2412MHz									
	H	2390.00	59.63	38.06	7.42	20.15	49.14	74.00	54.00	PASS
	H	2400.00	60.12	38.06	7.42	20.15	49.63	74.00	54.00	PASS
	V	2390.00	58.48	38.06	7.42	20.15	47.99	74.00	54.00	PASS
	V	2400.00	60.42	38.06	7.42	20.15	49.93	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	60.53	38.17	7.45	20.54	50.35	74.00	54.00	PASS
	H	2485.50	58.11	38.17	7.45	20.54	47.93	74.00	54.00	PASS
	V	2483.50	60.27	38.20	7.45	20.54	50.06	74.00	54.00	PASS
V	2485.50	58.35	38.20	7.45	20.54	48.14	74.00	54.00	PASS	
802.11N40	Low Channel 2422MHz									
	H	2390.00	58.87	38.06	7.42	20.15	48.38	74.00	54.00	PASS
	H	2400.00	59.69	38.06	7.42	20.15	49.20	74.00	54.00	PASS
	V	2390.00	58.35	38.06	7.42	20.15	47.86	74.00	54.00	PASS
	V	2400.00	59.84	38.06	7.42	20.15	49.35	74.00	54.00	PASS
	High Channel 2452MHz									
	H	2483.50	60.14	38.17	7.45	20.54	49.96	74.00	54.00	PASS
	H	2485.50	58.56	38.17	7.45	20.54	48.38	74.00	54.00	PASS
	V	2483.50	60.06	38.20	7.45	20.54	49.85	74.00	54.00	PASS
V	2485.50	58.67	38.20	7.45	20.54	48.46	74.00	54.00	PASS	
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.										

## 4. POWER SPECTRAL DENSITY TEST

### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

#### 4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### 4.1.2 DEVIATION FROM STANDARD

No deviation.

#### 4.1.3 TEST SETUP



#### 4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.





#### 4.1.5 TEST RESULTS

EUT :	11.6 inch laptop	Model Name :	EWT125
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.8V From Battery
Test Mode :	TX b Mode /CH01, CH06, CH11		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-11.19	8	PASS
2437 MHz	-12.01	8	PASS
2462 MHz	-10.49	8	PASS

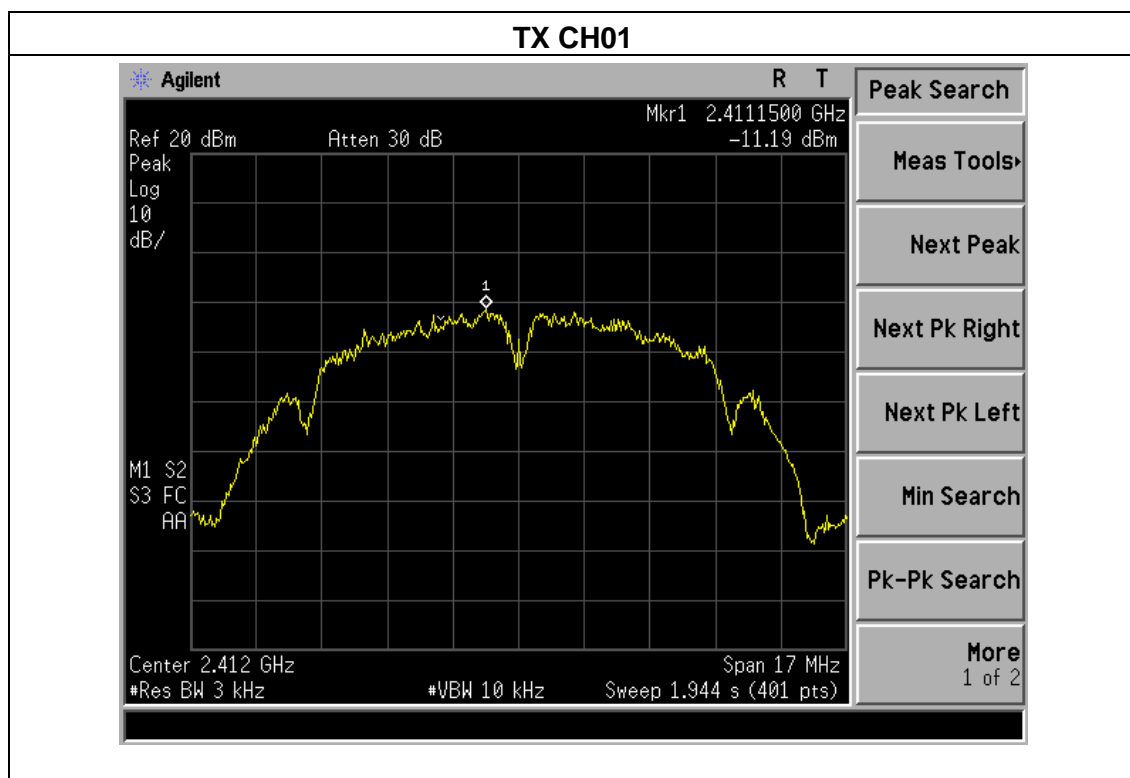




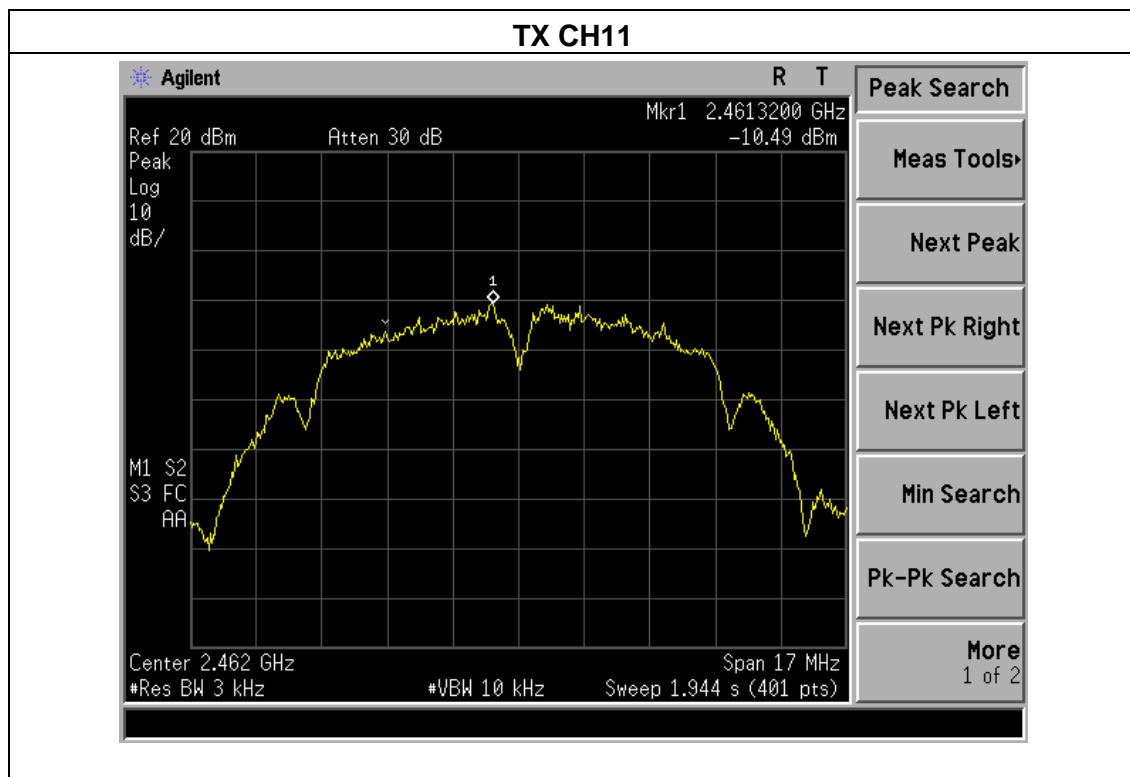
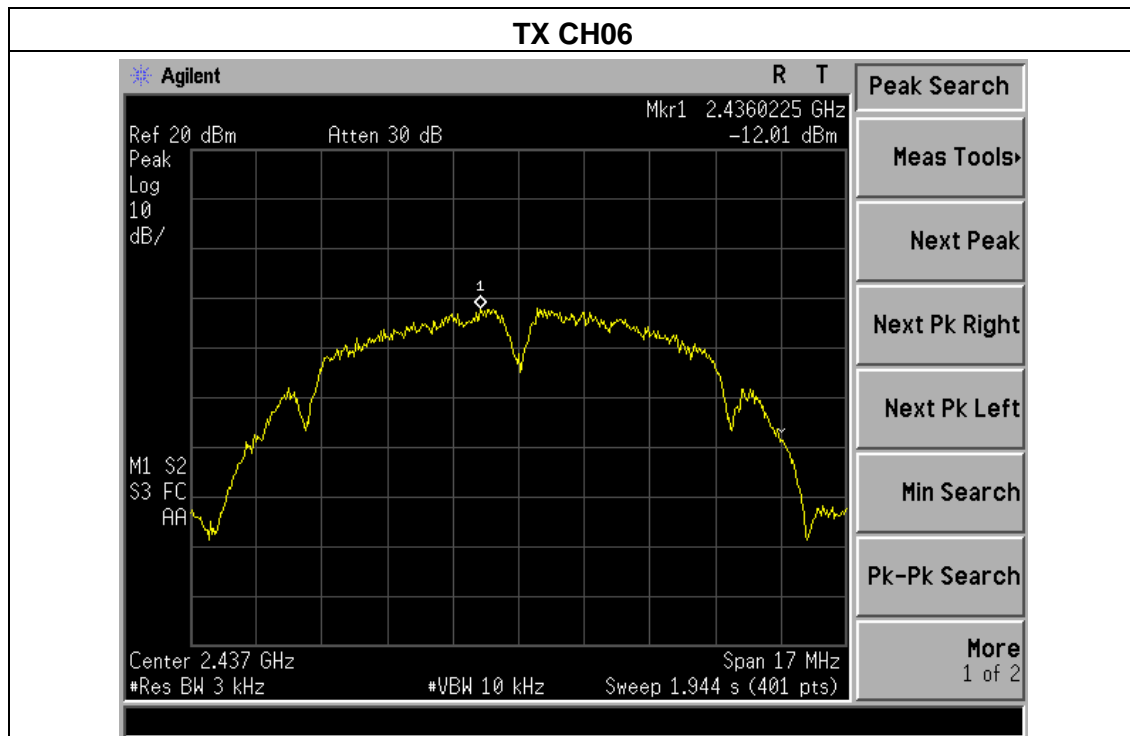




EUT :	11.6 inch laptop	Model Name :	EWT125
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.8V From Battery
Test Mode :	TX g Mode /CH01, CH06, CH11		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-13.03	8	PASS
2437 MHz	-14.18	8	PASS
2462 MHz	-13.64	8	PASS

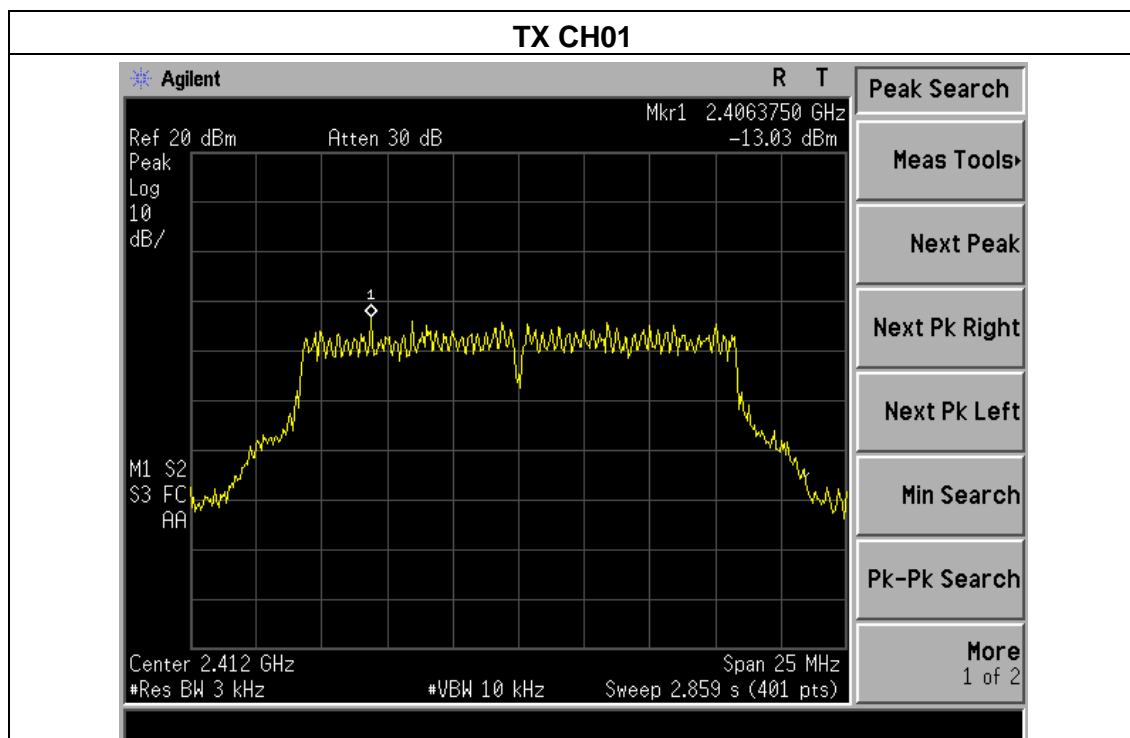


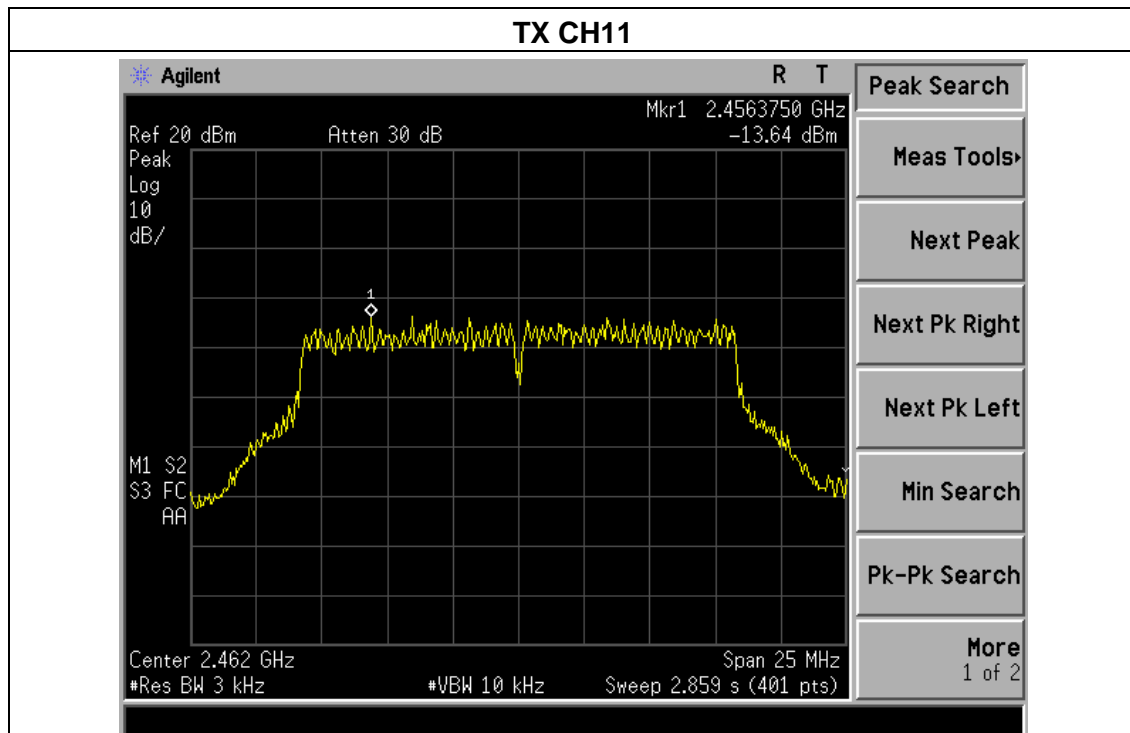
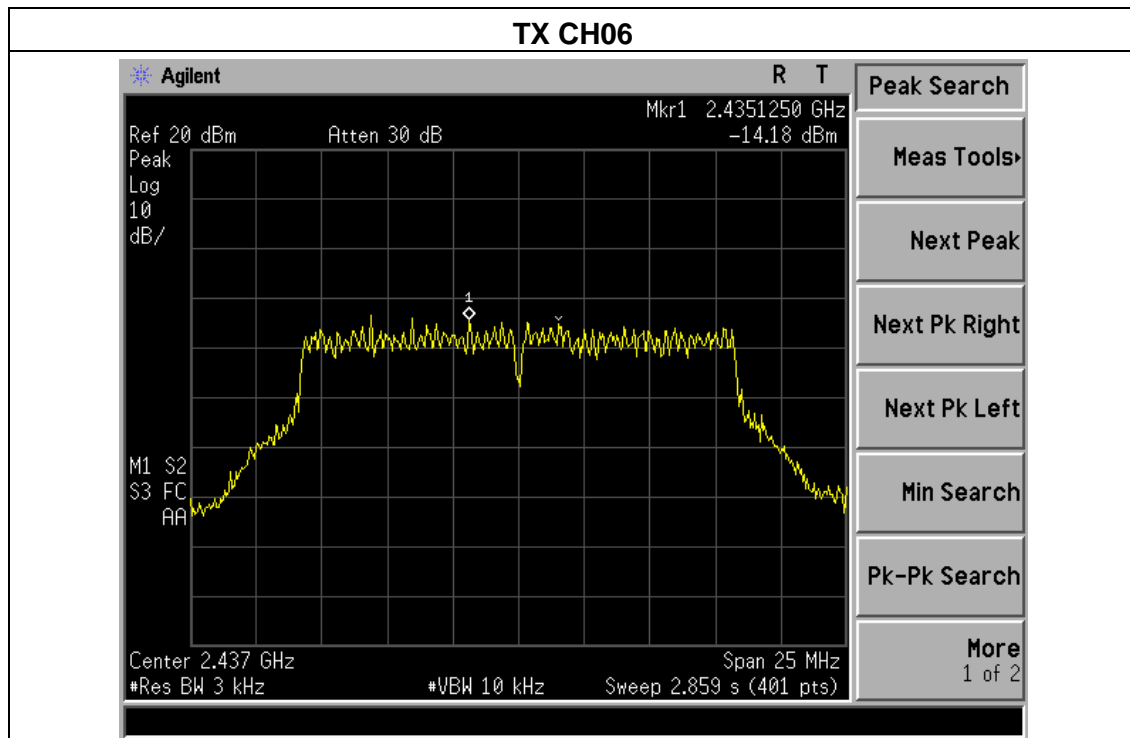




EUT :	11.6 inch laptop	Model Name :	EWT125
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.8V From Battery
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-15.18	8	PASS
2437 MHz	-14.46	8	PASS
2462 MHz	-16.65	8	PASS

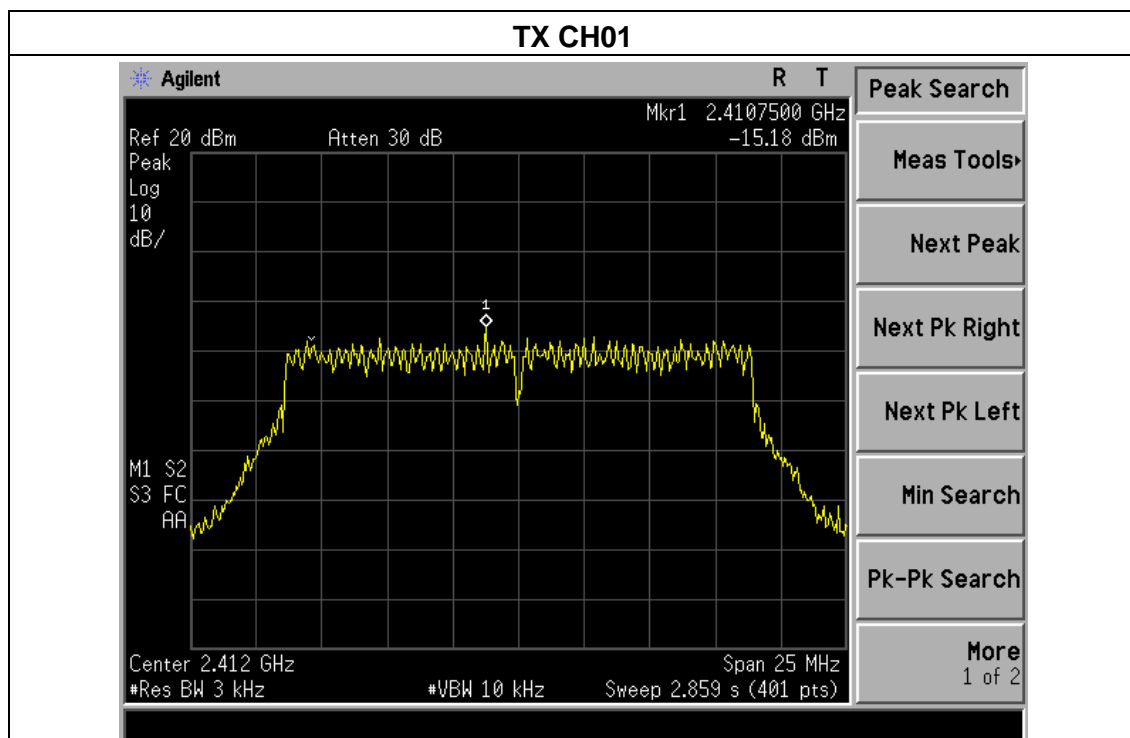


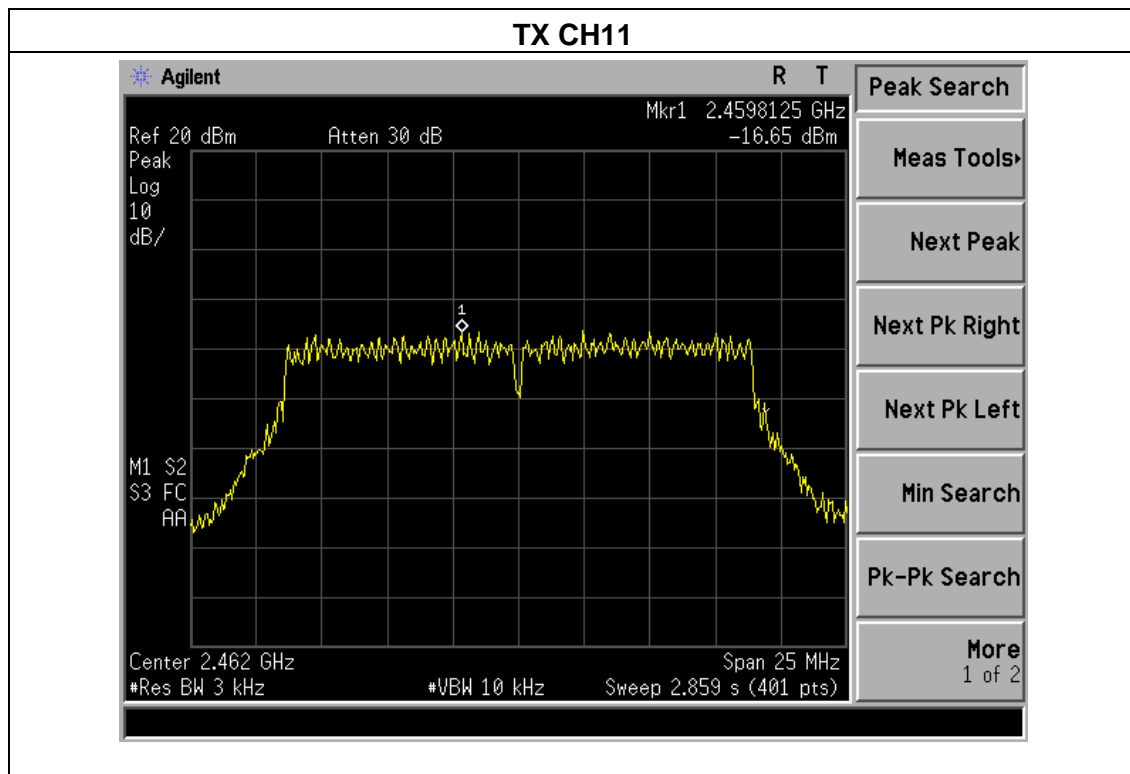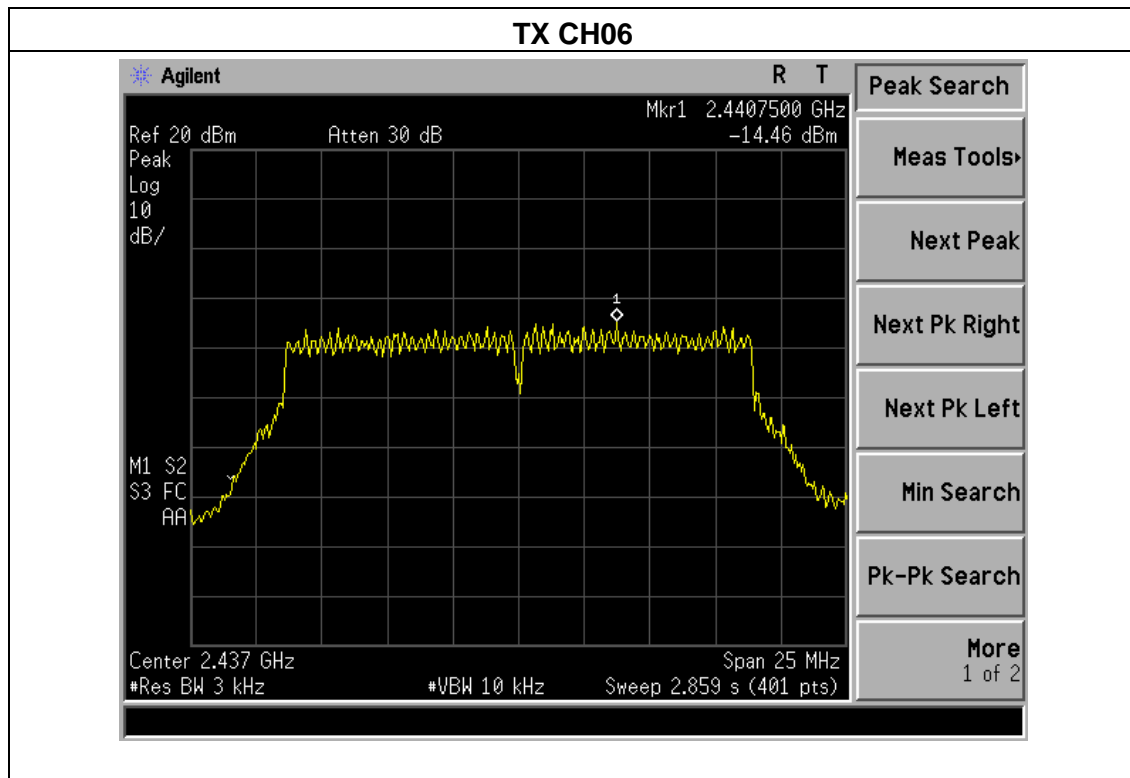




EUT :	11.6 inch laptop	Model Name :	EWT125
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.8V From Battery
Test Mode :	TX n Mode(40M) /CH03, CH06, CH09		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2422 MHz	-16.56	8	PASS
2437 MHz	-17.81	8	PASS
2452 MHz	-17.97	8	PASS

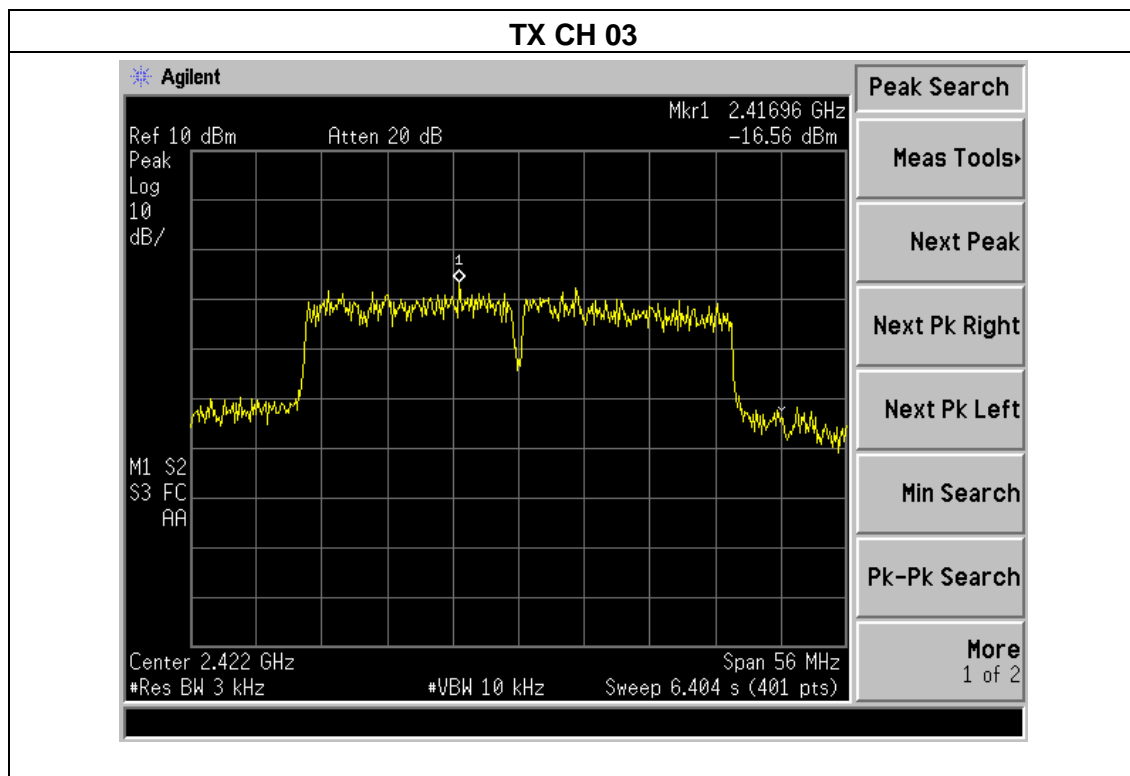

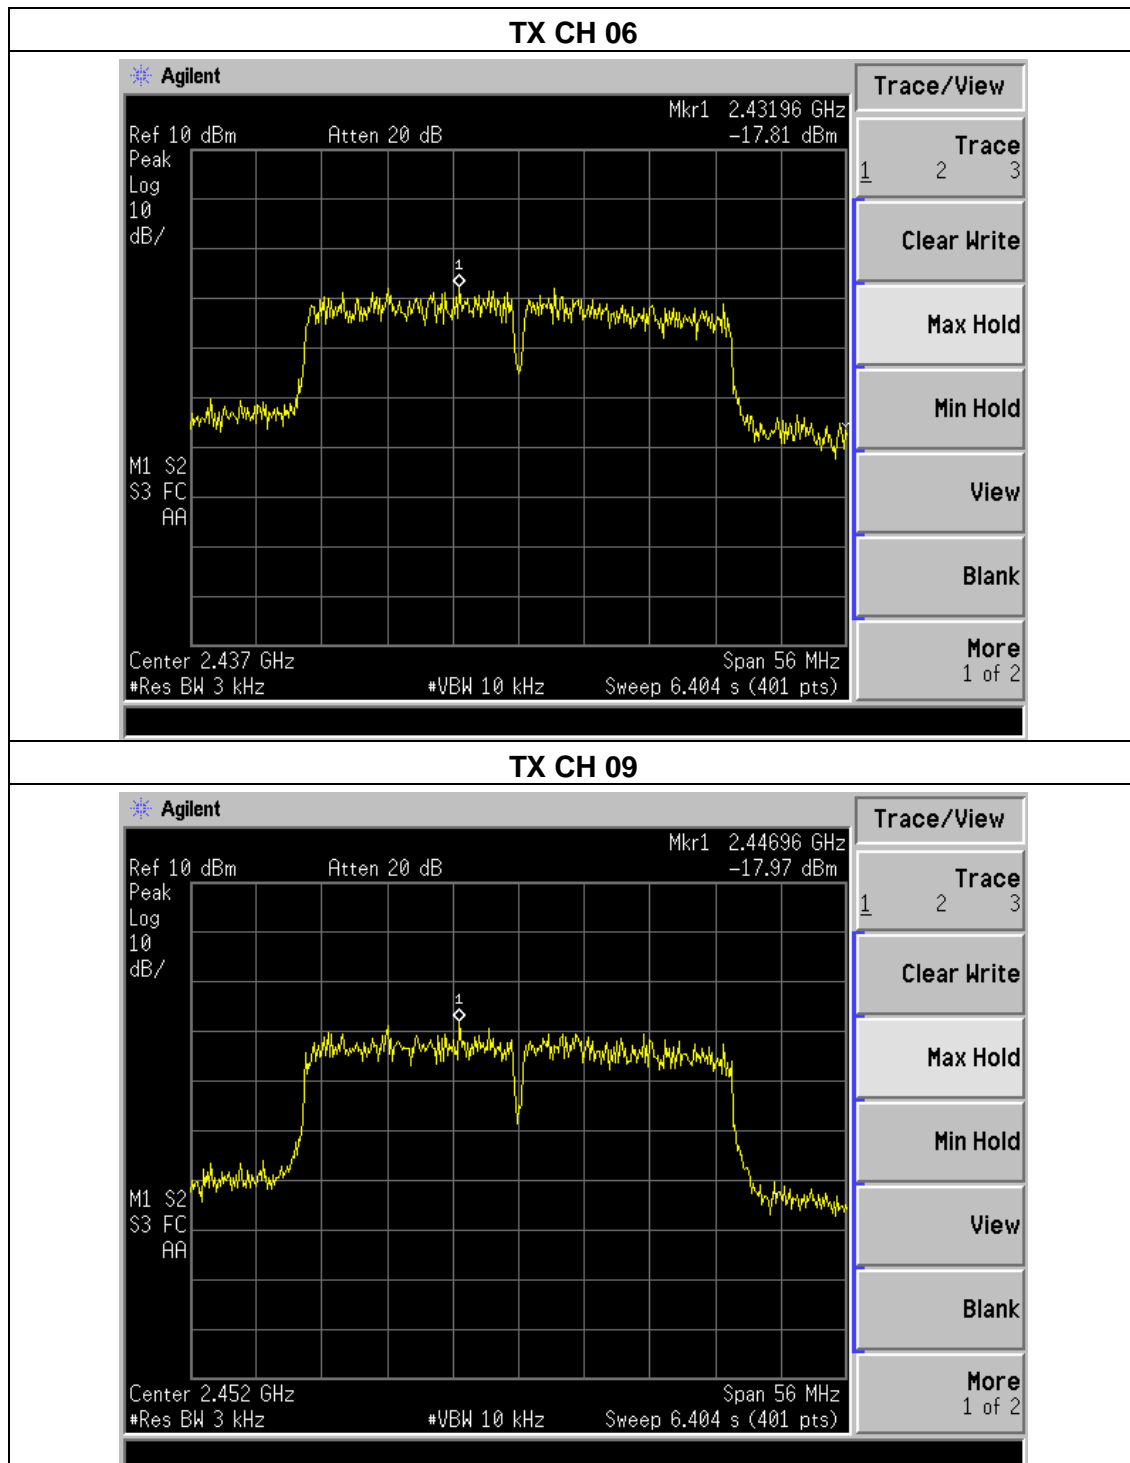



## 5. BANDWIDTH TEST

### 5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

#### 5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP



#### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.







### 5.1.5 TEST RESULTS

EUT :	11.6 inch laptop	Model Name :	EWT125
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V From Battery
Test Mode :	TX b Mode /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	9.918	500	Pass
Middle	2437	10.070	500	Pass
High	2462	10.092	500	Pass

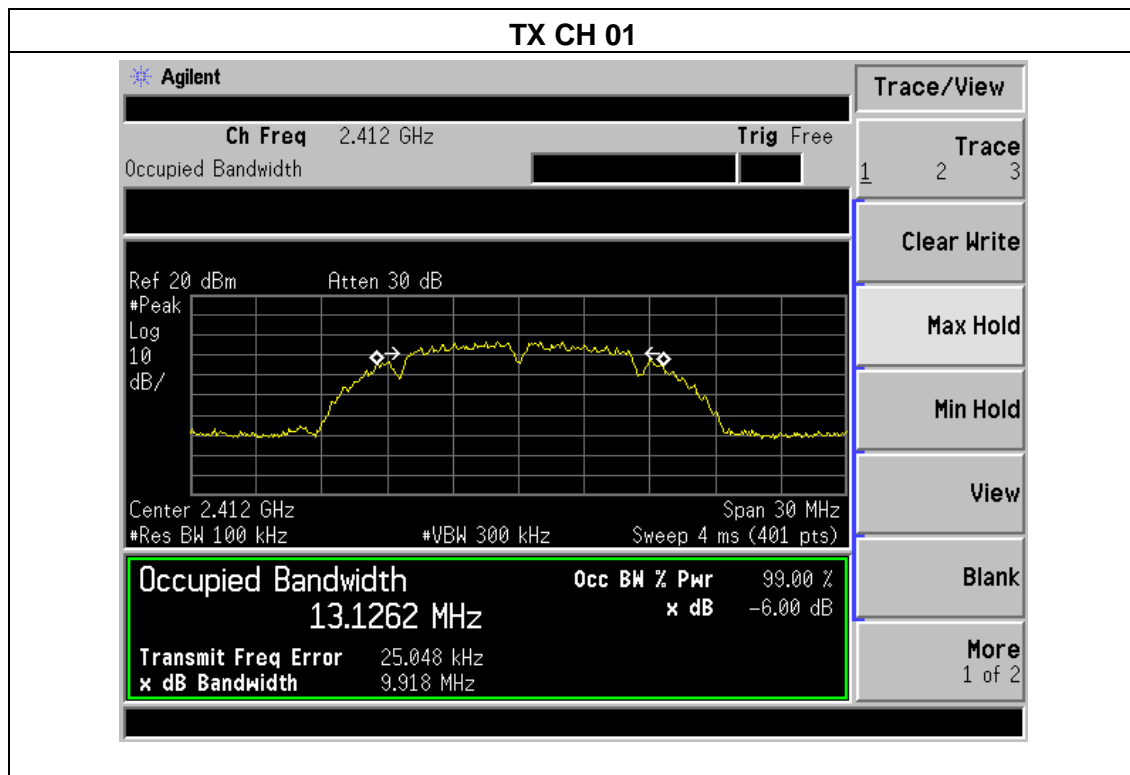

### TX CH 06

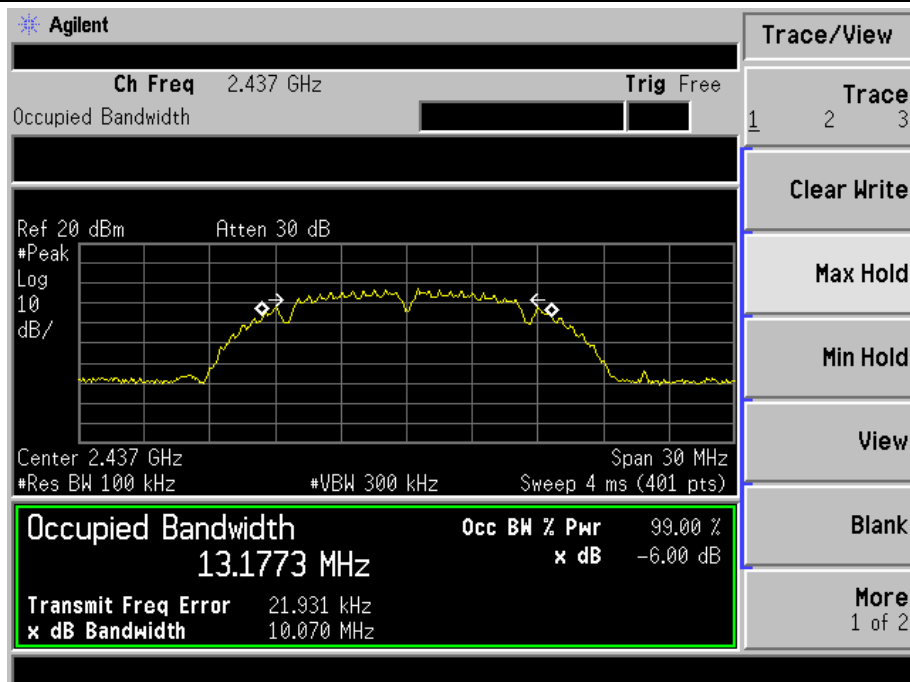


### TX CH 11

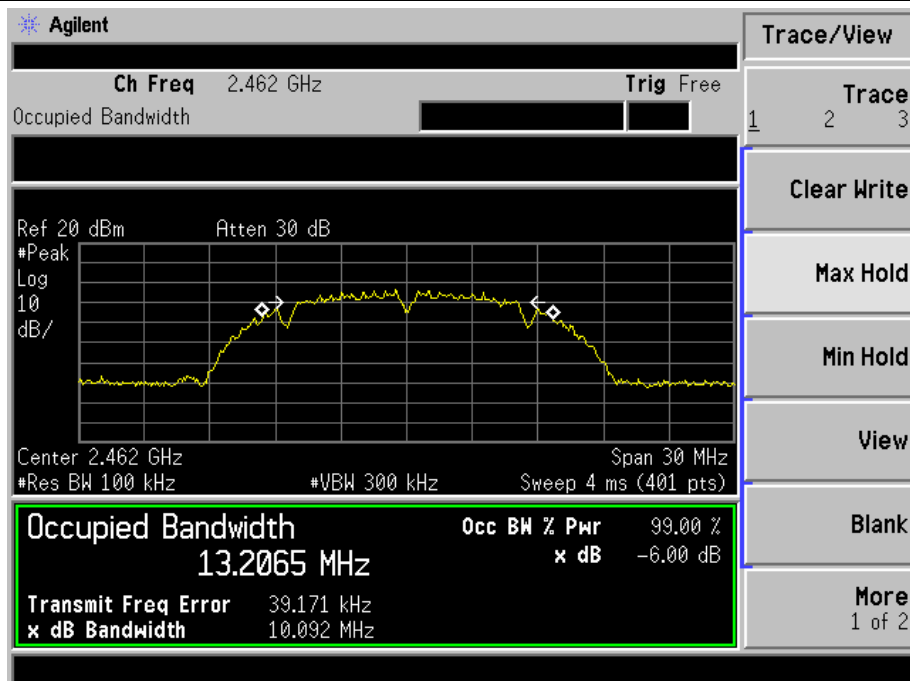




EUT :	11.6 inch laptop	Model Name :	EWT125
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V From Battery
Test Mode :	TX g Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.411	500	Pass
Middle	2437	16.546	500	Pass
High	2462	16.525	500	Pass

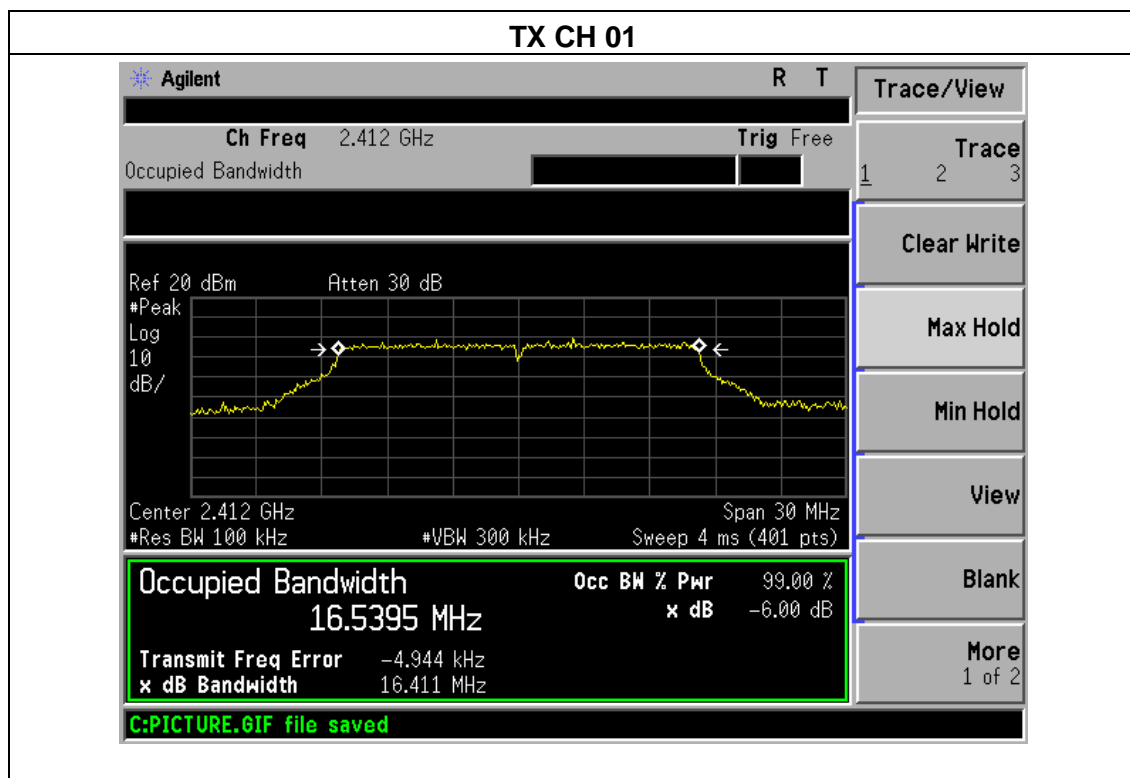




## TX CH 06

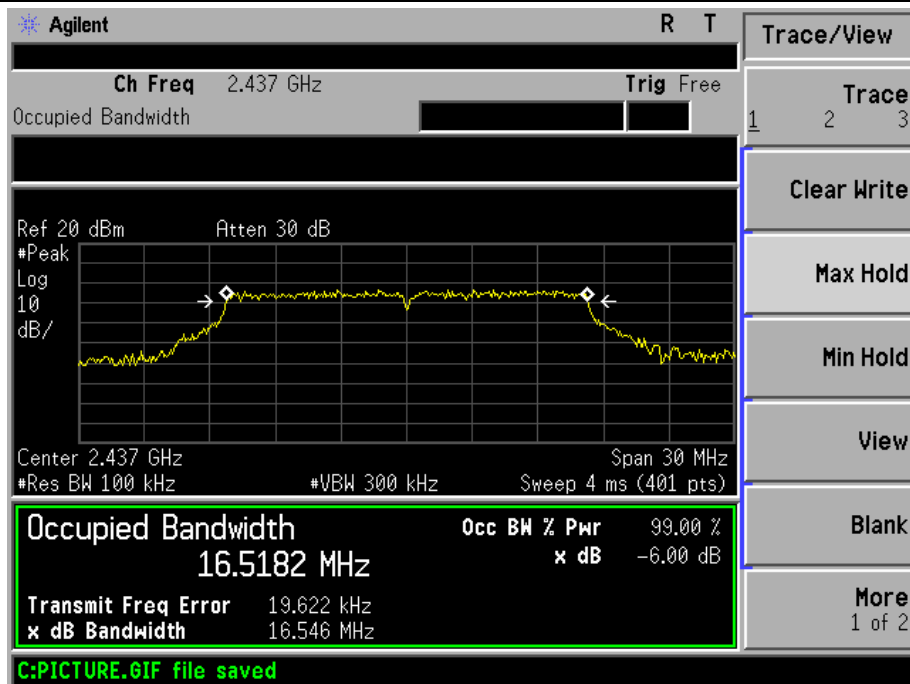


## TX CH 11

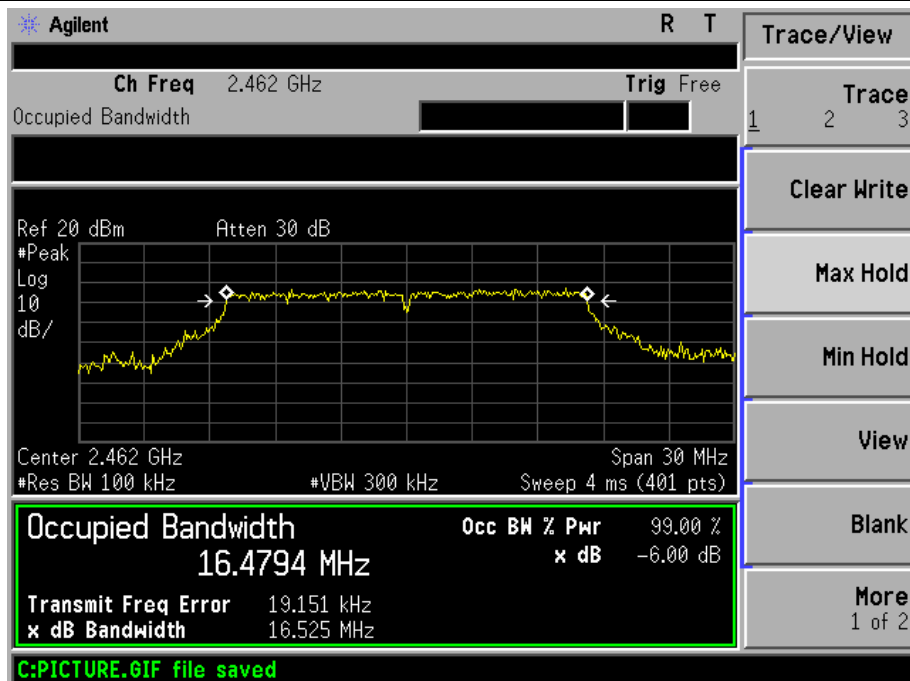




EUT :	11.6 inch laptop	Model Name :	EWT125
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V From Battery
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.715	500	Pass
Middle	2437	17.658	500	Pass
High	2462	17.680	500	Pass

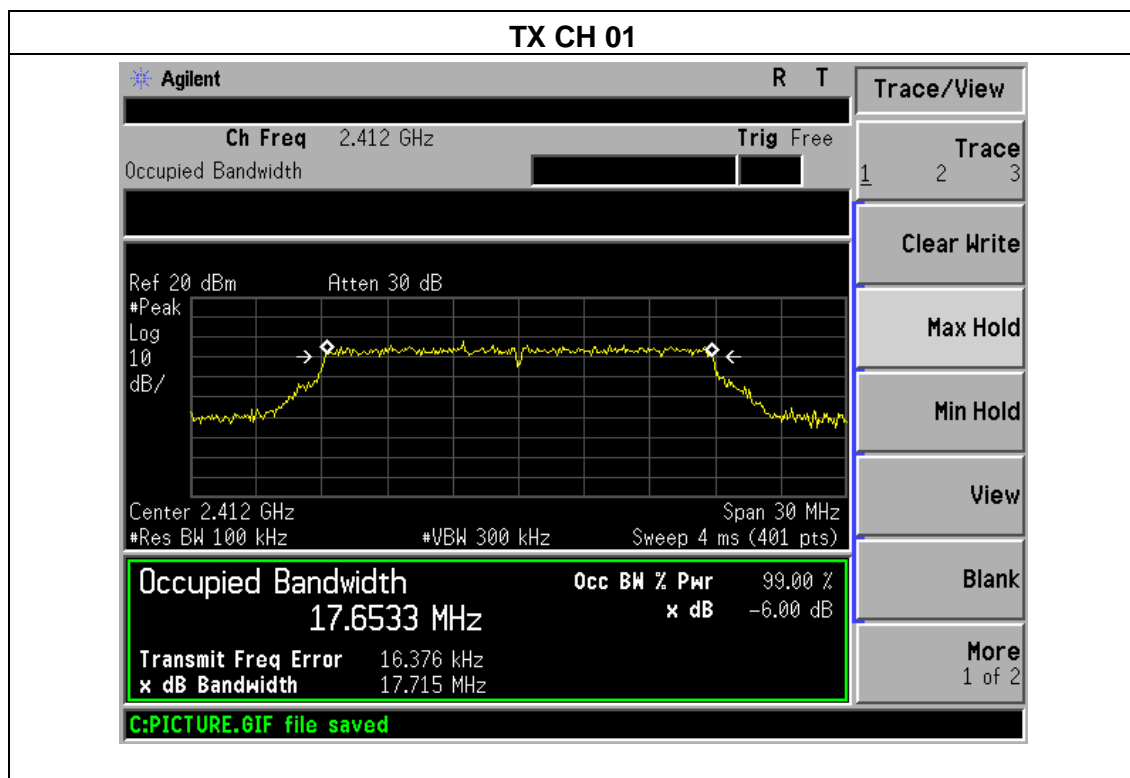


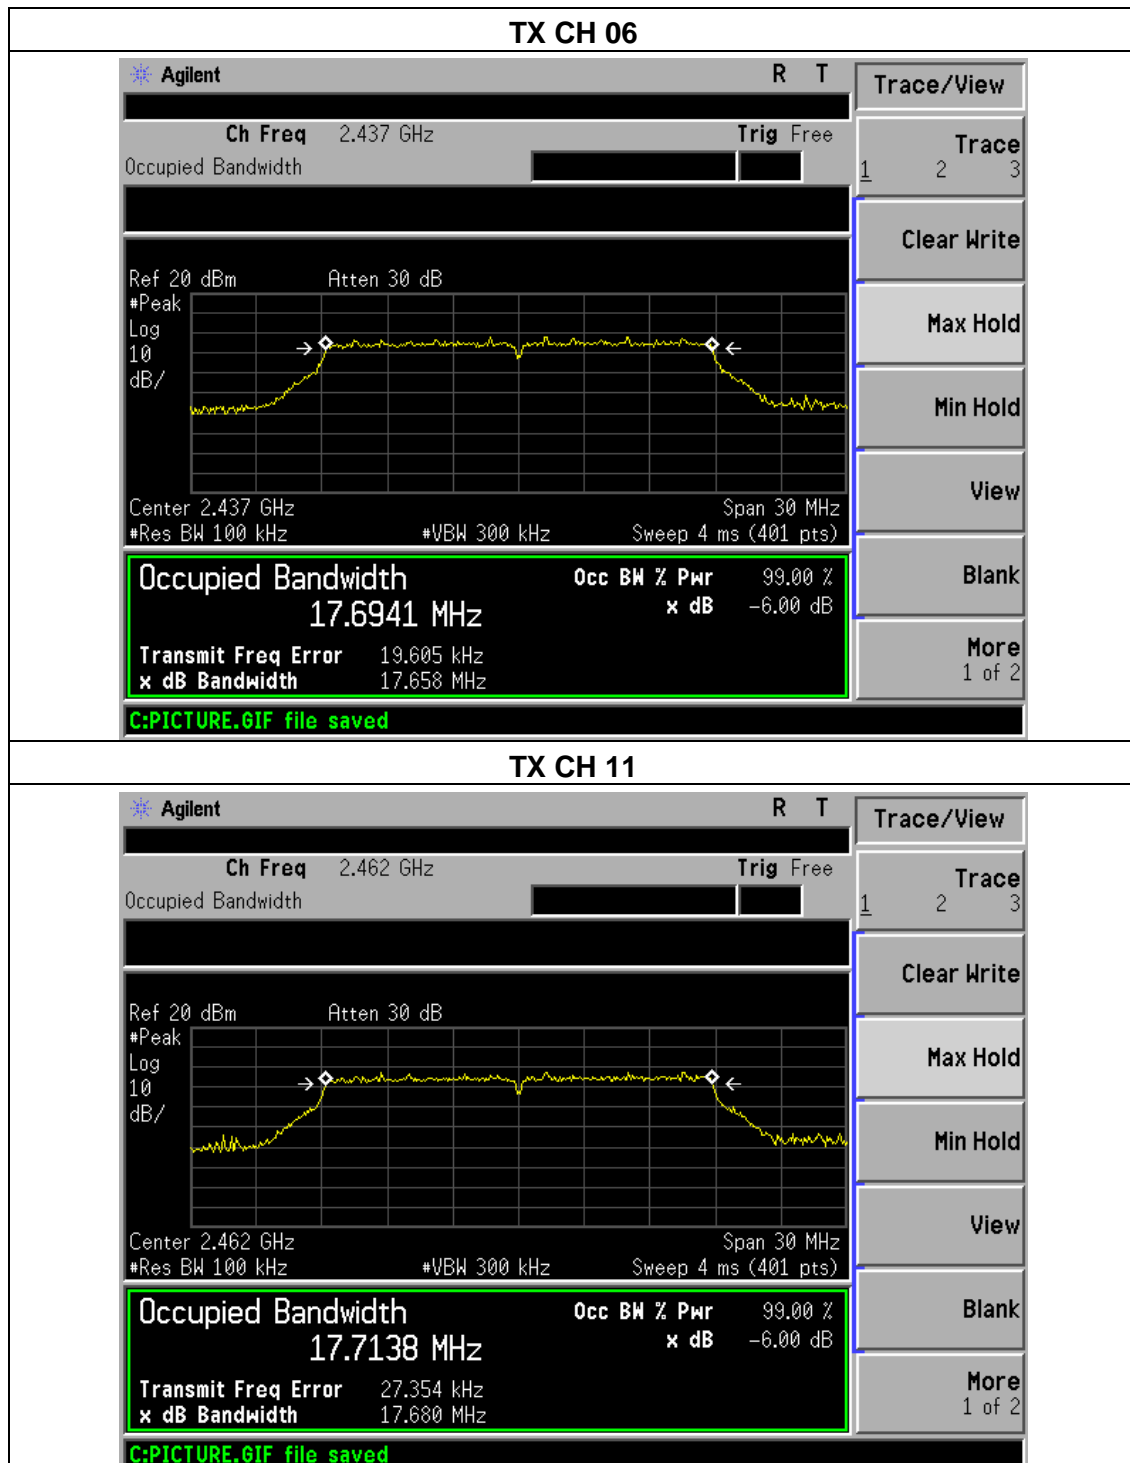



EUT :	11.6 inch laptop	Model Name :	EWT125
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V From Battery
Test Mode :	TX n Mode(40M) /CH03, CH06, CH09		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.538	500	Pass
Middle	2437	36.471	500	Pass
High	2452	36.450	500	Pass

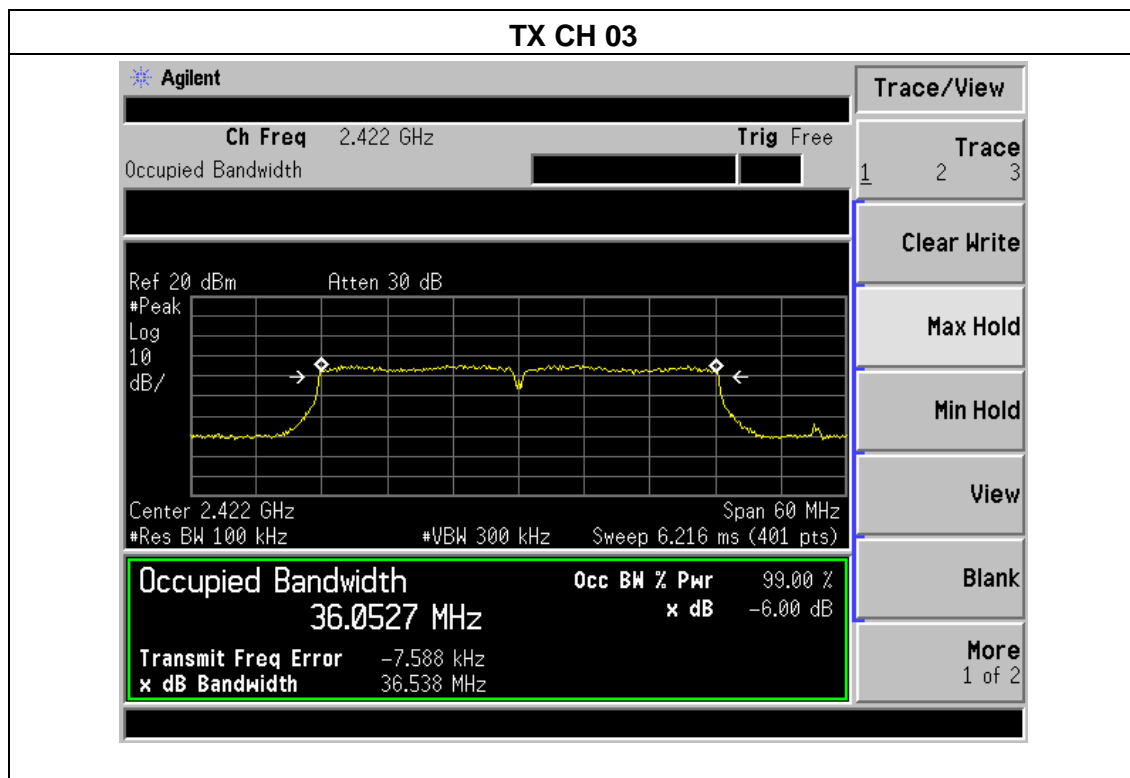







## 6. PEAK OUTPUT POWER TEST

### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

#### 6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP



#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**

EUT :	11.6 inch laptop	Model Name :	EWT125
Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V From Battery
Test Mode :	TX b/g/n(20M, 40M)		

TX 802.11b Mode			
Test Channe	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
CH01	2412	7.68	30
CH06	2437	7.47	30
CH11	2462	7.73	30
TX 802.11g Mode			
CH01	2412	7.24	30
CH06	2437	7.69	30
CH11	2462	7.37	30
TX 802.11n-HT20 Mode			
CH01	2412	6.64	30
CH06	2437	6.41	30
CH11	2462	6.38	30
TX 802.11n-HT40 Mode			
CH03	2422	5.59	30
CH06	2437	5.42	30
CH09	2452	5.66	30



## 7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

### APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.
- f) The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- g) The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- h) The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning



the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

- i) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- j) For the actual test configuration, please refer to the related Item –EUT Test Photos.


**Note:**

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 7.1 DEVIATION FROM STANDARD

No deviation.

### 7.2 TEST SETUP

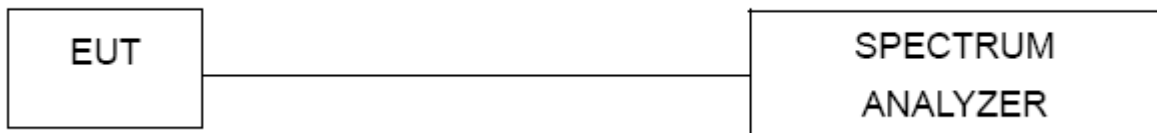


### 7.3 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 7.4 TEST RESULTS


802.11b: Band Edge, Left Side

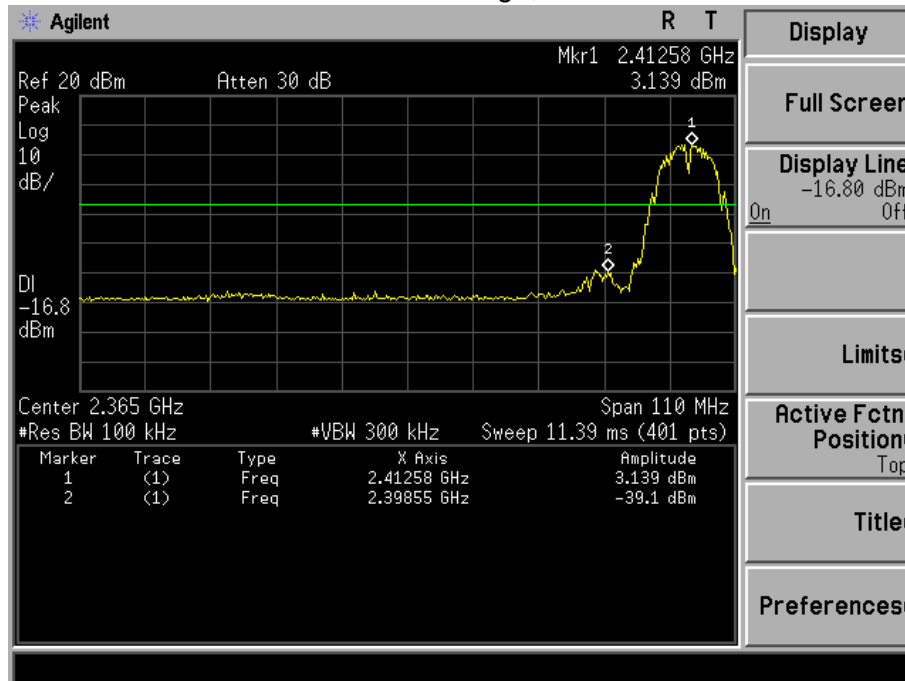


802.11b: Band Edge, Right Side

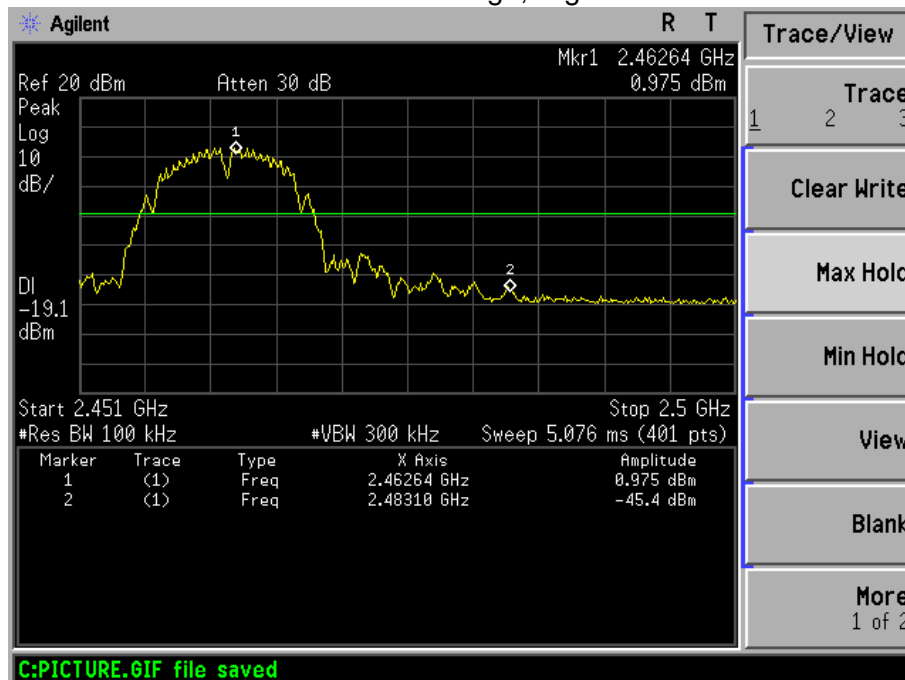


## 802.11g: Band Edge, Left Side

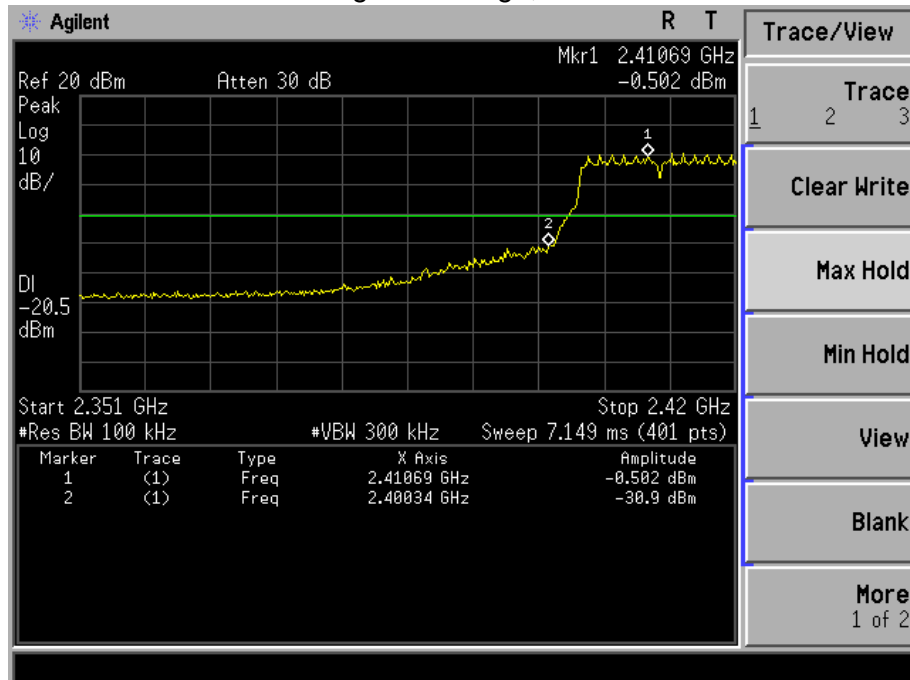


## 802.11g: Band Edge, Right Side

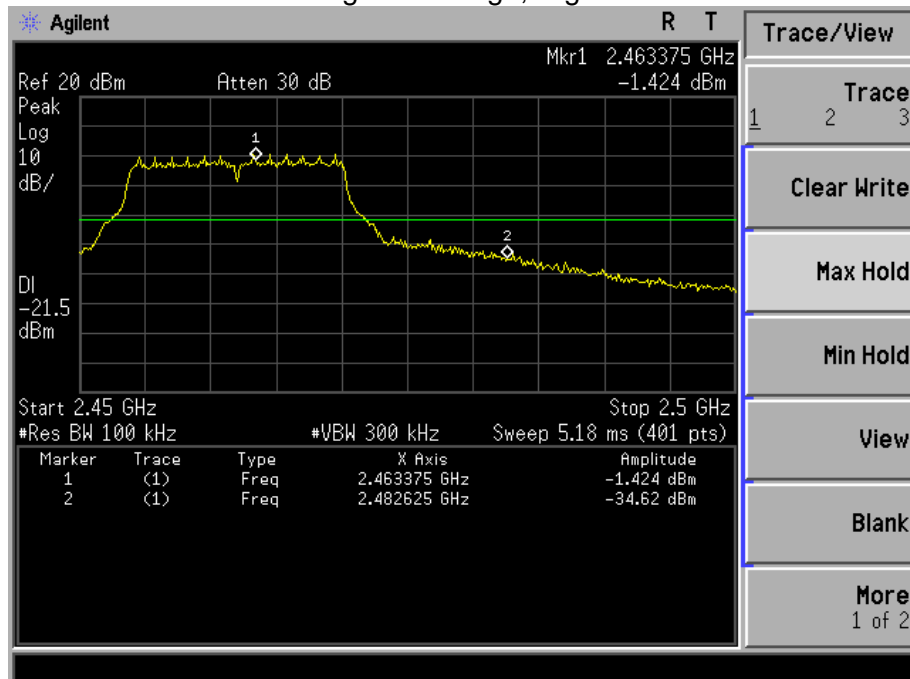

## 802.11n-HT20: Band Edge, Left Side

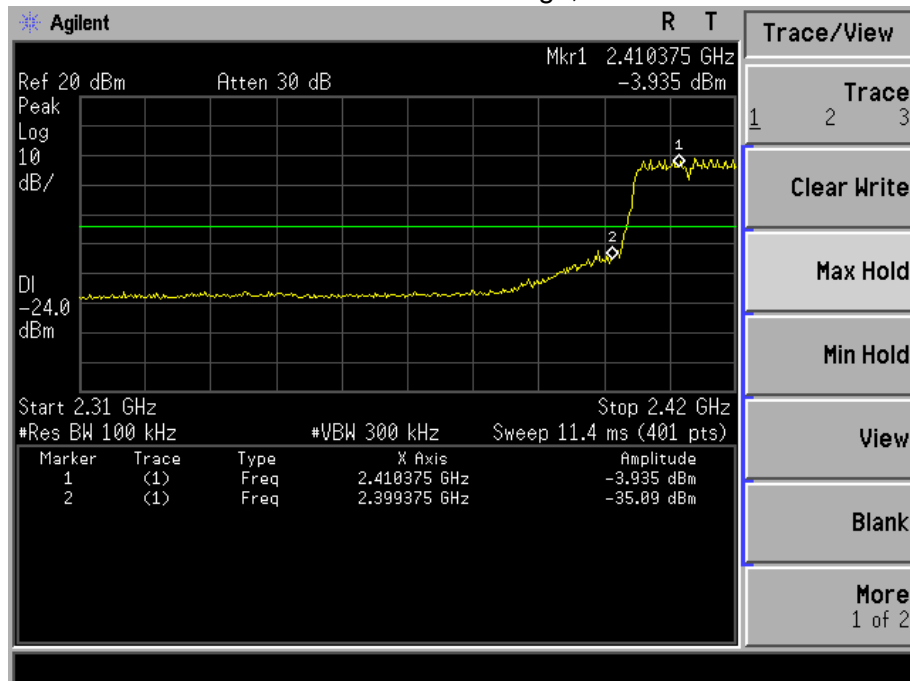


## 802.11n-HT20: Band Edge, Right Side

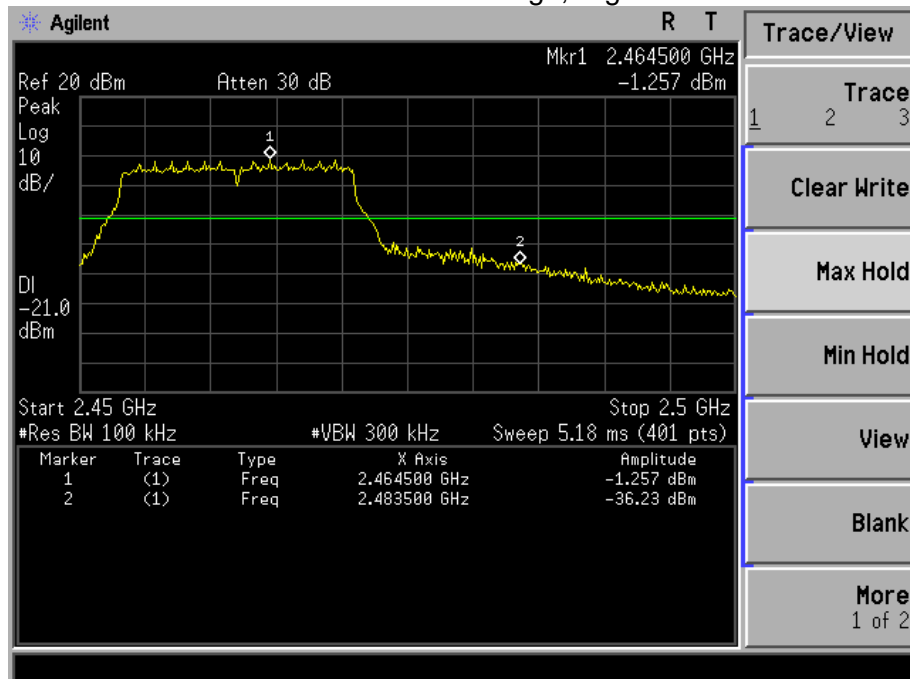




## 802.11n-HT40

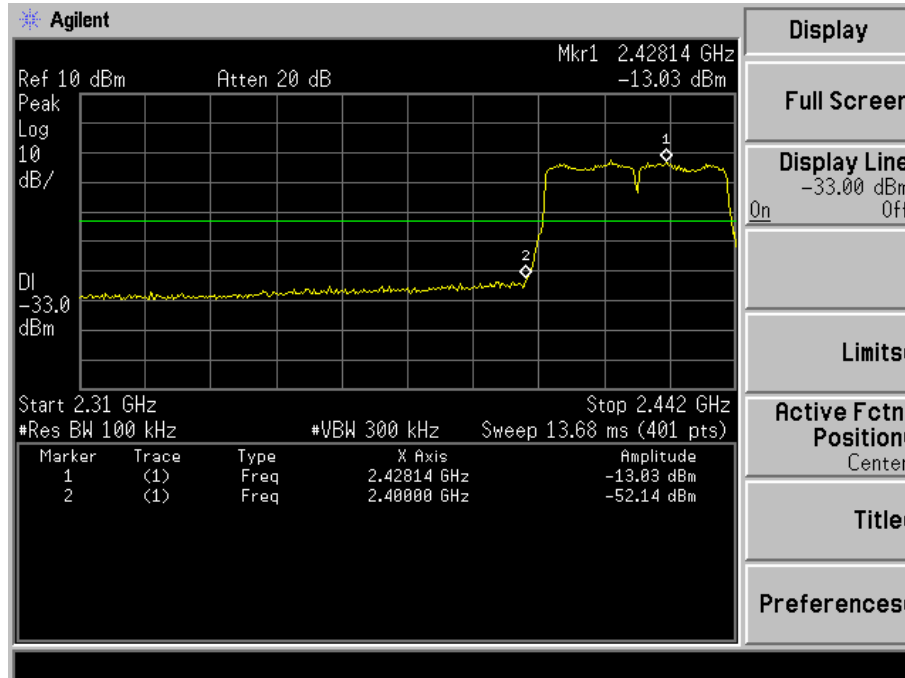

## 802.11n-HT40

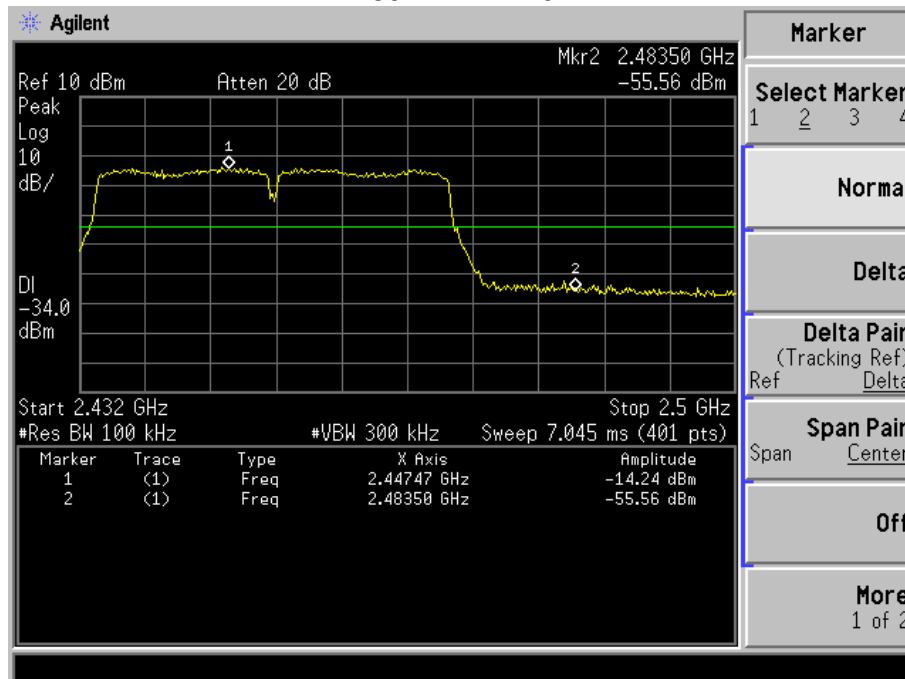





## 8. DUTY CYCLE OF TEST SIGNAL

### 8.1 STANDARD REQUIREMENT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

### 8.2 FORMULA:

Duty Cycle =  $T_{on} / (T_{on} + T_{off})$

#### Measurement Procedure:

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

#### Duty Cycle:

	Duty Cycle	Duty Fator (dB)
802.11b	1	0
802.11g	1	0
802.11n(HT20)	1	0
802.11n(HT40)	1	0



## **9. ANTENNA REQUIREMENT**

### **9.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **9.2 EUT ANTENNA**


The EUT antenna is Integrated FPCB Antenna. It comply with the standard requirement.

## 10. EUT TEST PHOTO


### Conducted Measurement Photos



### Radiated Measurement Photos

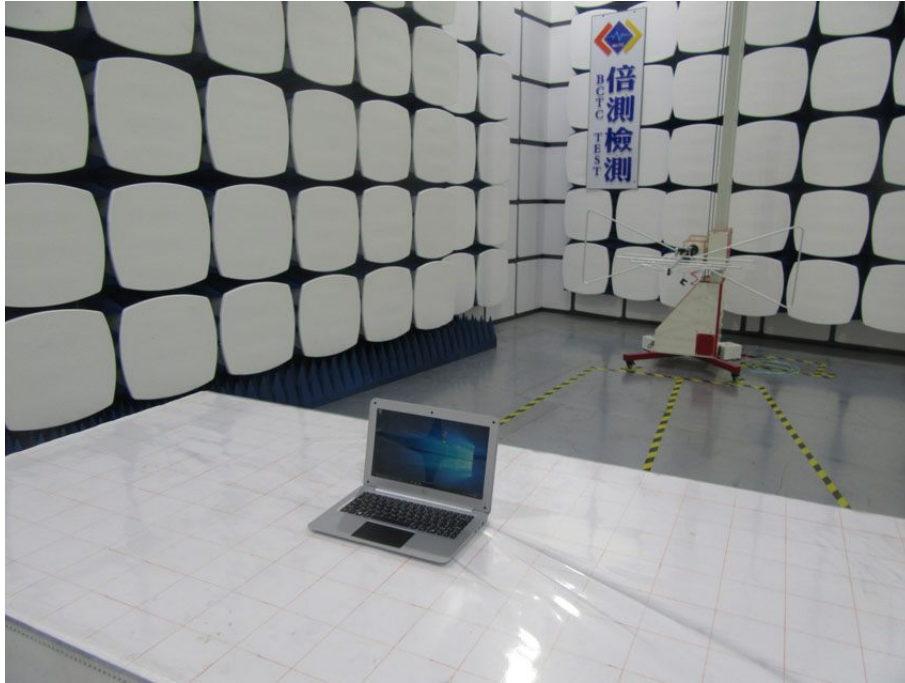

### Radiated Measurement Photos

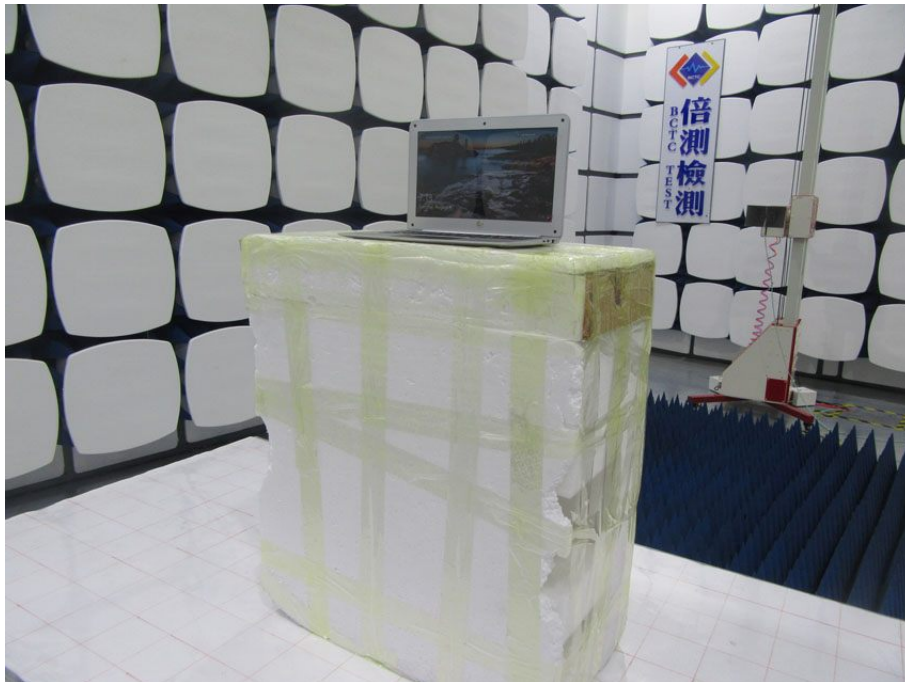

## 11. EUT PHOTO



\*\*\*\*\* END OF REPORT \*\*\*\*\*