



FCC/IC RF Test Report

APPLICANT : NetComm Wireless Limited
EQUIPMENT : 4G WiFi M2M Router
BRAND NAME : NetComm Wireless
MODEL NAME : NTC-140W-01
MARKETING NAME : 4G WiFi M2M Router
FCC ID : XIA-NTC140W
IC : 8847A-NTC140W
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Apr. 11, 2014 and testing was completed on Jul. 31, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification subjective to this standard.....	6
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
1.7 Testing Location	8
1.8 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration	11
2.4 Measurement Results Explanation Example	11
3 TEST RESULT.....	12
3.1 Conducted Output Power and ERP/EIRP Measurement.....	12
3.2 Peak-to-Average Ratio	16
3.3 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	39
3.4 Band Edge Measurement.....	77
3.5 Conducted Spurious Emission Measurement	96
3.6 Field Strength of Spurious Radiation Measurement	190
3.7 Frequency Stability Measurement.....	219
4 LIST OF MEASURING EQUIPMENT	226
5 UNCERTAINTY OF EVALUATION.....	227

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	RSS-132 (5.4) RSS-133 (6.4) RSS-139 (6.4)	Conducted Output Power	Reporting Only	PASS	-
3.2	§24.232(d)	RSS-132 (5.4) RSS-133 (6.4) RSS-139 (6.4)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.1	§22.913(a)(2)	RSS-132(5.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	RSS-139 (6.4) SRSP-513(5.1.2)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.3	§2.1049 §22.917(b) §24.238(b) §27.53(g)	RSS-GEN(4.6.1) RSS-133(6.5) RSS-139 (6.5)	Occupied Bandwidth	Reporting Only	PASS	-
3.4	§2.1051 §22.917(a) §24.238(a) §27.53(h)	RSS-GEN(4.9) RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a) §27.53(h)	RSS-GEN(4.9) RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.6	§2.1053 §22.917(a) §24.238(a) §27.53(h)	RSS-GEN(4.9) RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 12.53 dB at 4185.000 MHz
3.7	§2.1055 §22.355 §24.235 §27.54	RSS-GEN(4.7) RSS-132 (5.3) RSS-133 (6.3) RSS-139 (6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



1 General Description

1.1 Applicant

NetComm Wireless Limited

Level 2, 18-20 Orion Road Lane Cove NSW Australia

1.2 Manufacturer

NetComm Wireless Limited

Level 2, 18-20 Orion Road Lane Cove NSW Australia

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	4G WiFi M2M Router
Brand Name	NetComm Wireless
Model Name	NTC-140W-01
Marketing Name	4G WIFI M2M ROUTER
FCC ID	XIA-NTC140W
IC	8847A-NTC140W
EUT supports Radios application	CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE WLAN 11b/g/n HT20/HT40
HW Version	V1.0
SW Version	v2.0.5.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz CDMA2000 BC0: 824.70 MHz ~ 848.31 MHz CDMA2000 BC1: 1851.25 MHz ~ 1908.75 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz CDMA2000 BC0: 869.70 MHz ~ 893.31 MHz CDMA2000 BC1: 1931.25 MHz ~ 1988.75 MHz
Maximum Output Power to Antenna	GSM850 : 31.86 dBm GSM1900 : 29.22 dBm WCDMA Band V : 21.85 dBm WCDMA Band IV : 22.21 dBm WCDMA Band II : 22.30 dBm CDMA2000 BC0 : 23.78 dBm CDMA2000 BC1 : 24.16 dBm
99% Occupied Bandwidth	GSM850: 2.46MHz GSM1900: 2.46MHz WCDMA Band V: 4.18MHz WCDMA Band IV: 4.18MHz WCDMA Band II: 4.18MHz CDMA2000 BC0: 1.28MHz CDMA2000 BC1: 1.28MHz
Antenna Type	Dipole Antenna
Antenna Gain	Cellular Band: -1.39 dBi PCS Band: 1.96 dBi AWS Band: 3.03 dBi
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: 64QAM (Downlink) HSUPA: QPSK (Uplink) CDMA2000 : QPSK CDMA2000 1xEV-DO : QPSK/8PSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GPRS class 8	GMSK	0.68	0.025 ppm	246KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.16	0.022 ppm	246KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.07	0.009 ppm	4M18F9W
Part 22	CDMA2000 BC0 1xEV-DO Rev. 0	QPSK	0.11	0.025 ppm	1M28F9W
Part 24	GSM1900 GPRS class 8	GMSK	1.31	0.011 ppm	246KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.46	0.014 ppm	244KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.27	0.008 ppm	4M18F9W
Part 24	CDMA2000 BC1 1xEV-DO Rev. 0	QPSK	0.41	0.003 ppm	1M28F9W
Part 27	WCDMA Band IV RMC 12.2Kbps	QPSK	0.33	0.004 ppm	4M18F9W



1.7 Testing Location

Sportun Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sportun Site No.		IC Registration No.
	TH02-HY	03CH07-HY	4086B-1

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01
- ♦ FCC KDB 412172 D01 Determining ERP and ERIP v01
- ♦ IC RSS-132 Issue 3
- ♦ IC RSS-133 Issue 6
- ♦ IC RSS-Gen Issue 3
- ♦ NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, " Receivers Excluded from Industry Canada Requirements", only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850, WCDMA Band V, and CDMA2000 BC0..
2. 30 MHz to 19000 MHz for GSM1900, WCDMA Band II, WCDMA Band IV, and CDMA2000 BC1.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none">■ GPRS class 8 Link■ EDGE class 8 Link	<ul style="list-style-type: none">■ GPRS class 8 Link■ EDGE class 8 Link
GSM 1900	<ul style="list-style-type: none">■ GPRS class 8 Link■ EDGE class 8 Link	<ul style="list-style-type: none">■ GPRS class 8 Link■ EDGE class 8 Link
WCDMA Band V	<ul style="list-style-type: none">■ RMC 12.2Kbps Link	<ul style="list-style-type: none">■ RMC 12.2Kbps Link
WCDMA Band II	<ul style="list-style-type: none">■ RMC 12.2Kbps Link	<ul style="list-style-type: none">■ RMC 12.2Kbps Link
WCDMA Band IV	<ul style="list-style-type: none">■ RMC 12.2Kbps Link	<ul style="list-style-type: none">■ RMC 12.2Kbps Link
CDMA2000 BC0	<ul style="list-style-type: none">■ 1xEV-DO Rev. 0 Link Mode	<ul style="list-style-type: none">■ 1xEV-DO Rev. 0 Link Mode
CDMA2000 BC1	<ul style="list-style-type: none">■ 1xEV-DO Rev. 0 Link Mode	<ul style="list-style-type: none">■ 1xEV-DO Rev. 0 Link Mode

Note: The maximum power levels are chosen to test as the worst case configuration as follows:

GSM or GPRS multi-slot class 8 mode for GMSK modulation,

EDGE multi-slot class 8 mode for 8PSK modulation,

RMC 12.2Kbps mode for WCDMA band V,

RMC 12.2Kbps mode for WCDMA band II,

1xEV-DO Rev. 0 Link mode for CDMA2000 BC0

1xEV-DO Rev. 0 Link mode for CDMA2000 BC1, only these modes were used for all tests.




Conducted Power Measurement Results:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GRPS class 8	31.85	31.86	31.78	29.22	29.10	29.14
GRPS class 10	31.72	31.74	31.69	29.13	29.01	29.05
GRPS class 11	28.55	28.62	28.52	26.85	26.88	27.00
GRPS class 12	26.40	26.55	26.59	25.60	25.71	25.88
EGPRS class 8	25.52	25.58	25.56	24.63	24.66	24.67
EGPRS class 10	25.45	25.53	25.55	24.52	24.55	24.58
EGPRS class 11	25.32	25.33	25.30	24.40	24.43	24.42
EGPRS class 12	25.11	25.22	25.25	24.28	24.33	24.36

Conducted Power (*Unit: dBm)								
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV	
Channel	4132	4182	4233	9262	9400	9538	1312	1413
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6
RMC 12.2K	21.66	21.76	21.85	22.11	22.04	22.30	22.21	22.11
HSDPA Subtest-1	21.20	21.30	21.28	21.66	21.55	21.70	21.74	21.72
HSDPA Subtest-2	21.20	21.30	21.27	21.70	21.58	21.72	21.67	21.65
HSDPA Subtest-3	20.81	20.88	20.85	21.29	21.14	21.30	21.20	21.18
HSDPA Subtest-4	20.91	20.95	20.90	21.18	21.20	21.36	21.23	21.20

Conducted Power (*Unit: dBm)						
Band	CDMA2000 BC0			CDMA2000 BC1		
Channel	1013	384	777	25	600	1175
Frequency	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1 SO55	23.67	23.68	23.39	24.10	23.91	23.88
1xRTT RC3 SO55	23.67	23.76	23.38	24.08	23.97	23.98
1xRTT RC3 SO32(+ F-SCH)	23.68	23.73	23.35	24.07	23.98	23.97
1xRTT RC3 SO32(+SCH)	23.59	23.75	23.42	24.08	23.97	23.97
1xEV-DO RTAP 153.6kbps	23.58	23.78	23.43	24.16	24.00	23.98
1xEV-DO RETAP 4096Bits	23.68	23.78	23.45	24.14	23.98	24.02

2.2 Connection Diagram of Test System

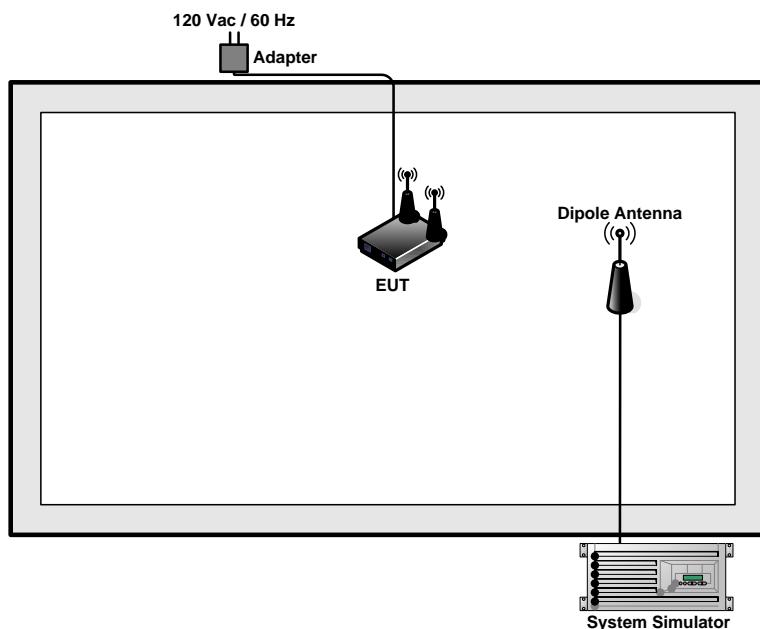

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$



3 Test Result

3.1 Conducted Output Power and ERP/EIRP Measurement

3.1.1 Description of the Conducted Output Power and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band). According to KDB 412172 D01 Power Approach,

$$\text{EIRP} = P_T + G_T - L_C, \text{ ERP} = \text{EIRP} - 2.15, \text{ where}$$

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

3.1.4 Test Setup

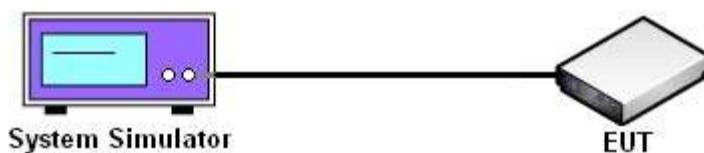



3.1.5 Test Result of Conducted Output Power

Cellular Band ($G_T - L_C = -1.39$ dB)									
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	31.85	31.86	31.78	25.52	25.58	25.56	21.66	21.76	21.85
Conducted Power (Watts)	1.53	1.53	1.51	0.36	0.36	0.36	0.15	0.15	0.15
ERP(dBm)	28.31	28.32	28.24	21.98	22.04	22.02	18.12	18.22	18.31
ERP(Watts)	0.68	0.68	0.67	0.16	0.16	0.16	0.07	0.07	0.07

PCS Band ($G_T - L_C = 1.96$ dB)									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	29.22	29.10	29.14	24.63	24.66	24.67	22.11	22.04	22.30
Conducted Power (Watts)	0.84	0.81	0.82	0.29	0.29	0.29	0.16	0.16	0.17
EIRP(dBm)	31.18	31.06	31.1	26.59	26.62	26.63	24.07	24	24.26
EIRP(Watts)	1.31	1.28	1.29	0.46	0.46	0.46	0.26	0.25	0.27



AWS Band ($G_T - L_C = 3.03 \text{ dB}$)			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Conducted Power (dBm)	22.21	22.11	22.08
Conducted Power (Watts)	0.17	0.16	0.16
EIRP(dBm)	25.24	25.14	25.11
EIRP(Watts)	0.33	0.33	0.32



Cellular Band ($G_T - L_C = -1.39\text{dB}$)			
Modes	CDMA 2000 BC0 (1xEV-DO Rev. 0)		
Test Status	RETAP 4096K		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
Conducted Power P_T (dBm)	23.58	23.78	23.43
Conducted Power P_T (Watts)	0.23	0.24	0.22
ERP(dBm)	20.04	20.24	19.89
ERP(Watts)	0.10	0.11	0.10

PCS Band ($G_T - L_C = 1.96\text{dB}$)			
Modes	CDMA 2000 BC1 (1xEV-DO Rev. 0)		
Test Status	RTAP 153.6K		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880.00	1908.75
Conducted Power P_T (dBm)	24.16	24.00	23.98
Conducted Power P_T (Watts)	0.26	0.25	0.25
EIRP(dBm)	26.12	25.96	25.94
EIRP(Watts)	0.41	0.39	0.39

Note: maximum burst average power for GSM, and maximum average power for WCDMA.

$\text{EIRP} = P_T + G_T - L_C$, $\text{ERP} = \text{EIRP} - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. For GSM/EGPRS operating modes:
 - a. Set EUT in maximum power output.
 - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector on spectrum analyzer for first trace.
 - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector on spectrum analyzer for second trace.
 - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator has synchronized with the spectrum analyzer.
3. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option on the spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

3.2.4 Test Setup

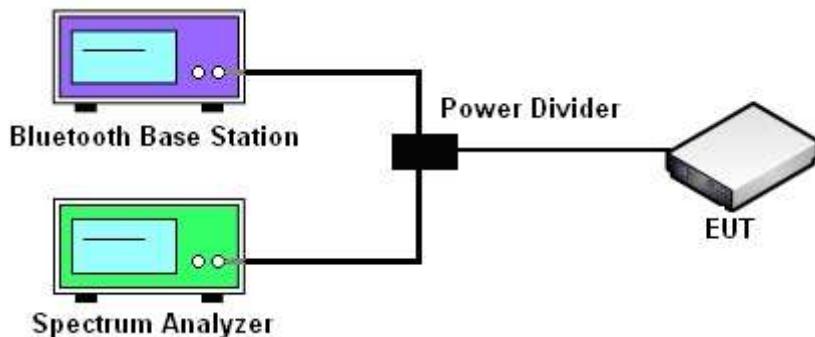



3.2.5 Test Result of Peak-to-Average Ratio

Cellular Band									
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Peak-to-Average Ratio (dB)	0.32	0.32	0.32	3.16	3.16	3.16	3.08	3.16	3.16

PCS Band									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.32	0.32	0.32	3.04	3.24	3.08	3.36	3.24	3.28

AWS Band				
Modes	WCDMA Band IV (RMC 12.2Kbps)			
Channel	1312(Low)		1413 (Mid)	
Frequency (MHz)	1712.4		1732.6	
Peak-to-Average Ratio (dB)	2.92		3.40	
	3.36			




CDMA2000 BC0			
Modes	CDMA 2000 1xEV-DO Rev. 0		
Test Status	RTAP 4096K		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880.00	1908.75
Peak-to-Average Ratio (dB)	4.12	4.00	3.36

CDMA2000 BC1			
Modes	CDMA 2000 1xEV-DO Rev. 0		
Test Status	RTAP 153.6K		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880.00	1908.75
Peak-to-Average Ratio (dB)	3.84	3.64	3.52

3.2.6 Test Result (Plots) of Peak-to-Average Ratio


Band :	GSM 850	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

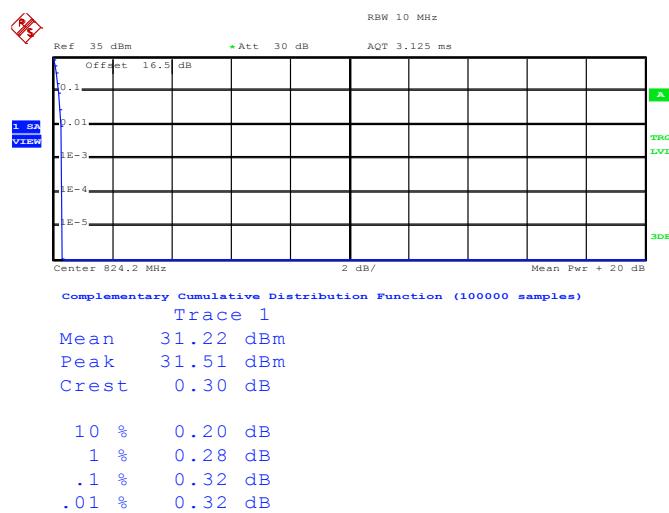

Date: 8.JUN.2014 17:14:58


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

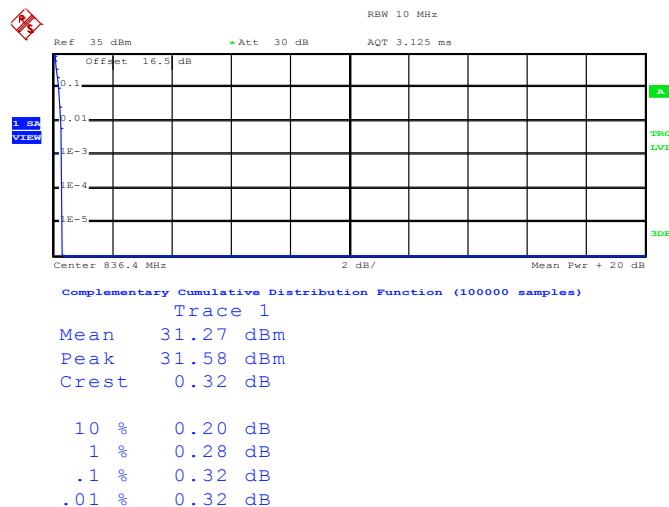

Date: 8.JUN.2014 17:15:25



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

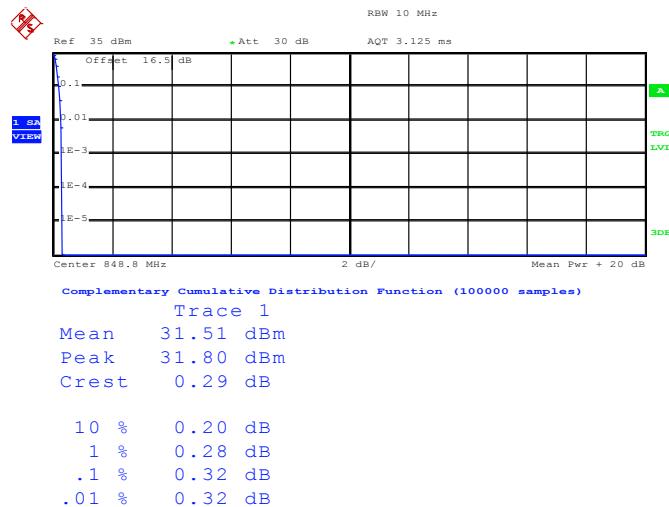


Date: 8.JUN.2014 17:15:54




Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

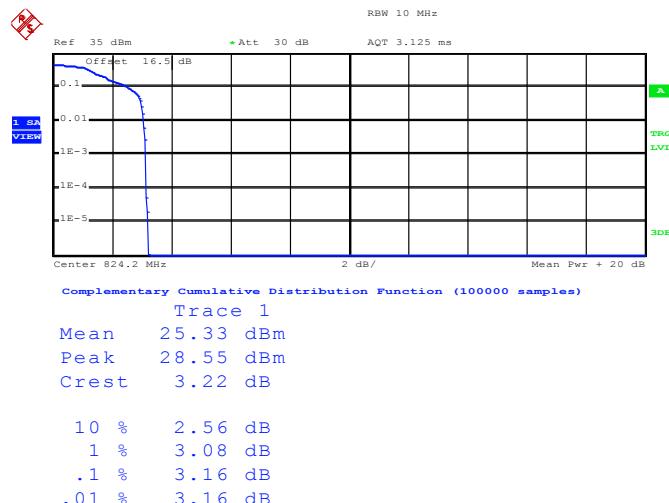

Date: 8.JUN.2014 17:38:28


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

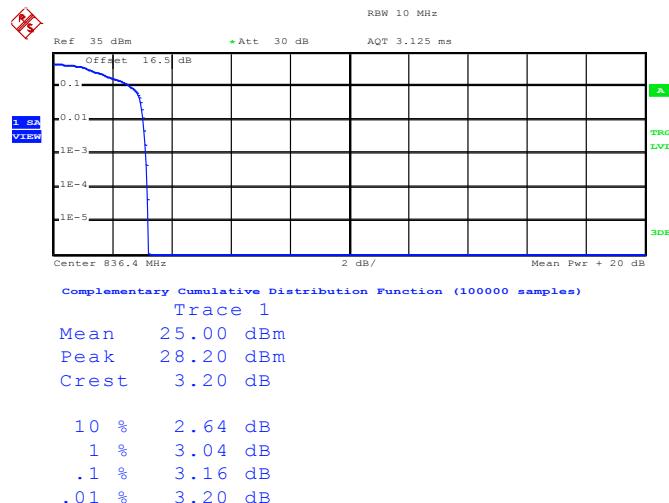

Date: 8.JUN.2014 17:39:02



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

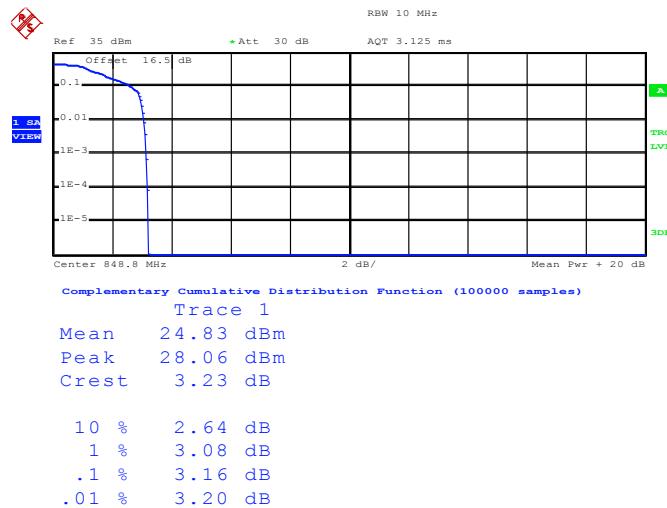


Date: 8.JUN.2014 17:39:41




Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	----------	-------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

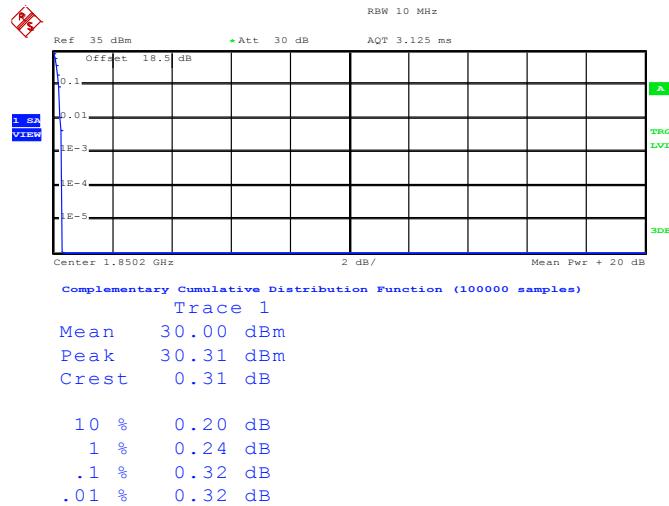

Date: 8.JUN.2014 18:07:36


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

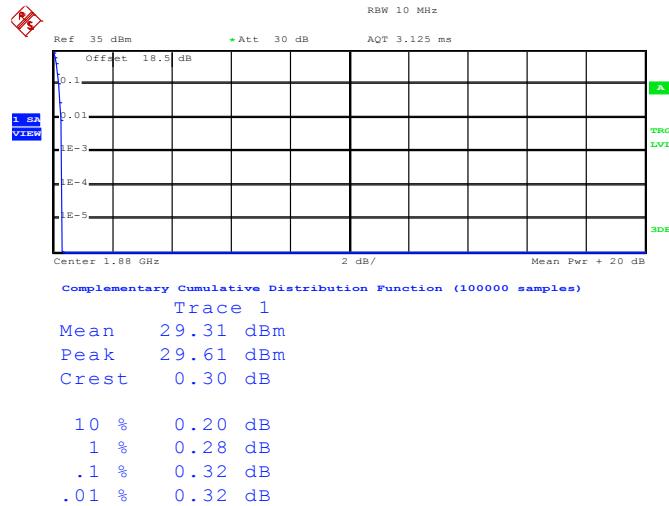

Date: 8.JUN.2014 18:08:02



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

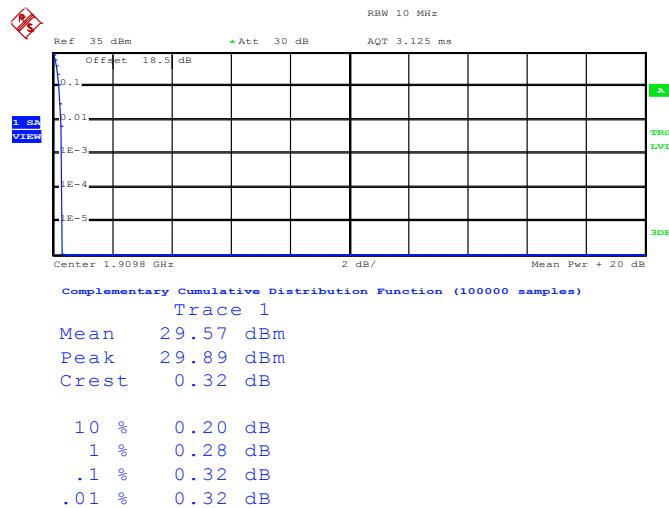


Date: 8.JUN.2014 18:08:26




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	----------	-------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

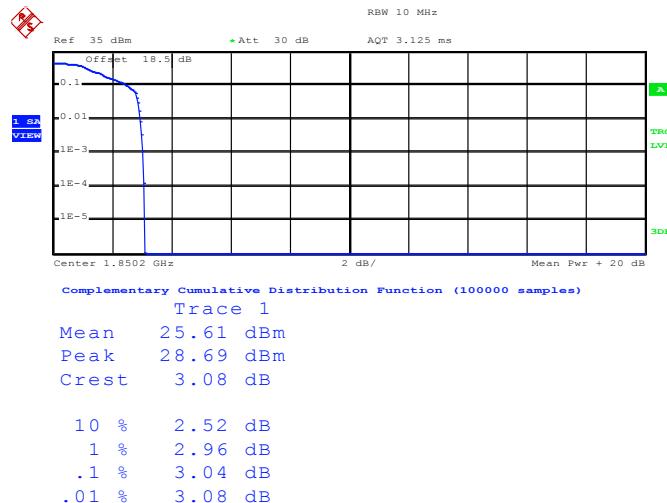

Date: 8.JUN.2014 18:32:44


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

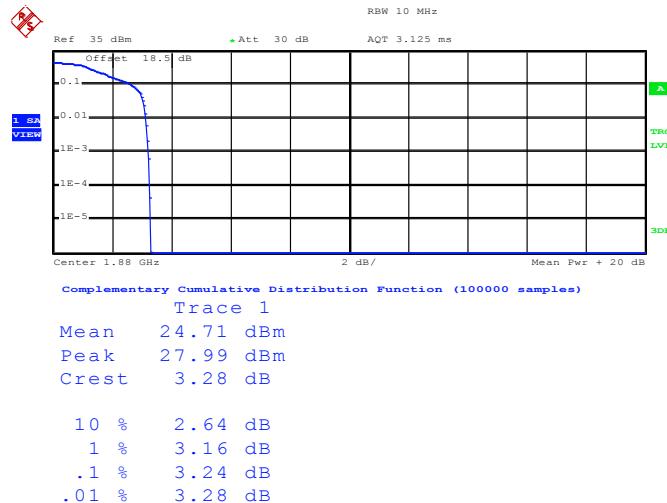

Date: 8.JUN.2014 18:33:23




Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

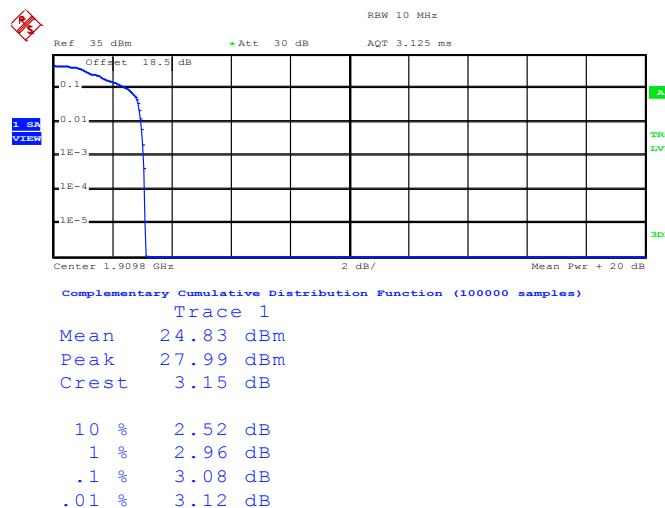


Date: 8.JUN.2014 18:35:24



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

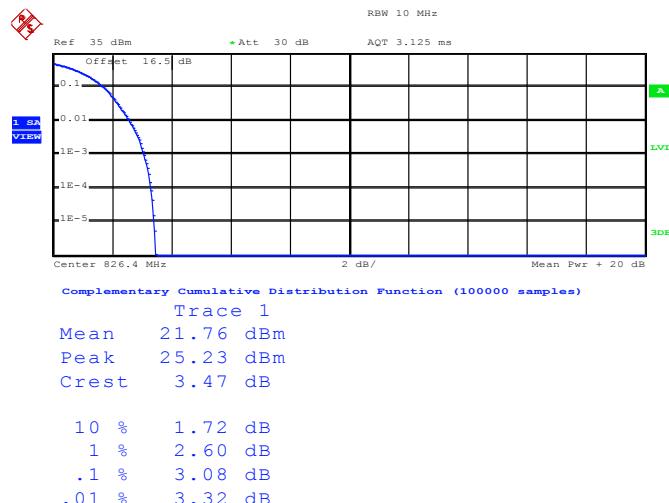Peak-to-Average Ratio on Channel 4132 (826.4 MHz)


Date: 9.JUN.2014 10:42:44

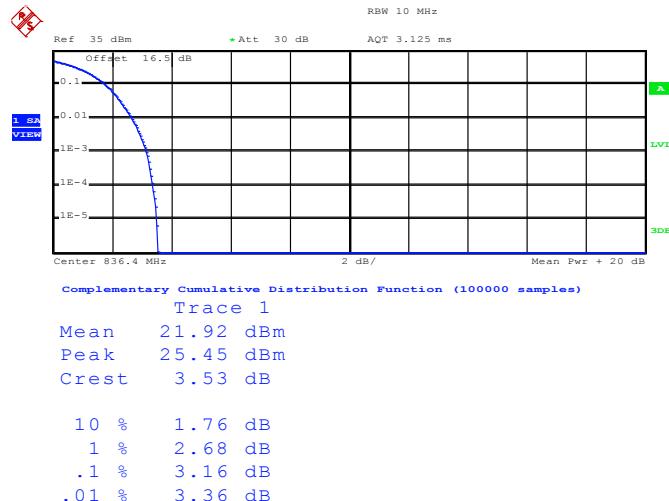Peak-to-Average Ratio on Channel 4182 (836.4 MHz)

Date: 9.JUN.2014 10:43:16



Peak-to-Average Ratio on Channel 4233 (846.6 MHz)

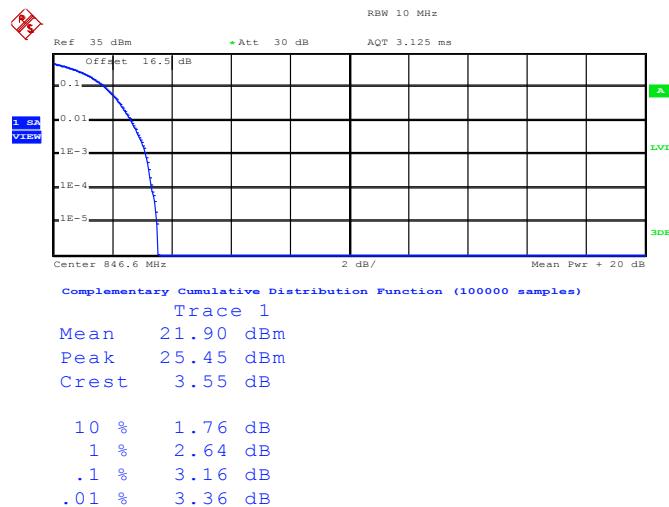


Date: 9.JUN.2014 10:43:46




Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Peak-to-Average Ratio on Channel 1312 (1712.4 MHz)

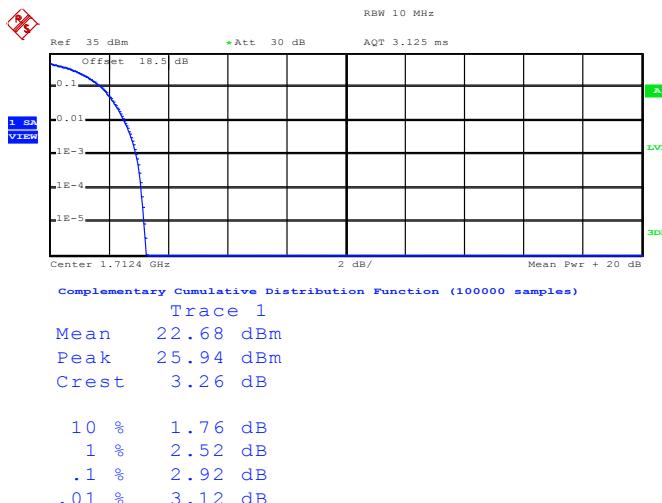

Date: 9.JUN.2014 10:12:16


Peak-to-Average Ratio on Channel 1413 (1732.6 MHz)

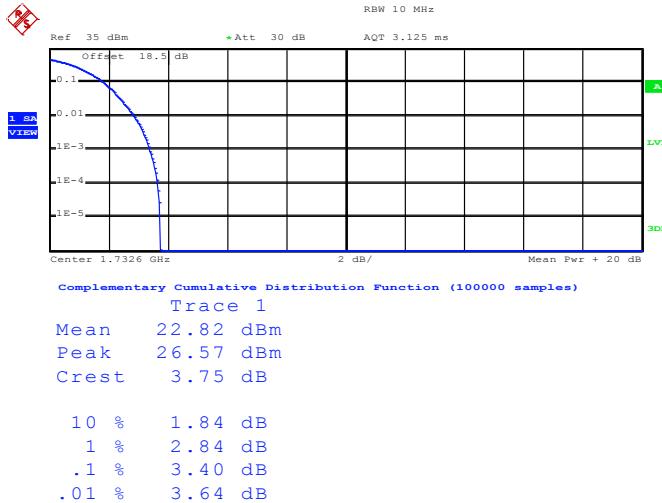

Date: 9.JUN.2014 10:13:54




Peak-to-Average Ratio on Channel 1513 (1752.6 MHz)

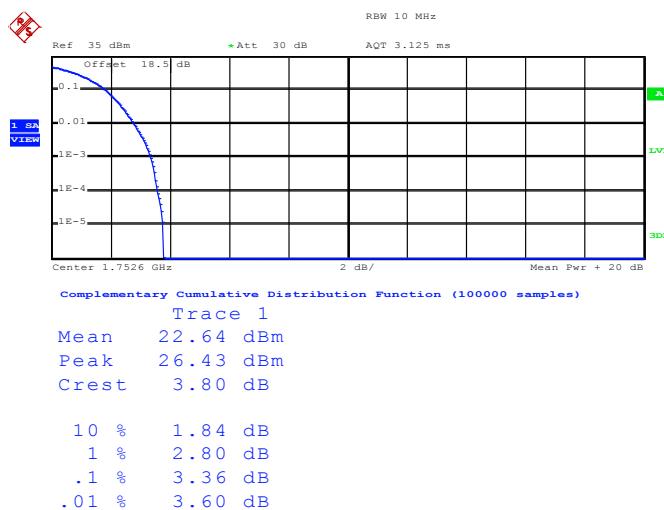


Date: 9.JUN.2014 10:14:29



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

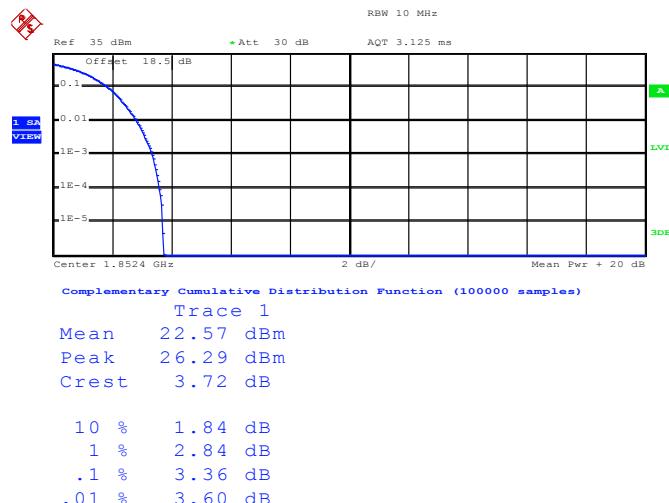Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)


Date: 9.JUN.2014 09:42:06

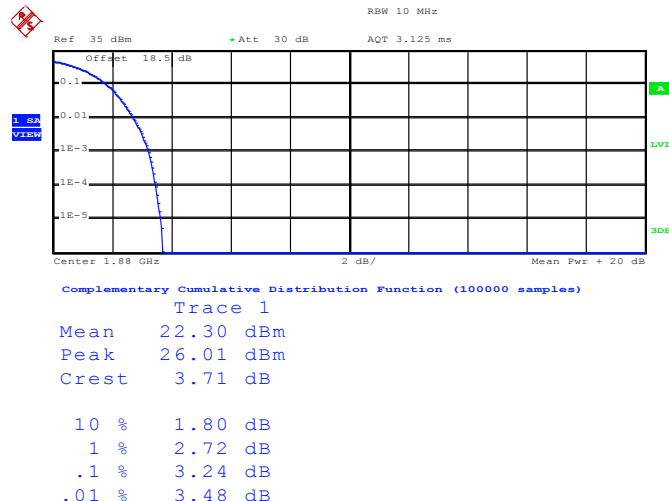Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)

Date: 9.JUN.2014 09:42:47



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

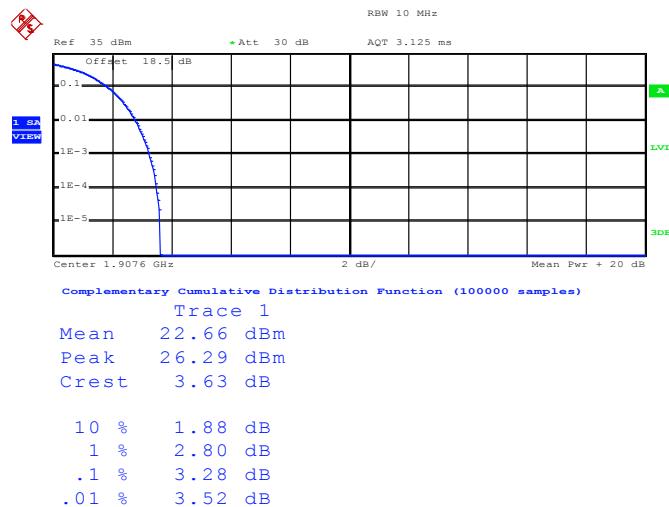


Date: 9.JUN.2014 09:43:36




Band :	CDMA2000 BC0	Test Mode :	1xEV-DO Rev. 0 Link (QPSK)
--------	--------------	-------------	----------------------------

Peak-to-Average Ratio on Channel 1013 (824.70 MHz)

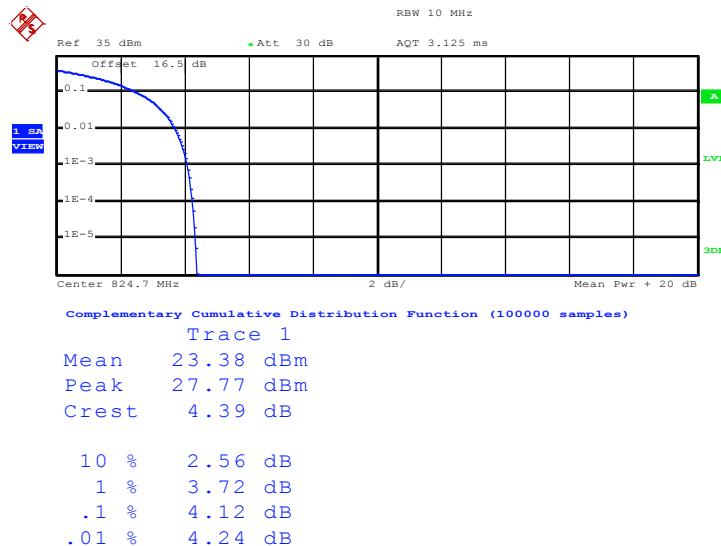

Date: 9.JUN.2014 14:35:53

Peak-to-Average Ratio on Channel 384 (836.52 MHz)

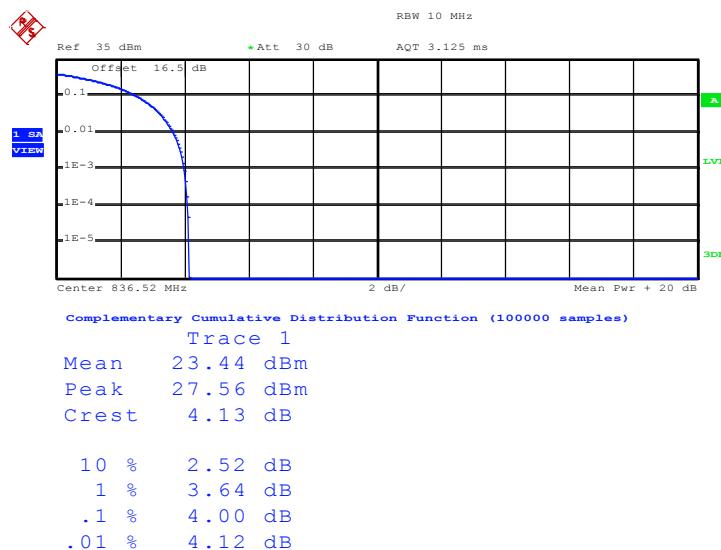

Date: 9.JUN.2014 14:37:00



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 34 of 227

Report Issued Date : Oct. 07, 2014


Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

Report Template No.: BU5-CG22/24 Version 1.1




Peak-to-Average Ratio on Channel 777 (848.31 MHz)

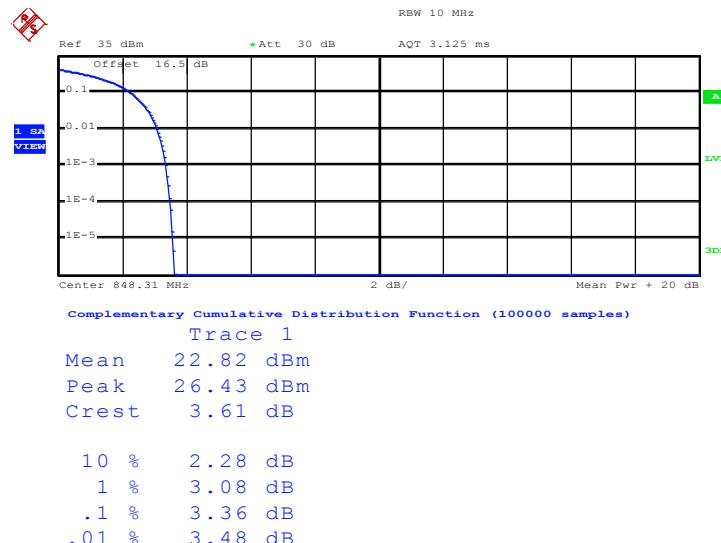


Date: 9.JUN.2014 14:37:38



Band :	CDMA2000 BC1	Test Mode :	1xEV-DO Rev. 0 Link (QPSK)
--------	--------------	-------------	----------------------------

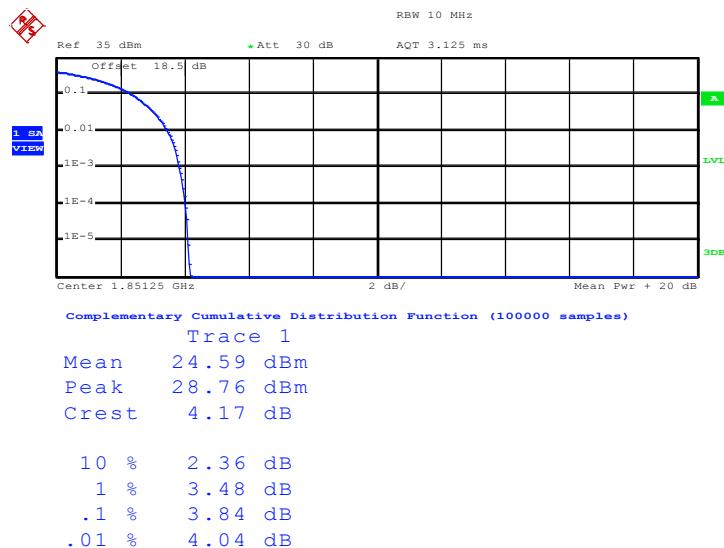Peak-to-Average Ratio on Channel 25 (1851.25 MHz)

Date: 9.JUN.2014 15:42:24

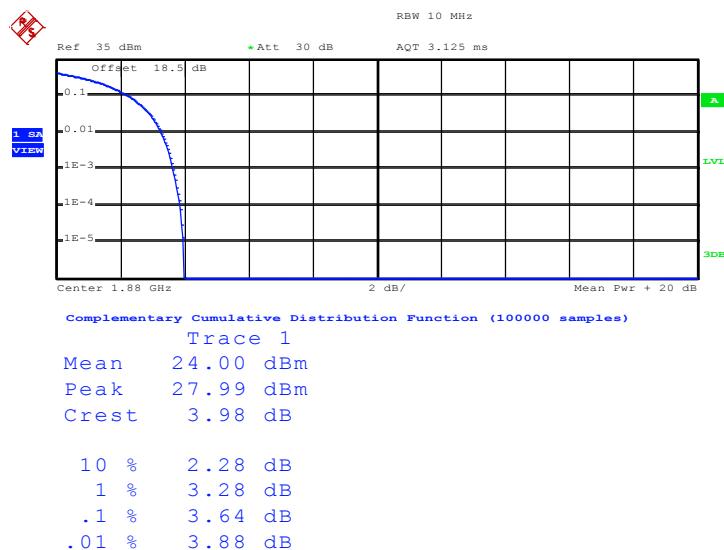Peak-to-Average Ratio on Channel 600 (1880 MHz)

Date: 9.JUN.2014 15:43:22



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 37 of 227

Report Issued Date : Oct. 07, 2014


Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

Report Template No.: BU5-CG22/24 Version 1.1



Peak-to-Average Ratio on Channel 1175 (1908.75 MHz)

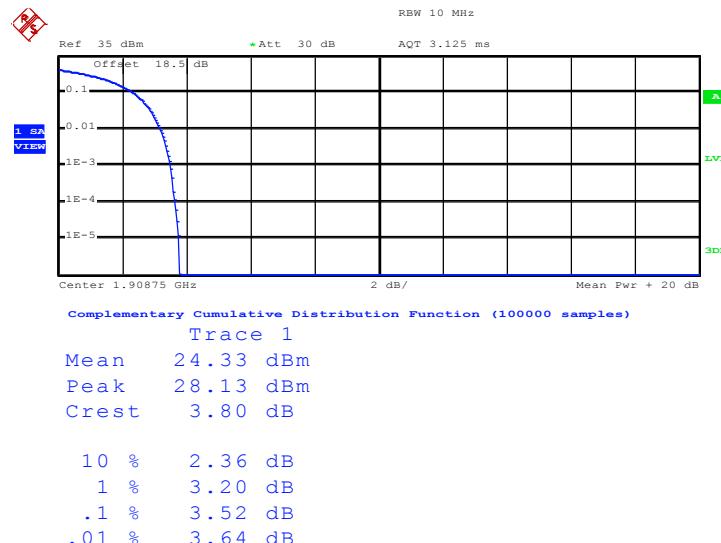

Date: 9.JUN.2014 15:44:26

3.3 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.3.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, sample detector, trace maximum hold.
4. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

3.3.4 Test Setup

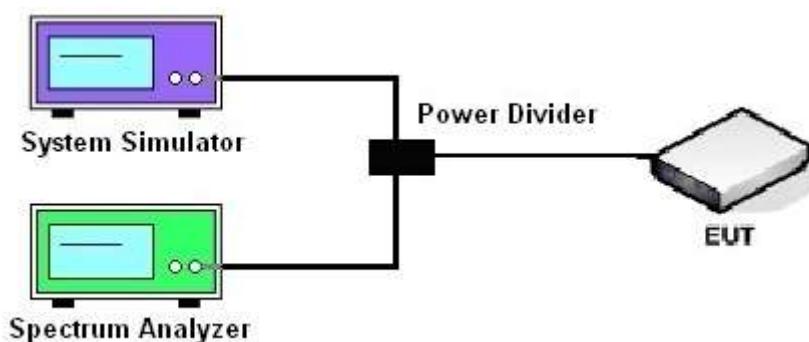



3.3.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
99% OBW (kHz)	246.00	246.00	242.00	246.00	240.00	238.00
26dB BW (kHz)	318.00	314.00	318.00	286.00	282.00	290.00

PCS Band						
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
99% OBW (kHz)	244.00	246.00	242.00	242.00	244.00	244.00
26dB BW (kHz)	316.00	312.00	318.00	300.00	298.00	298.00

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.18	4.18	4.18
26dB BW (MHz)	4.68	4.68	4.68

AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
99% OBW (MHz)	4.16	4.18	4.18
26dB BW (MHz)	4.68	4.68	4.68




PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (MHz)	4.18	4.18	4.18
26dB BW (MHz)	4.68	4.68	4.68




3.3.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth

Band :	GSM 850	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

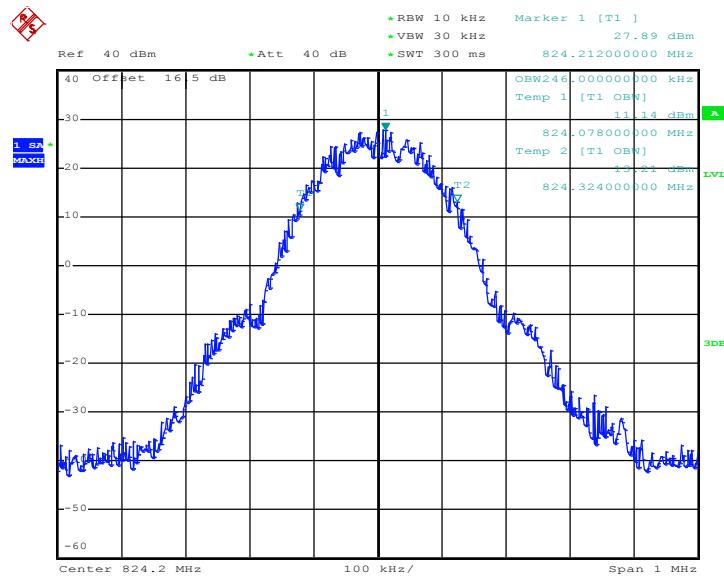99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

Date: 8.JUN.2014 17:18:28

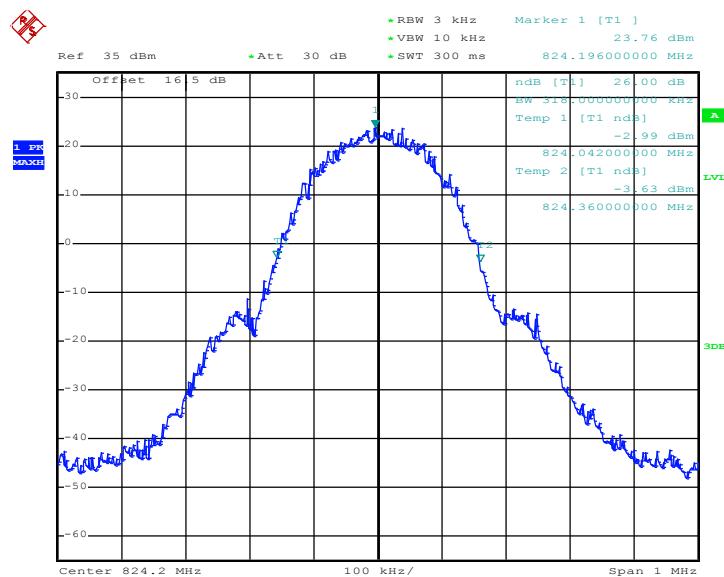26dB Bandwidth Plot on Channel 128 (824.2 MHz)

Date: 8.JUN.2014 17:16:39



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 43 of 227

Report Issued Date : Oct. 07, 2014


Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

Report Template No.: BU5-CG22/24 Version 1.1




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

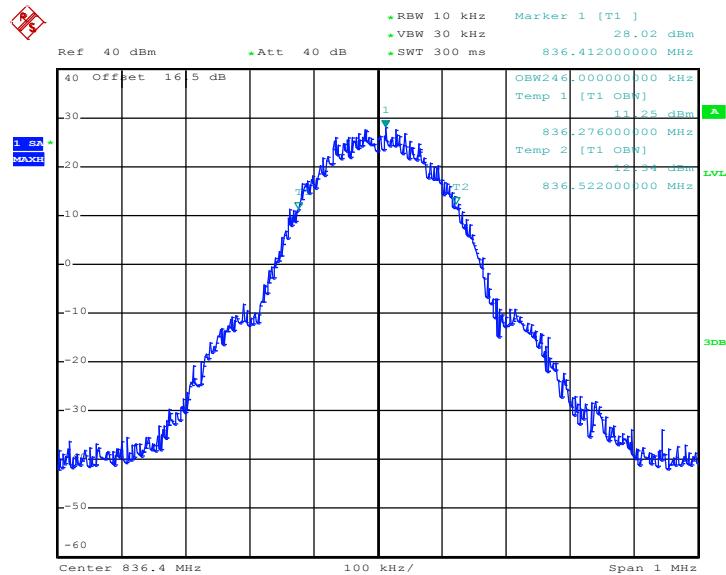

Date: 8.JUN.2014 17:18:56


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

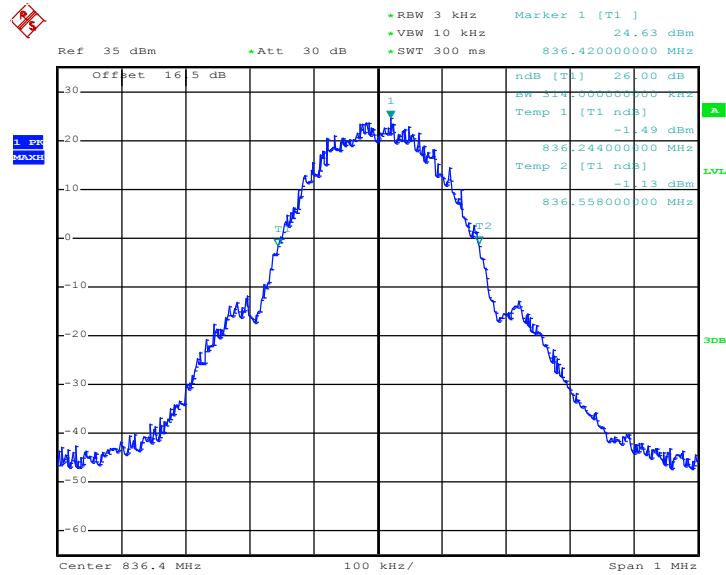

Date: 8.JUN.2014 17:17:07




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

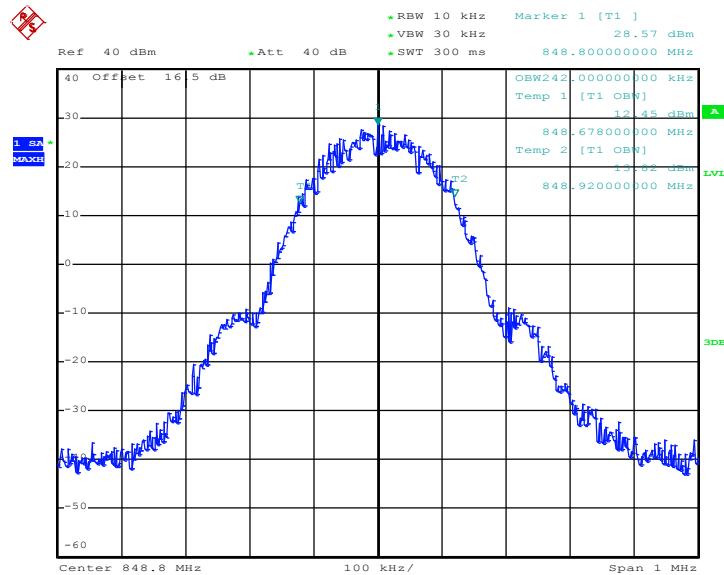

Date: 8.JUN.2014 17:19:25

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

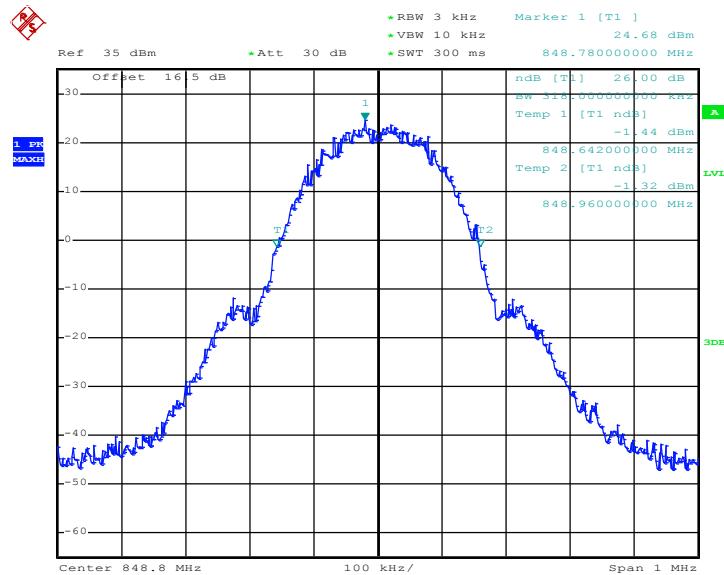


Date: 8.JUN.2014 17:17:36




Band : GSM 850 **Test Mode :** EDGE class 8 Link (8PSK)

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

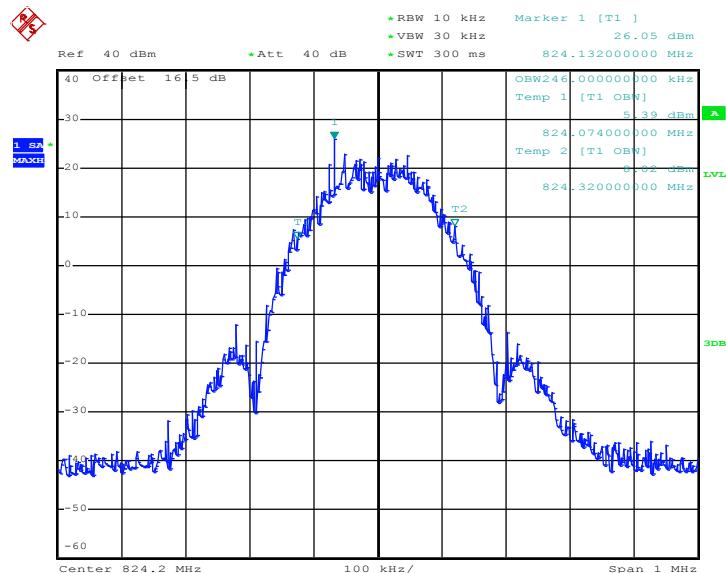

Date: 8.JUN.2014 17:46:37

26dB Bandwidth Plot on Channel 128 (824.2 MHz)

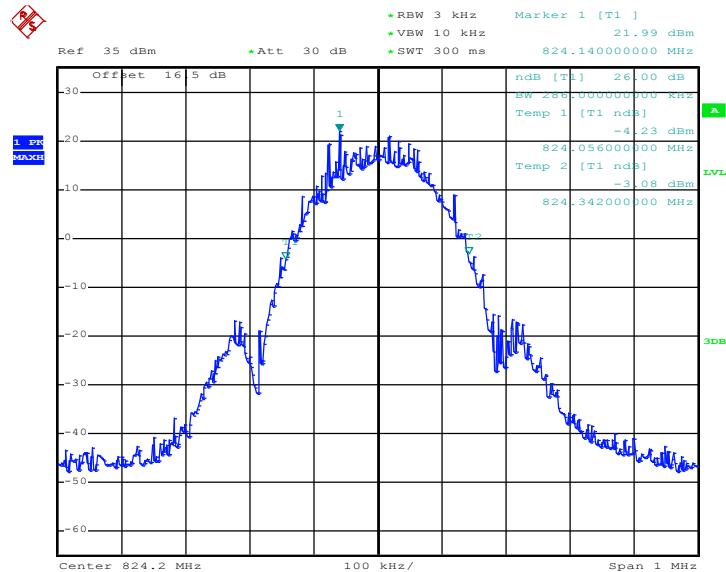

Date: 8.JUN.2014 17:42:14



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 47 of 227

Report Issued Date : Oct. 07, 2014


Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

Report Template No.: BU5-CG22/24 Version 1.1




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

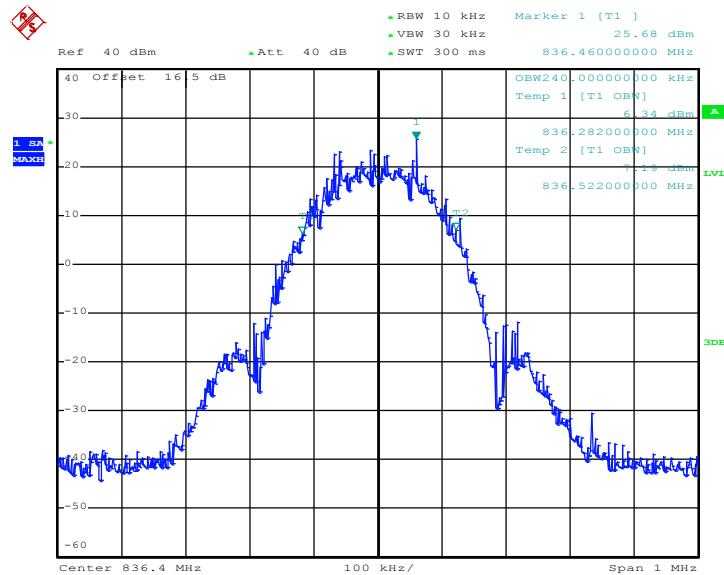

Date: 8.JUN.2014 17:47:06


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

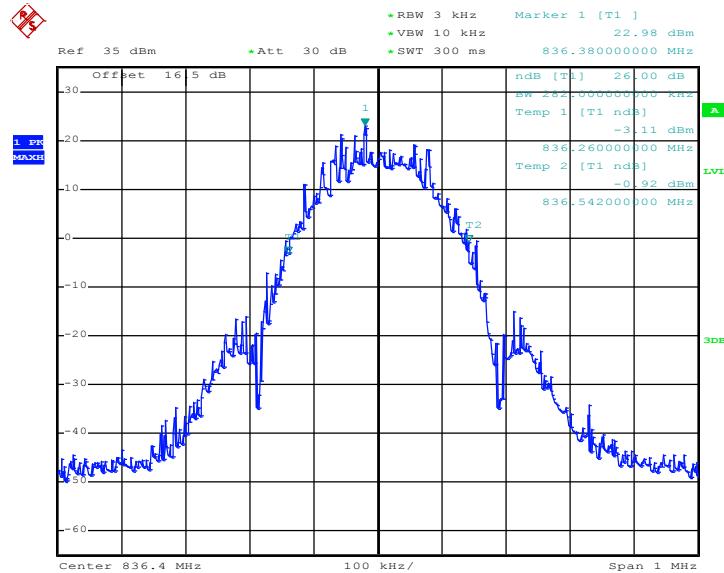

Date: 8.JUN.2014 17:44:49




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

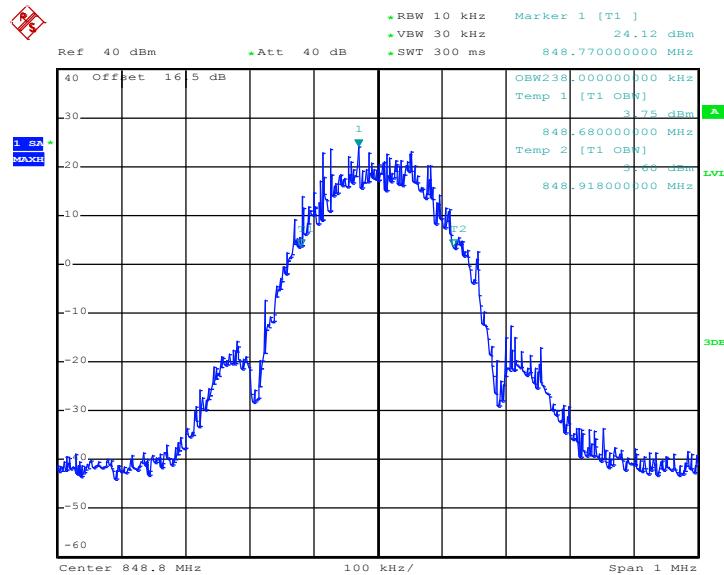

Date: 8.JUN.2014 17:47:34

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

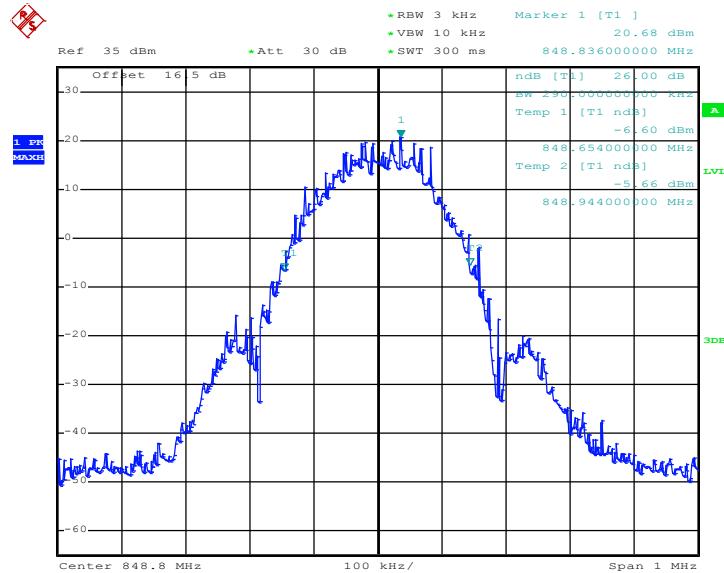


Date: 8.JUN.2014 17:45:18




Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

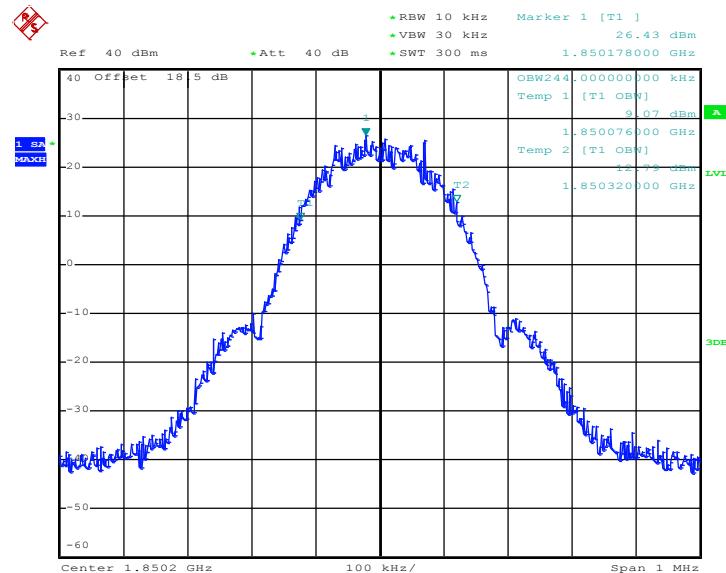

Date: 8.JUN.2014 18:13:53

26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

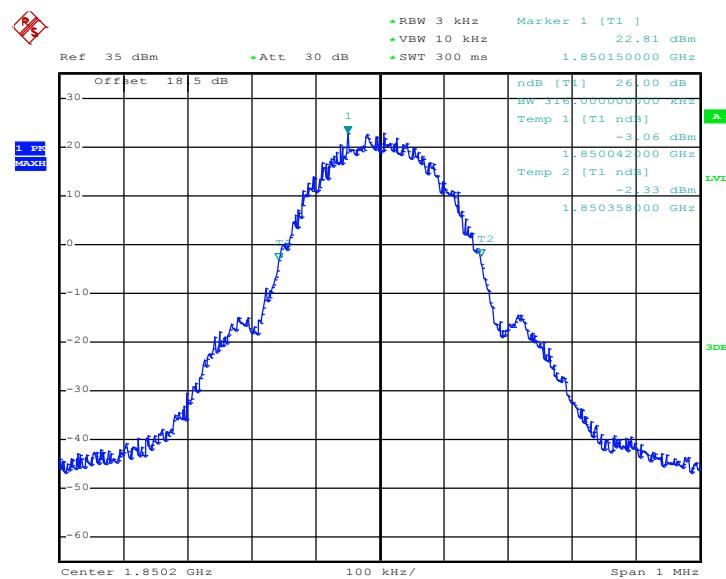

Date: 8.JUN.2014 18:11:36



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 51 of 227


Report Issued Date : Oct. 07, 2014

Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1


Report Template No.: BU5-CG22/24 Version 1.1

99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

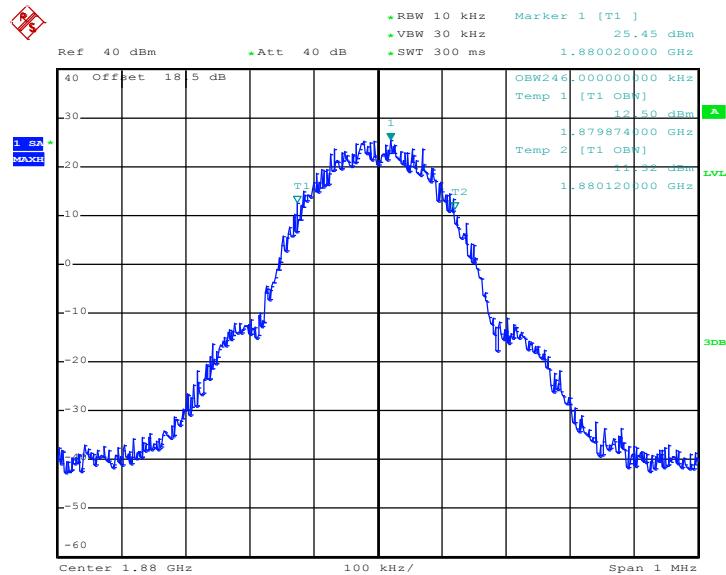

Date: 8.JUN.2014 18:14:21


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

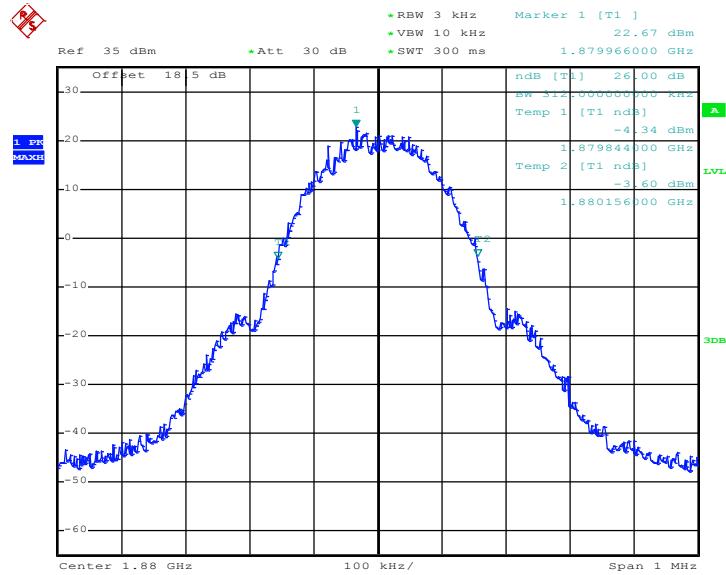

Date: 8.JUN.2014 18:12:04




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

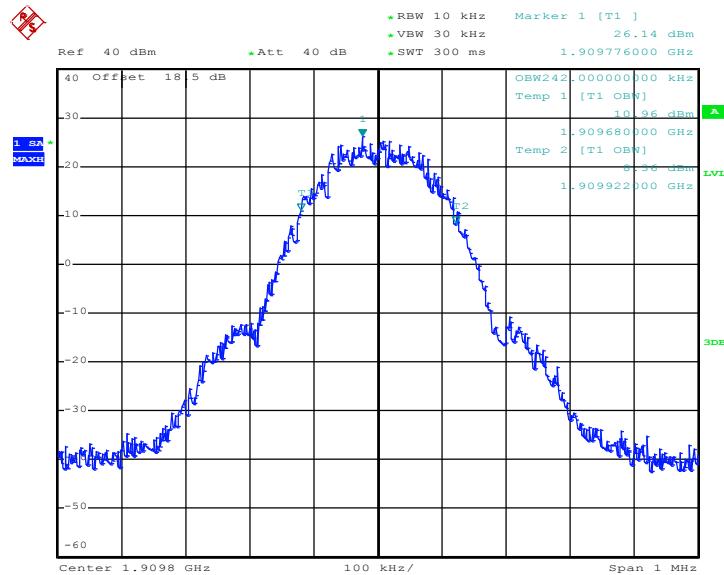

Date: 8.JUN.2014 18:14:50

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

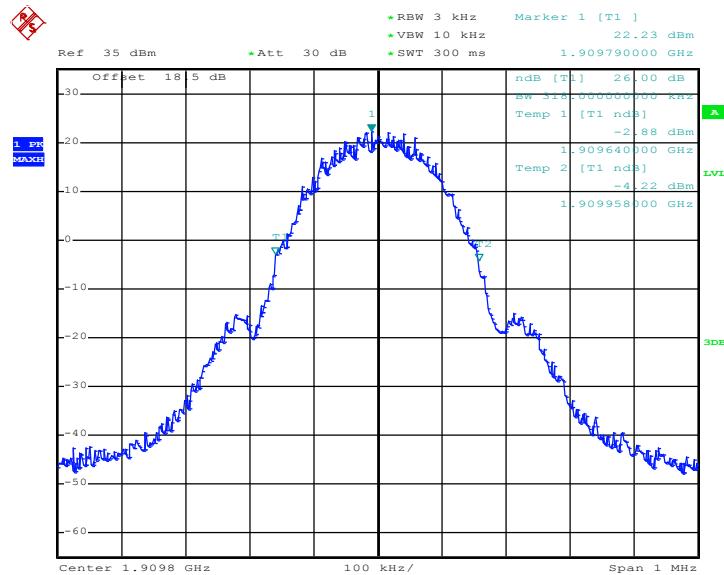


Date: 8.JUN.2014 18:12:33




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

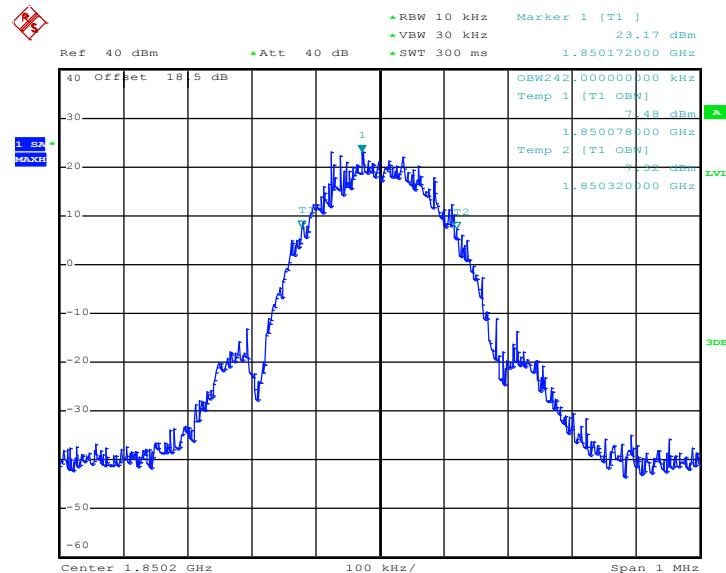

Date: 8.JUN.2014 18:43:36

26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

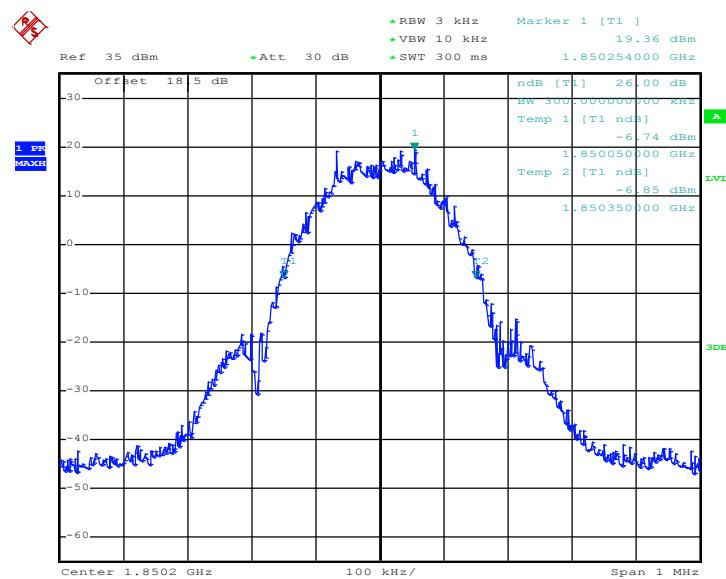

Date: 8.JUN.2014 18:41:48



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 55 of 227

Report Issued Date : Oct. 07, 2014


Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

Report Template No.: BU5-CG22/24 Version 1.1




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

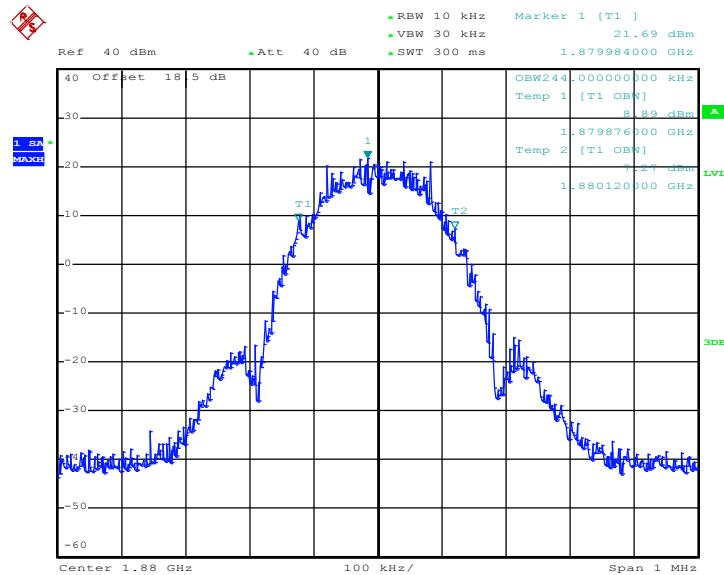

Date: 8.JUN.2014 18:44:05


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

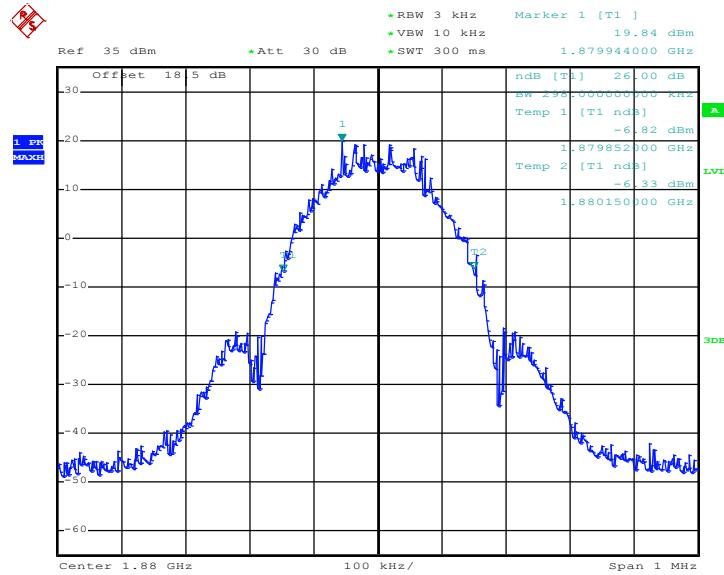

Date: 8.JUN.2014 18:42:17




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

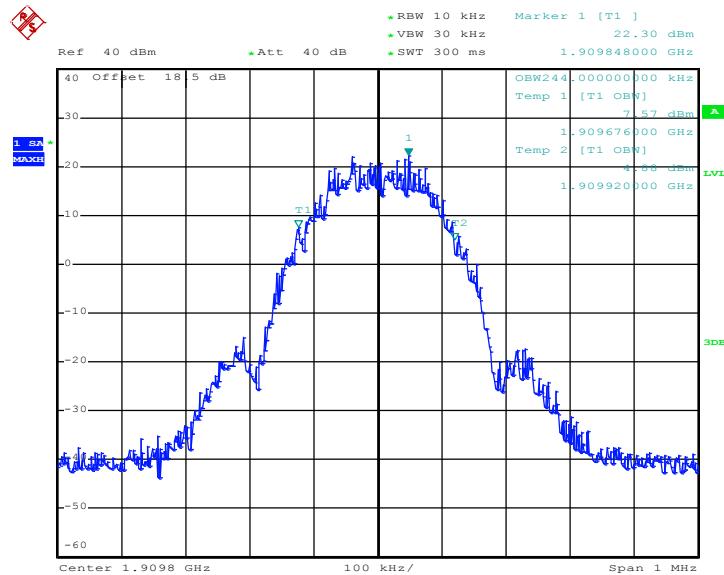

Date: 8.JUN.2014 18:44:33

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

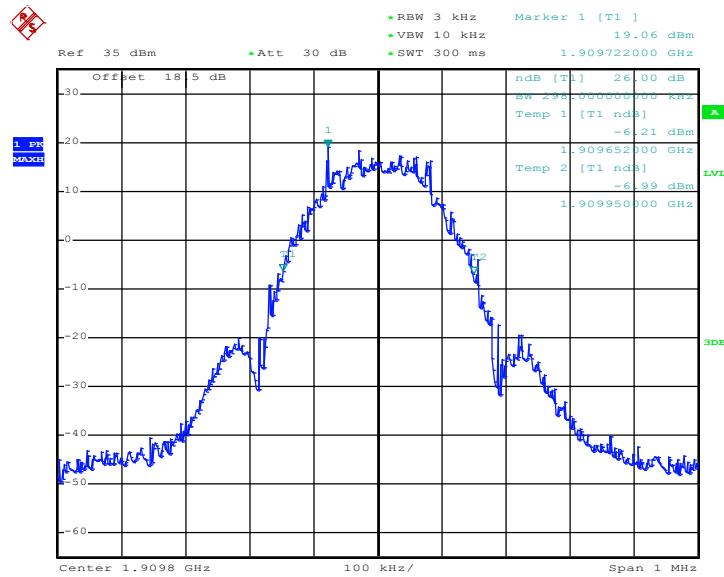


Date: 8.JUN.2014 18:42:45




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

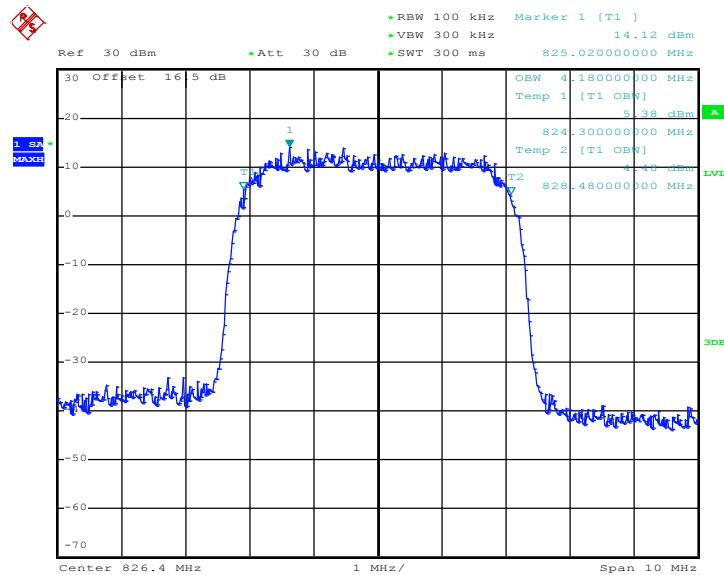

Date: 9.JUN.2014 10:53:12

26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

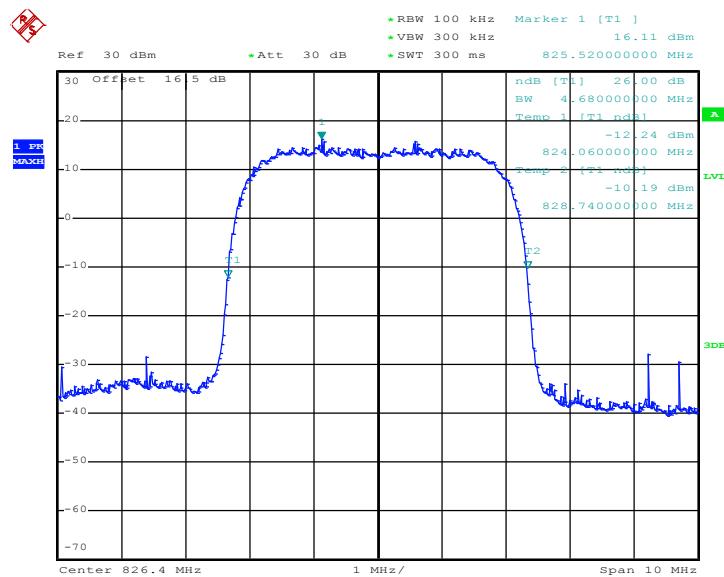

Date: 9.JUN.2014 10:50:36



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 59 of 227

Report Issued Date : Oct. 07, 2014


Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

Report Template No.: BU5-CG22/24 Version 1.1




99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

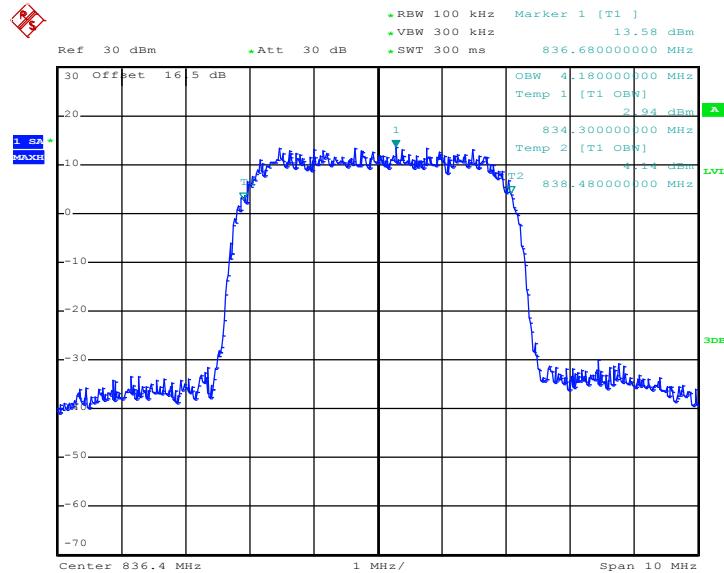

Date: 9.JUN.2014 10:53:41


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

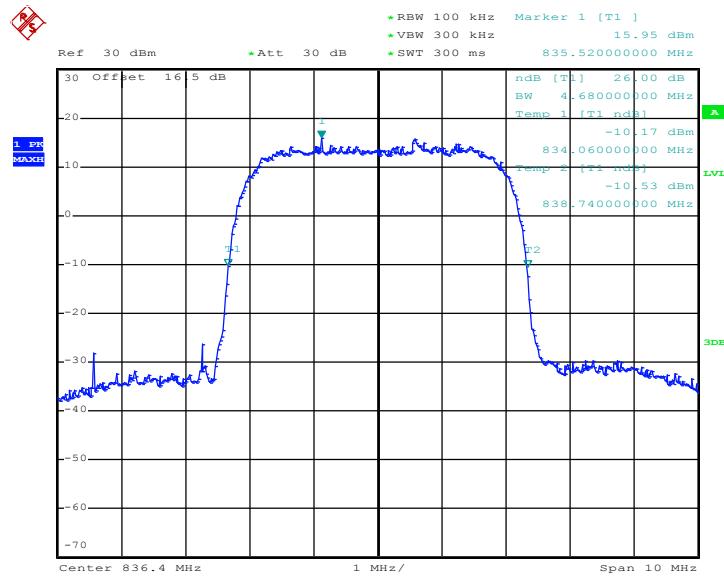

Date: 9.JUN.2014 10:49:10




99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

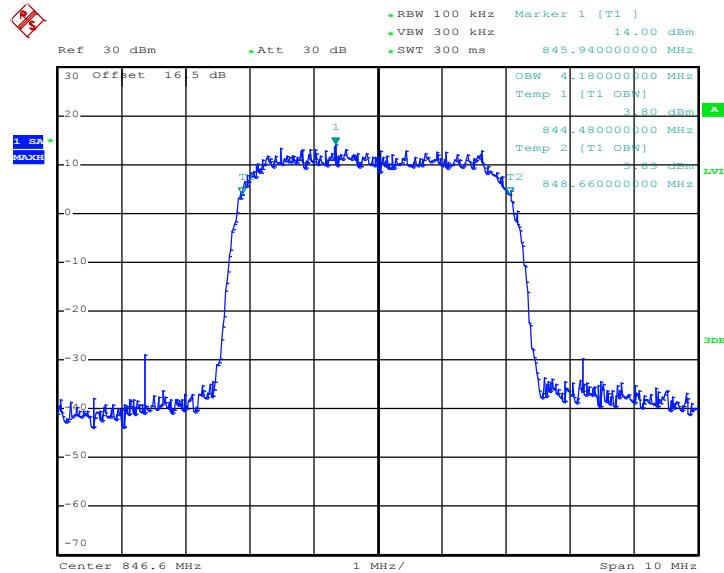

Date: 9.JUN.2014 10:54:09


26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

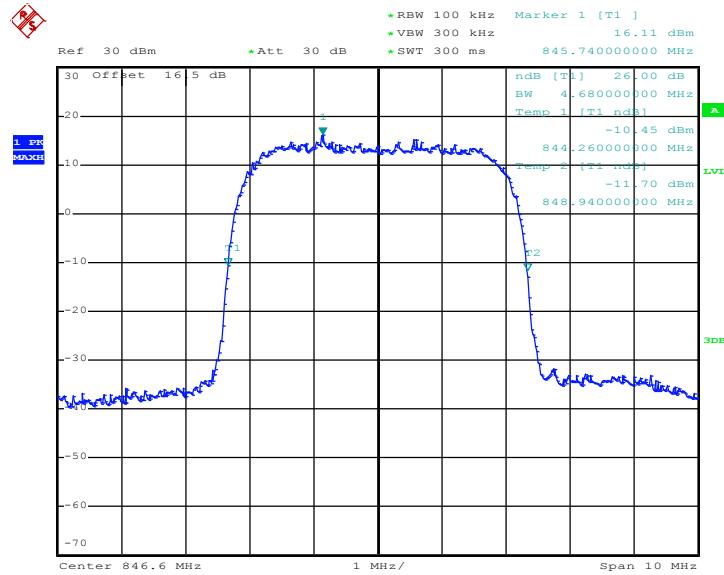


Date: 9.JUN.2014 10:48:39



Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

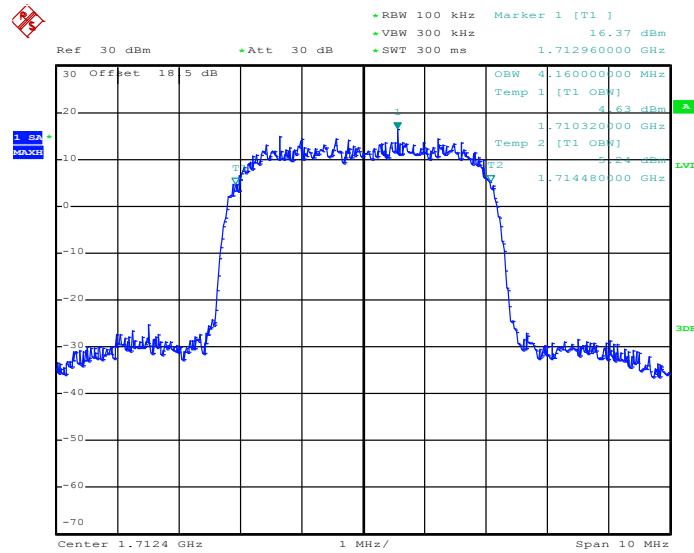99% Occupied Bandwidth Plot on Channel 1312 (1712.4 MHz)


Date: 9.JUN.2014 10:22:24

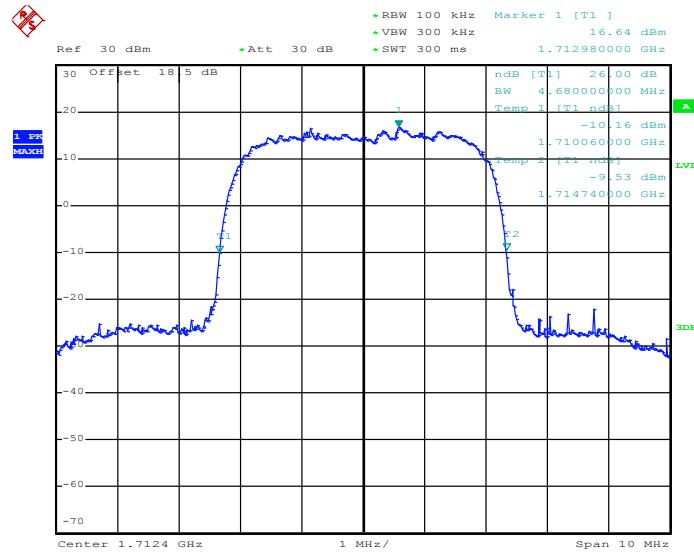26dB Bandwidth Plot on Channel 1312 (1712.4 MHz)

Date: 9.JUN.2014 10:19:25




99% Occupied Bandwidth Plot on Channel 1413 (1732.6 MHz)

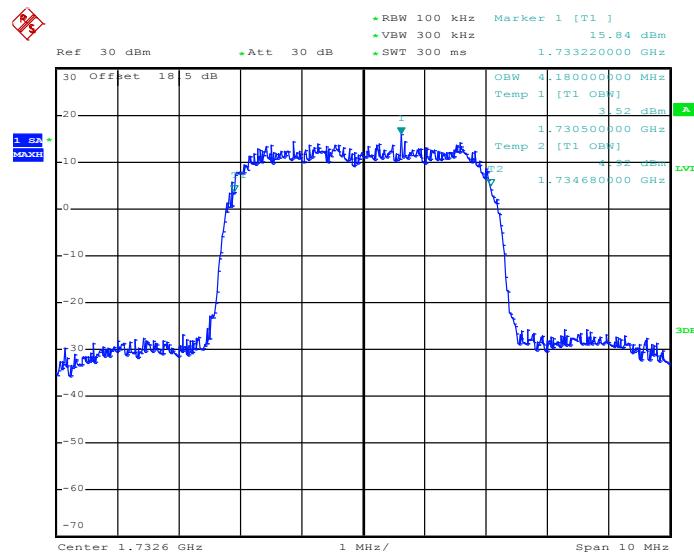

Date: 9.JUN.2014 10:22:52


26dB Bandwidth Plot on Channel 1413 (1732.6 MHz)

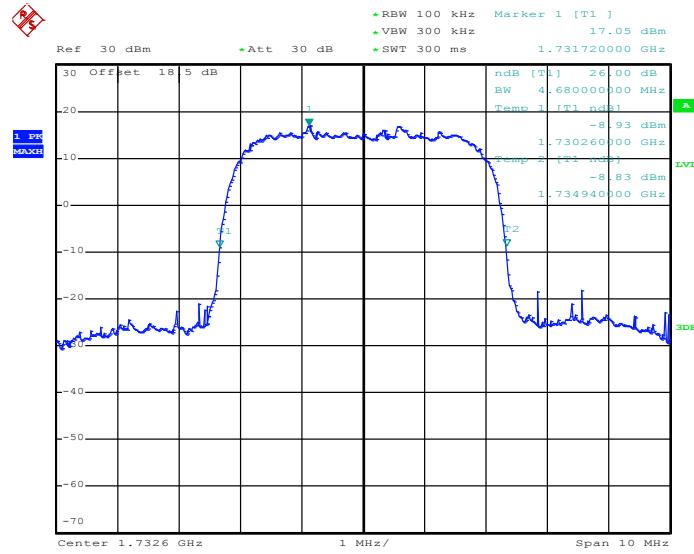

Date: 9.JUN.2014 10:17:56




99% Occupied Bandwidth Plot on Channel 1513 (1752.6 MHz)

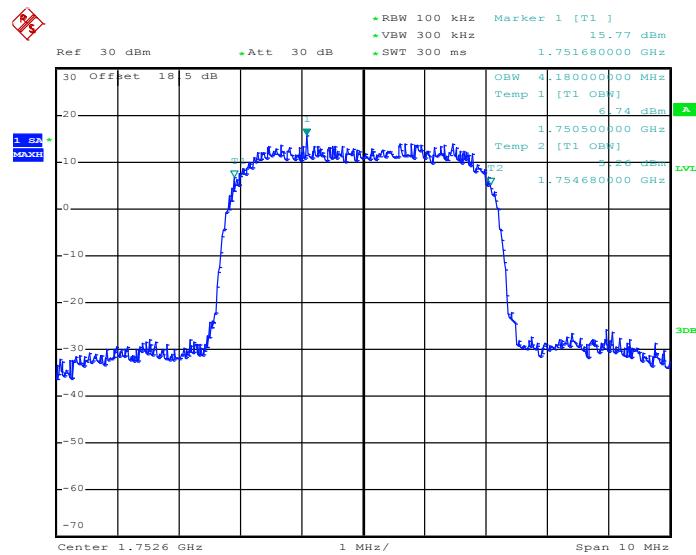

Date: 9.JUN.2014 10:23:21

26dB Bandwidth Plot on Channel 1513 (1752.6 MHz)

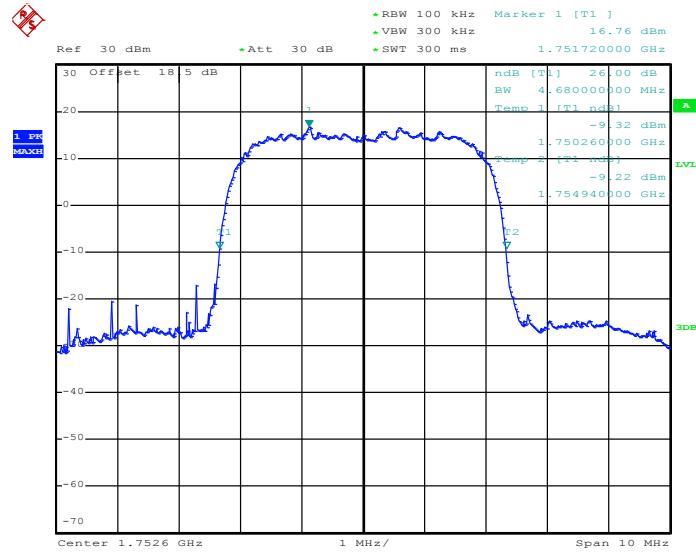


Date: 9.JUN.2014 10:20:22




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

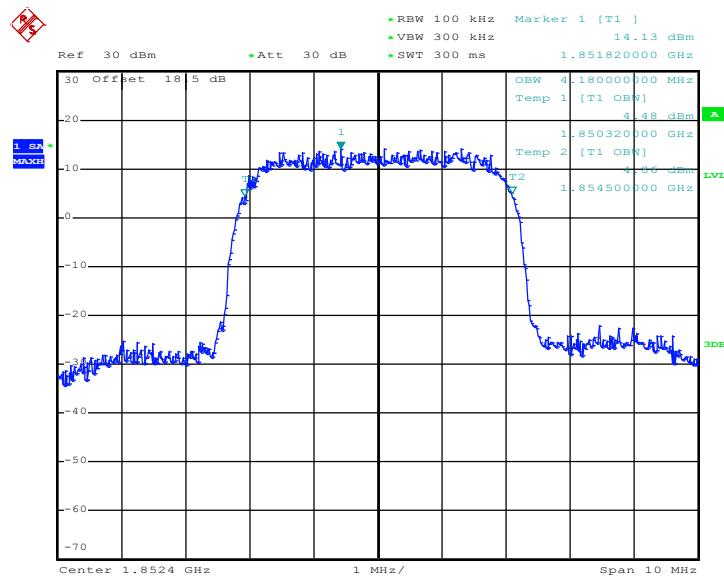

Date: 9.JUN.2014 09:49:05

26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

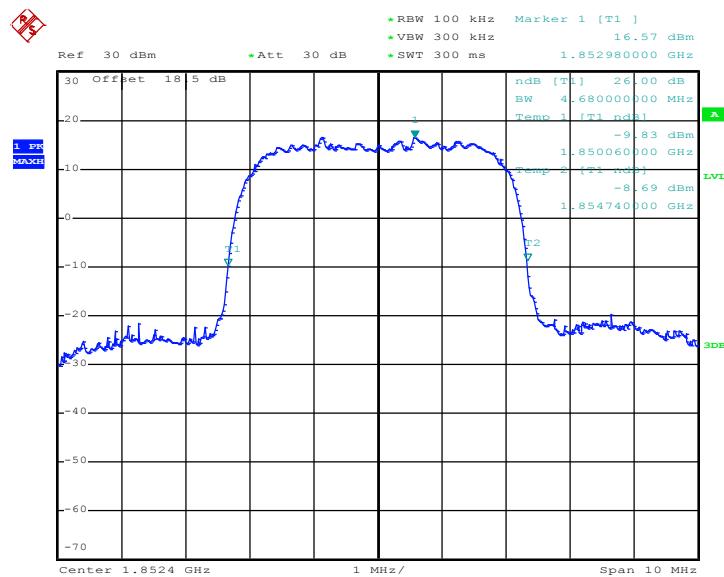

Date: 9.JUN.2014 09:47:21



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 66 of 227

Report Issued Date : Oct. 07, 2014


Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

Report Template No.: BU5-CG22/24 Version 1.1




99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

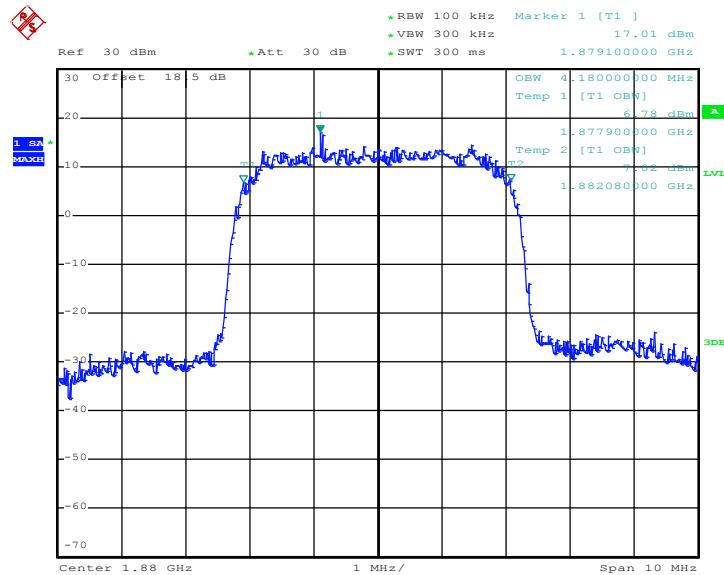

Date: 9.JUN.2014 09:49:33


26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

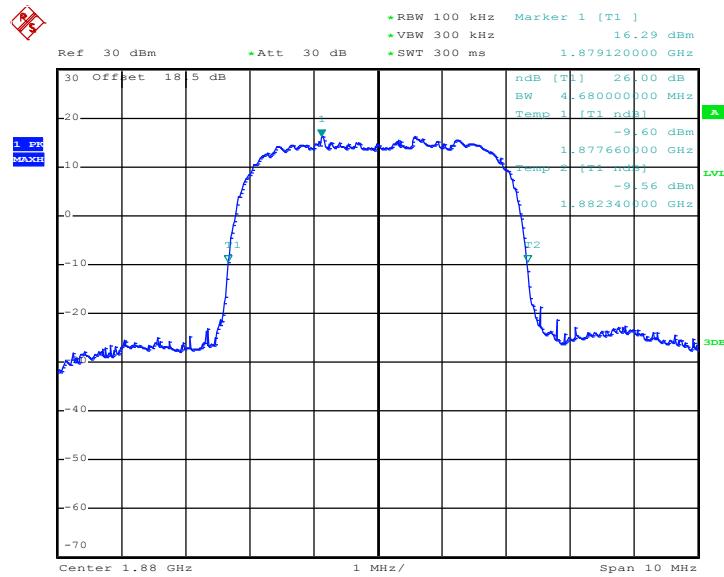

Date: 9.JUN.2014 09:47:49




99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

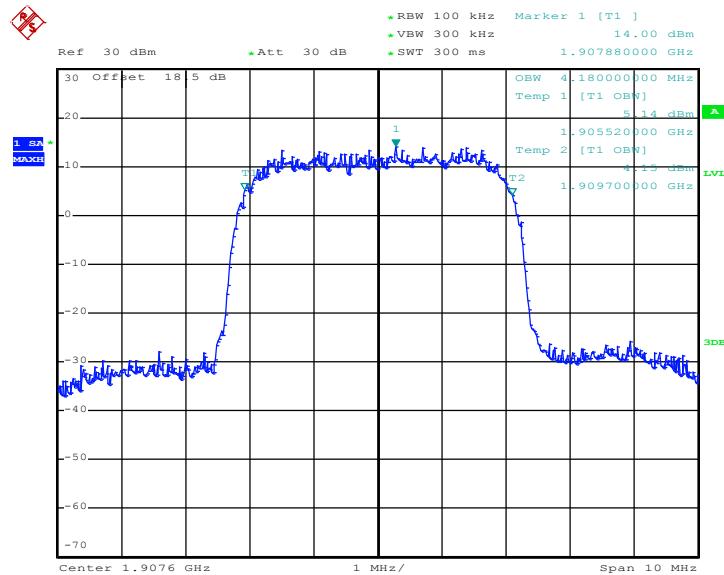

Date: 9.JUN.2014 09:50:02


26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

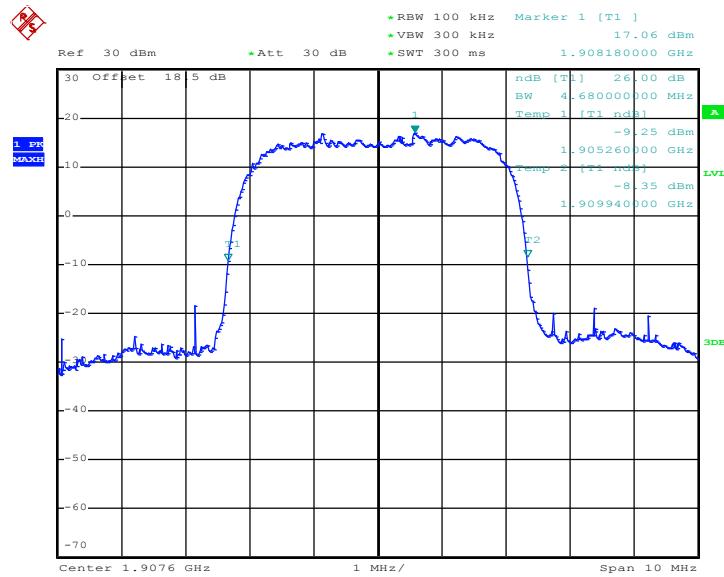


Date: 9.JUN.2014 09:48:18



Band :	CDMA2000 BC0	Test Mode :	BC0 (1xEV-DO Rev. 0_RETAP 4096K (QPSK)
---------------	--------------	--------------------	--

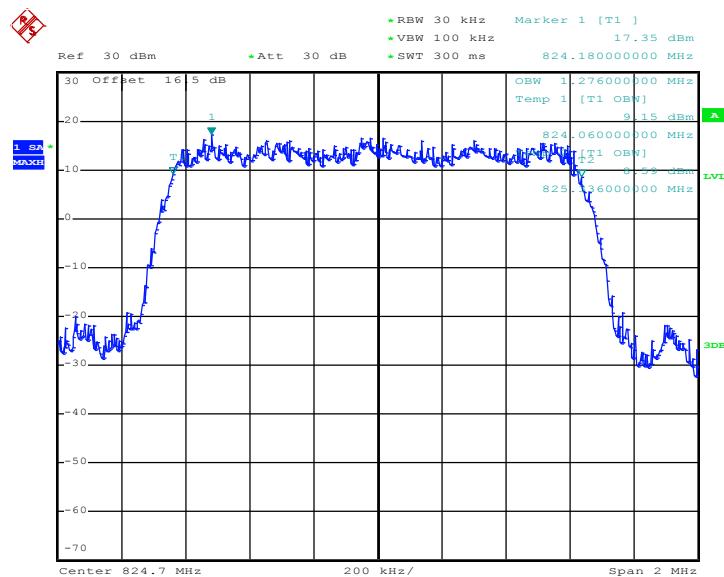99% Occupied Bandwidth Plot on Channel 1013 (824.7 MHz)

Date: 9.JUN.2014 14:45:08

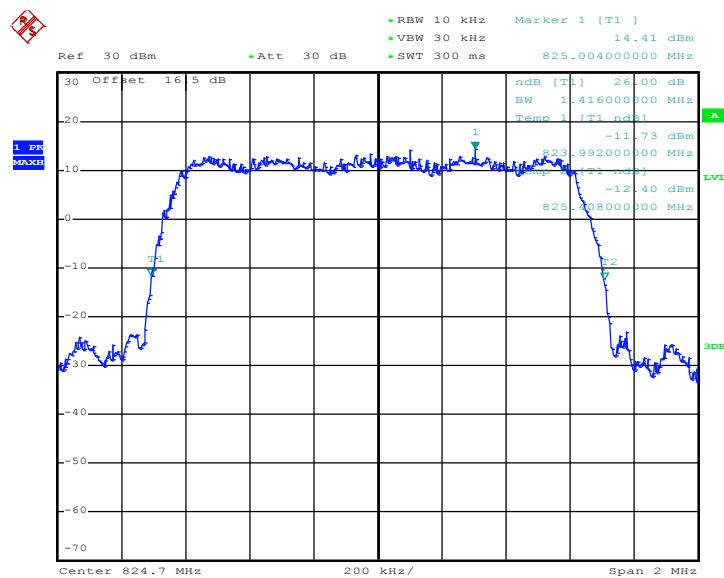26dB Bandwidth Plot on Channel 1013 (824.7 MHz)

Date: 9.JUN.2014 14:43:03



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 70 of 227

Report Issued Date : Oct. 07, 2014


Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

Report Template No.: BU5-CG22/24 Version 1.1




99% Occupied Bandwidth Plot on Channel 384 (836.52 MHz)

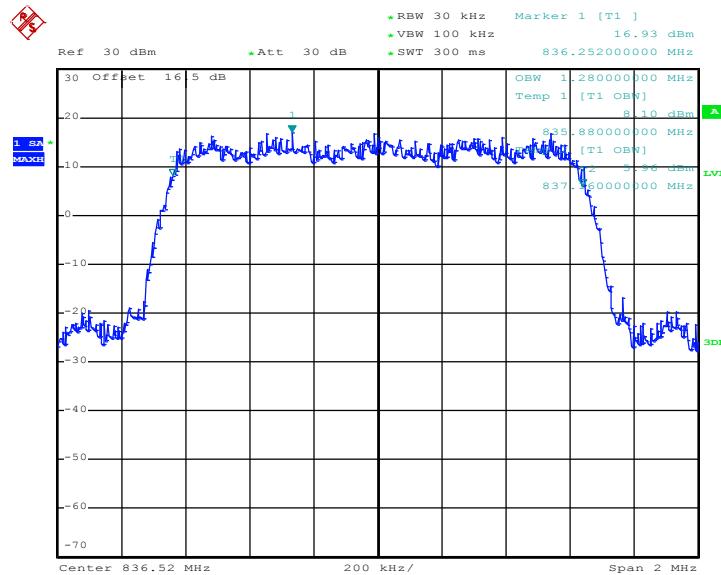

Date: 9.JUN.2014 14:45:36


26dB Bandwidth Plot on Channel 384 (836.52 MHz)

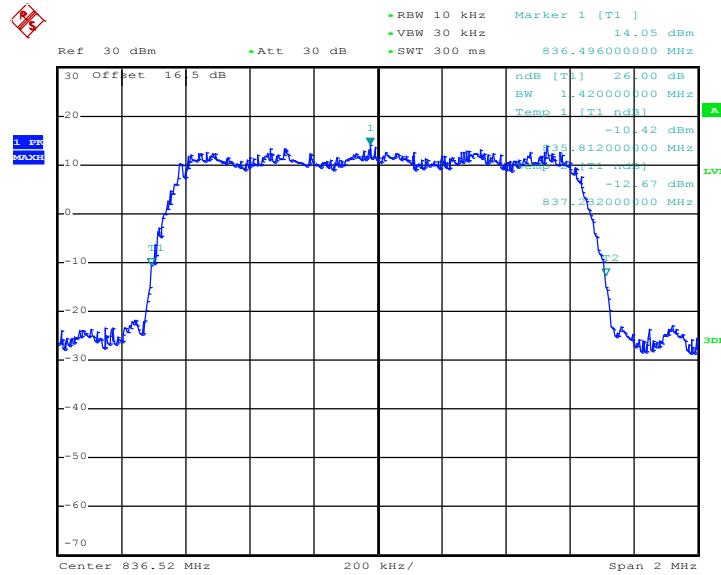

Date: 9.JUN.2014 14:43:32




99% Occupied Bandwidth Plot on Channel 777 (848.31 MHz)

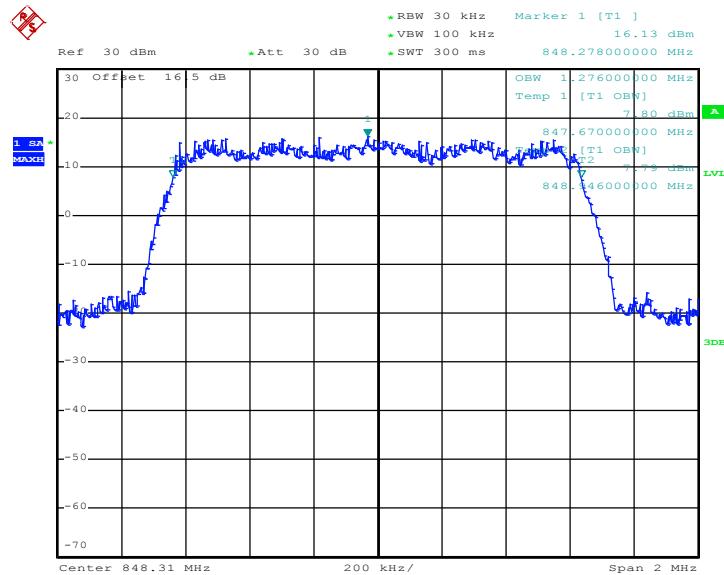

Date: 9.JUN.2014 14:46:05

26dB Bandwidth Plot on Channel 777 (848.31 MHz)

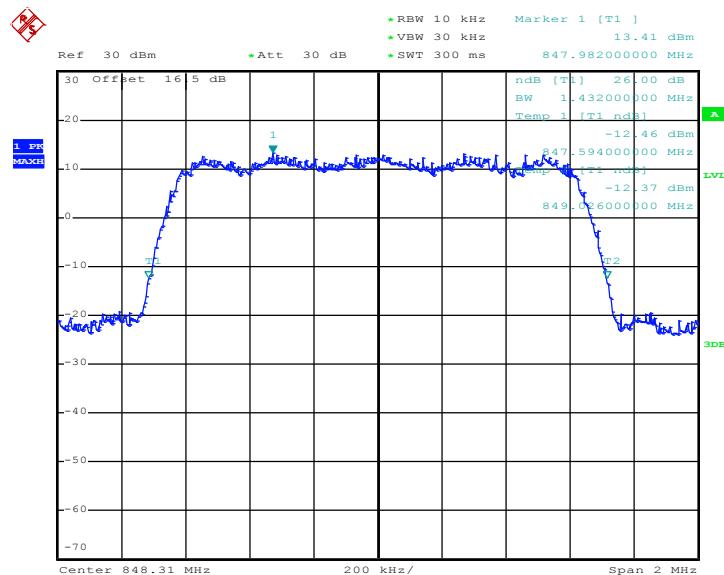


Date: 9.JUN.2014 14:44:00




Band :	CDMA2000 BC1	Test Mode :	(1xEV-DO Rev. 0_RTAP 153.6K (QPSK)
--------	--------------	-------------	------------------------------------

99% Occupied Bandwidth Plot on Channel 25 (1851.25 MHz)

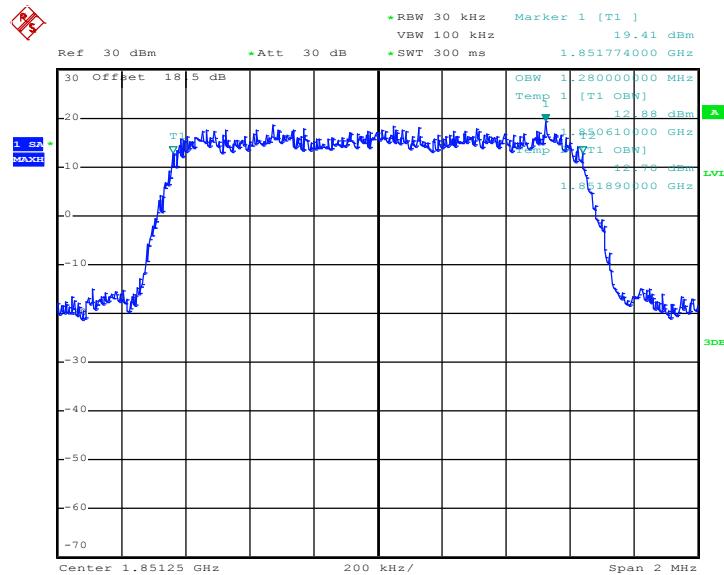

Date: 9.JUN.2014 16:04:36

26dB Bandwidth Plot on Channel 25 (1851.25 MHz)

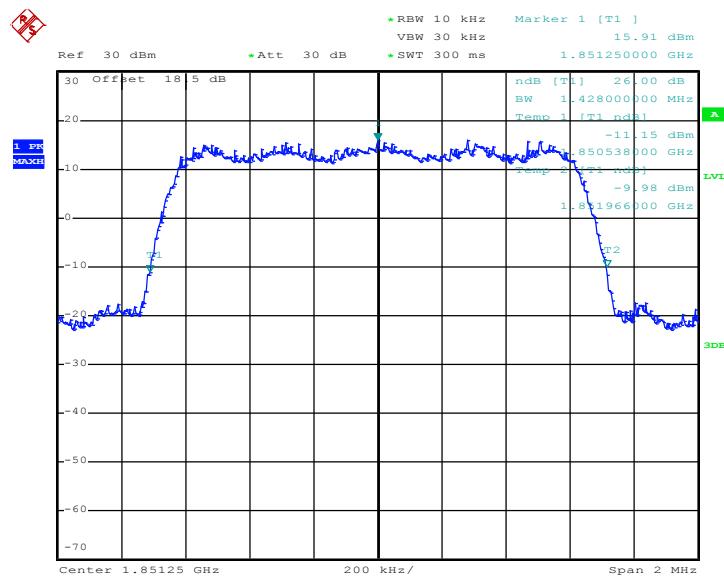

Date: 9.JUN.2014 15:56:30



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 74 of 227

Report Issued Date : Oct. 07, 2014


Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

Report Template No.: BU5-CG22/24 Version 1.1




99% Occupied Bandwidth Plot on Channel 600 (1880.0 MHz)

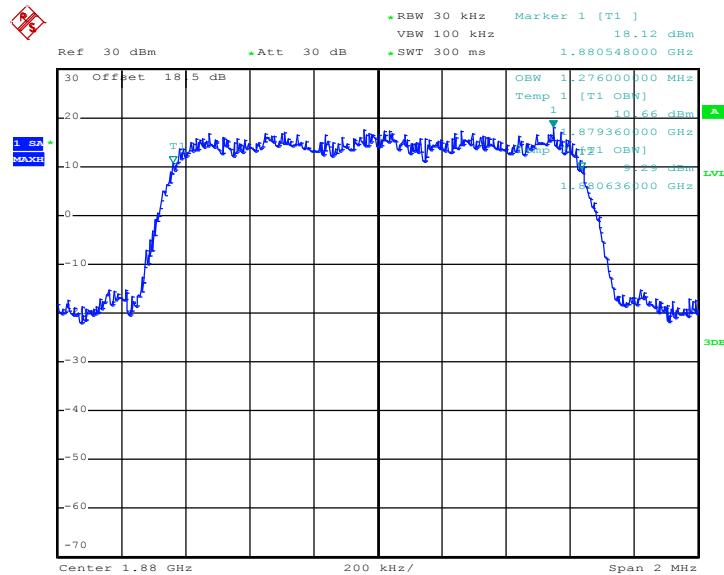

Date: 9.JUN.2014 16:03:57


26dB Bandwidth Plot on Channel 600 (1880.0 MHz)

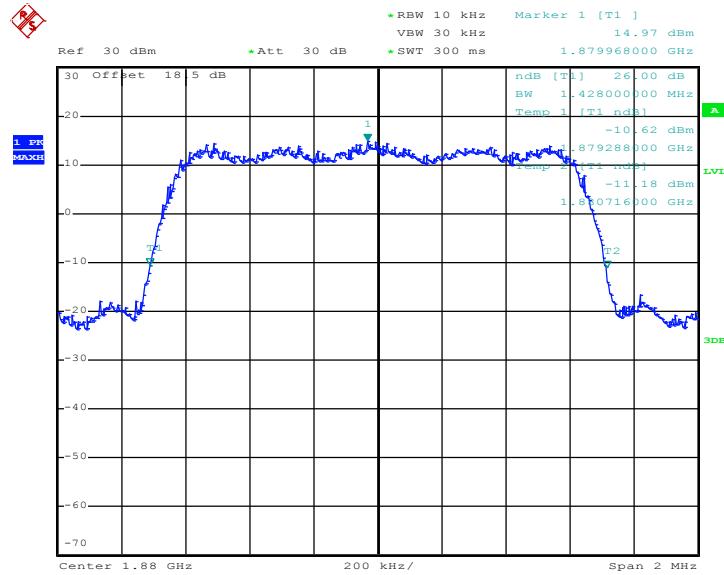

Date: 9.JUN.2014 15:57:32




99% Occupied Bandwidth Plot on Channel 1175 (1908.75 MHz)

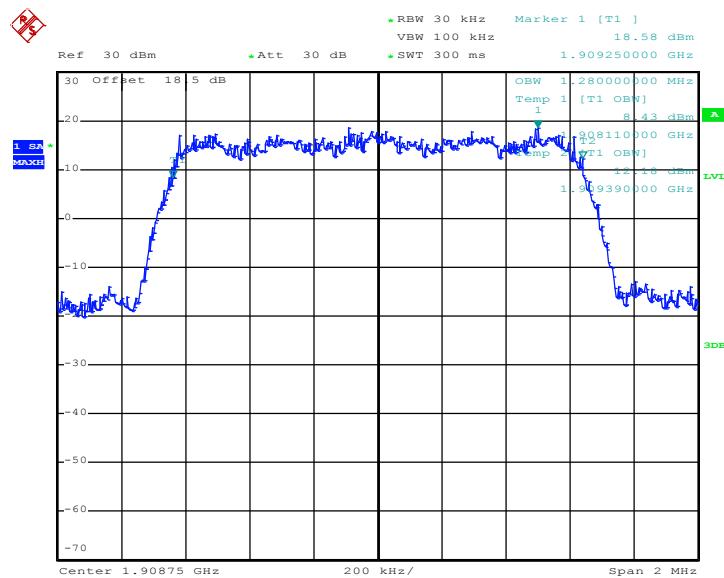

Date: 9.JUN.2014 16:03:11

26dB Bandwidth Plot on Channel 1175 (1908.75 MHz)

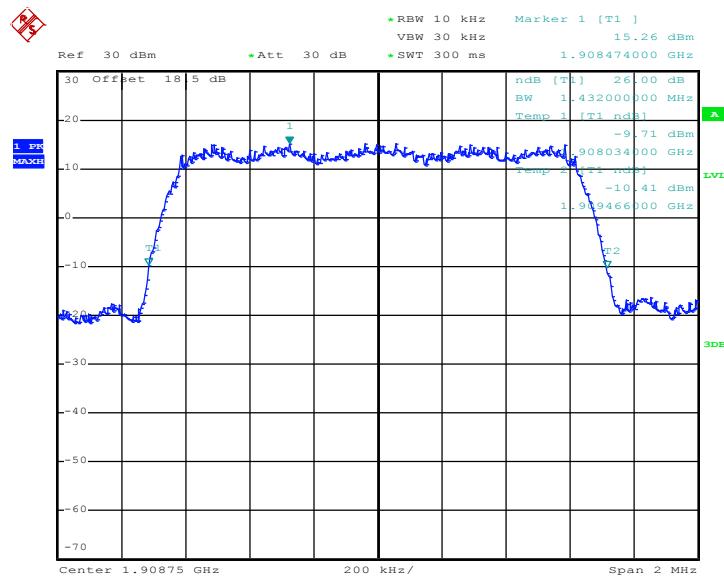

Date: 9.JUN.2014 15:58:30



3.4 Band Edge Measurement

3.4.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.

3.4.4 Test Setup

<Conducted Band Edge >

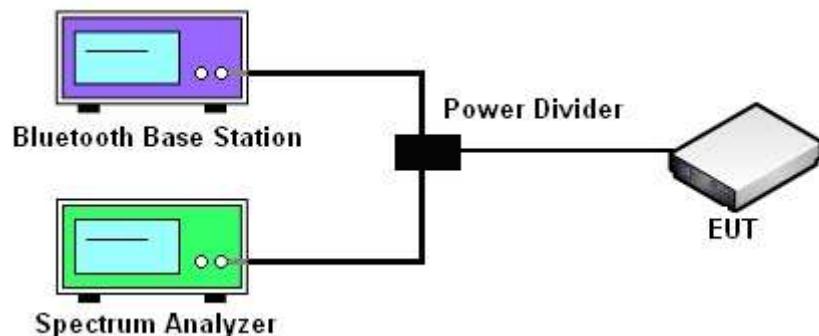


<Radiated Band Edge>

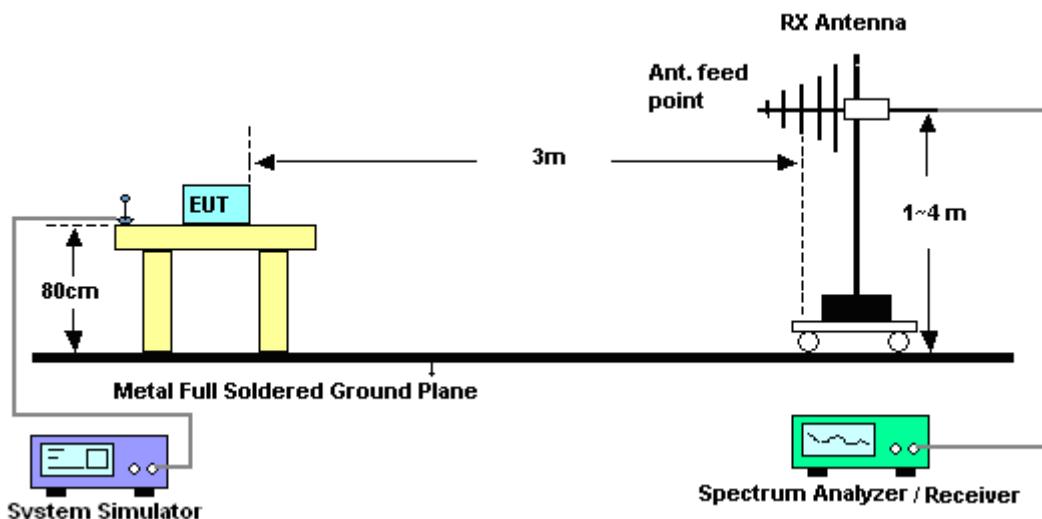

3.4.5 Test Result (Plots) of Conducted Band Edge


Band :	GSM850	Test Mode :	GPRS class 8 Link (GMSK)
--------	--------	-------------	--------------------------

Lower Band Edge Plot on Channel 128 (824.2 MHz)

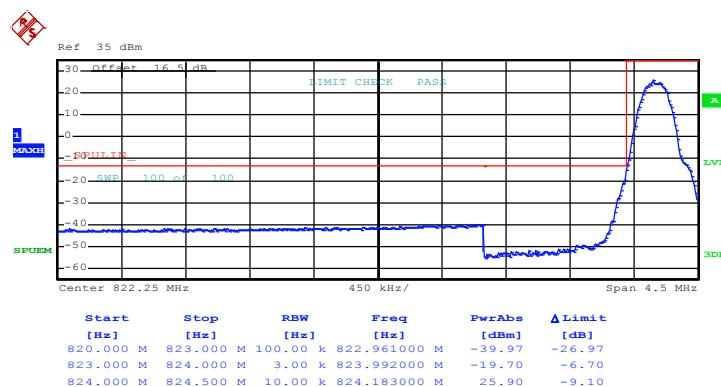

Date: 8.JUN.2014 17:26:28

Higher Band Edge Plot on Channel 251 (848.8 MHz)

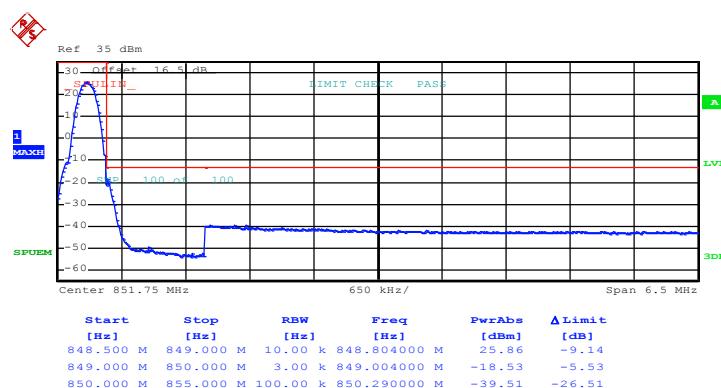

Date: 8.JUN.2014 17:23:16



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 80 of 227

Report Issued Date : Oct. 07, 2014


Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1


Report Template No.: BU5-CG22/24 Version 1.1



Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
--------	--------	-------------	--------------------------

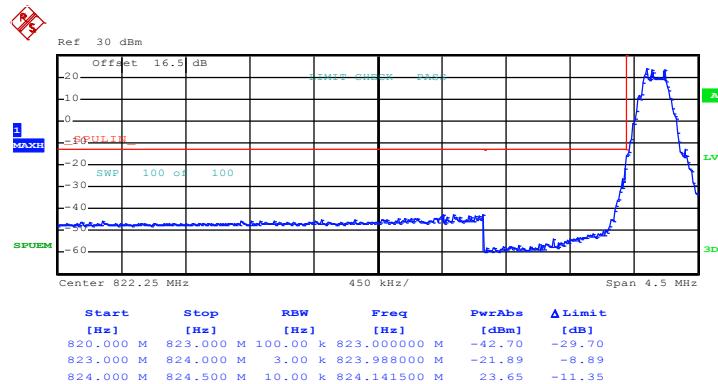Lower Band Edge Plot on Channel 128 (824.2 MHz)

Date: 8.JUN.2014 17:54:26

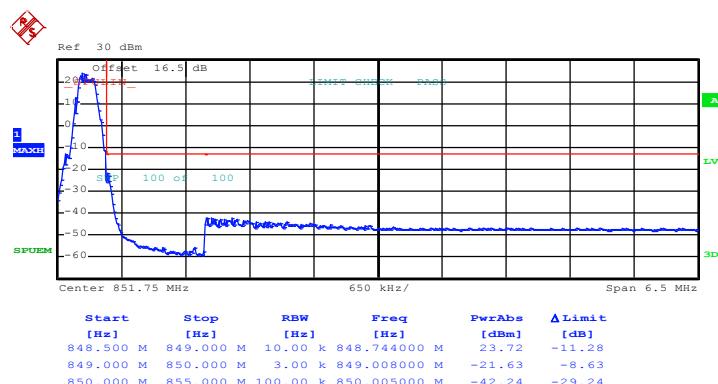Higher Band Edge Plot on Channel 251 (848.8 MHz)

Date: 8.JUN.2014 17:51:38



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 82 of 227

Report Issued Date : Oct. 07, 2014

Report Version : Rev. 01


Report Template No.: BU5-FG22/24 Version 1.1

Report Template No.: BU5-CG22/24 Version 1.1




Band :	GSM1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

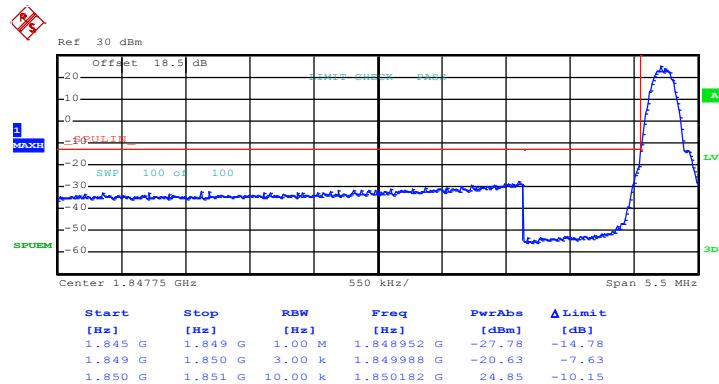

Date: 8.JUN.2014 18:20:53

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

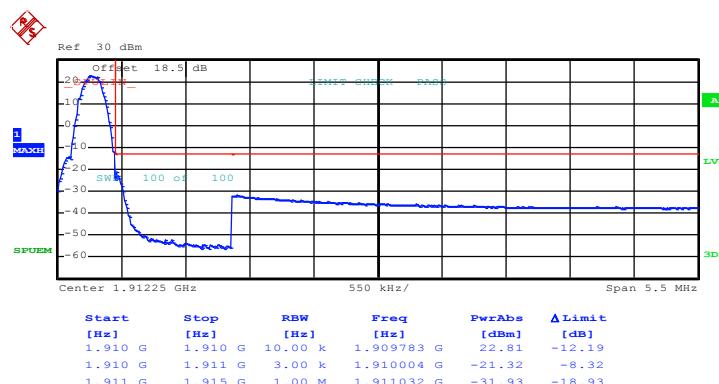

Date: 8.JUN.2014 18:17:51



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 84 of 227

Report Issued Date : Oct. 07, 2014

Report Version : Rev. 01


Report Template No.: BU5-FG22/24 Version 1.1

Report Template No.: BU5-CG22/24 Version 1.1




Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

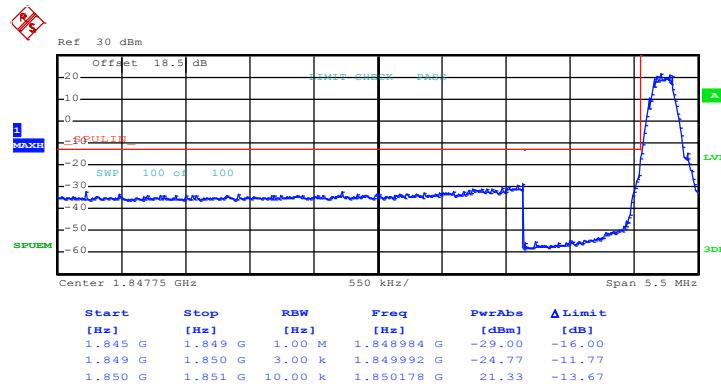

Date: 8.JUN.2014 18:49:47

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

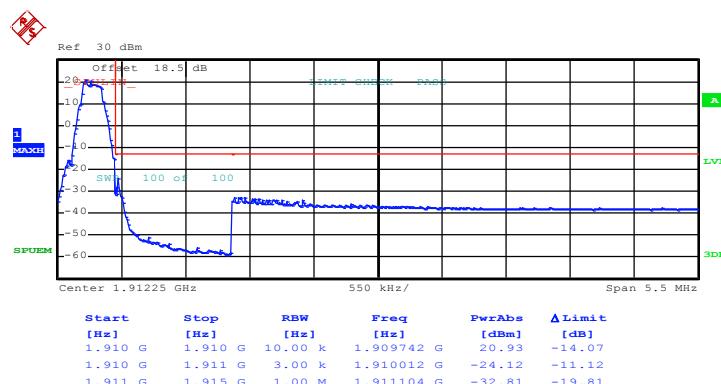

Date: 8.JUN.2014 18:47:28



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 86 of 227

Report Issued Date : Oct. 07, 2014


Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1


Report Template No.: BU5-CG22/24 Version 1.1



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

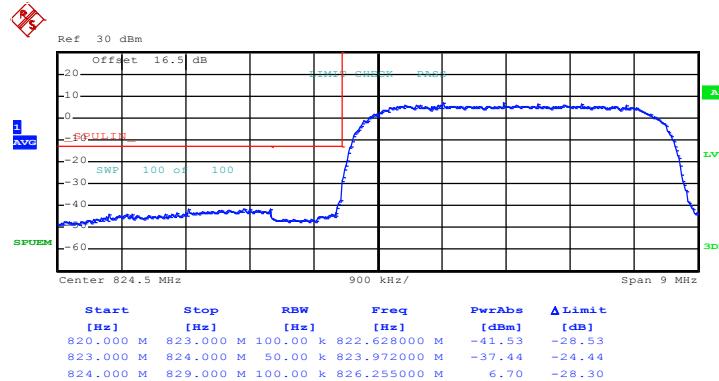Lower Band Edge Plot on Channel 4132 (826.4 MHz)

Date: 9.JUN.2014 11:05:19

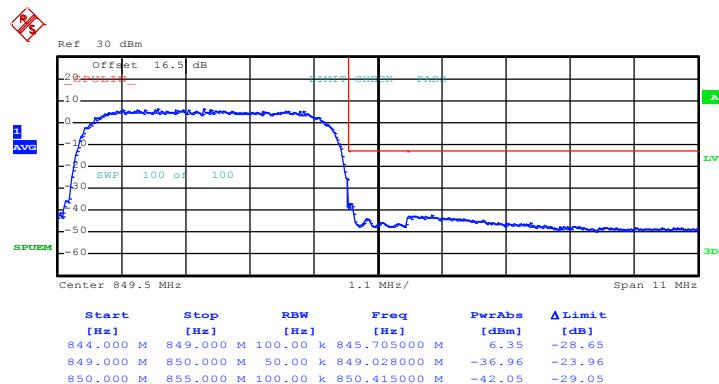Higher Band Edge Plot on Channel 4233 (846.6 MHz)

Date: 9.JUN.2014 10:59:14



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 88 of 227

Report Issued Date : Oct. 07, 2014


Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1


Report Template No.: BU5-CG22/24 Version 1.1



Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

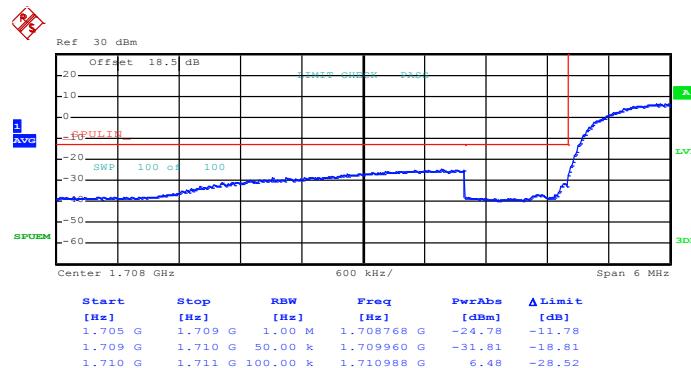Lower Band Edge Plot on Channel 1312 (1712.4 MHz)


Date: 9.JUN.2014 10:29:21

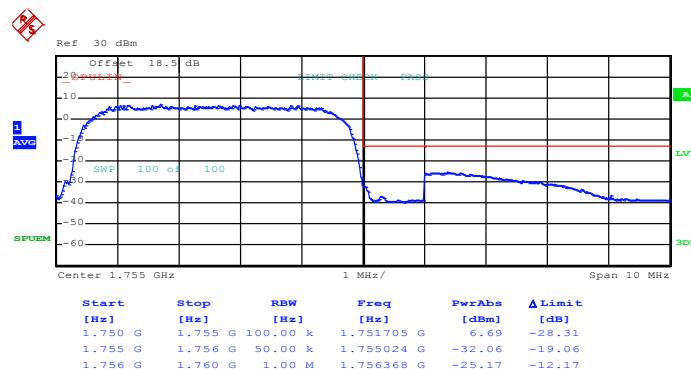Higher Band Edge Plot on Channel 1513 (1752.6 MHz)


Date: 9.JUN.2014 10:26:35



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

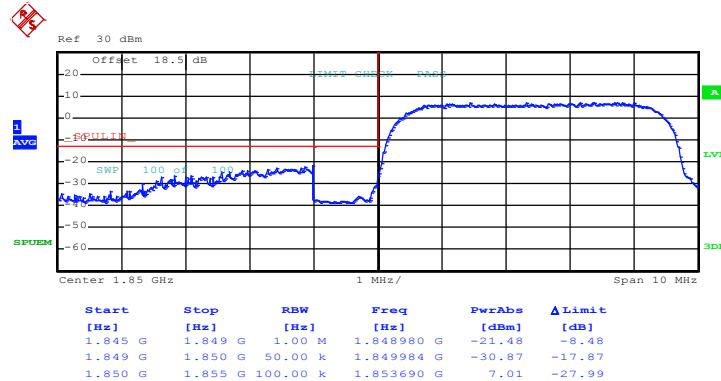Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

Date: 9.JUN.2014 09:56:23

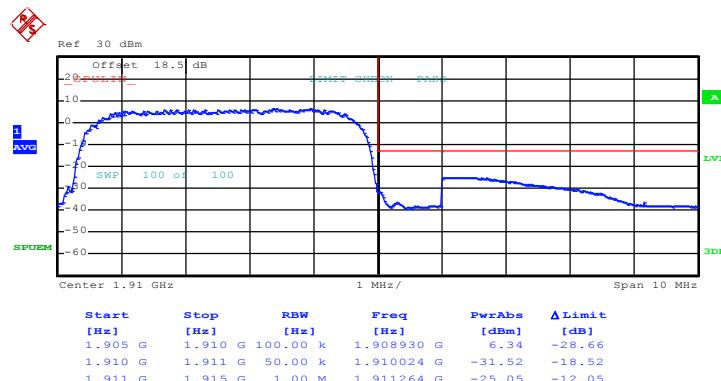Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

Date: 9.JUN.2014 09:53:11



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 91 of 227

Report Issued Date : Oct. 07, 2014


Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

Report Template No.: BU5-CG22/24 Version 1.1




Band :	CDMA2000 BC0	Test Mode :	BC0 (1xEV-DO Rev. 0_RETAP 4096K (QPSK)
--------	--------------	-------------	--

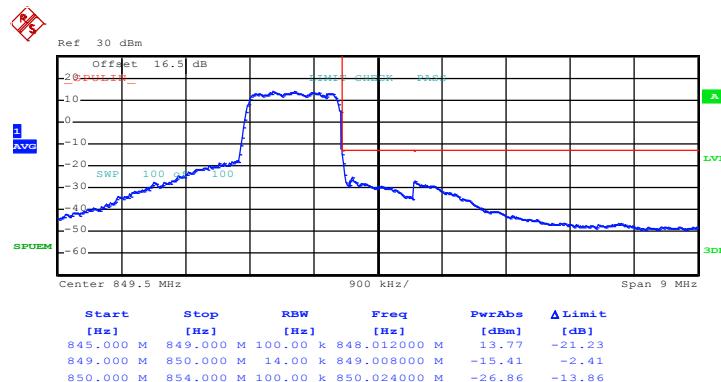Lower Band Edge Plot on Channel 1013 (824.7 MHz)

Date: 9.JUN.2014 15:07:59

Higher Band Edge Plot on Channel 777 (848.31 MHz)

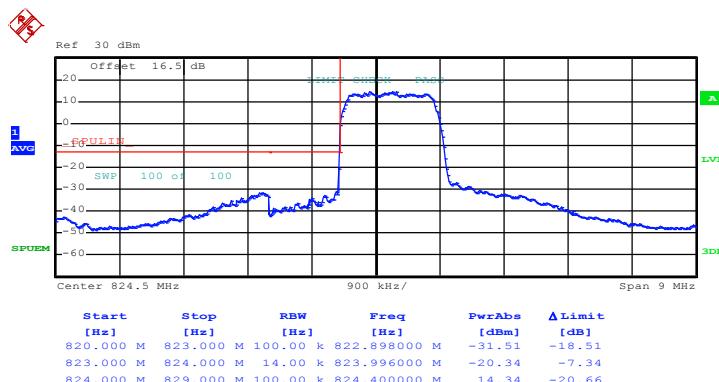


Date: 9.JUN.2014 14:55:00




Band :	CDMA2000 BC1	Test Mode :	(1xEV-DO Rev. 0_RTAP 153.6K (QPSK)
--------	--------------	-------------	------------------------------------

Lower Band Edge Plot on Channel 25 (1851.25 MHz)

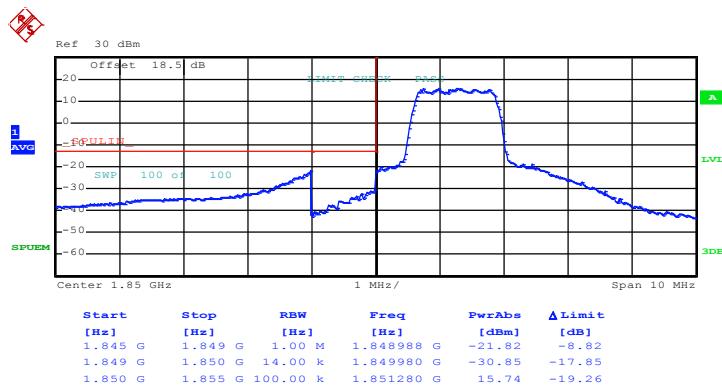

Date: 9.JUN.2014 16:08:15

Higher Band Edge Plot on Channel 1175 (1908.75 MHz)

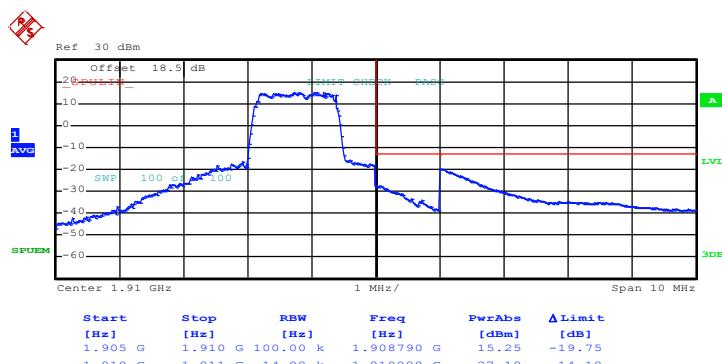

Date: 9.JUN.2014 16:11:11



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

IC : 8847A-NTC140W

Page Number : 95 of 227

Report Issued Date : Oct. 07, 2014

Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

Report Template No.: BU5-CG22/24 Version 1.1



3.5 Conducted Spurious Emission Measurement

3.5.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.


3.5.4 Test Setup

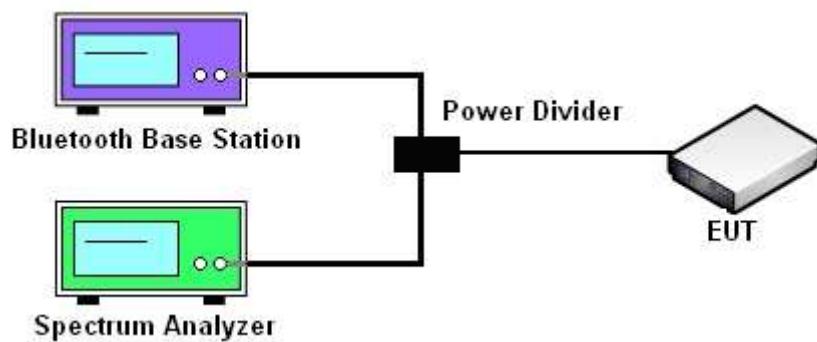

3.5.5 Test Result (Plots) of Conducted Spurious Emission


Band :	GSM850	Channel :	CH128
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	824.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

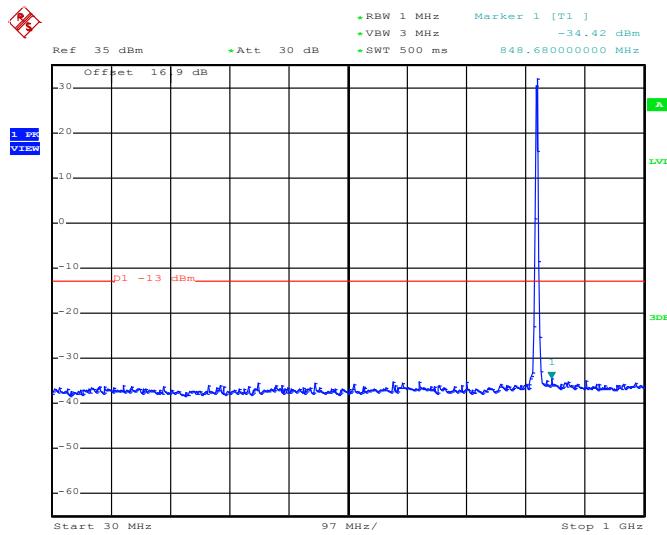

Date: 8.JUN.2014 17:29:10


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

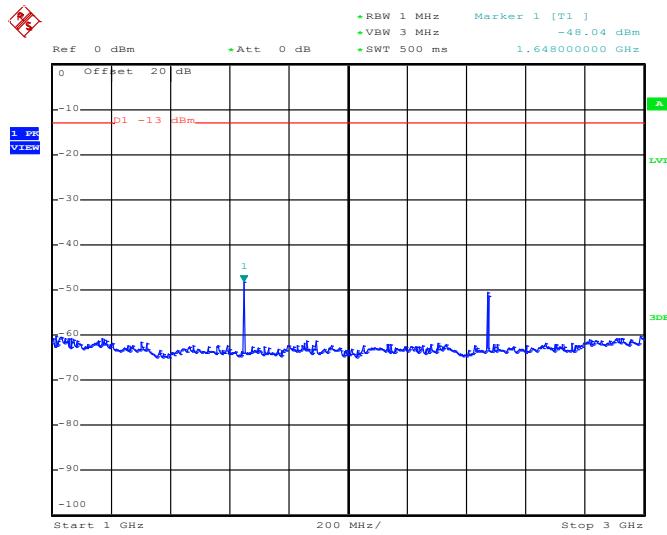

Date: 8.JUN.2014 17:29:21




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

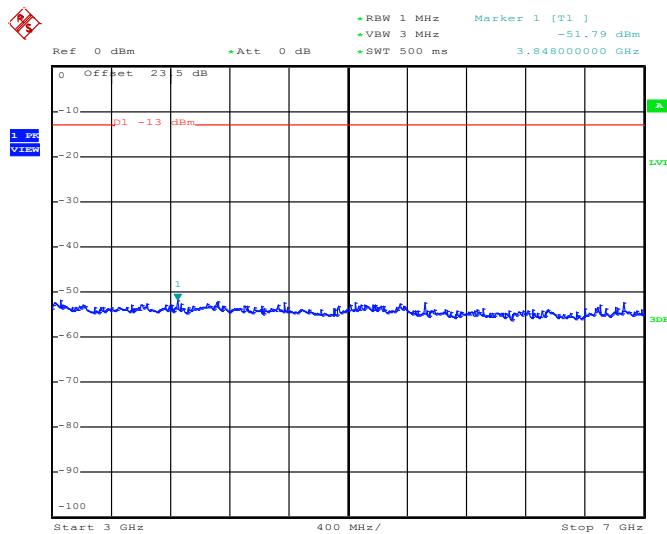

Date: 8.JUN.2014 17:29:30


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

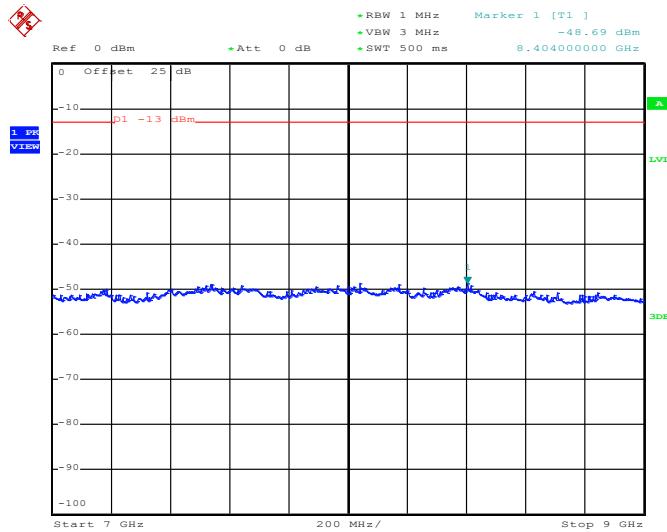

Date: 8.JUN.2014 17:29:38




Band :	GSM850	Channel :	CH189
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	836.4 MHz

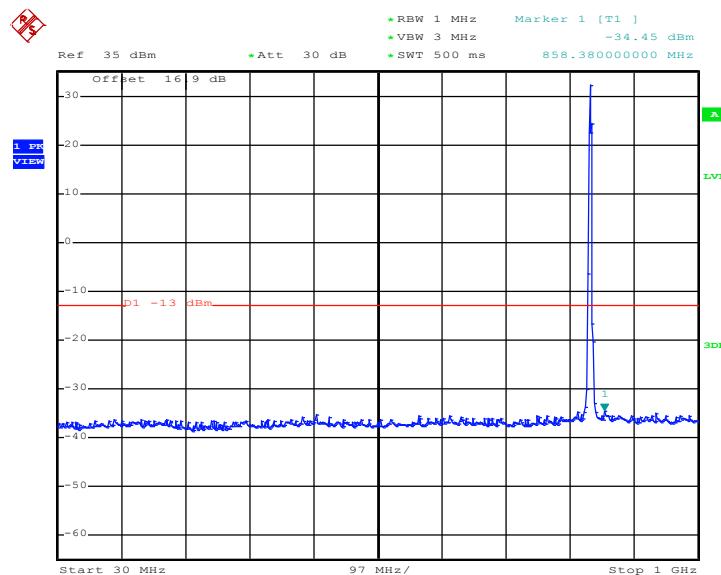Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 8.JUN.2014 17:28:00


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

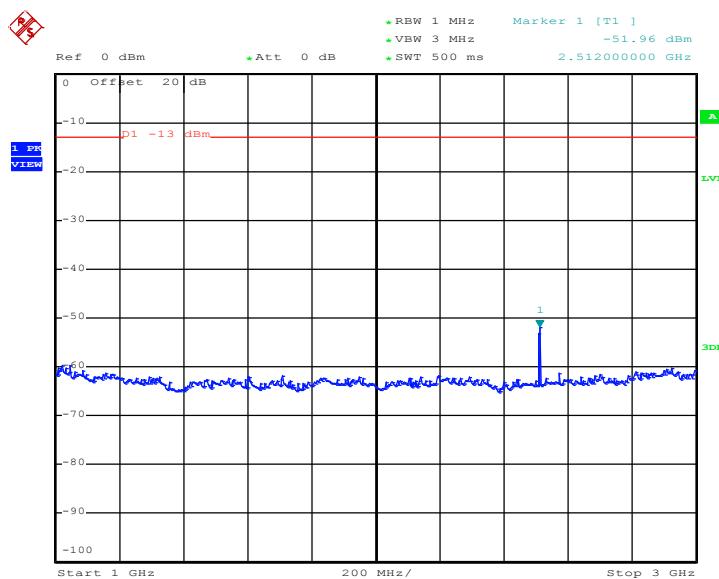

Date: 8.JUN.2014 17:28:11




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

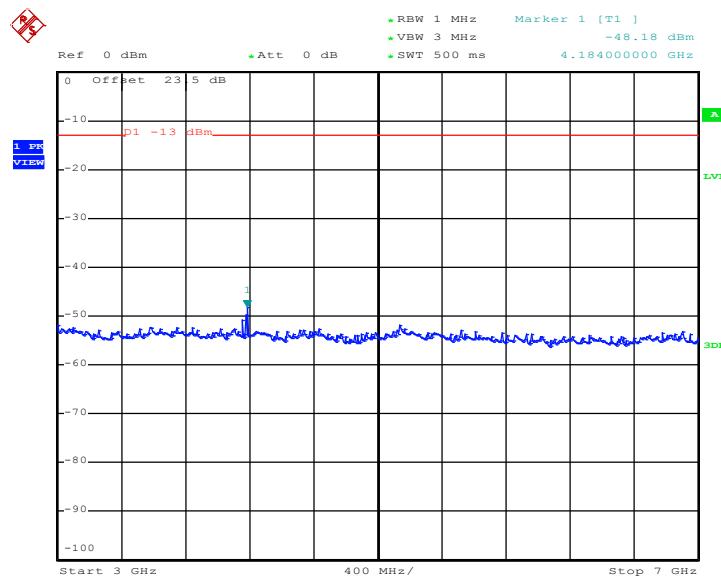

Date: 8.JUN.2014 17:28:19


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

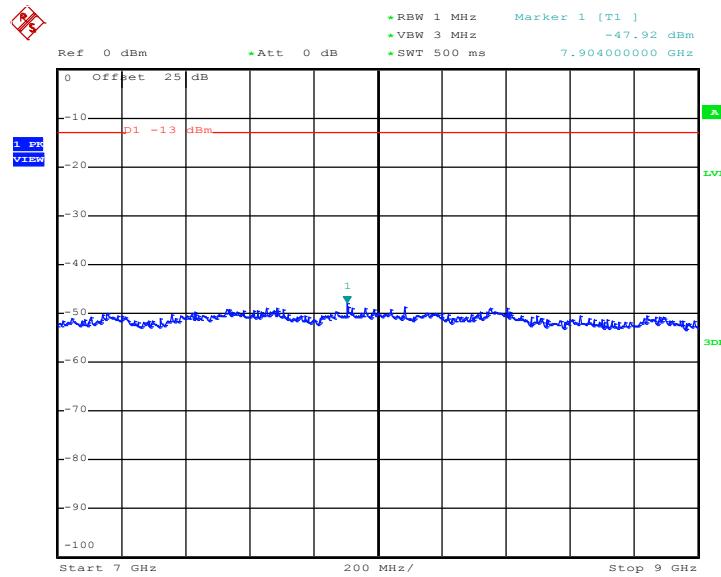

Date: 8.JUN.2014 17:28:28




Band :	GSM850	Channel :	CH251
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	848.8 MHz

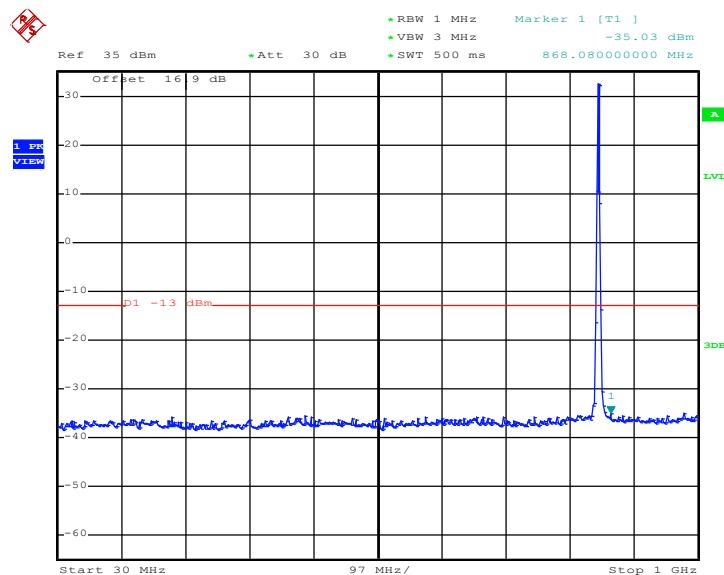Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 8.JUN.2014 17:30:37


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

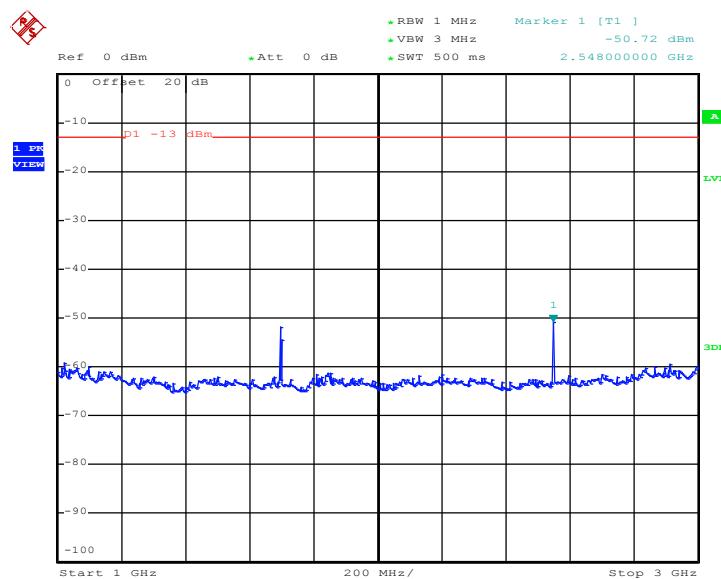

Date: 8.JUN.2014 17:30:48




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

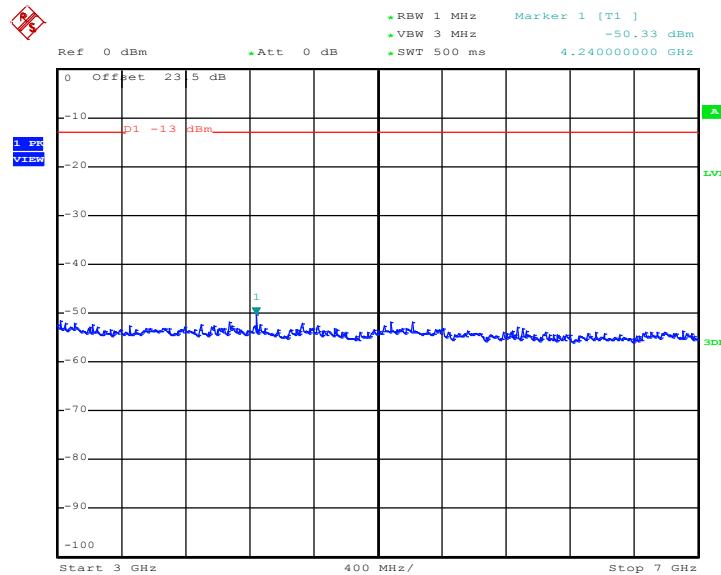

Date: 8.JUN.2014 17:30:56


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

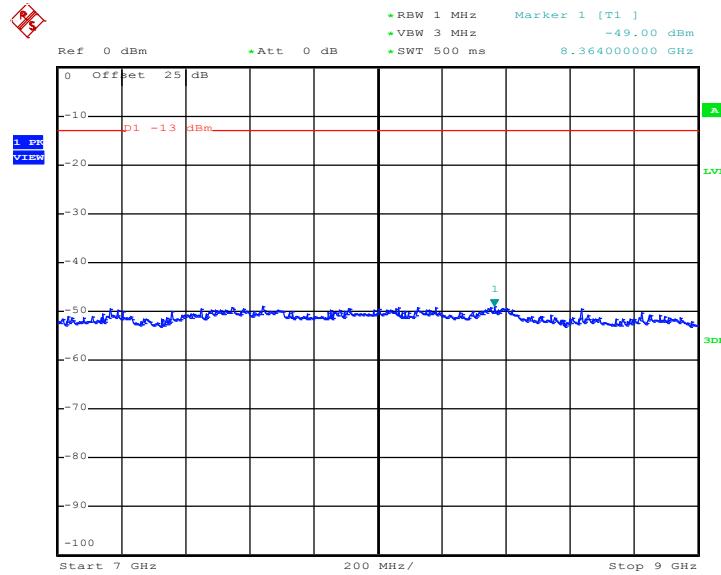

Date: 8.JUN.2014 17:31:05




Band :	GSM850	Channel :	CH128
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	824.2 MHz

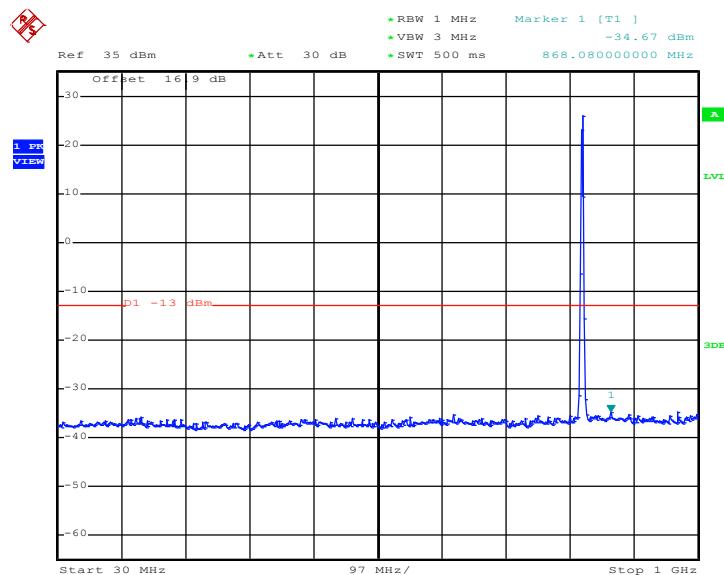Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 8.JUN.2014 17:59:52


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

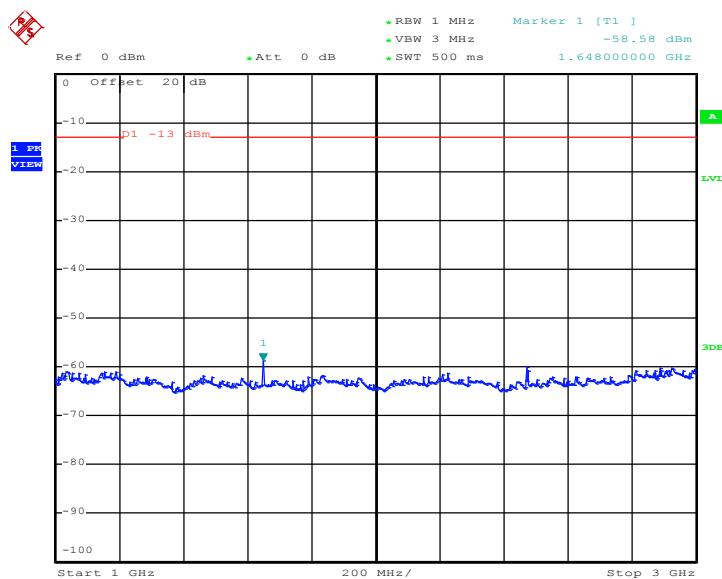

Date: 8.JUN.2014 18:00:03




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

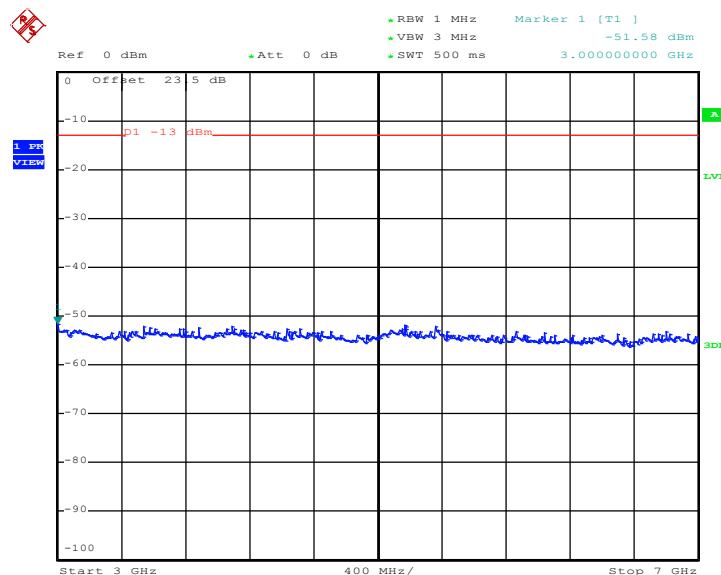

Date: 8.JUN.2014 18:00:11


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

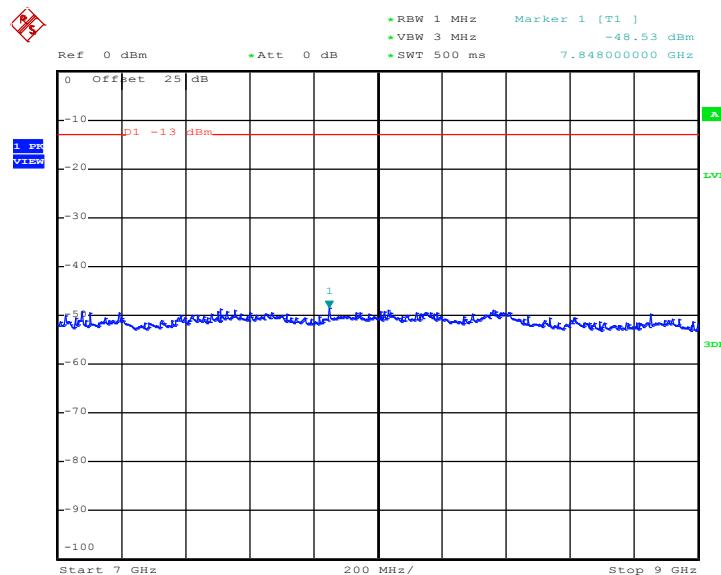

Date: 8.JUN.2014 18:00:19




Band :	GSM850	Channel :	CH189
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	836.4 MHz

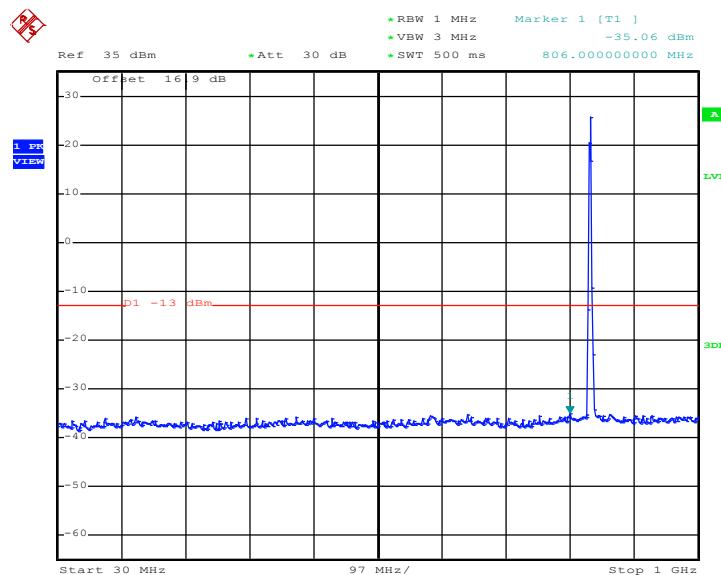Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 8.JUN.2014 17:57:40


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

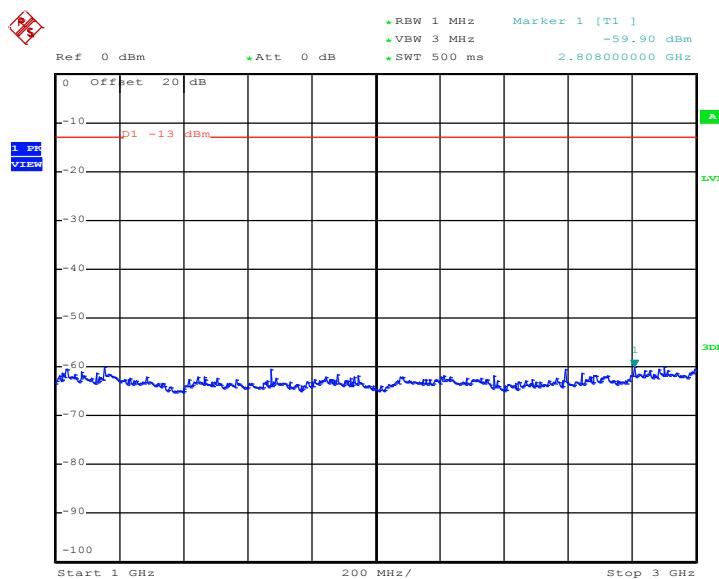

Date: 8.JUN.2014 17:57:50




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

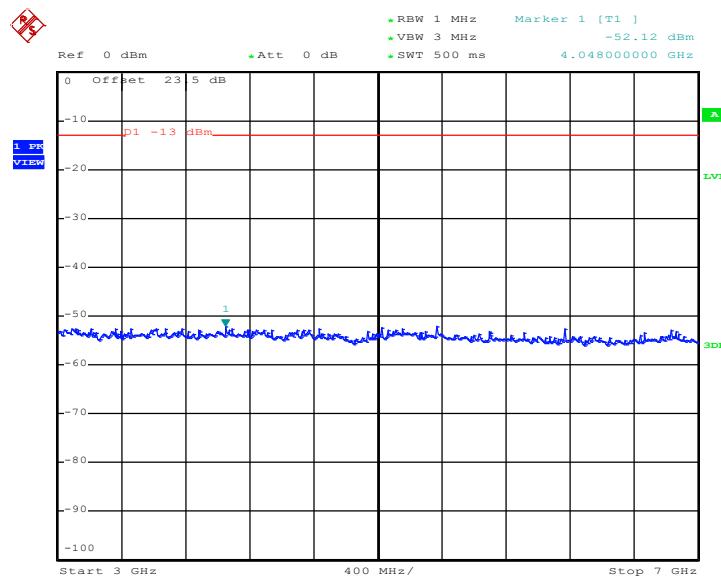

Date: 8.JUN.2014 17:57:59


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

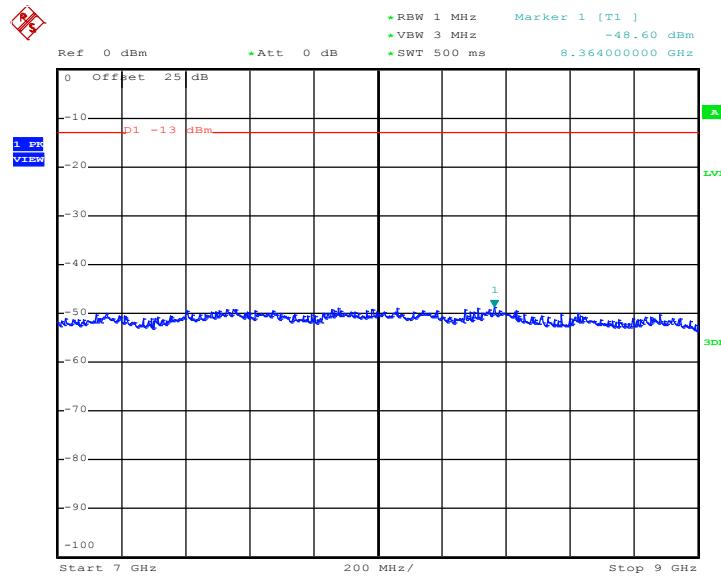

Date: 8.JUN.2014 17:58:07




Band :	GSM850	Channel :	CH251
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	848.8 MHz

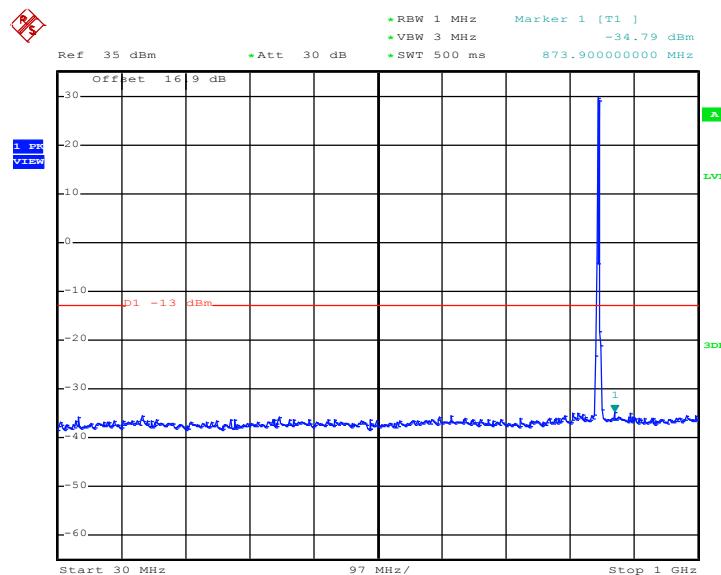Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 8.JUN.2014 18:01:16


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

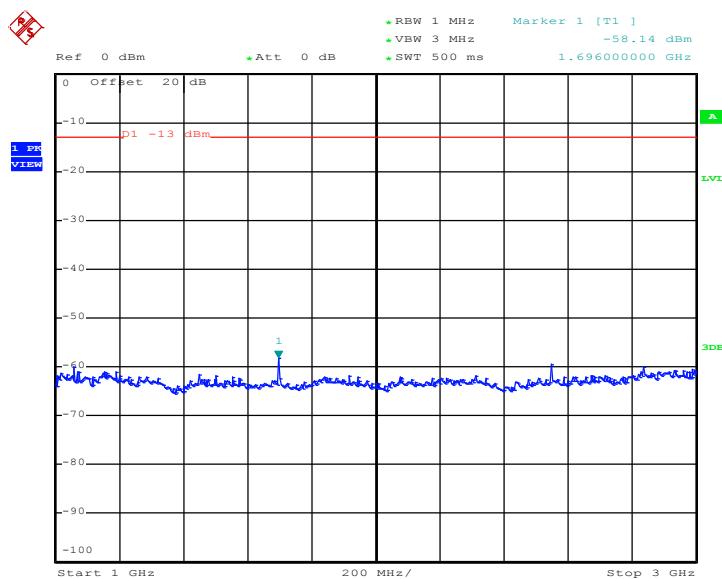

Date: 8.JUN.2014 18:01:27




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

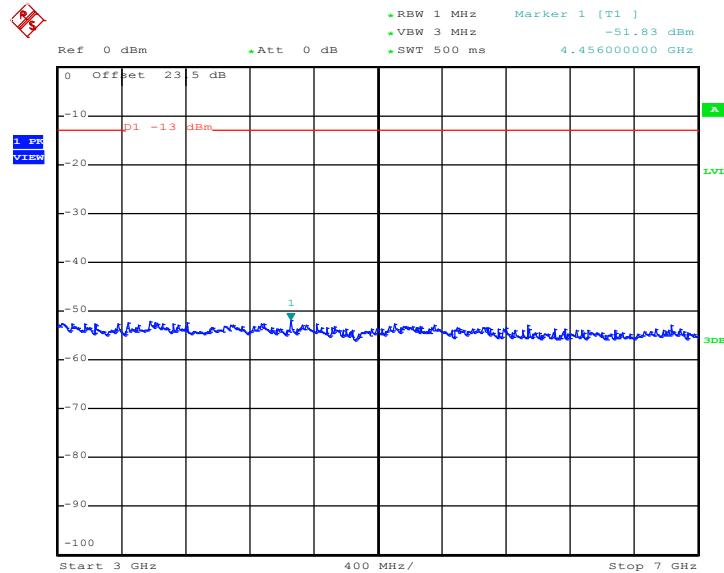

Date: 8.JUN.2014 18:01:35


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

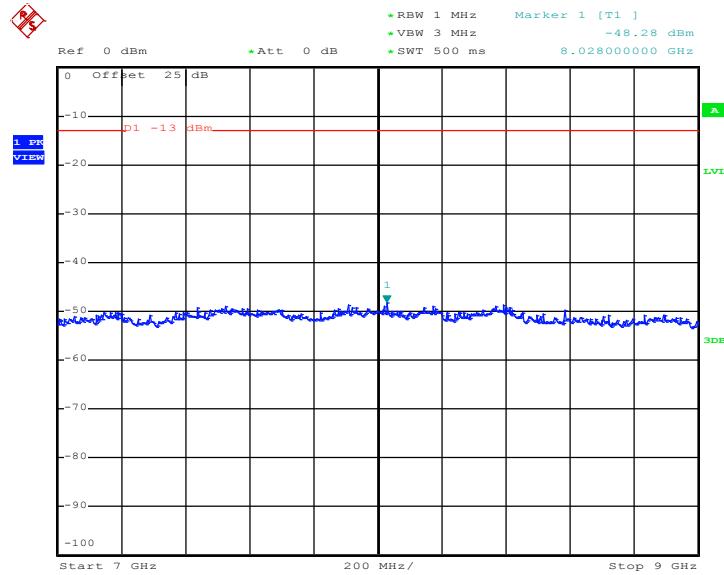

Date: 8.JUN.2014 18:01:43




Band :	GSM1900	Channel :	CH512
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1850.2 MHz

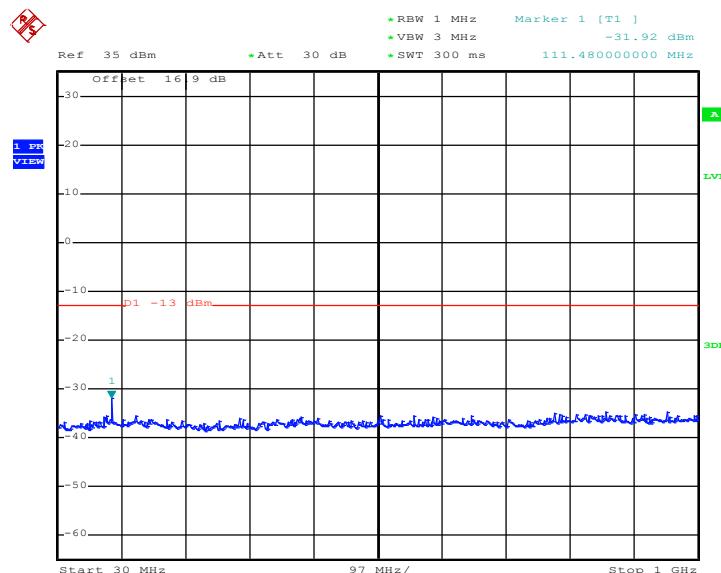Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 8.JUN.2014 18:25:01


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

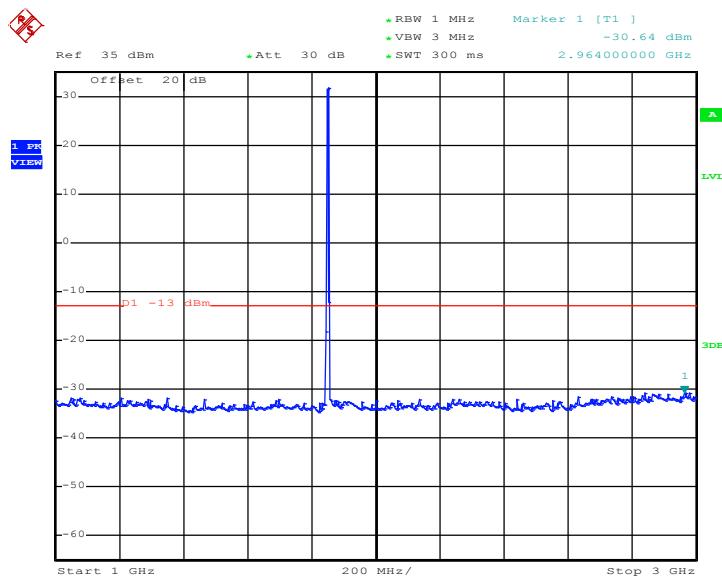

Date: 8.JUN.2014 18:25:09




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

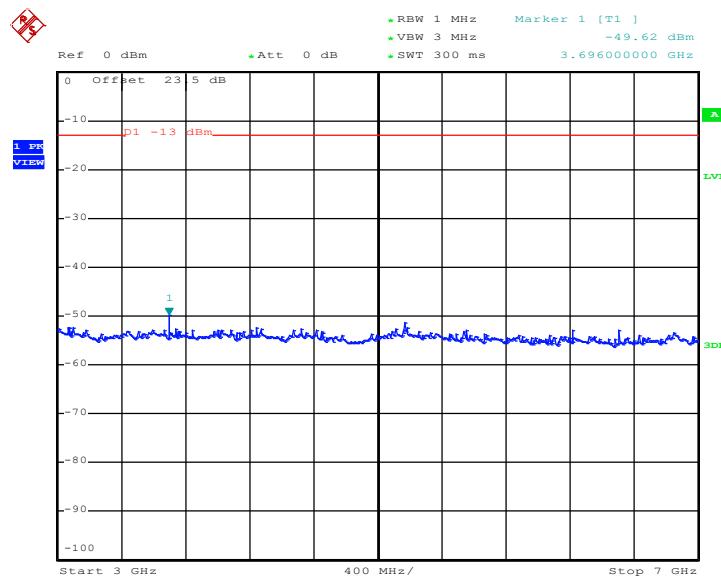

Date: 8.JUN.2014 18:25:20


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

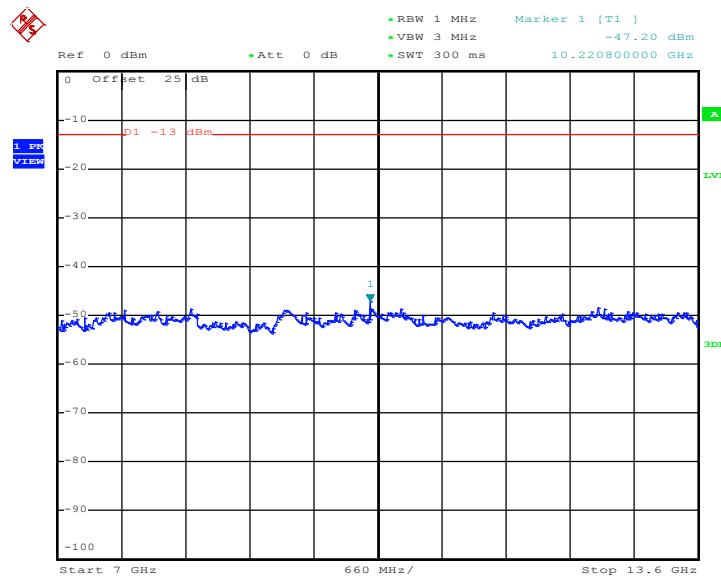

Date: 8.JUN.2014 18:25:28




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

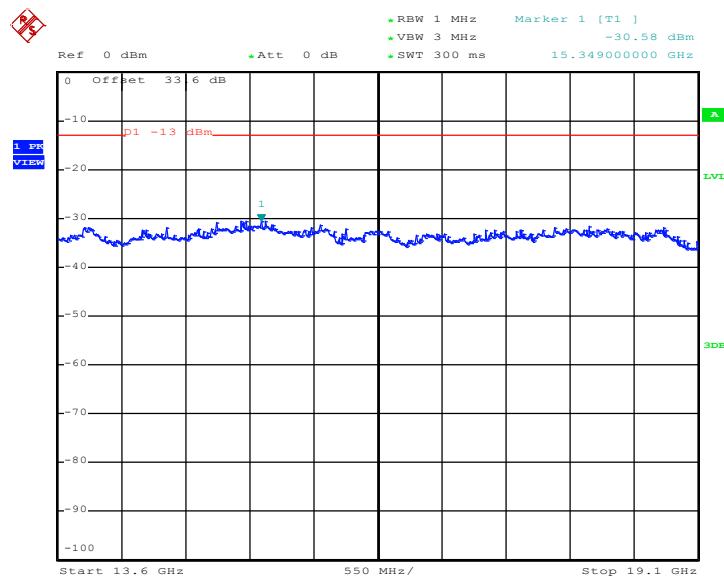

Date: 8.JUN.2014 18:25:37




Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1880.0 MHz

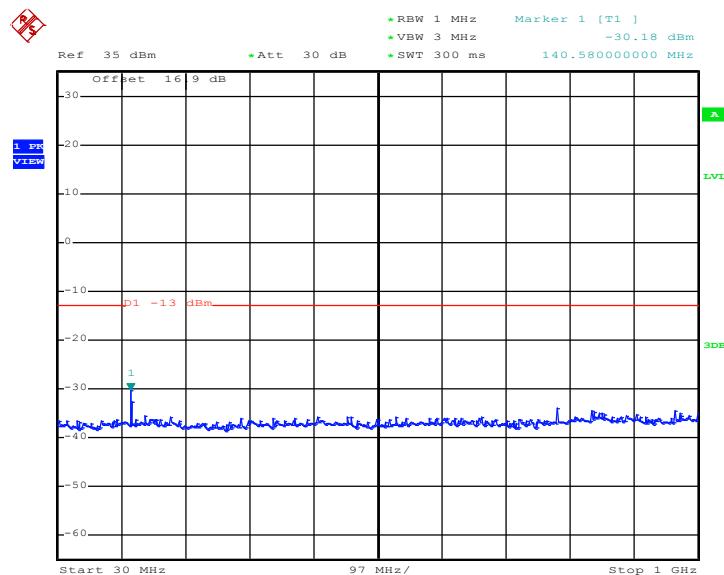Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 8.JUN.2014 18:23:34


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

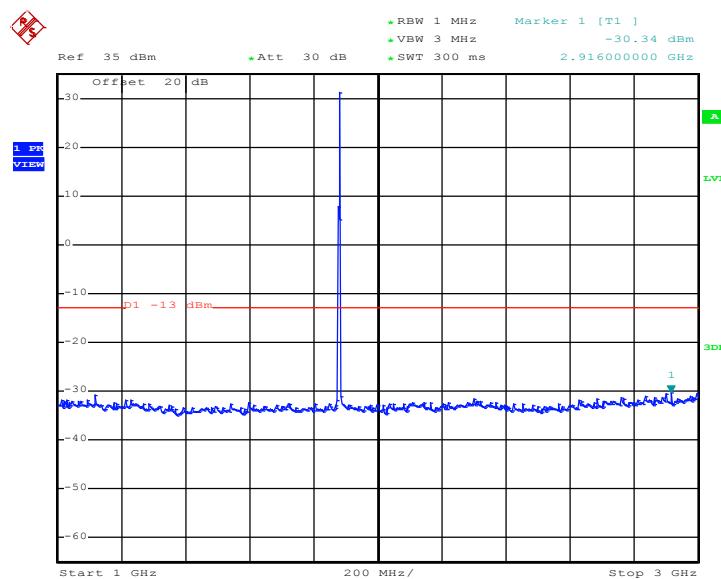

Date: 8.JUN.2014 18:23:43




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

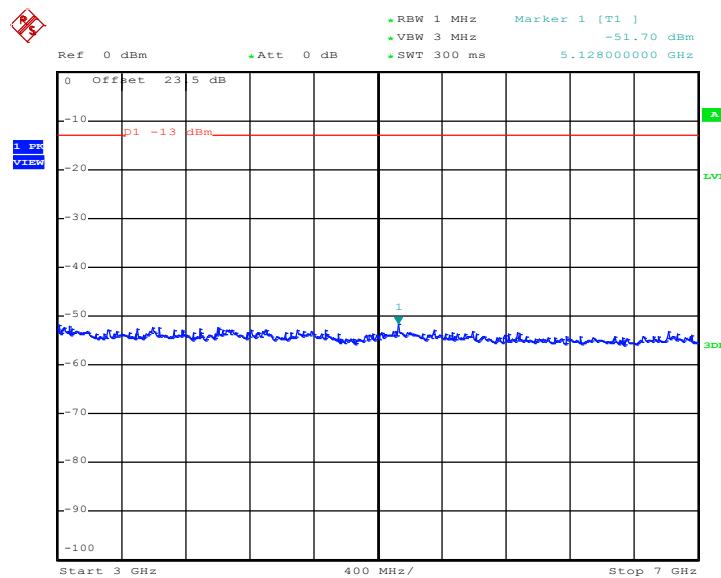

Date: 8.JUN.2014 18:23:54


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

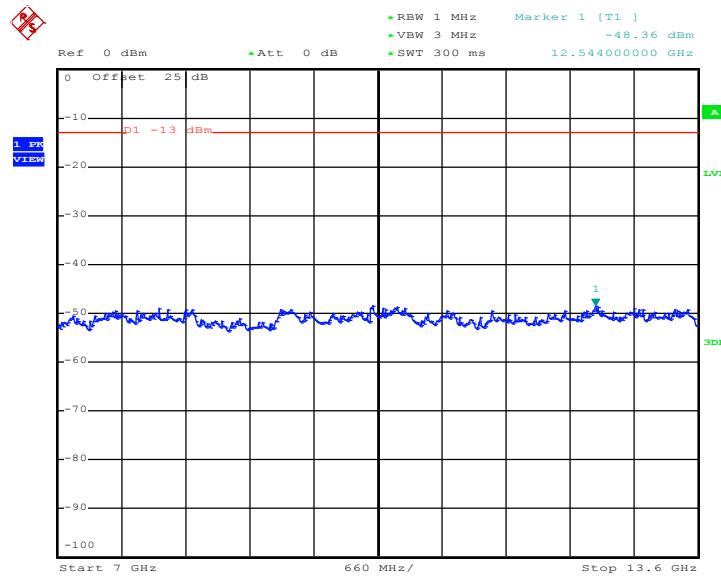

Date: 8.JUN.2014 18:24:02




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

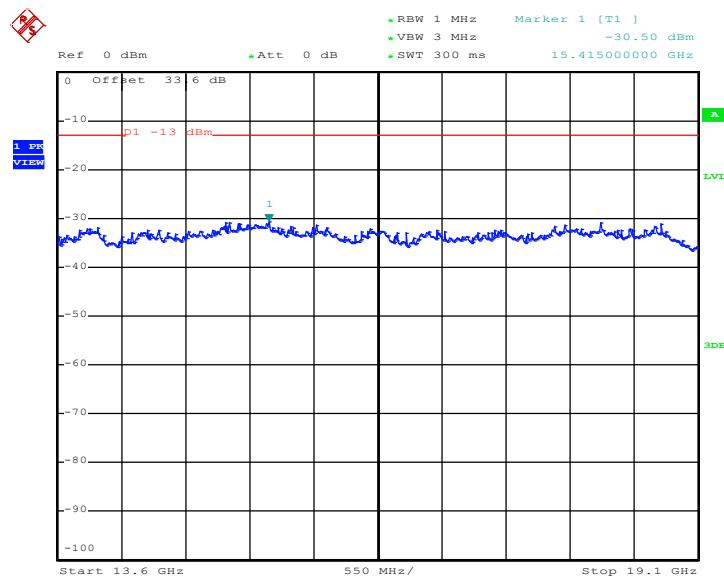

Date: 8.JUN.2014 18:24:11




Band :	GSM1900	Channel :	CH810
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1909.8 MHz

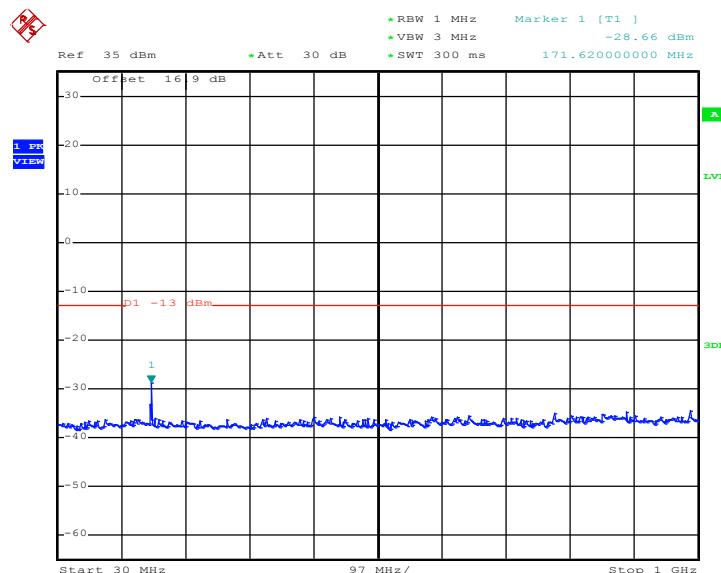Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 8.JUN.2014 18:26:37

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

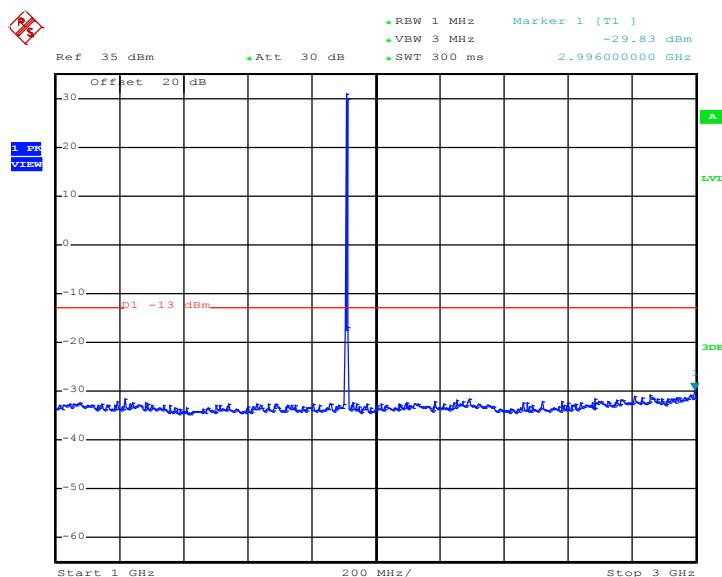

Date: 8.JUN.2014 18:26:45

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456
FAX : 886-3-328-4978
FCC ID : XIA-NTC140W
IC : 8847A-NTC140W

Page Number : 124 of 227

Report Issued Date : Oct. 07, 2014


Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

Report Template No.: BU5-CG22/24 Version 1.1




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

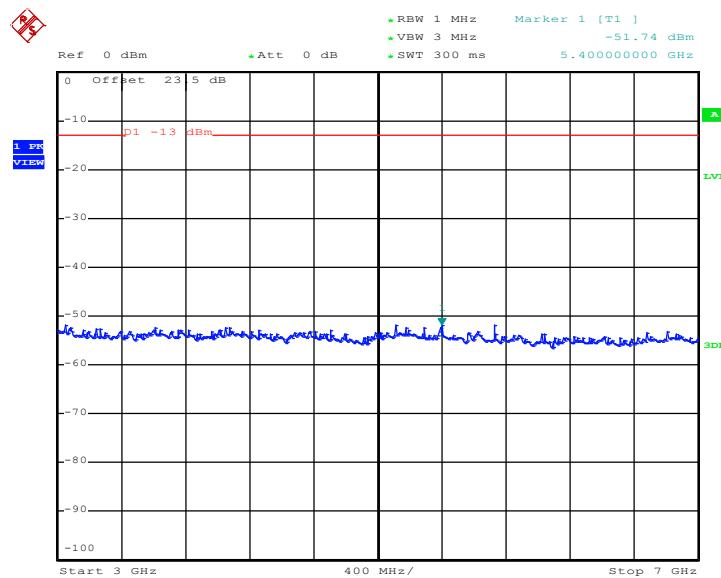

Date: 8.JUN.2014 18:26:56


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

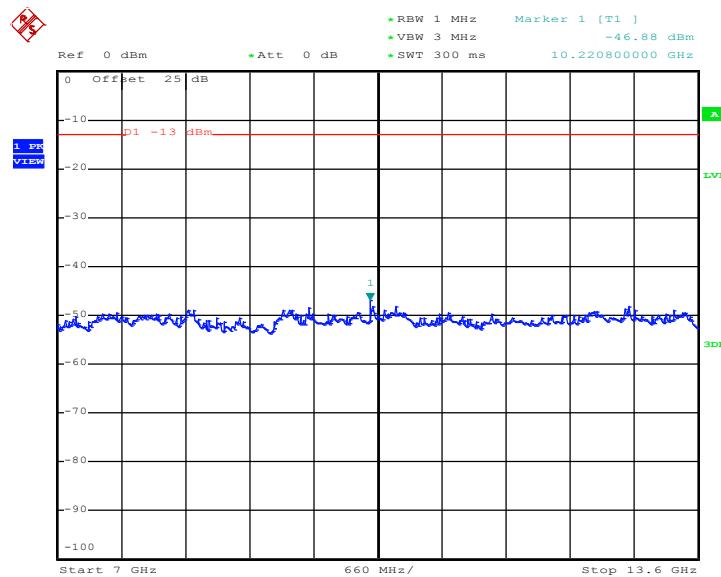

Date: 8.JUN.2014 18:27:04




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

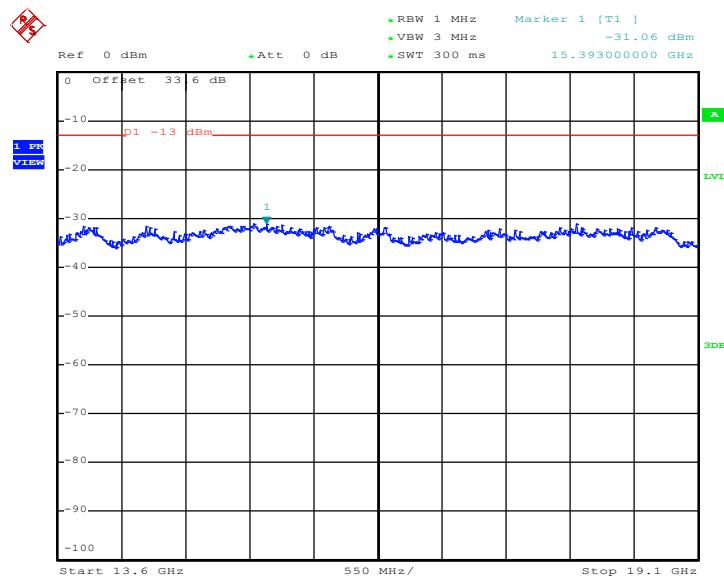

Date: 8.JUN.2014 18:27:13




Band :	GSM1900	Channel :	CH512
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1850.2 MHz

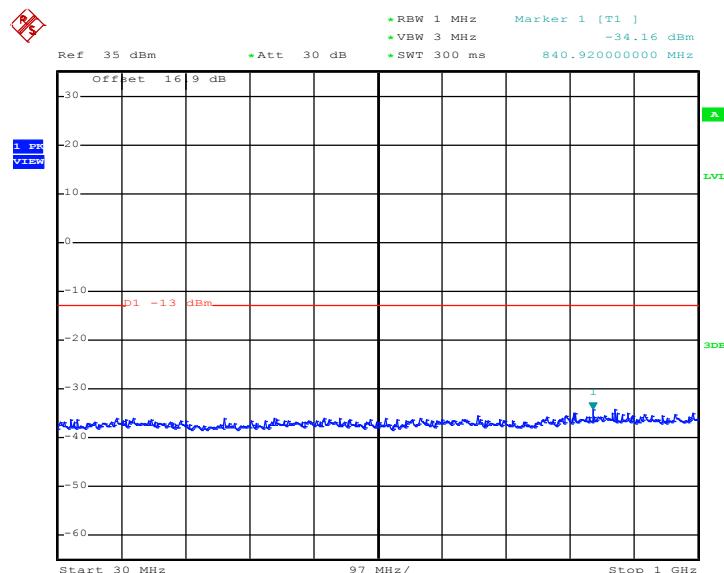Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 8.JUN.2014 18:53:06


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

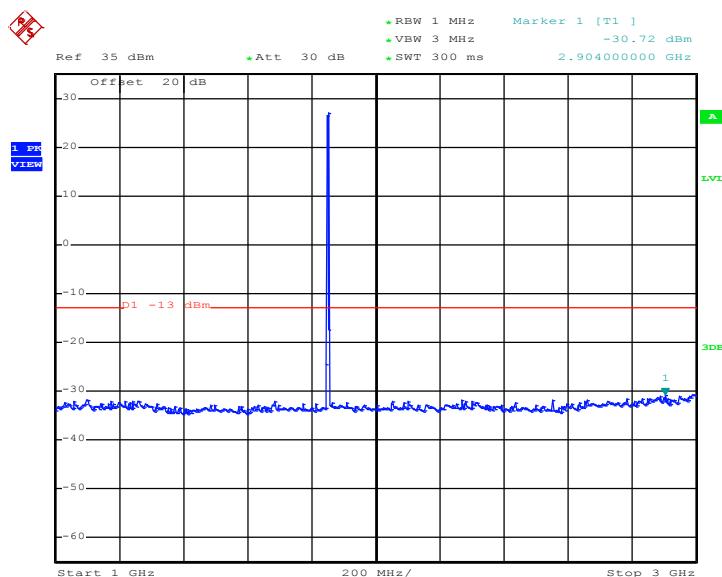

Date: 8.JUN.2014 18:53:14




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

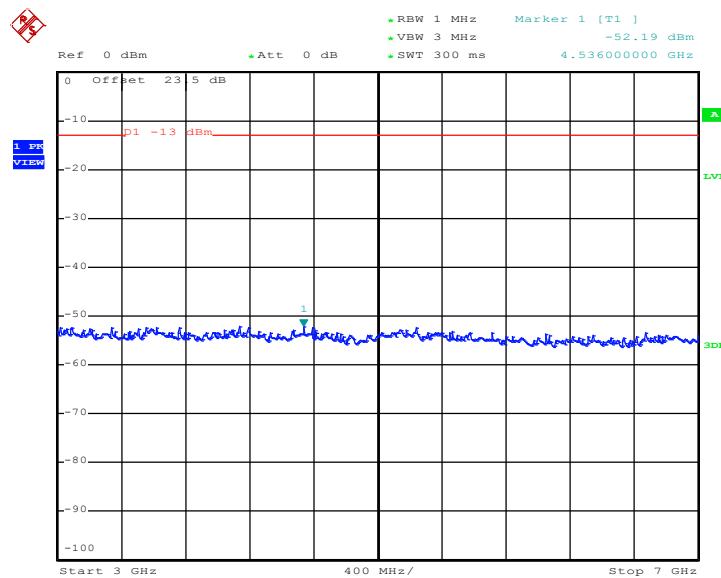

Date: 8.JUN.2014 18:53:26


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

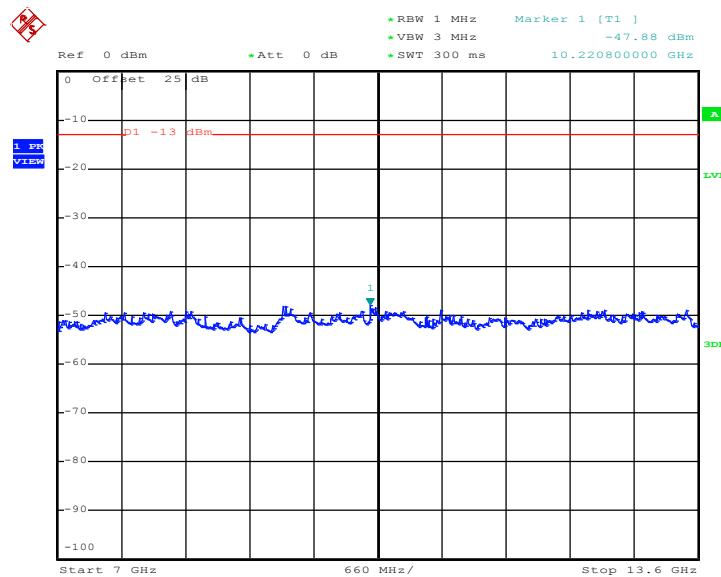

Date: 8.JUN.2014 18:53:34




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

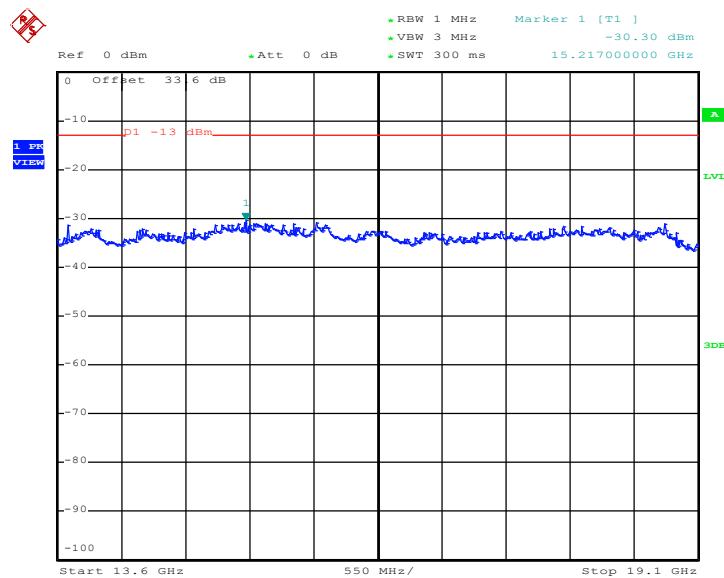

Date: 8.JUN.2014 18:53:42




Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1880.0 MHz

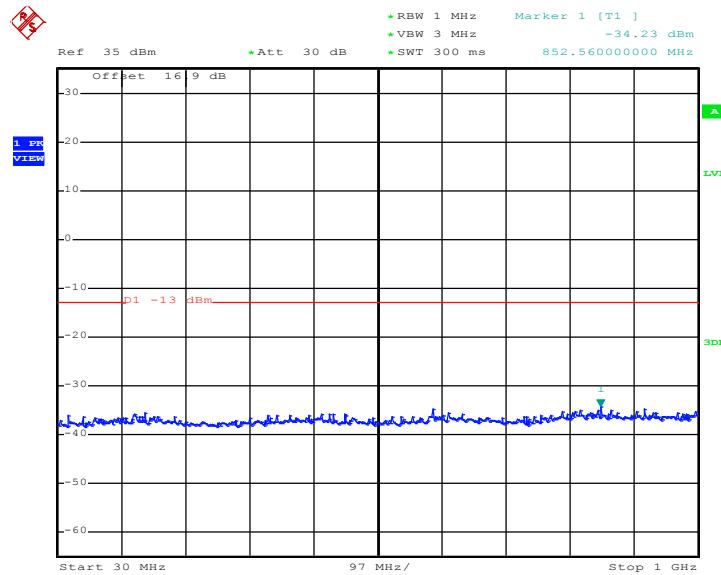Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 8.JUN.2014 18:51:51


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

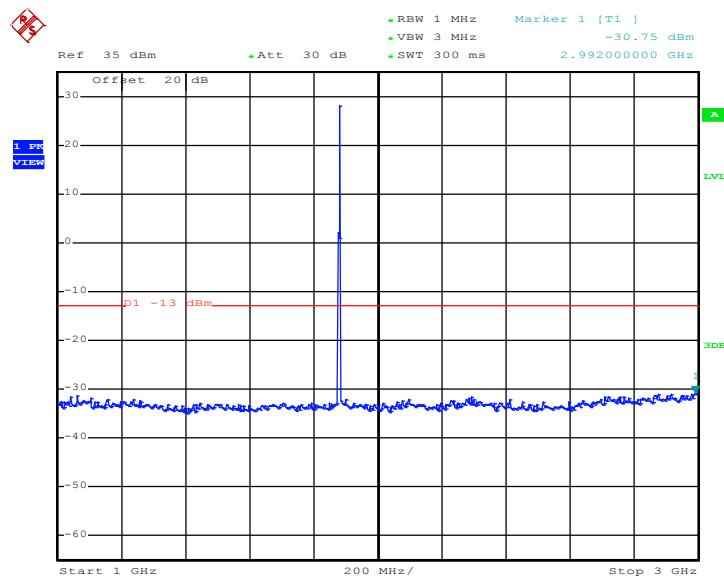

Date: 8.JUN.2014 18:51:59




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

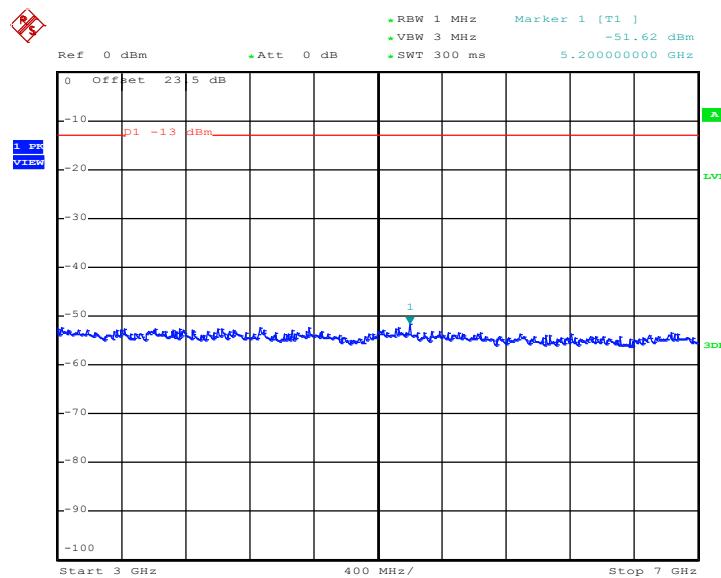

Date: 8.JUN.2014 18:52:11


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

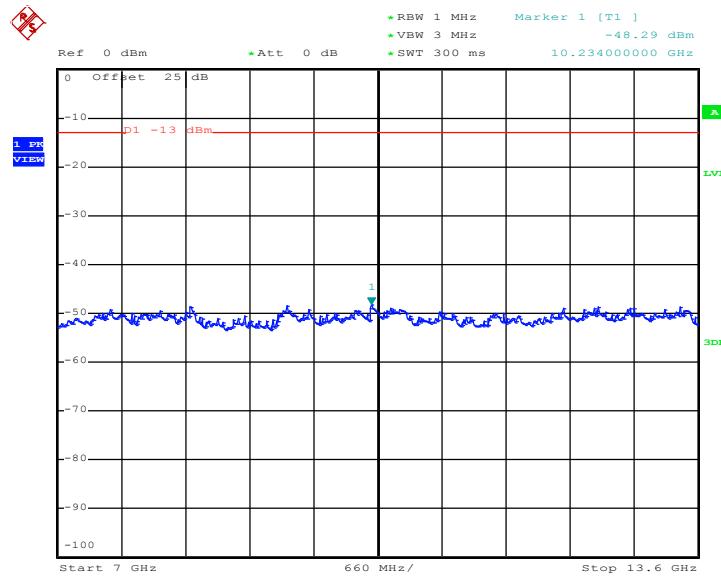

Date: 8.JUN.2014 18:52:20




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

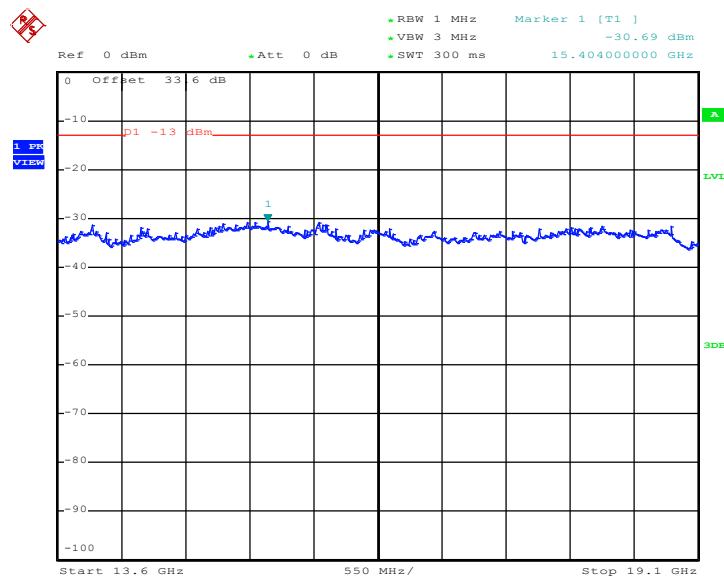

Date: 8.JUN.2014 18:52:28




Band :	GSM1900	Channel :	CH810
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1909.8 MHz

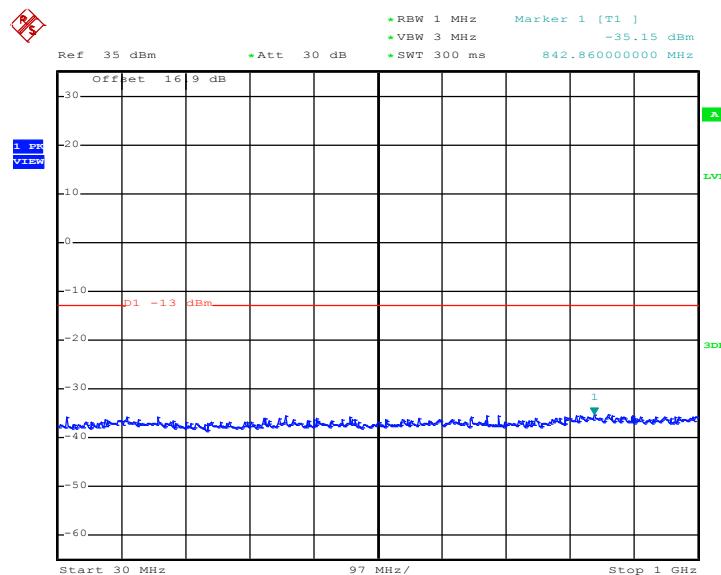Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 8.JUN.2014 18:54:42


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

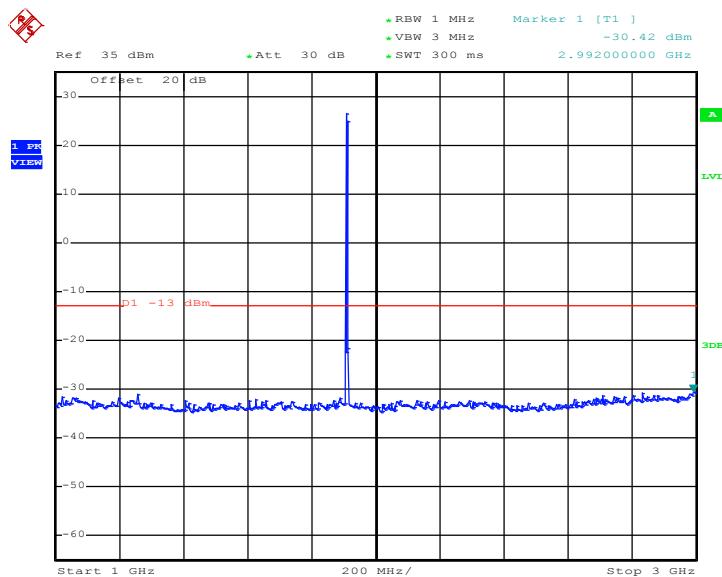

Date: 8.JUN.2014 18:54:50




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

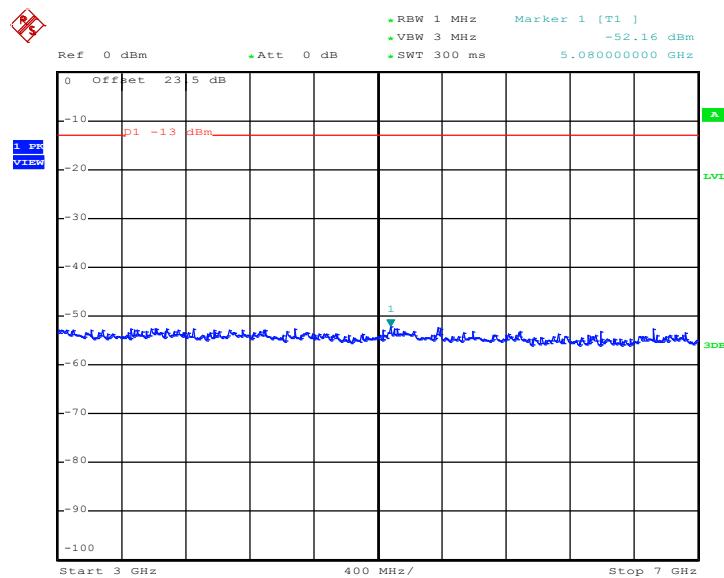

Date: 8.JUN.2014 18:55:01


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

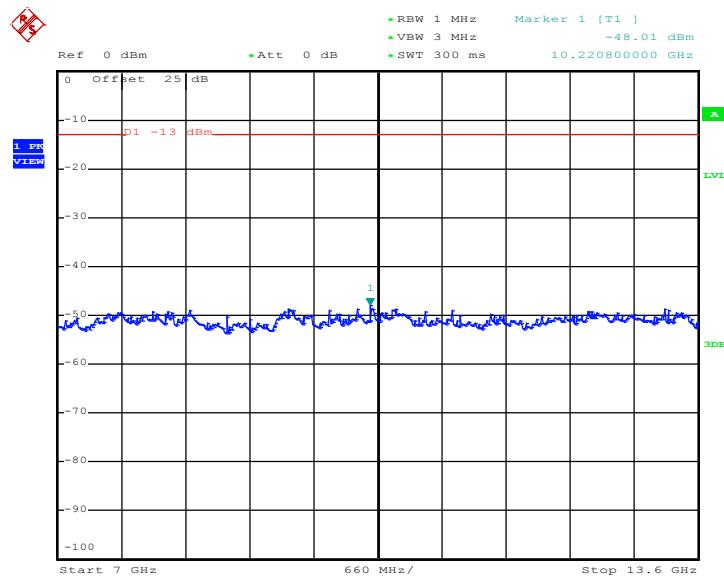

Date: 8.JUN.2014 18:55:10




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

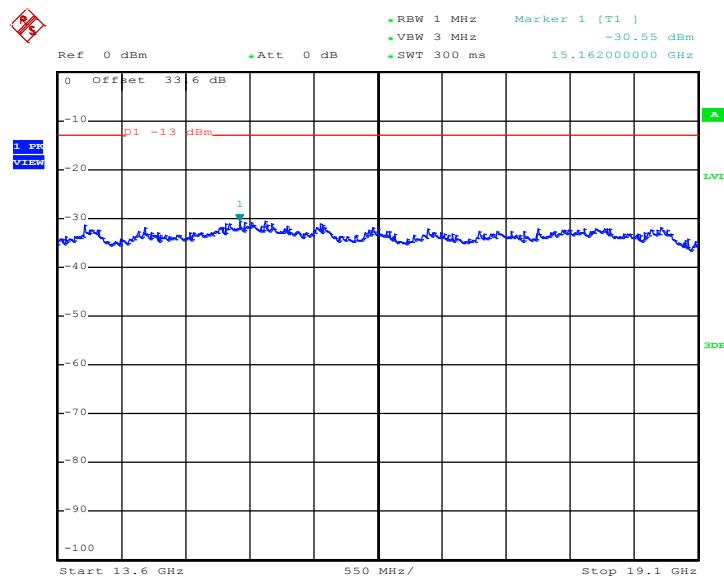

Date: 8.JUN.2014 18:55:18




Band :	WCDMA Band V	Channel :	CH4132
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	826.4 MHz

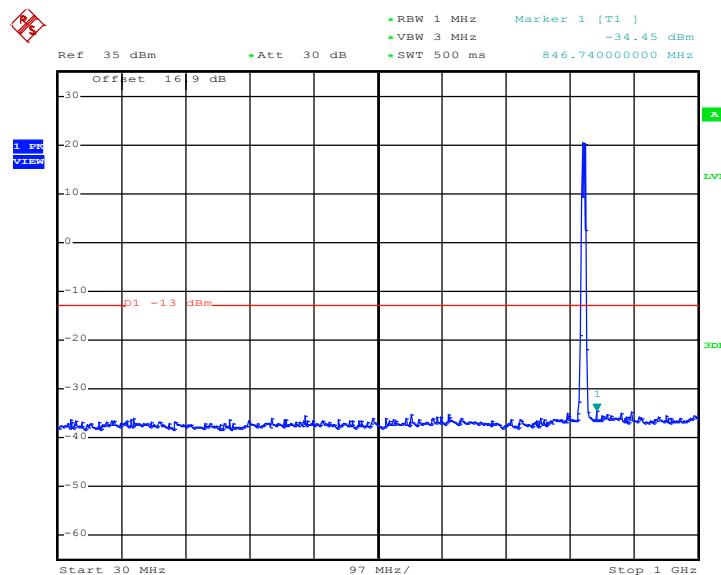Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 9.JUN.2014 11:09:28


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

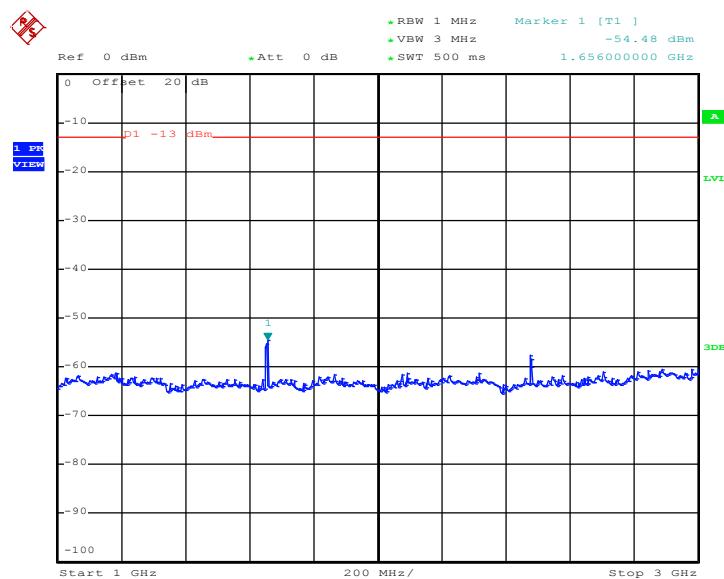

Date: 9.JUN.2014 11:09:39




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

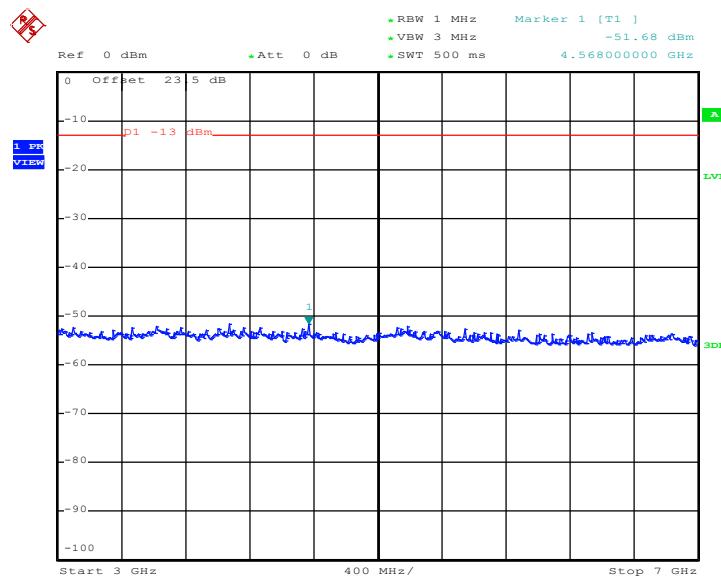

Date: 9.JUN.2014 11:09:47


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

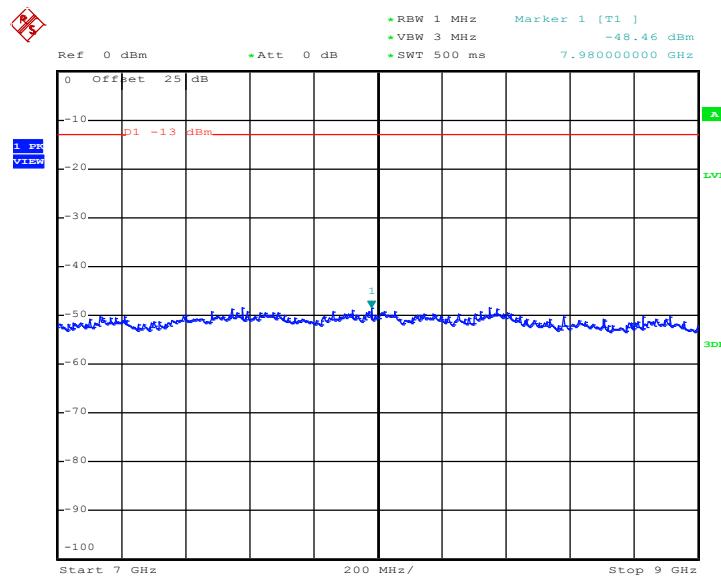

Date: 9.JUN.2014 11:09:56




Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	836.4 MHz

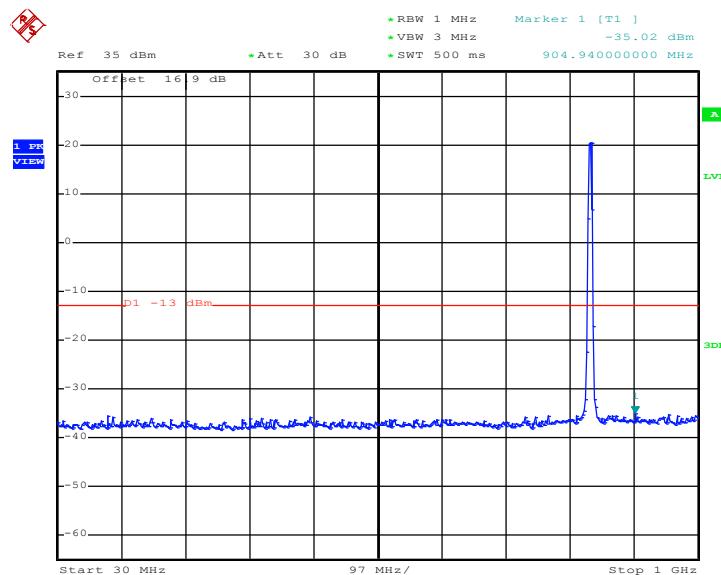Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 9.JUN.2014 11:07:45


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

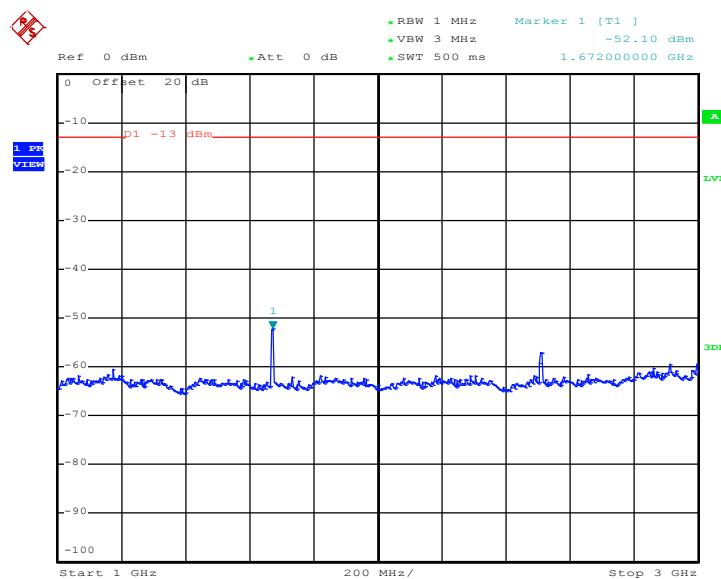

Date: 9.JUN.2014 11:07:02




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

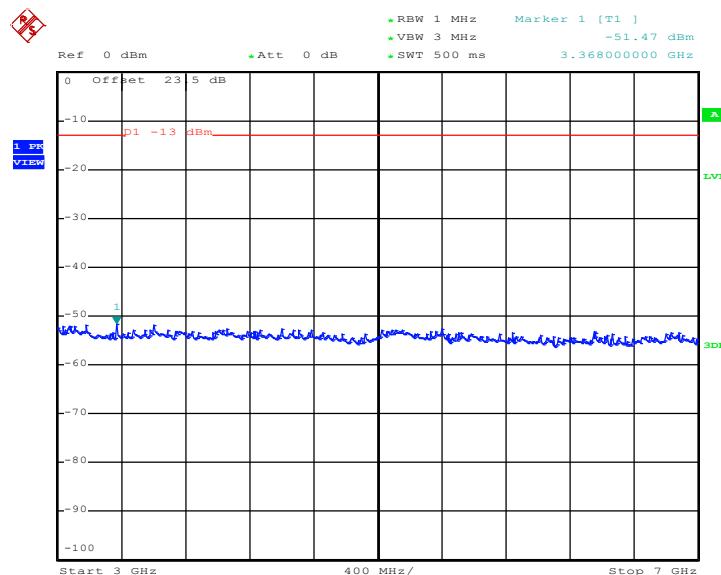

Date: 9.JUN.2014 11:07:10


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

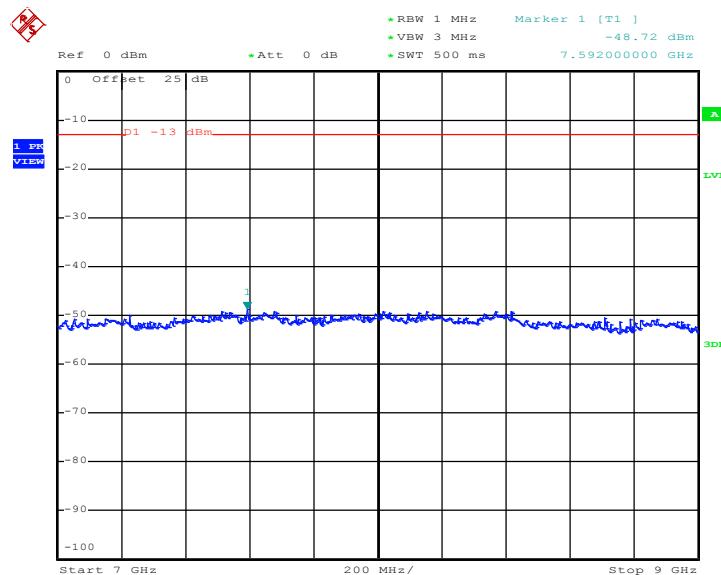

Date: 9.JUN.2014 11:07:18




Band :	WCDMA Band V	Channel :	CH4233
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	846.6 MHz

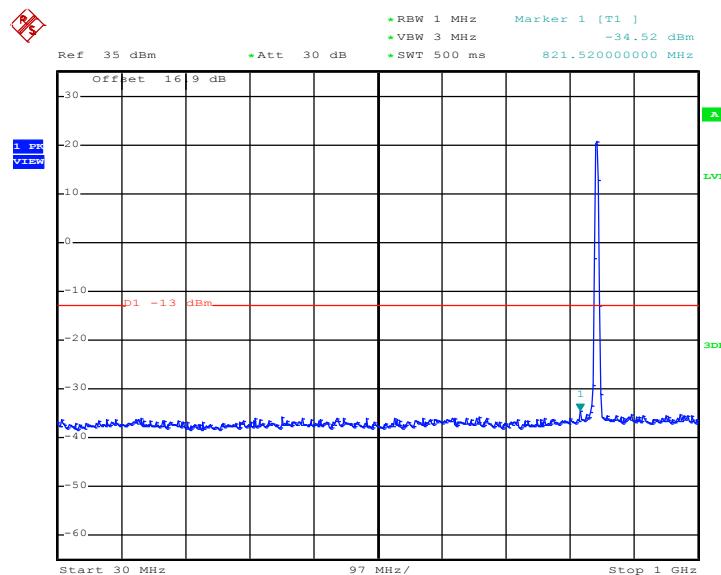Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 9.JUN.2014 11:10:56


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

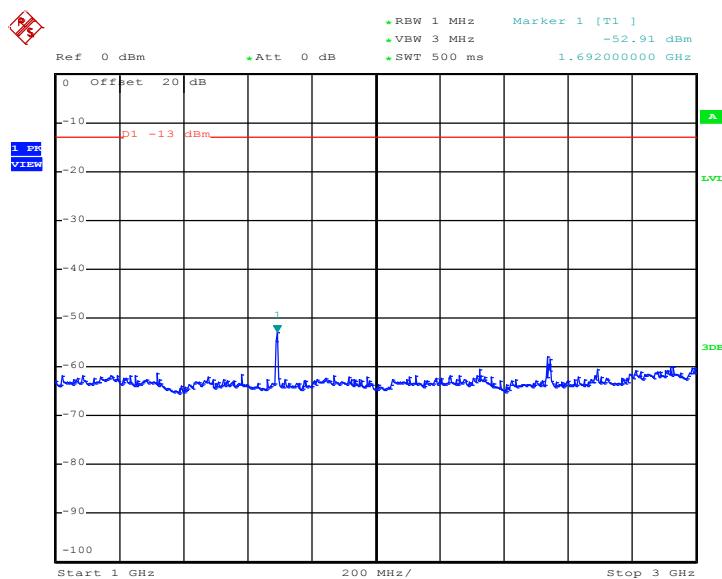

Date: 9.JUN.2014 11:11:07




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

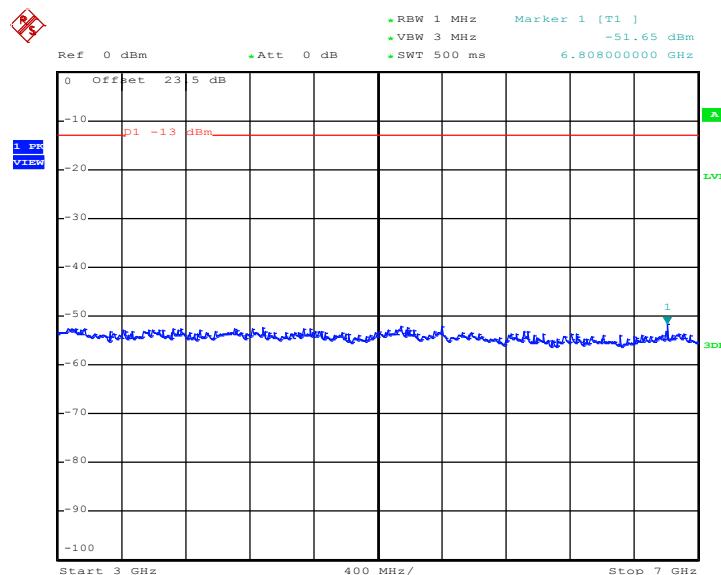

Date: 9.JUN.2014 11:11:16


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

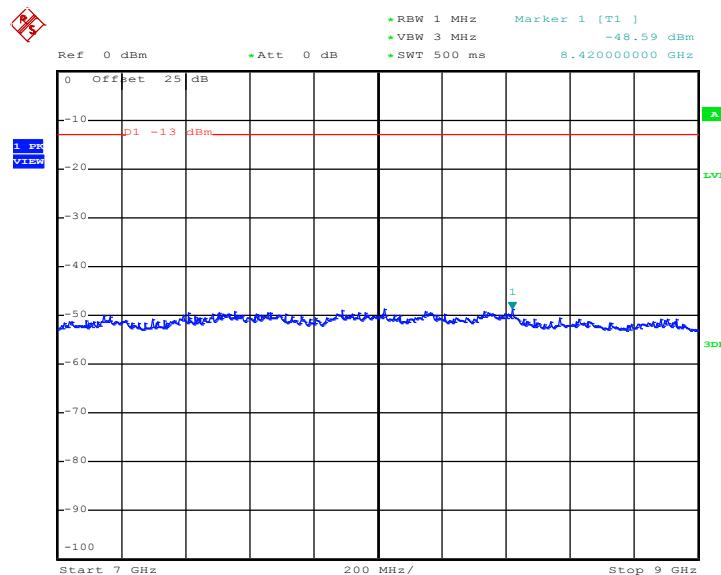


Date: 9.JUN.2014 11:11:24



Band :	WCDMA Band IV	Channel :	CH1312
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1712.4 MHz

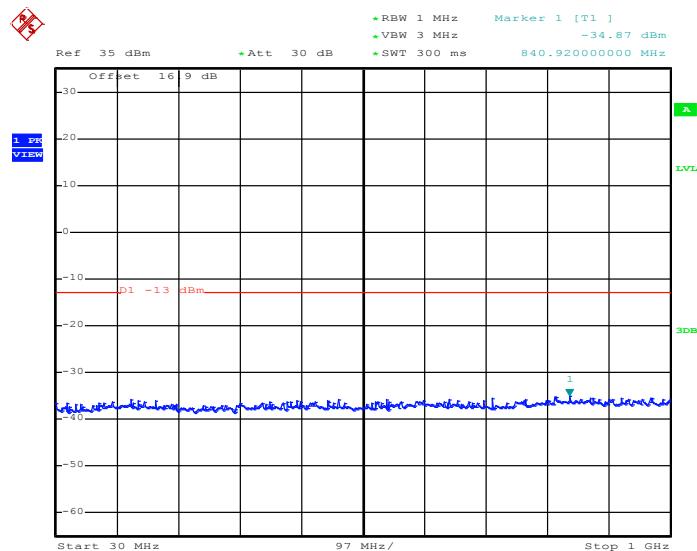Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 9.JUN.2014 10:36:36

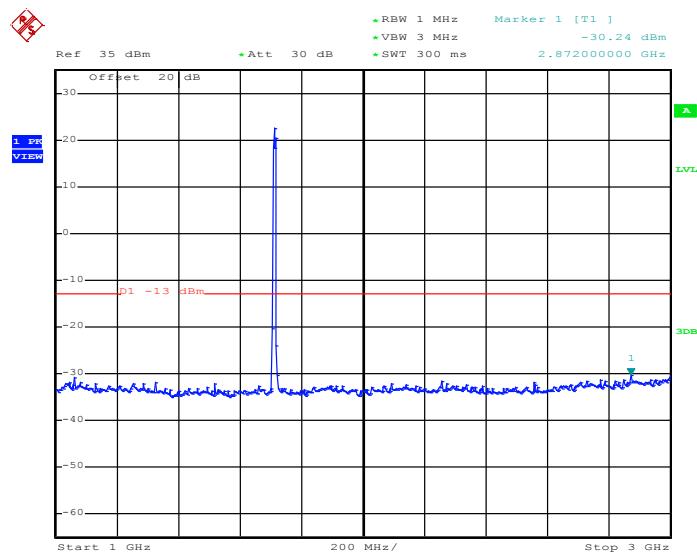Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 9.JUN.2014 10:36:44




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

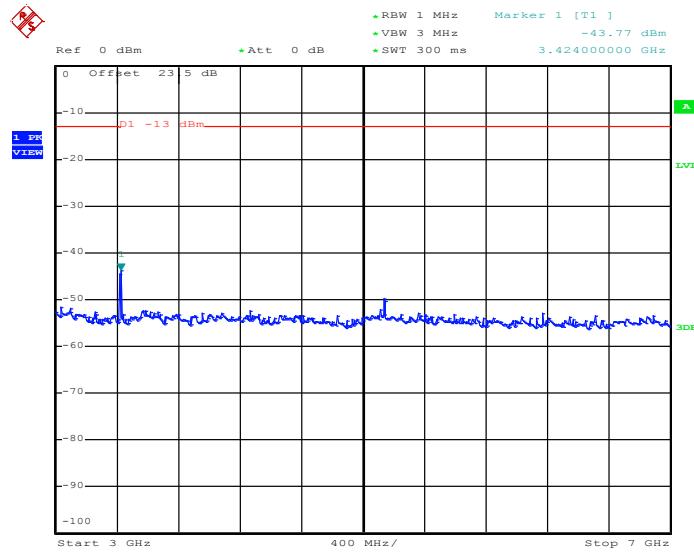

Date: 9.JUN.2014 10:36:55


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

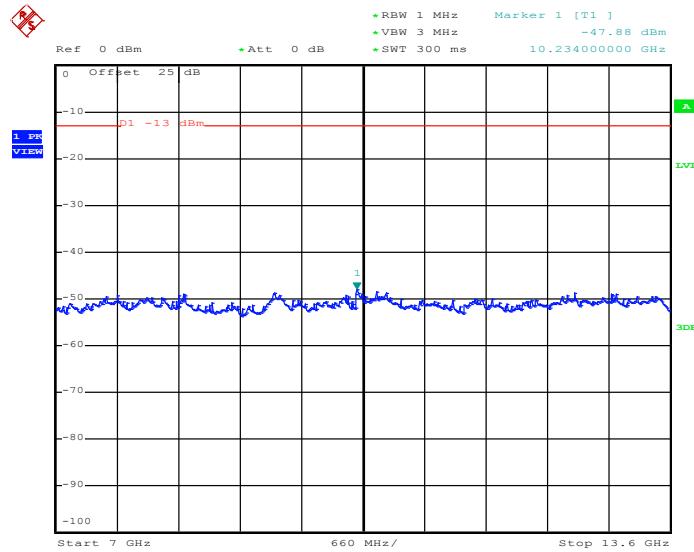

Date: 9.JUN.2014 10:37:04




Conducted Spurious Emission Plot between 13.6GHz ~ 18GHz

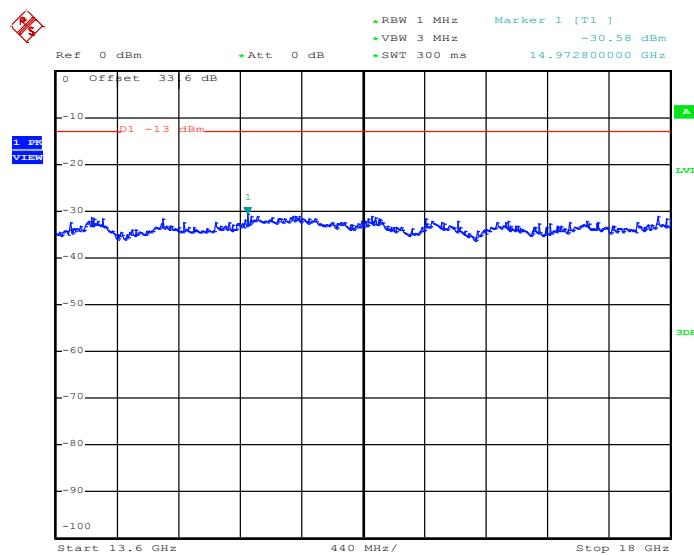


Date: 9.JUN.2014 10:37:12



Band :	WCDMA Band IV	Channel :	CH1413
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1732.6 MHz

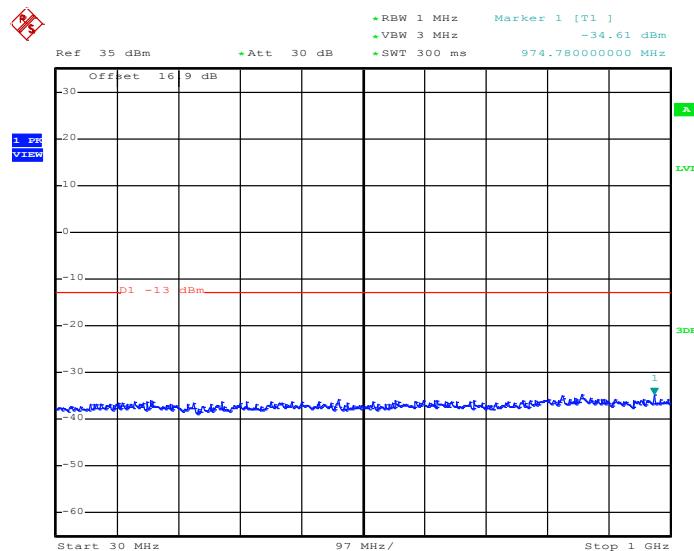Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 9.JUN.2014 10:32:58

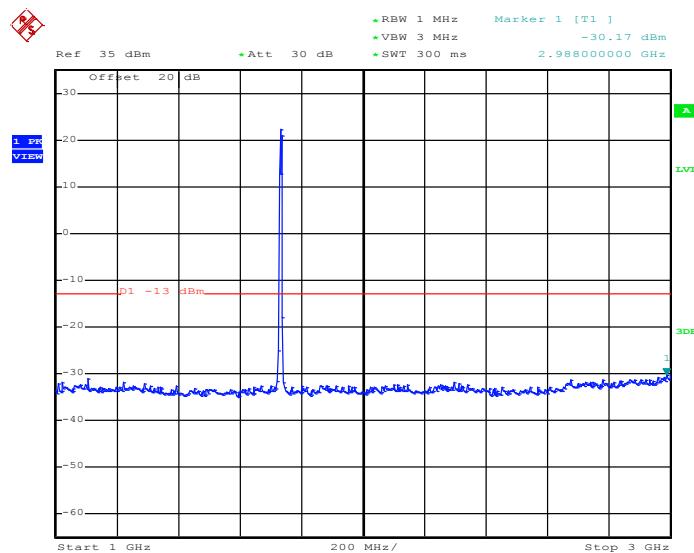Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 9.JUN.2014 10:33:06




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

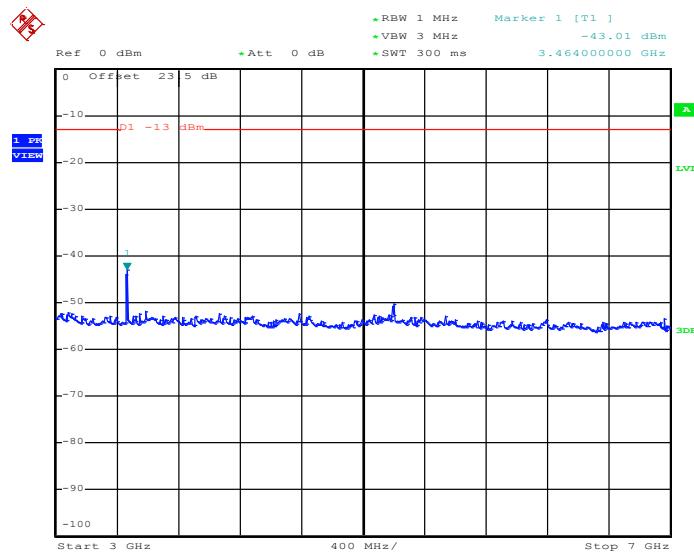

Date: 9.JUN.2014 10:33:18


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

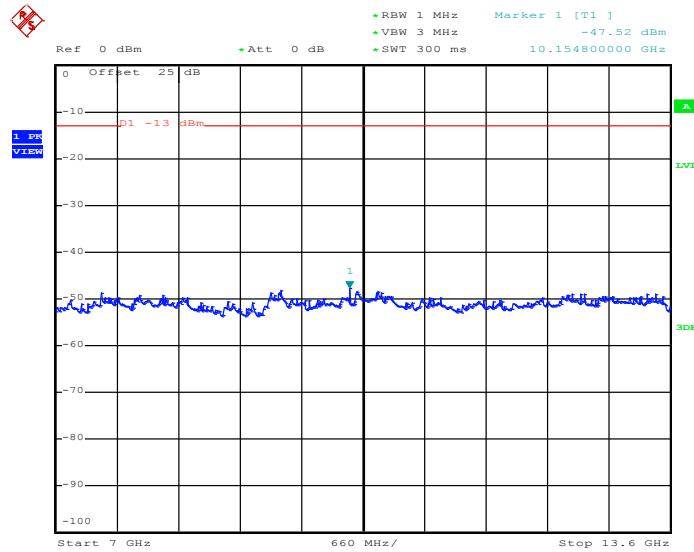

Date: 9.JUN.2014 10:33:26




Conducted Spurious Emission Plot between 13.6GHz ~ 18GHz

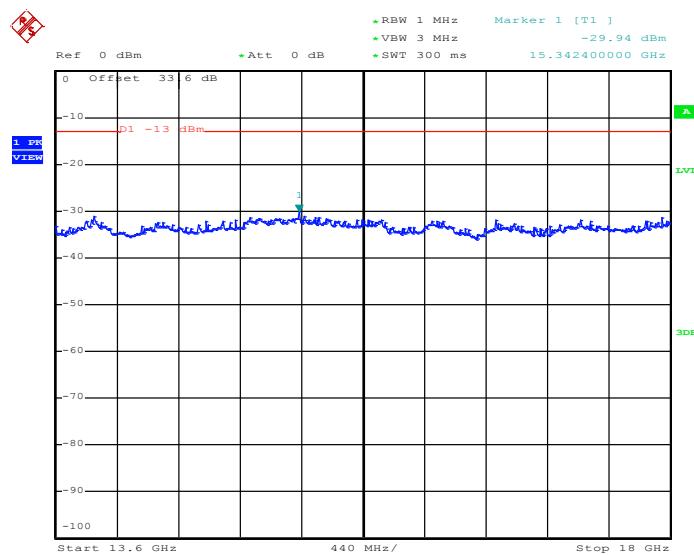


Date: 9.JUN.2014 10:33:35



Band :	WCDMA Band IV	Channel :	CH1513
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1752.6 MHz

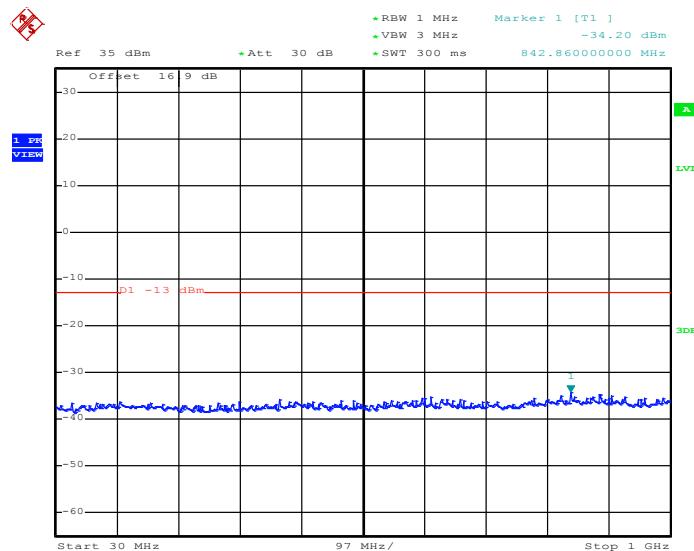Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 9.JUN.2014 10:38:29

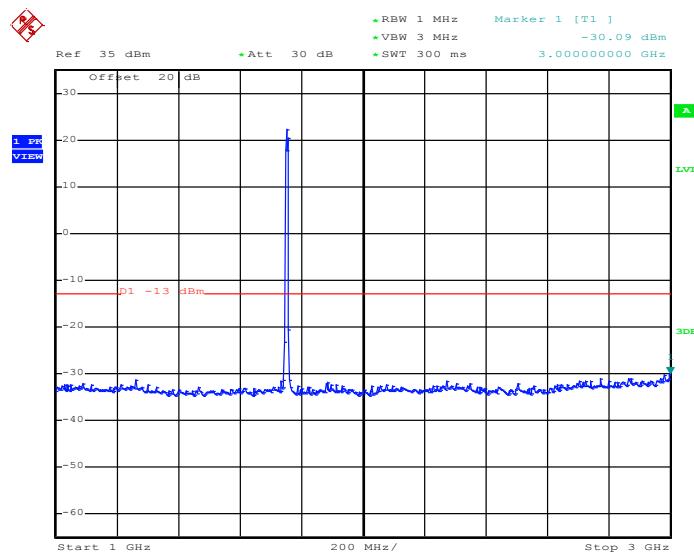Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 9.JUN.2014 10:38:37




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

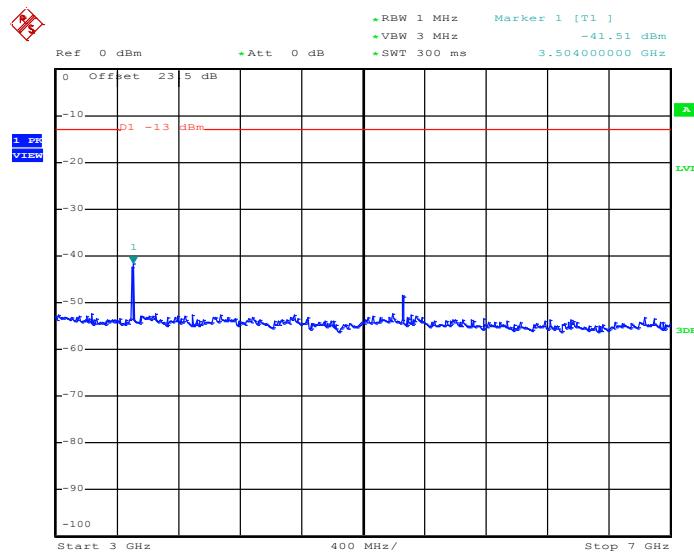

Date: 9.JUN.2014 10:38:48


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

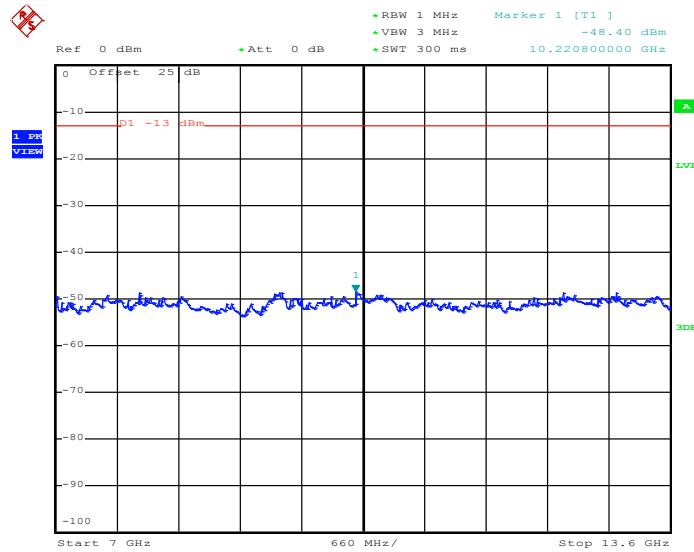

Date: 9.JUN.2014 10:38:56




Conducted Spurious Emission Plot between 13.6GHz ~ 18GHz

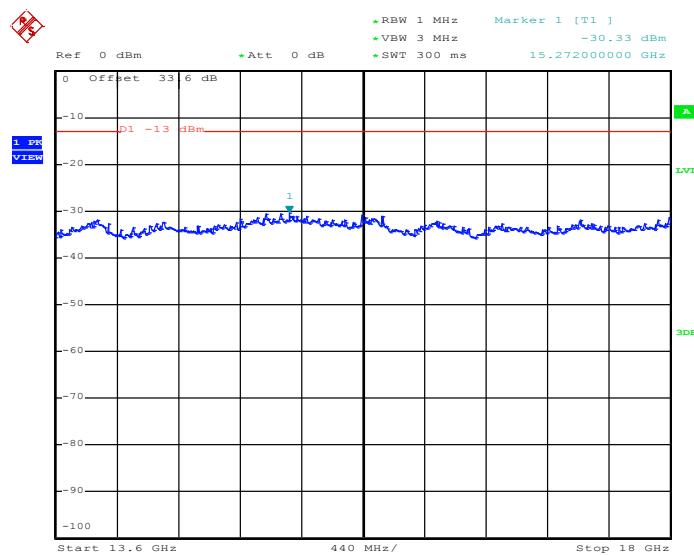

Date: 9.JUN.2014 10:39:05




Band :	WCDMA Band II	Channel :	CH9262
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1852.4 MHz

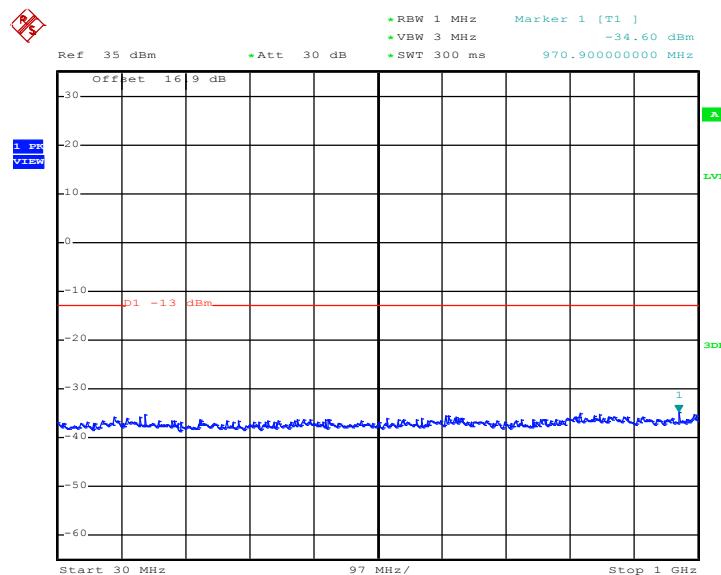Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 9.JUN.2014 10:00:56


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

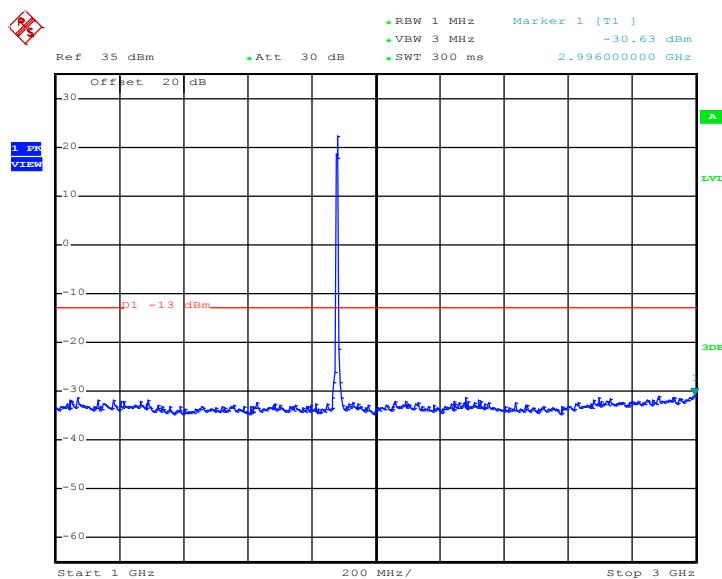

Date: 9.JUN.2014 10:01:04




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

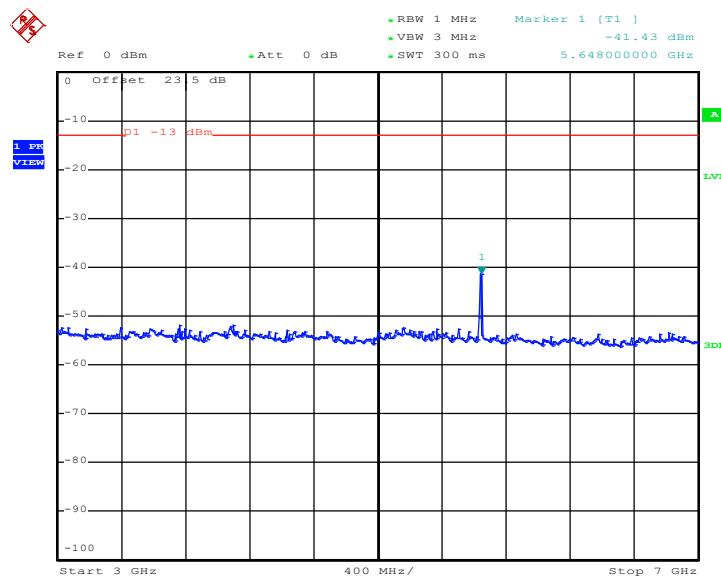

Date: 9.JUN.2014 10:01:15


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

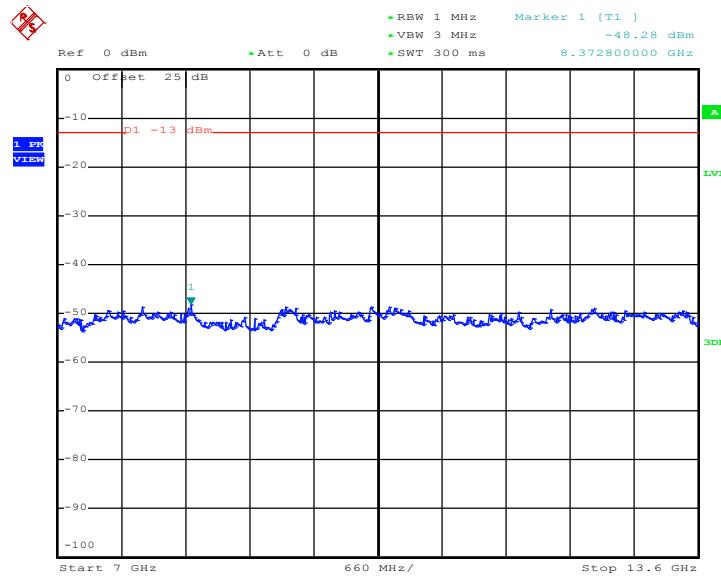

Date: 9.JUN.2014 10:01:23




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

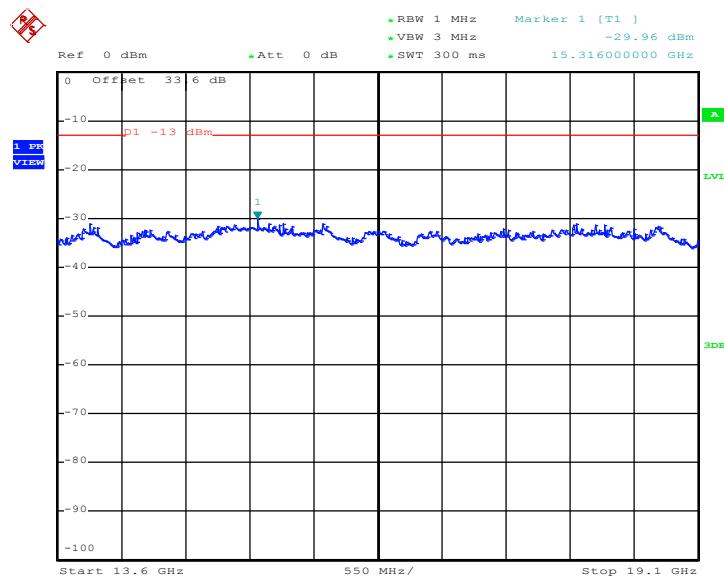

Date: 9.JUN.2014 10:01:31




Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1880.0 MHz

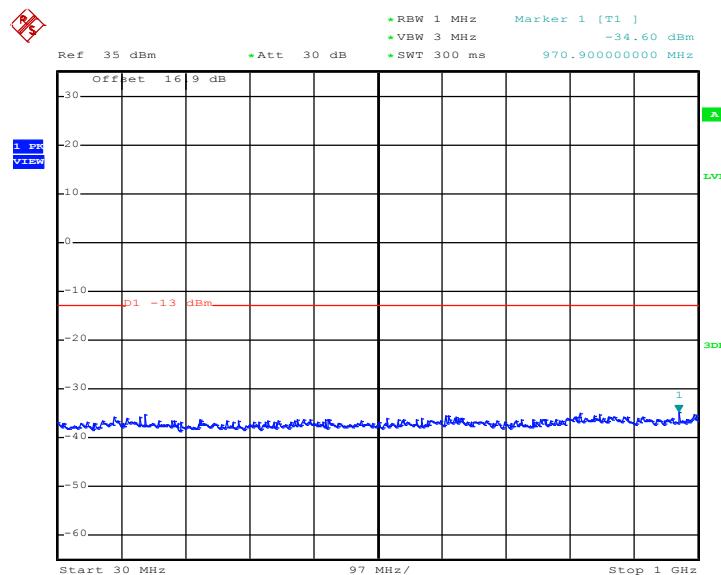Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 9.JUN.2014 10:00:56


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

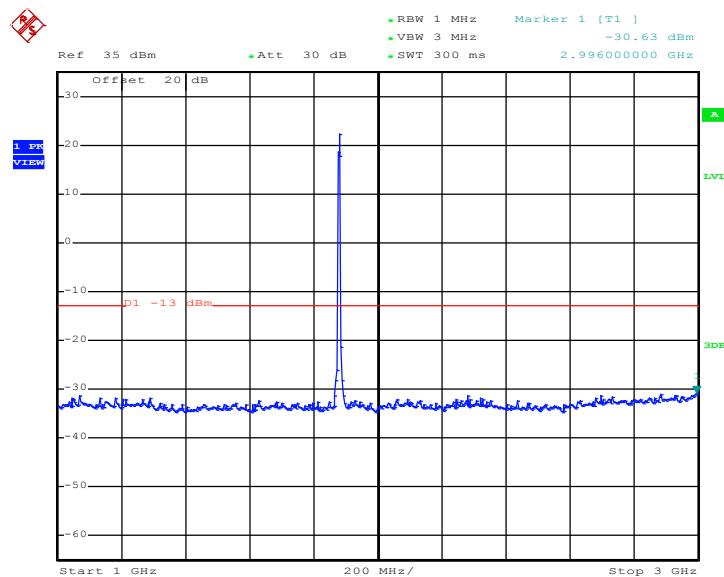

Date: 9.JUN.2014 10:01:04




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

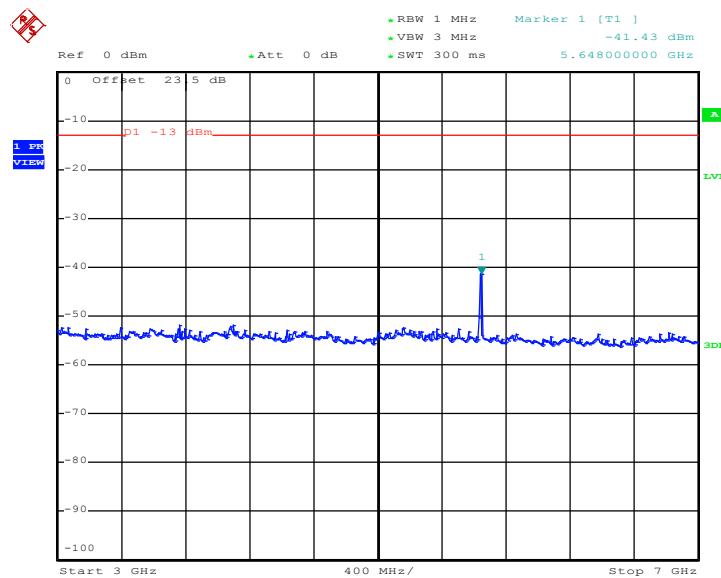

Date: 9.JUN.2014 10:01:15


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

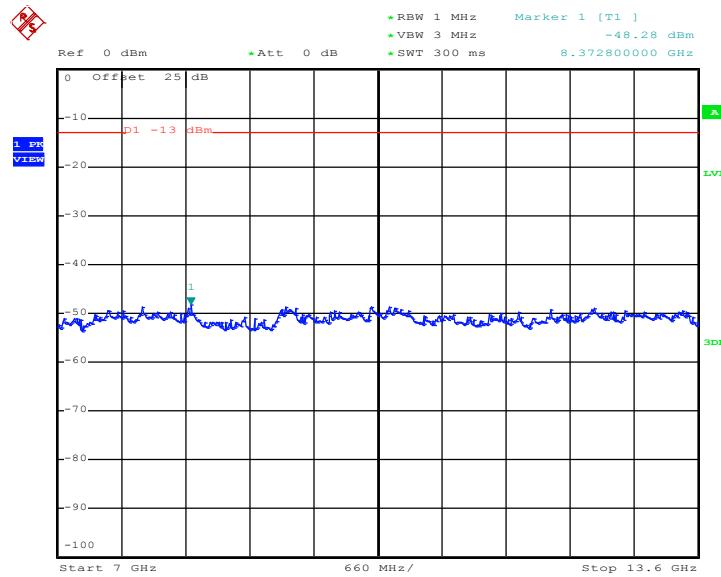

Date: 9.JUN.2014 10:01:23




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

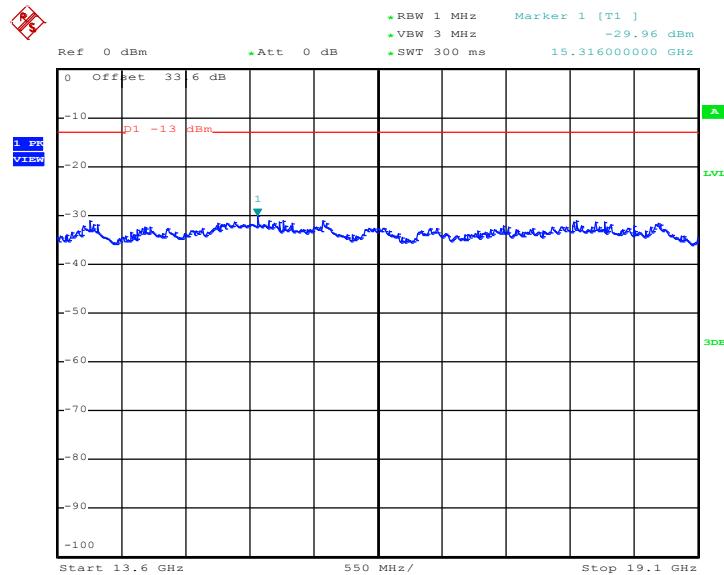

Date: 9.JUN.2014 10:01:31




Band :	WCDMA Band II	Channel :	CH9538
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1907.6 MHz

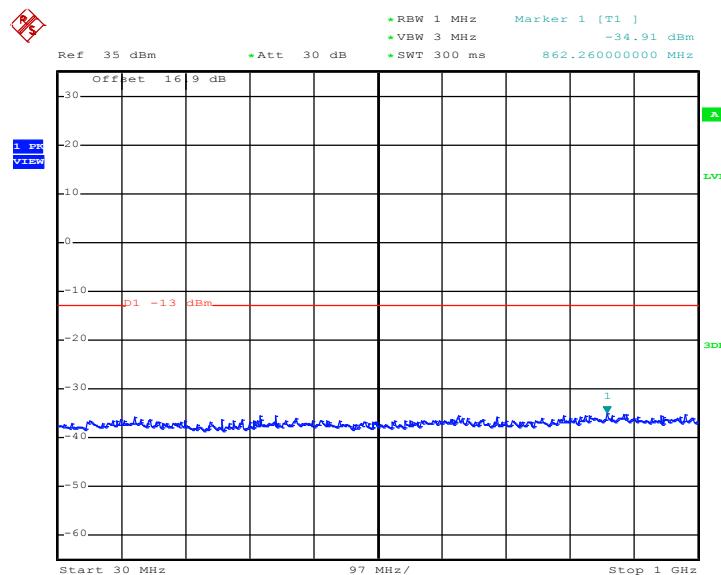Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 9.JUN.2014 10:05:32

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

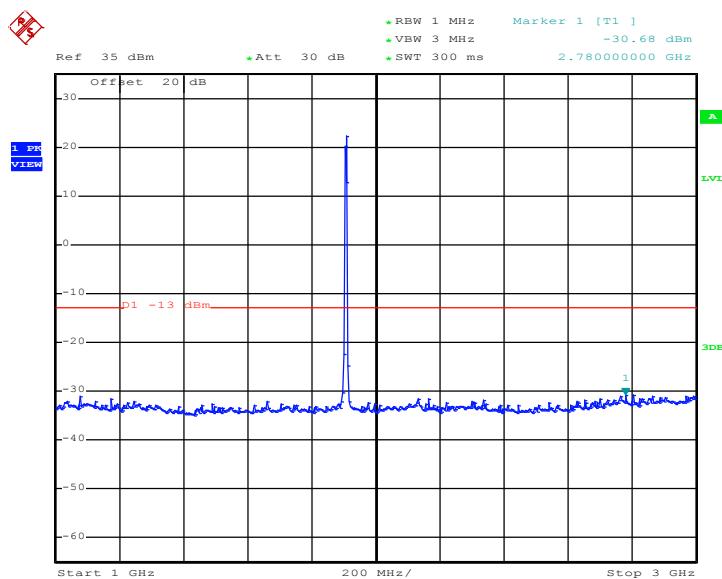

Date: 9.JUN.2014 10:05:41

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456
FAX : 886-3-328-4978
FCC ID : XIA-NTC140W
IC : 8847A-NTC140W

Page Number : 166 of 227

Report Issued Date : Oct. 07, 2014


Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

Report Template No.: BU5-CG22/24 Version 1.1




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

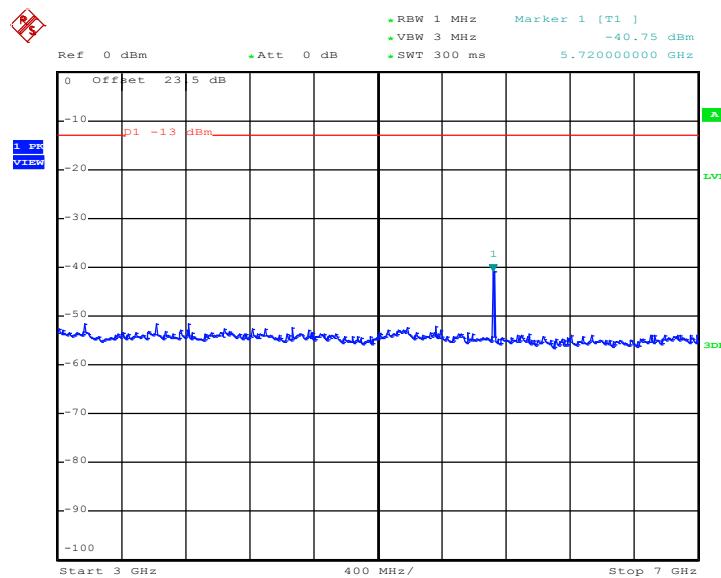

Date: 9.JUN.2014 10:05:52


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

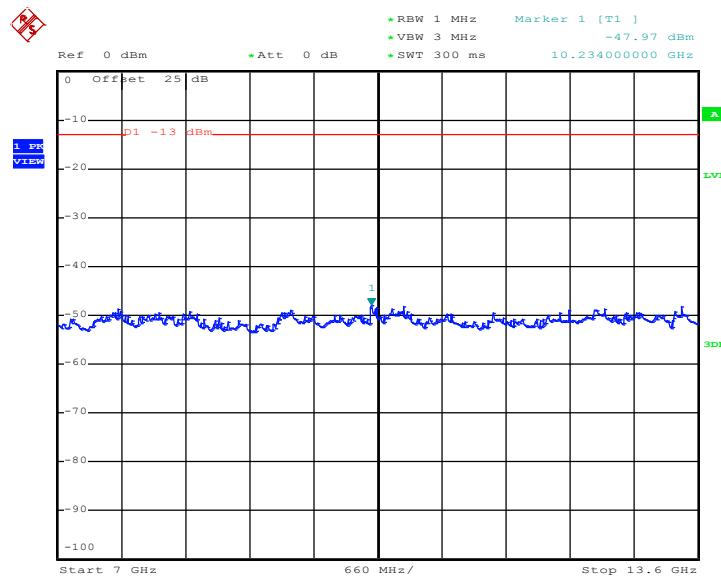

Date: 9.JUN.2014 10:06:00




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

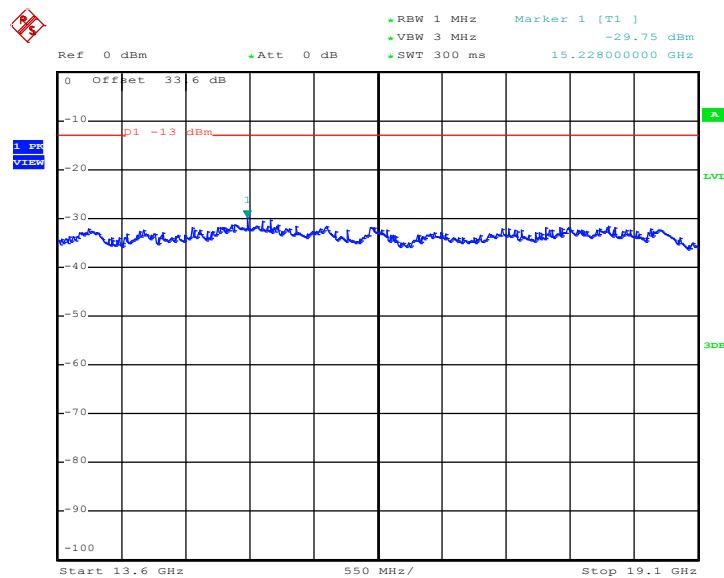

Date: 9.JUN.2014 10:06:08




Band :	CDMA2000 BC0	Channel :	CH1013
Test Mode :	BC0 (1xEV-DO Rev. 0_RETAP 4096K (QPSK)	Frequency :	824.7 MHz

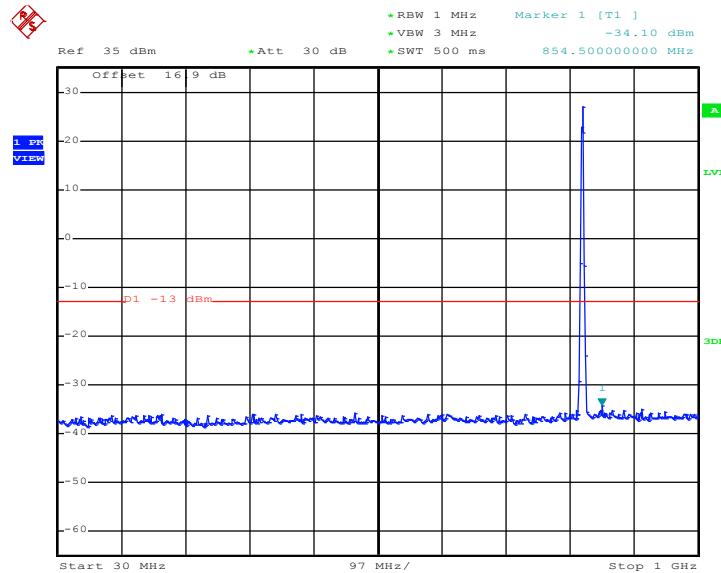Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 9.JUN.2014 15:13:06


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

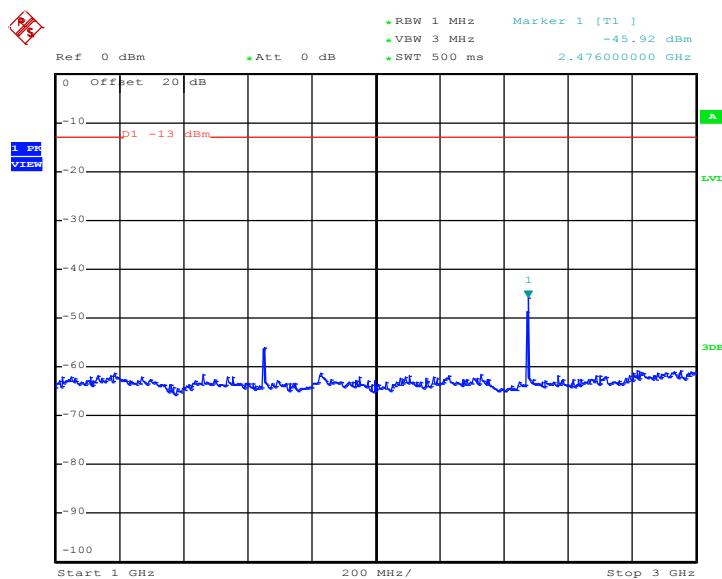

Date: 9.JUN.2014 15:13:17




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

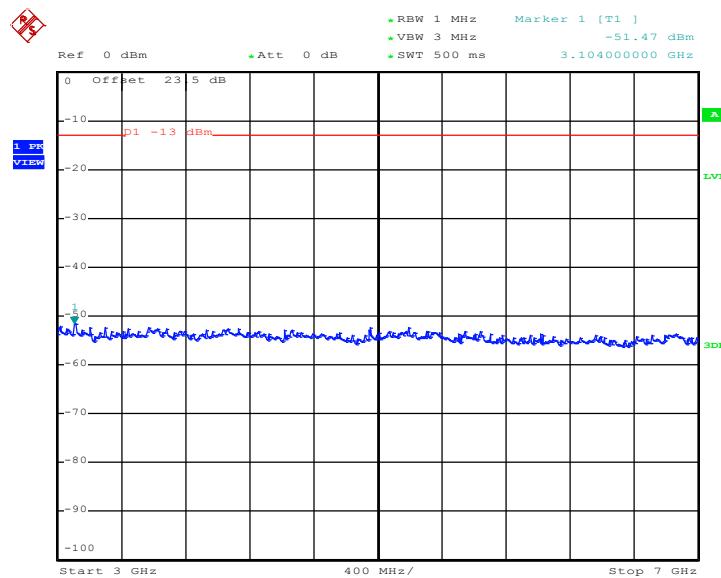

Date: 9.JUN.2014 15:13:25


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

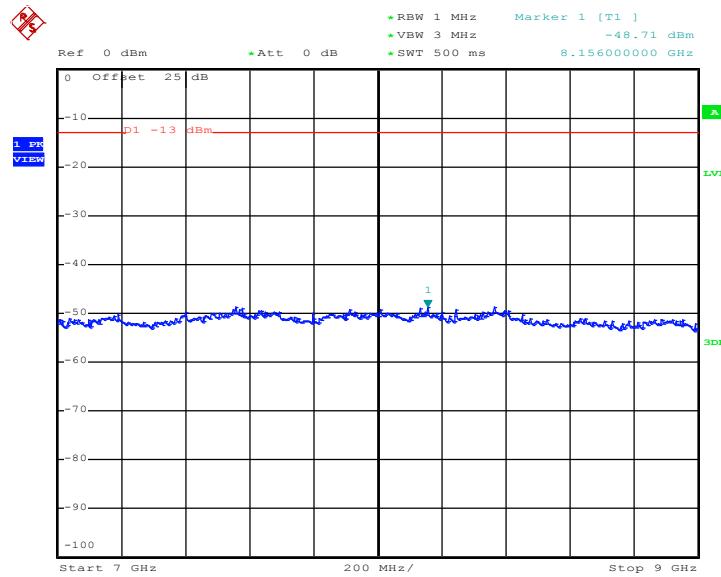

Date: 9.JUN.2014 15:13:34




Band :	CDMA2000 BC0	Channel :	CH384
Test Mode :	BC0 (1xEV-DO Rev. 0_RETAP 4096K (QPSK)	Frequency :	836.52 MHz

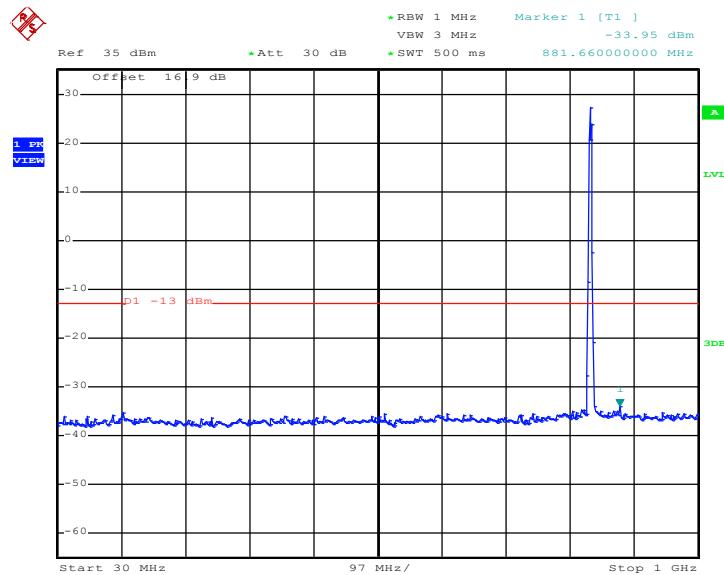Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 9.JUN.2014 15:10:20


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

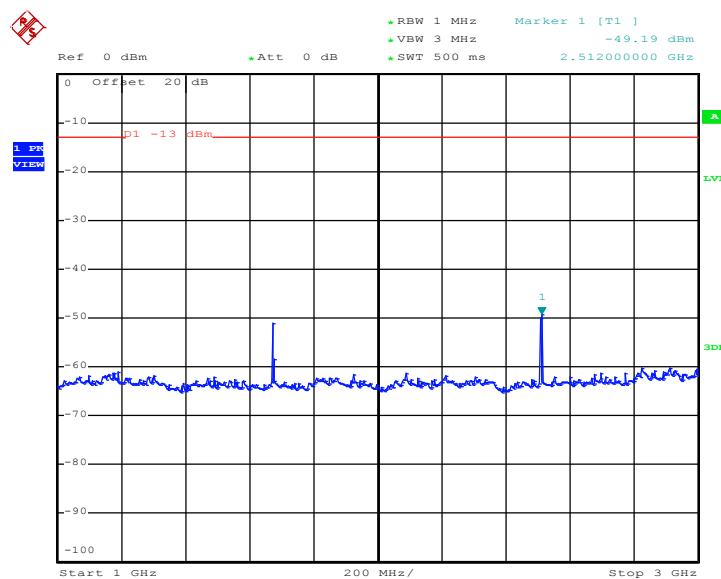

Date: 9.JUN.2014 15:10:50




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

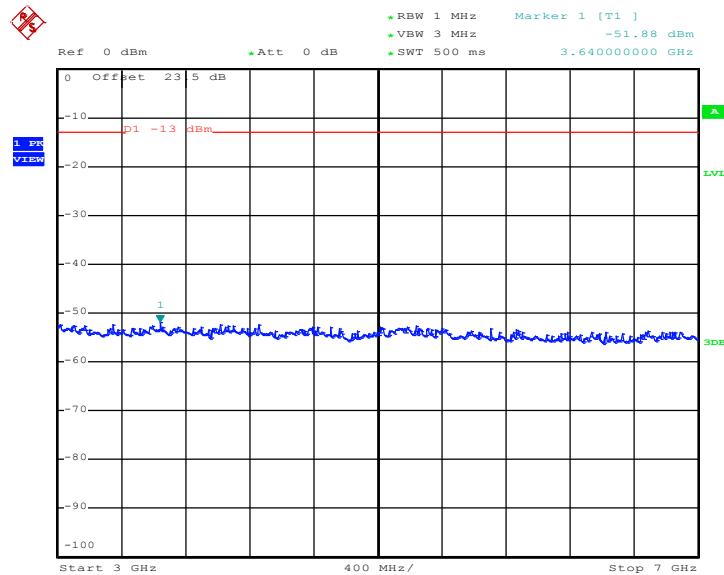

Date: 9.JUN.2014 15:10:58


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

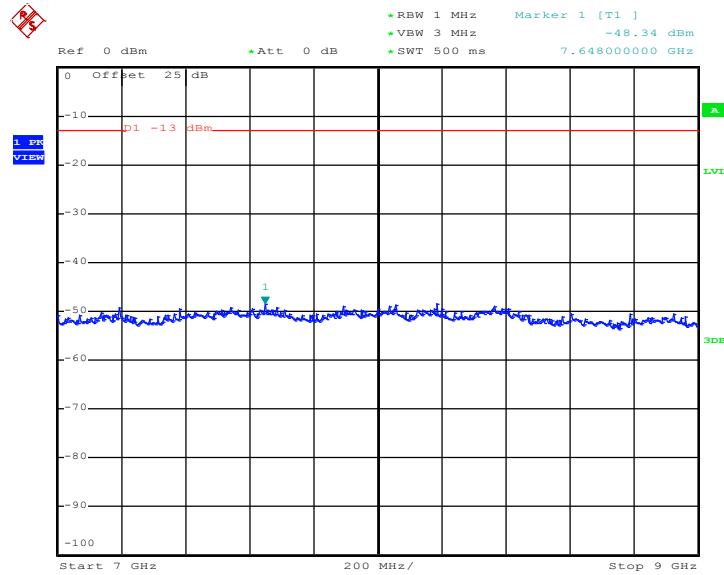

Date: 9.JUN.2014 15:11:06




Band :	CDMA2000 BC0	Channel :	CH777
Test Mode :	BC0 (1xEV-DO Rev. 0_RETAP 4096K (QPSK)	Frequency :	848.31 MHz

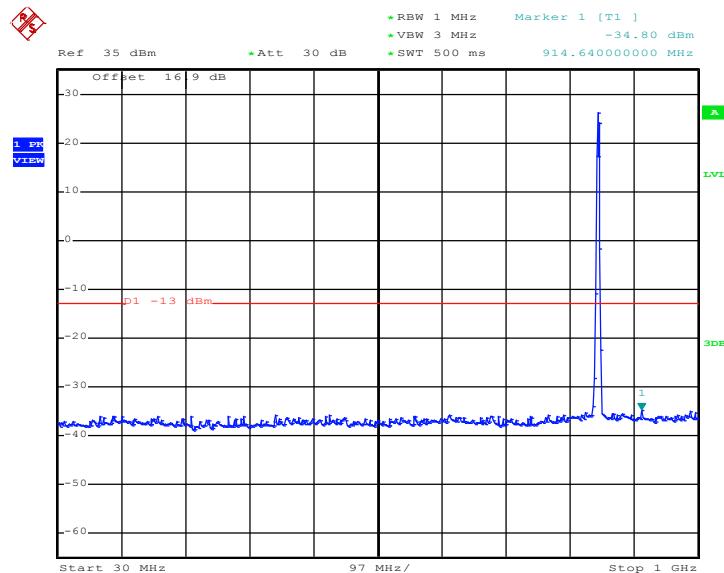Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 9.JUN.2014 15:14:44


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

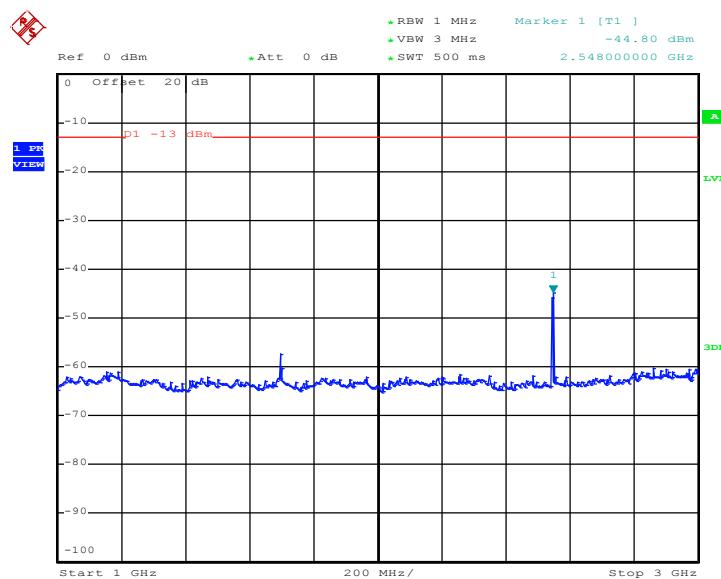

Date: 9.JUN.2014 15:14:55




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

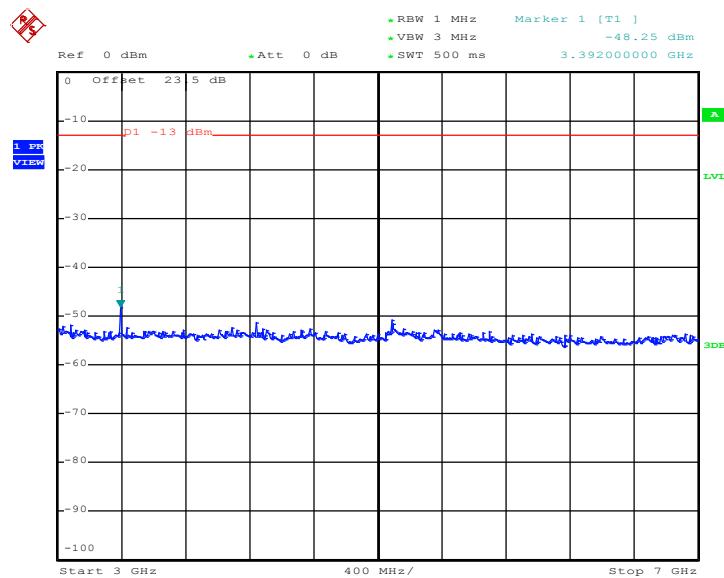

Date: 9.JUN.2014 15:15:04


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

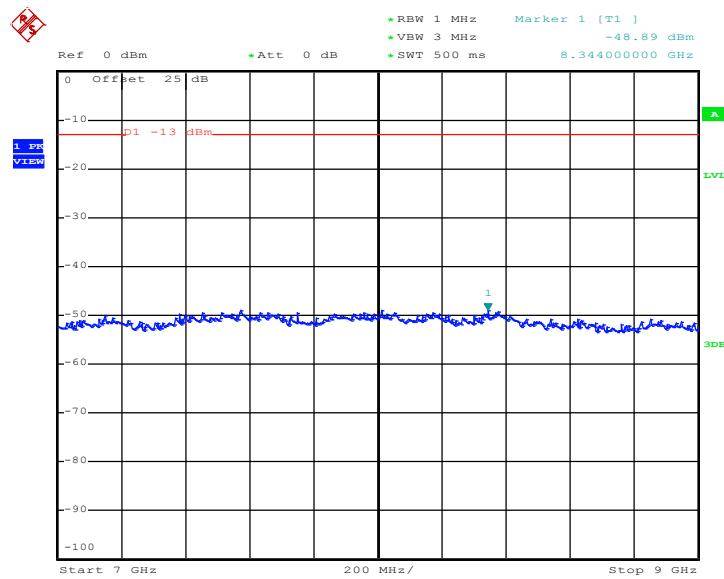

Date: 9.JUN.2014 15:15:12




Band :	CDMA2000 BC1	Channel :	CH25
Test Mode :	(1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	Frequency :	1851.25 MHz

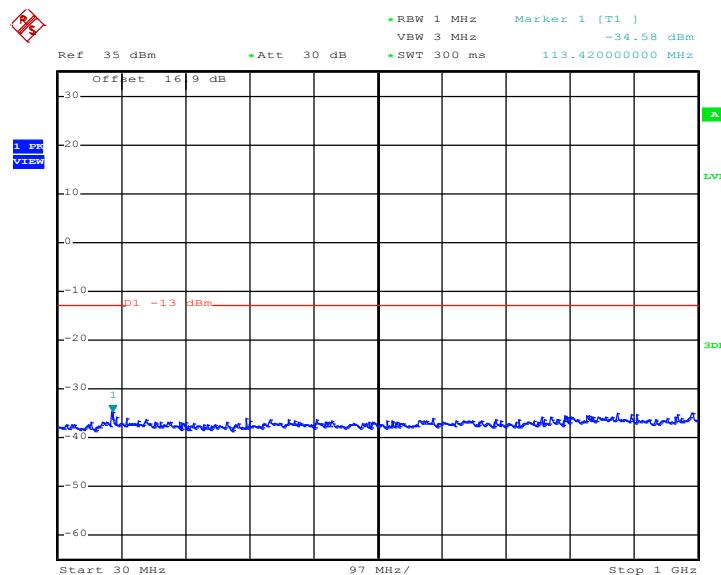Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 9.JUN.2014 16:23:45


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

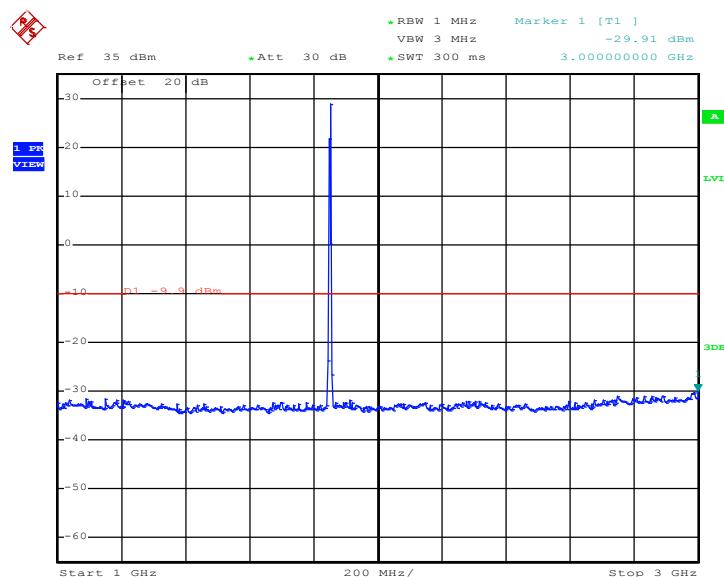

Date: 9.JUN.2014 16:27:38




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

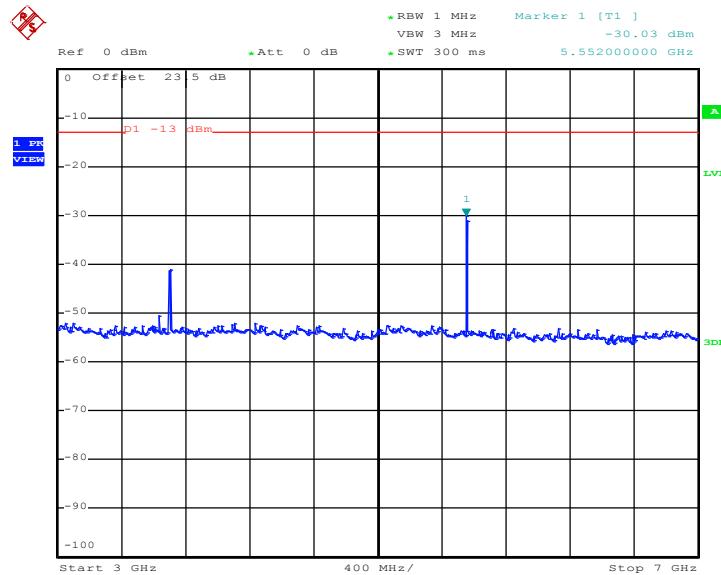

Date: 9.JUN.2014 16:35:37


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

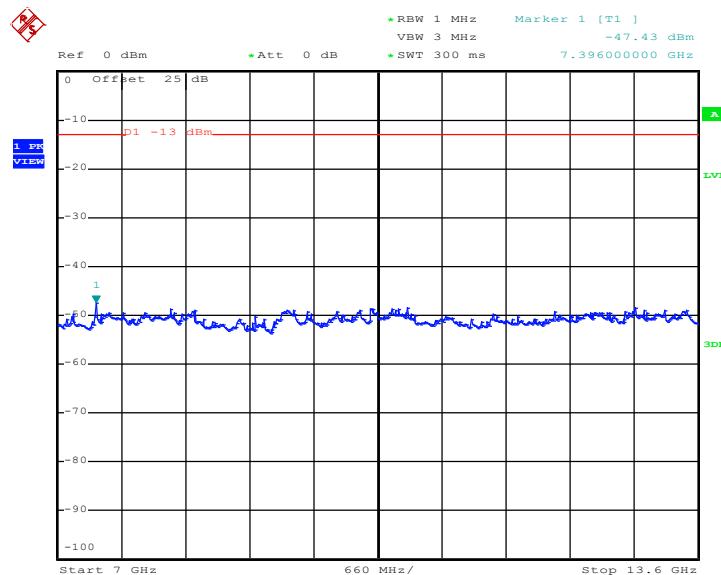

Date: 9.JUN.2014 16:41:31




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

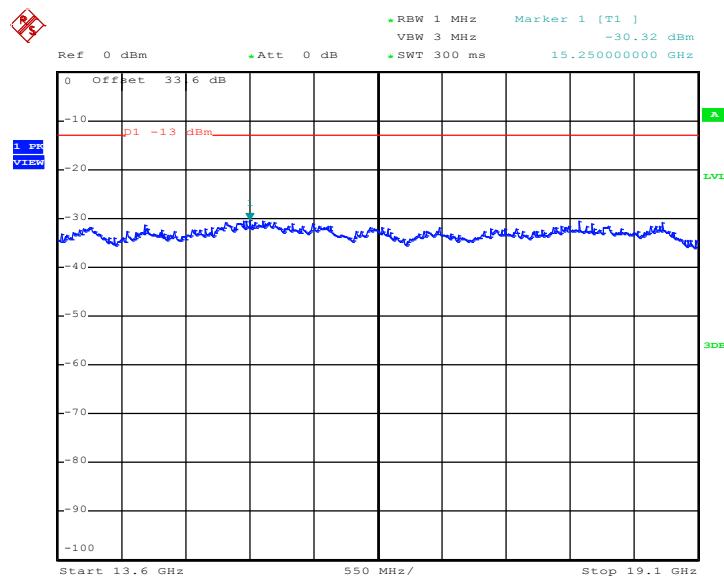

Date: 9.JUN.2014 16:46:59




Band :	CDMA2000 BC1	Channel :	CH600
Test Mode :	(1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	Frequency :	1880.0 MHz

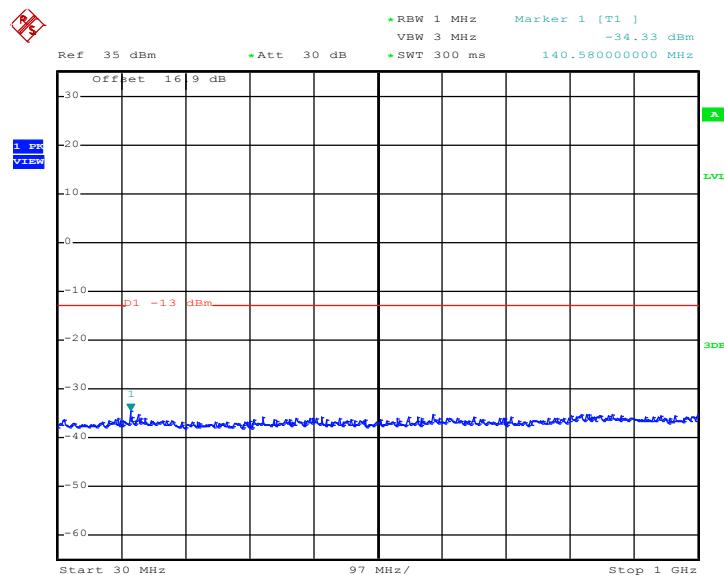Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 9.JUN.2014 16:24:15

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

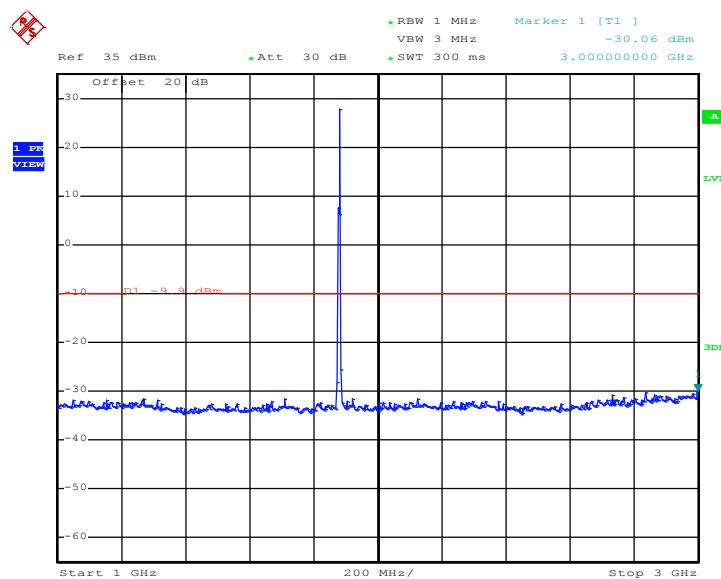

Date: 9.JUN.2014 16:29:07

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456
FAX : 886-3-328-4978
FCC ID : XIA-NTC140W
IC : 8847A-NTC140W

Page Number : 183 of 227

Report Issued Date : Oct. 07, 2014


Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 1.1

Report Template No.: BU5-CG22/24 Version 1.1




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

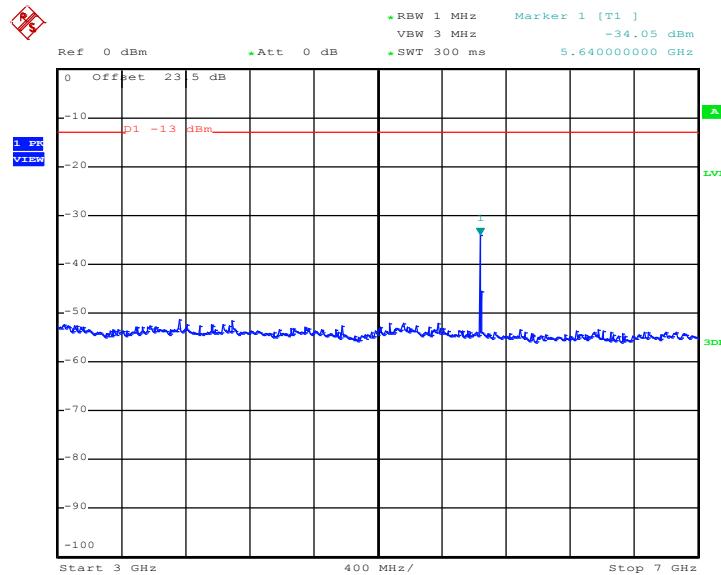

Date: 9.JUN.2014 16:36:02


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

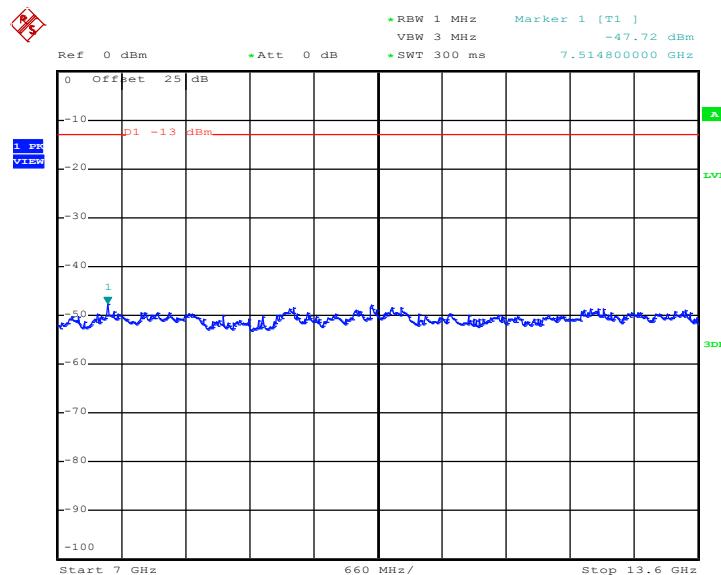

Date: 9.JUN.2014 16:42:08




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

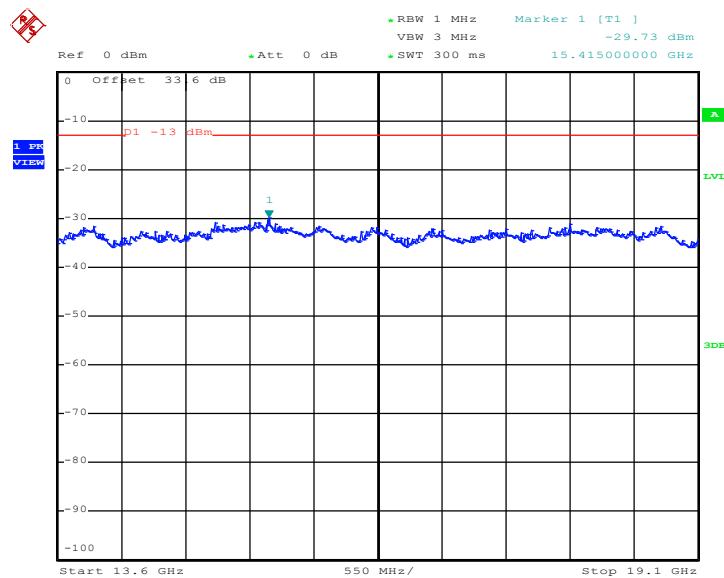

Date: 9.JUN.2014 16:47:42




Band :	CDMA2000 BC1	Channel :	CH1175
Test Mode :	(1xEV-DO Rev. 0_RTAP 153.6K (QPSK)	Frequency :	1908.75 MHz

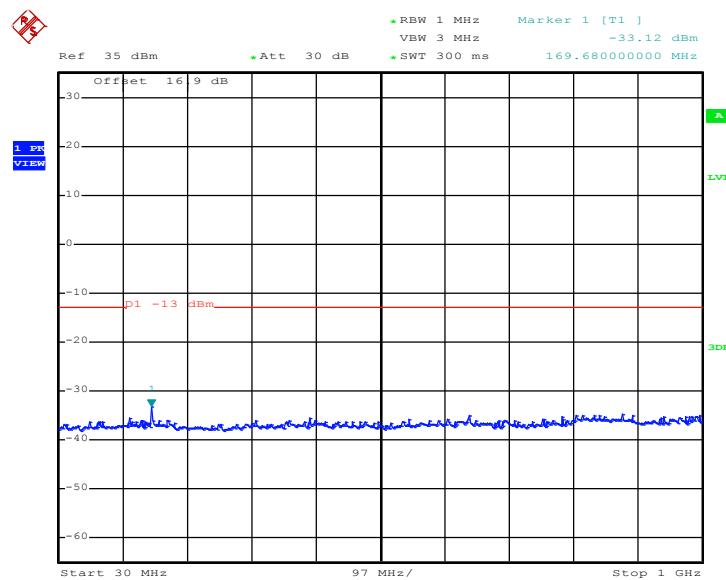Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 9.JUN.2014 16:24:45


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

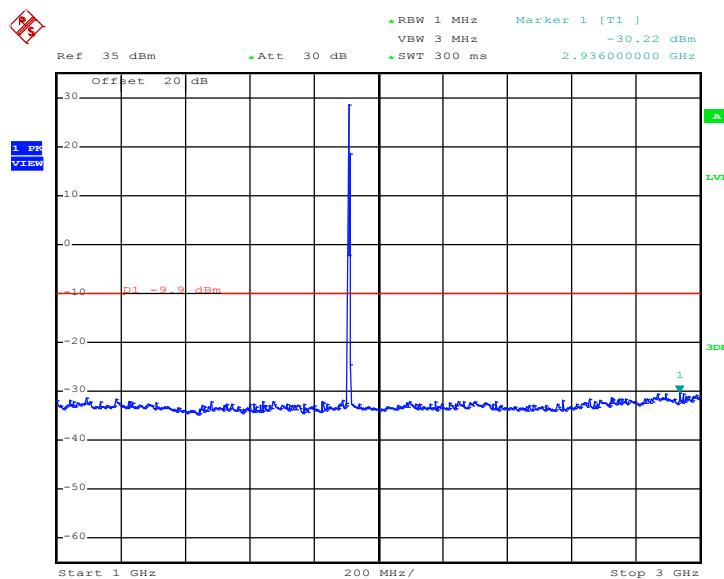

Date: 9.JUN.2014 16:30:36




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

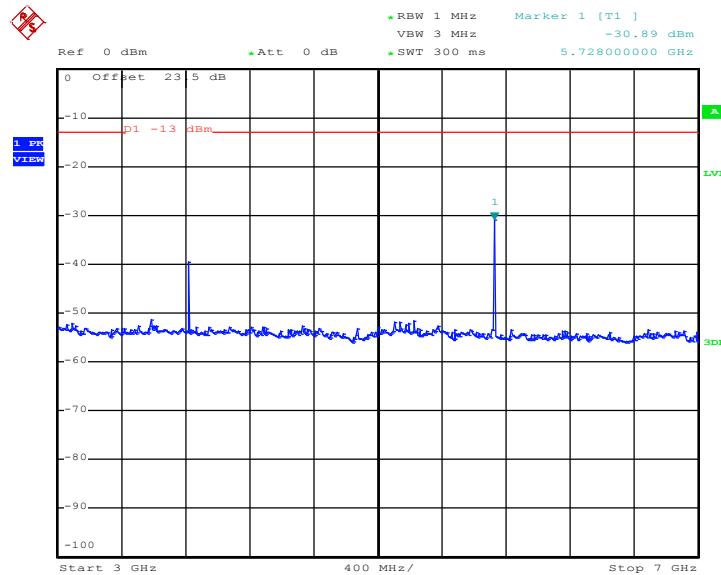

Date: 9.JUN.2014 16:36:47


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

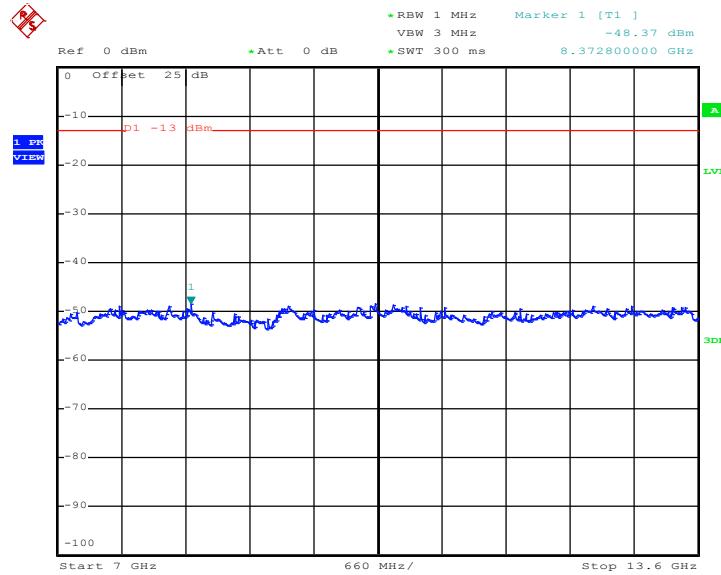

Date: 9.JUN.2014 16:43:54



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

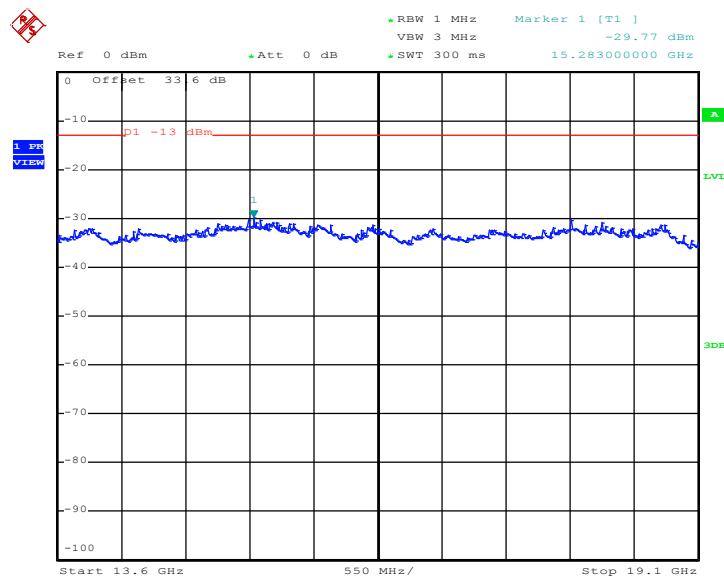

Date: 9.JUN.2014 16:48:21



3.6 Field Strength of Spurious Radiation Measurement

3.6.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures


1. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP (\text{dBm}) = S.G. \text{ Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
11. $ERP (\text{dBm}) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
$$\begin{aligned} &= P(\text{W}) - [43 + 10\log(P)] \text{ (dB)} \\ &= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} \\ &= -13 \text{ dBm}. \end{aligned}$$

3.6.4 Test Setup

For radiated emissions from 30MHz to 1GHz

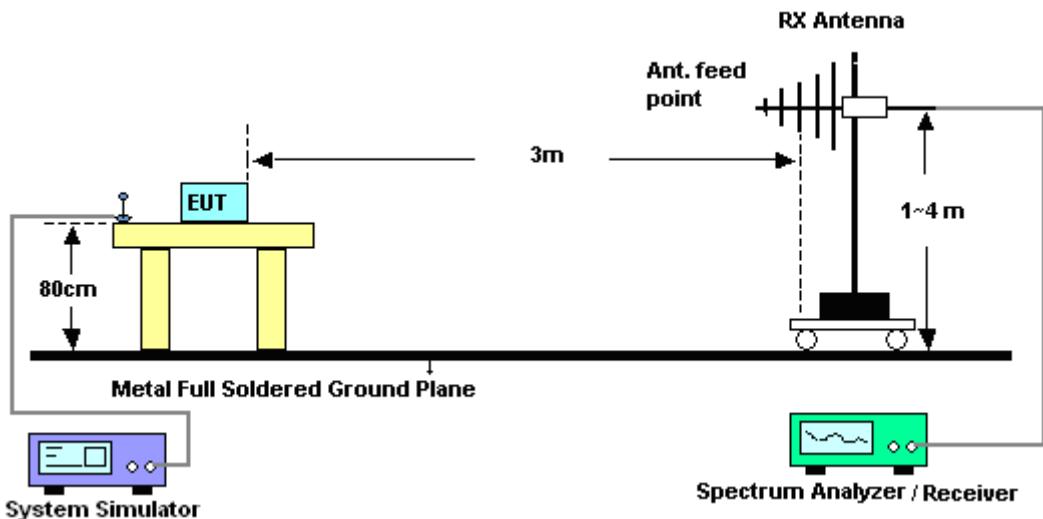

For radiated emissions above 1GHz

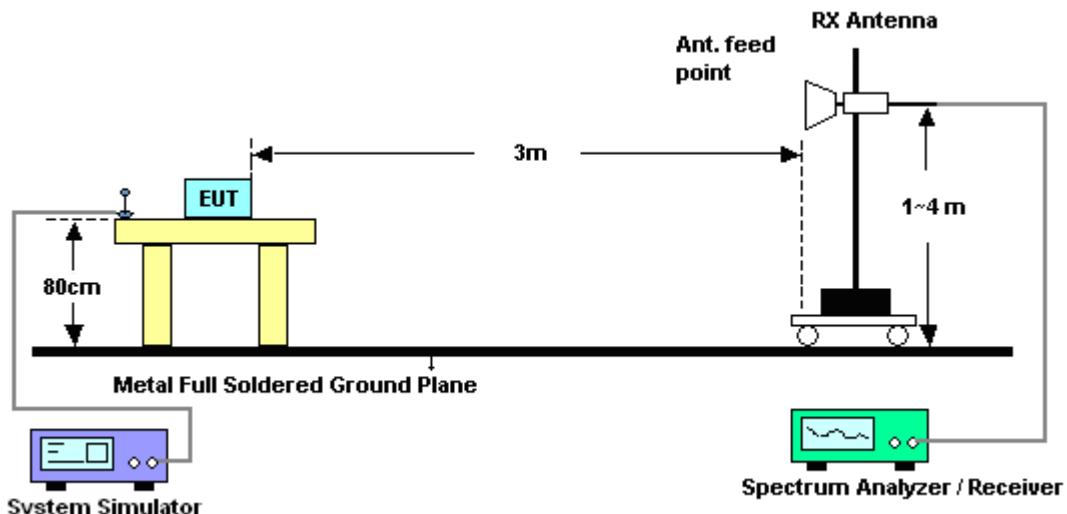



3.6.5 Test Result of Field Strength of Spurious Radiated

<Low Channel>

Band :	GSM850			Temperature :		22~24°C			
Test Mode :	GPRS class 8 Link (GMSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-49.88	-13	-36.88	-59.2	-56.03	1.53	5.53	H	Pass
2472	-48.84	-13	-35.84	-61	-55.08	2.06	6.15	H	Pass
3296	-50.73	-13	-37.73	-65.9	-58.33	2.48	7.93	H	Pass

Band :	GSM850			Temperature :		22~24°C			
Test Mode :	GPRS class 8 Link (GMSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-57.16	-13	-44.16	-60.55	-59.01	1.53	5.53	V	Pass
2472	-49.75	-13	-36.75	-59.15	-51.69	2.06	6.15	V	Pass
3296	-54.92	-13	-41.92	-65.58	-58.22	2.48	7.93	V	Pass



<Middle Channel>

Band :	GSM850			Temperature :		22~24°C			
Test Mode :	GPRS class 8 Link (GMSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-59.17	-13	-46.17	-63.71	-60.89	1.62	5.49	H	Pass
2512	-37.25	-13	-24.25	-45.14	-39.22	2.1	6.22	H	Pass
3344	-54.33	-13	-41.33	-64.91	-57.22	3.03	8.07	H	Pass

Band :	GSM850			Temperature :		22~24°C			
Test Mode :	GPRS class 8 Link (GMSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-57.14	-13	-44.14	-60.7	-58.86	1.62	5.49	V	Pass
2512	-33.15	-13	-20.15	-42.61	-35.12	2.1	6.22	V	Pass
3344	-54.77	-13	-41.77	-65.18	-57.66	3.03	8.07	V	Pass



<High Channel>

Band :	GSM850			Temperature :		22~24°C			
Test Mode :	GPRS class 8 Link (GMSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-60.28	-13	-47.28	-64.98	-62.01	1.57	5.45	H	Pass
2544	-41.20	-13	-28.20	-49.42	-43.31	2.02	6.28	H	Pass
3400	-54.59	-13	-41.59	-65.57	-58.34	2.3	8.20	H	Pass

Band :	GSM850			Temperature :		22~24°C			
Test Mode :	GPRS class 8 Link (GMSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-59.49	-13	-46.49	-63.39	-61.22	1.57	5.45	V	Pass
2544	-41.11	-13	-28.11	-50.76	-43.22	2.02	6.28	V	Pass
3400	-54.77	-13	-41.77	-65.35	-58.52	2.3	8.20	V	Pass



<Low Channel>

Band :	GSM850			Temperature :		22~24°C			
Test Mode :	EDGE class 8 Link (8PSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-61.43	-13	-48.43	-65	-63.28	1.53	5.53	H	Pass
2473	-59.18	-13	-46.18	-66.06	-61.12	2.06	6.15	H	Pass
3298	-55.17	-13	-42.17	-65.39	-58.47	2.48	7.93	H	Pass

Band :	GSM850			Temperature :		22~24°C			
Test Mode :	EDGE class 8 Link (8PSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-60.96	-13	-47.96	-63.6	-62.81	1.53	5.53	V	Pass
2473	-56.69	-13	-43.69	-65.07	-58.63	2.06	6.15	V	Pass
3295	-55.52	-13	-42.52	-65.1	-58.82	2.48	7.93	V	Pass



<Middle Channel>

Band :	GSM850			Temperature :		22~24°C			
Test Mode :	EDGE class 8 Link (8PSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-60.48	-13	-47.48	-64.11	-62.2	1.62	5.49	H	Pass
2509	-58.35	-13	-45.35	-65.43	-60.32	2.1	6.22	H	Pass
3346	-55.56	-13	-42.56	-65.65	-58.45	3.03	8.07	H	Pass

Band :	GSM850			Temperature :		22~24°C			
Test Mode :	EDGE class 8 Link (8PSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-62.10	-13	-49.10	-64.79	-63.82	1.62	5.49	V	Pass
2509	-57.16	-13	-44.16	-65.74	-59.13	2.1	6.22	V	Pass
3346	-56.52	-13	-43.52	-66.02	-59.41	3.03	8.07	V	Pass



<High Channel>

Band :	GSM850				Temperature :	22~24°C			
Test Mode :	EDGE class 8 Link (8PSK)				Relative Humidity :	47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-61.23	-13	-48.23	-64.9	-62.96	1.57	5.45	H	Pass
2545	-58.68	-13	-45.68	-66.1	-60.79	2.02	6.28	H	Pass
3394	-56.06	-13	-43.06	-65.72	-59.81	2.3	8.20	H	Pass

Band :	GSM850				Temperature :	22~24°C			
Test Mode :	EDGE class 8 Link (8PSK)				Relative Humidity :	47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-62.15	-13	-49.15	-65.15	-63.88	1.57	5.45	V	Pass
2545	-56.81	-13	-43.81	-65.95	-58.92	2.02	6.28	V	Pass
3394	-56.24	-13	-43.24	-65.98	-59.99	2.3	8.20	V	Pass



<Low Channel>

Band :	GSM1900			Temperature :		22~24°C			
Test Mode :	GPRS class 8 Link (GMSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-48.87	-13	-35.87	-63.59	-55.02	2.59	8.74	H	Pass
5548	-45.75	-13	-32.75	-65.89	-53.41	3.04	10.70	H	Pass
7403	-40.64	-13	-27.64	-64.99	-49.38	3.28	12.02	H	Pass

Band :	GSM1900			Temperature :		22~24°C			
Test Mode :	GPRS class 8 Link (GMSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-47.09	-13	-34.09	-62.16	-53.24	2.59	8.74	V	Pass
5548	-46.35	-13	-33.35	-65.21	-54.01	3.04	10.70	V	Pass
7403	-42.07	-13	-29.07	-65.24	-50.81	3.28	12.02	V	Pass



<Middle Channel>

Band :	GSM1900			Temperature :		22~24°C			
Test Mode :	GPRS class 8 Link (GMSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3763	-49.45	-13	-36.45	-64.4	-55.75	2.51	8.81	H	Pass
5639	-43.60	-13	-30.60	-64.07	-51.31	2.99	10.70	H	Pass
7522	-41.52	-13	-28.52	-66.22	-50.05	3.59	12.12	H	Pass

Band :	GSM1900			Temperature :		22~24°C			
Test Mode :	GPRS class 8 Link (GMSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3763	-49.55	-13	-36.55	-64.37	-55.85	2.51	8.81	V	Pass
5639	-45.70	-13	-32.70	-64.89	-53.41	2.99	10.70	V	Pass
7522	-42.23	-13	-29.23	-65.54	-50.76	3.59	12.12	V	Pass



<High Channel>

Band :	GSM1900			Temperature :		22~24°C			
Test Mode :	GPRS class 8 Link (GMSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-49.47	-13	-36.47	-64.66	-55.88	2.47	8.88	H	Pass
5730	-45.27	-13	-32.27	-65.75	-52.97	3	10.70	H	Pass
7641	-41.09	-13	-28.09	-65.28	-49.87	3.43	12.21	H	Pass

Band :	GSM1900			Temperature :		22~24°C			
Test Mode :	GPRS class 8 Link (GMSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-49.92	-13	-36.92	-64.89	-56.33	2.47	8.88	V	Pass
5730	-45.16	-13	-32.16	-64.85	-52.86	3	10.70	V	Pass
7641	-43.03	-13	-30.03	-65.91	-51.81	3.43	12.21	V	Pass



<Low Channel>

Band :	GSM1900			Temperature :		22~24°C			
Test Mode :	EDGE class 8 Link (8PSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-50.13	-13	-37.13	-63.76	-56.28	2.59	8.74	H	Pass
5552	-47.00	-13	-34.00	-66.68	-54.66	3.04	10.70	H	Pass
7400	-42.14	-13	-29.14	-65.77	-50.88	3.28	12.02	H	Pass

Band :	GSM1900			Temperature :		22~24°C			
Test Mode :	EDGE class 8 Link (8PSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-50.73	-13	-37.73	-64.77	-56.88	2.59	8.74	V	Pass
5552	-47.96	-13	-34.96	-66.48	-55.62	3.04	10.70	V	Pass
7400	-43.62	-13	-30.62	-65.76	-52.36	3.28	12.02	V	Pass



<Middle Channel>

Band :	GSM1900			Temperature :		22~24°C			
Test Mode :	EDGE class 8 Link (8PSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-48.86	-13	-35.86	-63.06	-55.16	2.51	8.81	H	Pass
5640	-46.46	-13	-33.46	-66.25	-54.17	2.99	10.70	H	Pass
7520	-41.32	-13	-28.32	-65.34	-49.85	3.59	12.12	H	Pass

Band :	GSM1900			Temperature :		22~24°C			
Test Mode :	EDGE class 8 Link (8PSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-50.23	-13	-37.23	-64.7	-56.53	2.51	8.81	V	Pass
5640	-48.50	-13	-35.50	-66.81	-56.21	2.99	10.70	V	Pass
7520	-44.38	-13	-31.38	-66.73	-52.91	3.59	12.12	V	Pass



<High Channel>

Band :	GSM1900			Temperature :		22~24°C			
Test Mode :	EDGE class 8 Link (8PSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3820	-49.17	-13	-36.17	-64.04	-55.58	2.47	8.88	H	Pass
5728	-47.08	-13	-34.08	-66.86	-54.78	3	10.70	H	Pass
7640	-42.46	-13	-29.46	-65.75	-51.24	3.43	12.21	H	Pass

Band :	GSM1900			Temperature :		22~24°C			
Test Mode :	EDGE class 8 Link (8PSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3820	-49.95	-13	-36.95	-63.87	-56.36	2.47	8.88	V	Pass
5728	-47.14	-13	-34.14	-66.36	-54.84	3	10.70	V	Pass
7640	-44.21	-13	-31.21	-66.53	-52.99	3.43	12.21	V	Pass



<Low Channel>

Band :	WCDMA Band V			Temperature :	22~24°C				
Test Mode :	RMC 12.2Kbps Link (QPSK)			Relative Humidity :	47~49%				
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :	Horizontal				
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1656	-55.20	-13	-42.20	-59.7	-57.05	1.53	5.53	H	Pass
2480	-57.61	-13	-44.61	-65.43	-59.55	2.06	6.15	H	Pass
3304	-53.55	-13	-40.55	-64.43	-56.85	2.48	7.93	H	Pass

Band :	WCDMA Band V			Temperature :	22~24°C				
Test Mode :	RMC 12.2Kbps Link (QPSK)			Relative Humidity :	47~49%				
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :	Vertical				
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1656	-52.53	-13	-39.53	-56.29	-54.38	1.53	5.53	V	Pass
2480	-55.57	-13	-42.57	-64.78	-57.51	2.06	6.15	V	Pass
3304	-54.80	-13	-41.80	-65.42	-58.1	2.48	7.93	V	Pass



<Middle Channel>

Band :	WCDMA Band V			Temperature :		22~24°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-60.48	-13	-47.48	-64.11	-62.2	1.62	5.49	H	Pass
2509	-58.35	-13	-45.35	-65.43	-60.32	2.1	6.22	H	Pass
3346	-55.56	-13	-42.56	-65.65	-58.45	3.03	8.07	H	Pass

Band :	WCDMA Band V			Temperature :		22~24°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-62.10	-13	-49.10	-64.79	-63.82	1.62	5.49	V	Pass
2509	-57.16	-13	-44.16	-65.74	-59.13	2.1	6.22	V	Pass
3346	-56.52	-13	-43.52	-66.02	-59.41	3.03	8.07	V	Pass



<High Channel>

Band :	WCDMA Band V				Temperature :	22~24°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)				Relative Humidity :	47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-61.23	-13	-48.23	-64.9	-62.96	1.57	5.45	H	Pass
2545	-58.68	-13	-45.68	-66.1	-60.79	2.02	6.28	H	Pass
3394	-56.06	-13	-43.06	-65.72	-59.81	2.3	8.20	H	Pass

Band :	WCDMA Band V				Temperature :	22~24°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)				Relative Humidity :	47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-62.15	-13	-49.15	-65.15	-63.88	1.57	5.45	V	Pass
2545	-56.81	-13	-43.81	-65.95	-58.92	2.02	6.28	V	Pass
3394	-56.24	-13	-43.24	-65.98	-59.99	2.3	8.20	V	Pass



<Low Channel>

Band :	WCDMA Band IV				Temperature :	22~24°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)				Relative Humidity :	47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3420	-44.06	-13	-31.06	-56.8	-47.89	4.48	8.31	H	Pass
5142	-45.58	-13	-32.58	-64.89	-50.22	5.332	9.98	H	Pass
6850	-42.11	-13	-29.11	-65.42	-47.35	6.1	11.34	H	Pass

Band :	WCDMA Band IV				Temperature :	22~24°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)				Relative Humidity :	47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3427	-43.19	-13	-30.19	-56.2	-47.02	4.48	8.31	V	Pass
5142	-42.58	-13	-29.58	-61.4	-47.22	5.332	9.98	V	Pass
6850	-43.10	-13	-30.10	-65.5	-48.34	6.1	11.34	V	Pass



<Middle Channel>

Band :	WCDMA Band IV			Temperature :		22~24°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3469	-48.39	-13	-35.39	-61.39	-52.22	4.48	8.31	H	Pass
5191	-46.02	-13	-33.02	-65.45	-50.66	5.332	9.98	H	Pass
6927	-41.09	-13	-28.09	-64.69	-46.33	6.1	11.34	H	Pass

Band :	WCDMA Band IV			Temperature :		22~24°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3469	-47.19	-13	-34.19	-60.75	-51.02	4.48	8.31	V	Pass
5191	-42.42	-13	-29.42	-61.1	-47.06	5.332	9.98	V	Pass
6927	-41.64	-13	-28.64	-64.4	-46.88	6.1	11.34	V	Pass



<High Channel>

Band :	WCDMA Band IV			Temperature :	22~24°C				
Test Mode :	RMC 12.2Kbps Link (QPSK)			Relative Humidity :	47~49%				
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :	Horizontal				
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3504	-43.11	-13	-30.11	-56.23	-47.38	4.16	8.43	H	Pass
5261	-45.35	-13	-32.35	-64.85	-50.31	5.13	10.09	H	Pass
7011	-40.01	-13	-27.01	-63.88	-45.29	6.15	11.43	H	Pass

Band :	WCDMA Band IV			Temperature :	22~24°C				
Test Mode :	RMC 12.2Kbps Link (QPSK)			Relative Humidity :	47~49%				
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :	Vertical				
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3504	-40.01	-13	-27.01	-54.35	-44.28	4.16	8.43	V	Pass
5261	-41.42	-13	-28.42	-60.5	-46.38	5.13	10.09	V	Pass
7011	-41.06	-13	-28.06	-64.35	-46.34	6.15	11.43	V	Pass



<Low Channel>

Band :	WCDMA Band II			Temperature :	22~24°C				
Test Mode :	RMC 12.2Kbps Link (QPSK)			Relative Humidity :	47~49%				
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :	Horizontal				
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3707	-49.23	-13	-36.23	-63.92	-55.38	2.59	8.74	H	Pass
5562	-43.47	-13	-30.47	-63.58	-51.13	3.04	10.70	H	Pass
7410	-41.15	-13	-28.15	-65.35	-49.89	3.28	12.02	H	Pass

Band :	WCDMA Band II			Temperature :	22~24°C				
Test Mode :	RMC 12.2Kbps Link (QPSK)			Relative Humidity :	47~49%				
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :	Vertical				
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3707	-47.47	-13	-34.47	-62.15	-53.62	2.59	8.74	V	Pass
5555	-41.56	-13	-28.56	-60.39	-49.22	3.04	10.70	V	Pass
7410	-41.36	-13	-28.36	-64.84	-50.1	3.28	12.02	V	Pass



<Middle Channel>

Band :	WCDMA Band II			Temperature :		22~24°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3763	-49.12	-13	-36.12	-64.15	-55.42	2.51	8.81	H	Pass
5646	-38.61	-13	-25.61	-59.17	-46.32	2.99	10.70	H	Pass
7522	-40.80	-13	-27.80	-65.42	-49.33	3.59	12.12	H	Pass

Band :	WCDMA Band II			Temperature :		22~24°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)			Relative Humidity :		47~49%			
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :		Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3763	-47.81	-13	-34.81	-62.78	-54.11	2.51	8.81	V	Pass
5646	-38.81	-13	-25.81	-57.92	-46.52	2.99	10.70	V	Pass
7522	-41.75	-13	-28.75	-65.29	-50.28	3.59	12.12	V	Pass



<High Channel>

Band :	WCDMA Band II			Temperature :	22~24°C				
Test Mode :	RMC 12.2Kbps Link (QPSK)			Relative Humidity :	47~49%				
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :	Horizontal				
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-46.61	-13	-33.61	-61.88	-53.02	2.47	8.88	H	Pass
5730	-39.95	-13	-26.95	-60.59	-47.65	3	10.70	H	Pass
7634	-40.33	-13	-27.33	-64.81	-49.11	3.43	12.21	H	Pass

Band :	WCDMA Band II			Temperature :	22~24°C				
Test Mode :	RMC 12.2Kbps Link (QPSK)			Relative Humidity :	47~49%				
Test Engineer :	Kyle Jhuang and Abi Lin			Polarization :	Vertical				
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-49.40	-13	-36.40	-64.11	-55.81	2.47	8.88	V	Pass
5730	-38.01	-13	-25.01	-57.71	-45.71	3	10.70	V	Pass
7634	-41.60	-13	-28.60	-64.84	-50.38	3.43	12.21	V	Pass



<Low Channel>

Band :	CDMA2000 BC0				Temperature :	22~24°C		
Test Mode :	BC0 (1xEV-DO Rev. 0 RETAP 4096K (QPSK)				Relative Humidity :	47~49%		
Test Engineer :	Kyle Jhuang and Abi Lin				Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
1648	-37.46	-13	-24.46	-47.38	-39.22	0.98	4.89	H Pass
2473	-33.82	-13	-20.82	-47.87	-35.71	1.28	5.32	H Pass
3298	-34.58	-13	-21.58	-51.88	-38	1.54	7.11	H Pass
4120	-44.36	-13	-31.36	-63.93	-49	1.83	8.62	H Pass
4945	-46.88	-13	-33.88	-66.71	-52.01	2.31	9.59	H Pass

Band :	CDMA2000 BC0				Temperature :	22~24°C		
Test Mode :	BC0 (1xEV-DO Rev. 0 RETAP 4096K (QPSK)				Relative Humidity :	47~49%		
Test Engineer :	Kyle Jhuang and Abi Lin				Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
1648	-44.19	-13	-31.19	-53.3	-45.95	0.98	4.89	V Pass
2476	-34.23	-13	-21.23	-49.96	-36.12	1.28	5.33	V Pass
3298	-41.63	-13	-28.63	-58.9	-45.05	1.54	7.11	V Pass
4120	-41.25	-13	-28.25	-60.7	-45.89	1.83	8.62	V Pass
4945	-46.43	-13	-33.43	-65.68	-51.56	2.31	9.59	V Pass



<Middle Channel>

Band :	CDMA2000 BC0					Temperature :	22~24°C	
Test Mode :	BC0 (1xEV-DO Rev. 0 RETAP 4096K (QPSK)					Relative Humidity :	47~49%	
Test Engineer :	Kyle Jhuang and Abi Lin					Polarization :	Horizontal	
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
1672	-27.26	-13	-14.26	-30.92	-28.98	1.62	5.49	H Pass
2509	-27.50	-13	-14.50	-34.99	-29.47	2.1	6.22	H Pass
3346	-25.68	-13	-12.68	-35.98	-28.57	3.03	8.07	H Pass
4185	-25.53	-13	-12.53	-38.81	-30.07	2.52	9.21	H Pass
5020	-30.54	-13	-17.54	-47.94	-35.99	3.1	10.70	H Pass

Band :	CDMA2000 BC0					Temperature :	22~24°C	
Test Mode :	BC0 (1xEV-DO Rev. 0 RETAP 4096K (QPSK)					Relative Humidity :	47~49%	
Test Engineer :	Kyle Jhuang and Abi Lin					Polarization :	Vertical	
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
1672	-30.63	-13	-17.63	-33.71	-32.35	1.62	5.49	V Pass
2509	-30.36	-13	-17.36	-38.05	-32.33	2.1	6.22	V Pass
3346	-28.10	-13	-15.10	-36.57	-30.99	3.03	8.07	V Pass
4185	-25.61	-13	-12.61	-39.14	-30.15	2.52	9.21	V Pass
5020	-28.77	-13	-15.77	-44.41	-34.22	3.1	10.70	V Pass



<High Channel>

Band :	CDMA2000 BC0				Temperature :	22~24°C		
Test Mode :	BC0 (1xEV-DO Rev. 0 RETAP 4096K (QPSK)				Relative Humidity :	47~49%		
Test Engineer :	Kyle Jhuang and Abi Lin				Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
1696	-30.50	-13	-17.50	-34.39	-32.23	1.57	5.45	H Pass
2545	-26.54	-13	-13.54	-34.3	-28.65	2.02	6.28	H Pass
3394	-27.10	-13	-14.10	-36.75	-30.85	2.3	8.20	H Pass
4245	-26.82	-13	-13.82	-40.08	-31.18	2.73	9.24	H Pass
5090	-32.42	-13	-19.42	-48.46	-37.89	2.75	10.37	H Pass

Band :	CDMA2000 BC0				Temperature :	22~24°C		
Test Mode :	BC0 (1xEV-DO Rev. 0 RETAP 4096K (QPSK)				Relative Humidity :	47~49%		
Test Engineer :	Kyle Jhuang and Abi Lin				Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
1696	-34.52	-13	-21.52	-37.4	-36.25	1.57	5.45	V Pass
2545	-28.62	-13	-15.62	-37.17	-30.73	2.02	6.28	V Pass
3394	-26.26	-13	-13.26	-35.75	-30.01	2.3	8.20	V Pass
4240	-27.69	-13	-14.69	-40	-32.05	2.73	9.24	V Pass
5090	-29.14	-13	-16.14	-44.5	-34.61	2.75	10.37	V Pass



<Low Channel>

Band :	CDMA2000 BC1				Temperature :	22~24°C		
Test Mode :	(1xEV-DO Rev. 0_RTAP 153.6K (QPSK)				Relative Humidity :	47~49%		
Test Engineer :	Kyle Jhuang and Abi Lin				Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
3704	-43.97	-13	-30.97	-57.79	-50.12	2.59	8.74	H Pass
5556	-38.75	-13	-25.75	-57.94	-46.41	3.04	10.70	H Pass
7416	-41.54	-13	-28.54	-64.94	-50.28	3.28	12.02	H Pass

Band :	CDMA2000 BC1				Temperature :	22~24°C		
Test Mode :	(1xEV-DO Rev. 0_RTAP 153.6K (QPSK)				Relative Humidity :	47~49%		
Test Engineer :	Kyle Jhuang and Abi Lin				Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
3704	-44.03	-13	-31.03	-57.93	-50.18	2.59	8.74	V Pass
5556	-34.15	-13	-21.15	-52.23	-41.81	3.04	10.70	V Pass
7408	-40.95	-13	-27.95	-63.39	-49.69	3.28	12.02	V Pass



<Middle Channel>

Band :	CDMA2000 BC1				Temperature :	22~24°C		
Test Mode :	(1xEV-DO Rev. 0_RTAP 153.6K (QPSK)				Relative Humidity :	47~49%		
Test Engineer :	Kyle Jhuang and Abi Lin				Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
3768	-41.03	-13	-28.03	-55.51	-47.33	2.51	8.81	H Pass
5640	-36.11	-13	-23.11	-55.72	-43.82	2.99	10.70	H Pass
7508	-41.36	-13	-28.36	-65.32	-49.89	3.59	12.12	H Pass

Band :	CDMA2000 BC1				Temperature :	22~24°C		
Test Mode :	(1xEV-DO Rev. 0_RTAP 153.6K (QPSK)				Relative Humidity :	47~49%		
Test Engineer :	Kyle Jhuang and Abi Lin				Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
3760	-42.28	-13	-29.28	-56.1	-48.58	2.51	8.81	V Pass
5640	-33.90	-13	-20.90	-51.98	-41.61	2.99	10.70	V Pass
7520	-40.15	-13	-27.15	-62.87	-48.68	3.59	12.12	V Pass



<High Channel>

Band :	CDMA2000 BC1				Temperature :	22~24°C		
Test Mode :	(1xEV-DO Rev. 0_RTAP 153.6K (QPSK)				Relative Humidity :	47~49%		
Test Engineer :	Kyle Jhuang and Abi Lin				Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
3816	-43.73	-13	-30.73	-58	-50.14	2.47	8.88	H Pass
5728	-32.59	-13	-19.59	-52.44	-40.29	3	10.70	H Pass
7636	-42.34	-13	-29.34	-65.97	-51.12	3.43	12.21	H Pass

Band :	CDMA2000 BC1				Temperature :	22~24°C		
Test Mode :	(1xEV-DO Rev. 0_RTAP 153.6K (QPSK)				Relative Humidity :	47~49%		
Test Engineer :	Kyle Jhuang and Abi Lin				Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
3820	-46.63	-13	-33.63	-60.94	-53.04	2.47	8.88	V Pass
5728	-31.39	-13	-18.39	-50.22	-39.09	3	10.70	V Pass
7636	-38.44	-13	-25.44	-60.85	-47.22	3.43	12.21	V Pass



3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures for Temperature Variation


1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25 \pm 5^\circ\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.



3.7.5 Test Setup

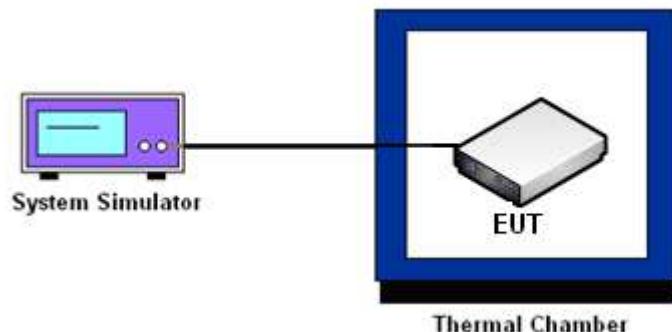



3.7.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	GPRS class 8		EDGE class 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
50	18	0.0084	-17	0.0108	PASS
40	16	0.0060	-15	0.0084	
30	15	0.0048	-14	0.0072	
20(Ref.)	11	0.0000	-8	0.0000	
10	13	0.0024	-11	0.0036	
0	16	0.0060	-14	0.0072	
-10	17	0.0072	-13	0.0060	
-20	20	0.0108	-16	0.0096	
-30	21	0.0120	-18	0.0120	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	GPRS class 8		EDGE class 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
50	21	0.0032	-25	0.0027	PASS
40	17	0.0011	-23	0.0016	
30	13	0.0011	-22	0.0011	
20(Ref.)	15	0.0000	-20	0.0000	
10	14	0.0005	-19	0.0005	
0	13	0.0011	-23	0.0016	
-10	18	0.0016	-21	0.0005	
-20	16	0.0005	-24	0.0021	
-30	20	0.0027	-26	0.0032	



Band :	WCDMA Band V	Channel :	4182
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
50	9	0.0060	PASS
40	-7	0.0132	
30	5	0.0012	
20(Ref.)	4	0.0000	
10	-4	0.0096	
0	7	0.0036	
-10	-5	0.0108	
-20	6	0.0024	
-30	8	0.0048	

Band :	WCDMA Band IV	Channel :	1413
Limit (ppm) :	2.5	Frequency :	1732.6 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
50	12	0.0023	PASS
40	14	0.0035	
30	10	0.0012	
20(Ref.)	8	0.0000	
10	7	0.0006	
0	9	0.0006	
-10	12	0.0023	
-20	13	0.0029	
-30	10	0.0012	



Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
50	-12	0.0021	PASS
40	-13	0.0027	
30	-10	0.0011	
20(Ref.)	-8	0.0000	
10	-11	0.0016	
0	-9	0.0005	
-10	-12	0.0021	
-20	-15	0.0037	
-30	-14	0.0032	



Band :	CDMA2000 BC0 BC0 (1xEV-DO Rev. 0)	Channel :	384
Limit (ppm) :	2.5	Frequency :	836.52 MHz

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
50	-20	0.0239	PASS
40	-16	0.0191	
30	-15	0.0179	
20(Ref.)	-14	0.0167	
10	-17	0.0203	
0	-19	0.0227	
-10	-16	0.0191	
-20	-21	0.0251	
-30	-20	0.0239	

Band :	CDMA2000 BC1 (1xEV-DO Rev. 0)	Channel :	600
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
50	18	0.0096	PASS
40	15	0.0080	
30	17	0.0090	
20(Ref.)	14	0.0074	
10	16	0.0085	
0	12	0.0064	
-10	15	0.0080	
-20	16	0.0085	
-30	19	0.0101	



3.7.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS class 8	40.0	12	0.0012	2.5	PASS
		12.0	14	0.0036		
		BEP	15	0.0048		
	EDGE class 8	40.0	-11	0.0036		
		12.0	-10	0.0024		
		BEP	-12	0.0048		
	GPRS class 8	40.0	15	0.0000		
		12.0	14	0.0005		
		BEP	18	0.0016		
	EDGE class 8	40.0	-20	0.0000		
		12.0	-22	0.0011		
		BEP	-23	0.0016		
WCDMA Band V CH4182	RMC 12.2Kbps	40.0	4	0.0000		
		12.0	-5	0.0108		
		BEP	7	0.0036		
WCDMA Band IV CH1413	RMC 12.2Kbps	40.0	9	0.0006		
		12.0	8	0.0000		
		BEP	11	0.0017		
WCDMA Band II CH9400	RMC 12.2Kbps	40.0	-11	0.0016		
		12.0	-10	0.0011		
		BEP	-12	0.0021		
CDMA2000 BC0 CH384	1xEV-DO Rev. 0	40.0	-15	0.0012		
		12.0	-16	0.0024		
		BEP	-19	0.0060		
CDMA2000 BC1 CH600	1xEV-DO Rev. 0	40.0	15	0.0005		
		12.0	16	0.0011		
		BEP	14	0.0000		

Note:

1. Normal Voltage = 12.0V.
2. Battery End Point (BEP) = 8.0 V.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
System Simulator	Rohde & Schwarz	CMU200	117995	N/A	Aug. 01, 2013	Jun. 08, 2014~Jun. 09, 2014	Jul. 31, 2014	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Jun. 08, 2014~Jun. 09, 2014	Jun. 08, 2015	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 17, 2014	Jun. 08, 2014~Jun. 09, 2014	Jul. 16, 2015	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	101749	10Hz ~ 30GHz	Feb. 10, 2014	Jun. 26, 2014~Jul. 31, 2014	Feb. 09, 2015	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 10, 2013	Jun. 26, 2014~Jul. 31, 2014	Oct. 09, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 22, 2013	Jun. 26, 2014~Jul. 31, 2014	Aug. 21, 2014	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10 MHz ~ 1000MHz	Mar. 17, 2014	Jun. 26, 2014~Jul. 31, 2014	Mar. 16, 2015	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1 GHz~26.5 GHz	Nov. 29, 2013	Jun. 26, 2014~Jul. 31, 2014	Nov. 28, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Jun. 26, 2014~Jul. 31, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	M-400-0	114/8000604	N/A	N/A	Jun. 26, 2014~Jul. 31, 2014	N/A	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA91702 51	15GHz- 40GHz	Oct. 03, 2013	Jun. 26, 2014~Jul. 31, 2014	Oct. 02, 2014	Radiation (03CH07-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.50
---	------



SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : XIA-NTC140W

Page Number : A1 of A1

Report Issued Date : Oct. 07, 2014

Report Version : Rev. 01