

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: sgs_internet_operations@sgs.com

Report No.: SZEM110600136901

Page : 1 of 48

FCC REPORT

Application No: SZEM1106001369RF

Applicant: CHIN FAI ELECTRONICS COMPANY
Manufacturer: CHIN FAI ELECTRONICS COMPANY
Factory: CHIN FAI ELECTRONICS COMPANY
Product Name: SILICON BLUETOOTH KEYBOARD

Operation Frequency: 2402MHz to 2480MHz

FCC ID: XJ4KB6121C

Standards: FCC CFR Title 47 Part 15 Subpart C

Date of Receipt: 2011-06-15

Date of Test: 2011-06-17 to 2011-09-22

Date of Issue: 2011-09-30

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Jack Zhang

EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM110600136901

Page : 2 of 48

2 Contents

1	CC	OVER PAGE	Page
2	CC	ONTENTS	2
3	TE	EST SUMMARY	3
4	GE	ENERAL INFORMATION	1 2 3 3 4 4 4 4 4 4 4 5 6 6 7 7 7 7 7 7 7 7 8 8 10 11 11 11 14 17 20 20 23 25 25 28 28 31 5 35 37 39
	4.1	CLIENT INFORMATION	4
	4.2	GENERAL DESCRIPTION OF E.U.T.	4
	4.3	E.U.T OPERATION MODE	6
	4.4	DESCRIPTION OF SUPPORT UNITS	6
	4.5	TEST FACILITY	7
	4.6	TEST LOCATION	7
	4.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.8	TEST INSTRUMENTS LIST	8
5	TE	EST RESULTS AND MEASUREMENT DATA	10
	5.1	ANTENNA REQUIREMENT:	10
	5.2	CONDUCTED EMISSIONS	11
	5.3	CONDUCTED PEAK OUTPUT POWER	14
	5.4	20DB OCCUPY BANDWIDTH	
	5.5	CARRIER FREQUENCIES SEPARATION	20
	5.6	HOPPING CHANNEL NUMBER	23
	5.7	DWELL TIME	25
	5.8	BAND EDGE	28
	5.9	RF ANTENNA CONDUCTED SPURIOUS EMISSIONS	31
	5.10	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	34
	5.11	RADIATED EMISSION	35
	<i>5.</i> 7	11.1 Radiated emission below 1GHz	37
	<i>5.</i> 7	11.2 Transmitter emission above 1GHz	39
	<i>5.</i> 7	11.3 Band edge (Radiated Emission)	41-48



Report No.: SZEM110600136901

Page : 3 of 48

3 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (b)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remark: Pass: The EUT complies with the essential requirements in the standard.

Fail: The EUT does not comply with the essential requirements in the standard.



Report No.: SZEM110600136901

Page : 4 of 48

4 General Information

4.1 Client Information

Applicant:	CHIN FAI ELECTRONICS COMPANY		
Address of Applicant	Building 2C-2D, Yingfeng industrial Part, Sanhe economic development Zone, Huiyang District, Huizhou City, Guangdong Province, China		
Manufacturer	CHIN FAI ELECTRONICS COMPANY		
Address of Manufacturer	Building 2C-2D, Yingfeng industrial Part, Sanhe economic development Zone, Huiyang District, Huizhou City, Guangdong Province, China		
Factory:	CHIN FAI ELECTRONICS COMPANY		
Address of Factory:	Building 2C-2D, Yingfeng industrial Part, Sanhe economic development Zone, Huiyang District, Huizhou City, Guangdong Province, China		

4.2 General Description of E.U.T.

Product Name:	SILICON BLUETOOTH KEYBOARD
Model No.:	KB-6121C
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	FHSS
Antenna Type:	Integral
Test software:	Bluetool (manufacturer declare)
Antenna gain:	2.0dBi
EUT power supply:	PC USB port supply(charging) Battery: 3.7V 450mAh(Lithium battery)



Report No.: SZEM110600136901

Page : 5 of 48

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel for testing see below:

Channel	Frequency		
Lowest channel	2402MHz		
Middle channel	2441MHz		
Highest channel	2480MHz		



Report No.: SZEM110600136901

Page : 6 of 48

4.3 E.U.T Operation mode

Operating Environment:			
Temperature:	25.0 °C		
Humidity:	50 % RH		
Atmospheric Pressure:	1004mbar		
Test mode:			
Transmitting:	Keep the EUT in transmitting mode.		
Charge+ transmitting:	Keep the EUT in transmitting mode, and PC charge to EUT.		

4.4 Description of Support Units

The EUT was tested with associated equipment as below:

Description	Manufacturer	Model No.	
PC	DELL	OPTIPLEX 755	
LCD-displaying	DELL	E1909WF	
KEYBOARD	DELL	SK-8115	
MOUSE	DELL	MOC5110	
PC	DELL	OPTIDLEX 330	
LCD-displaying	DELL	SP2208WFPT	
KEYBOARD	DELL	SK-8115	
MOUSE	DELL	MOC5110	
Coder	HengTong ELECTRON	HT4000	
Printer	Canon	BJC-1000SP	
Mobile	Nokia	6300	



Report No.: SZEM110600136901

Page : 7 of 48

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively.

Date of Registration: September 29, 2008. Valid until September 28, 2011.

FCC - Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, March 16, 2011

Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 No tests were sub-contracted.

4.7 Other Information Requested by the Customer

None.



Report No.: SZEM110600136901

Page : 8 of 48

4.8 Test Instruments list

RE in Chamber							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2012-06-10		
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2012-05-26		
3	EMI Test software	AUDIX	E3	SEL0050	N/A		
4	Coaxial cable	SGS	N/A	SEL0028	2012-05-29		
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2011-11-09		
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2011-11-09		
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2011-11-09		
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2012-05-26		
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2011-10-27		
11	Band filter	Amindeon	82346	SEL0094	2012-05-26		

RF conducted								
Item	Test Equipment	Manufacturer	Model No.	·	Cal.Due date (yyyy-mm-dd)			
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2011-10-27			
2	Coaxial cable	SGS	N/A	SEL0028	2012-05-29			



Report No.: SZEM110600136901

Page : 9 of 48

Conducted Emission							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2012-06-10		
2	Two-Line V-Network	ETS-LINDGREN	3816/2	SEL0021	2012-05-26		
3	LISN	Rohde & Schwarz	ENV216	SEL0152	2011-10-27		
4	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2012-05-26		
5	Coaxial Cable	SGS	N/A	SEL0024	2012-05-29		

General used equipment								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)			
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2011-11-04			
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2012-03-10			
3	Barometer	ChangChun	DYM3	SEL0088	2012-05-18			



Report No.: SZEM110600136901

Page : 10 of 48

5 Test results and Measurement Data

5.1 Antenna requirement:

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best gain of the antenna is 2.0dBi.

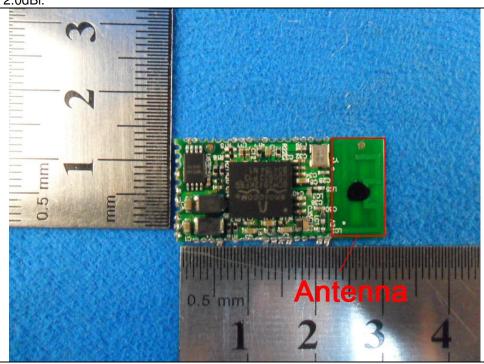



Report No.: SZEM110600136901

Page : 11 of 48

5.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10: 2009		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Limit:	Frequency range (MHz)	Limit (c	dBuV)
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm		
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.		
Test setup:	Reference Plane		
	AUX Equipment Test table/Insulation plane Remark E.U.T: Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0 8m		
Test Instruments:	Refer to section 4.8 for details		
Test mode:	Charge+transmitting mode		
	, , ,		
Test results:	Pass		

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



Report No.: SZEM110600136901

Page : 12 of 48

Live Line:

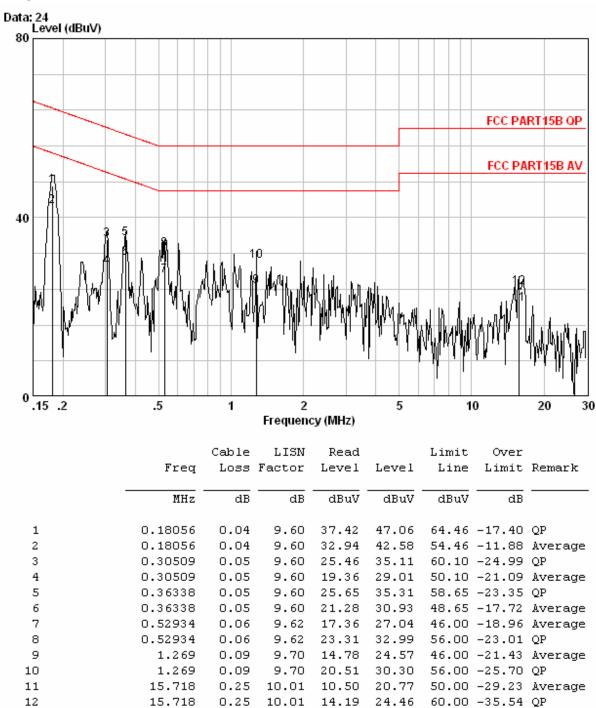

Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM110600136901

Page : 13 of 48

Neutral Line:

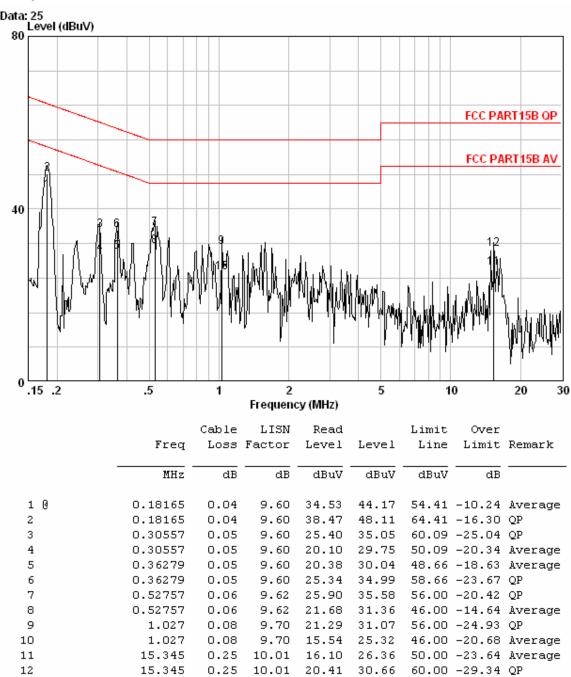

Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM110600136901

Page : 14 of 48

5.3 Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)	
Test Method:	ANSI C63.10:2009	
Limit:	30dBm	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:	
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Test Instruments:	Refer to section 4.8 for details	
Test state:	Non-hopping transmitting with all kinds of modulation.	
Test results:	Pass	

Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-0.05	30.00	Pass
Middle	0.98	30.00	Pass
Highest	1.19	30.00	Pass




Report No.: SZEM110600136901


Page : 15 of 48

Test plot as follows:

Test mode: GFSK Test channel: Lowest

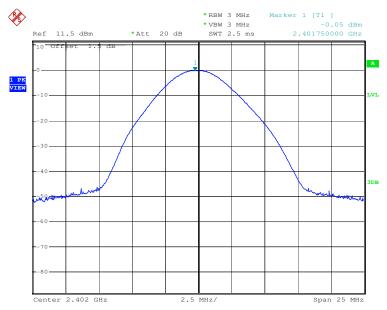

Test mode: GFSK Test channel: Middle

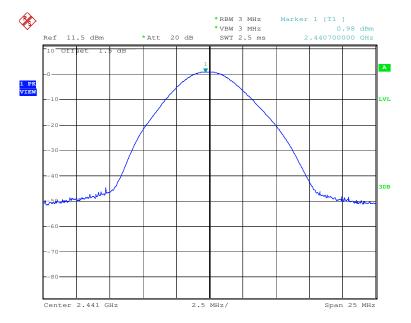




Report No.: SZEM110600136901

Page : 16 of 48

Test mode: GFSK Test channel: Highest

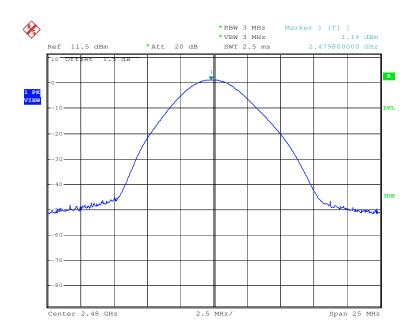



Report No.: SZEM110600136901

Page : 17 of 48

5.4 20dB Occupy Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Limit:	NA	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 4.8 for details	
Test state:	Non-hopping transmitting with all kind of modulation.	
Test results:	Pass	

Measurement Data

Test channel	20dB Occupy Bandwidth (KHz)	
	GFSK	
Lowest	1122	
Middle	1122	
Highest	1122	




Report No.: SZEM110600136901


Page : 18 of 48

Test plot as follows:

Test mode: GFSK Test channel: Lowest

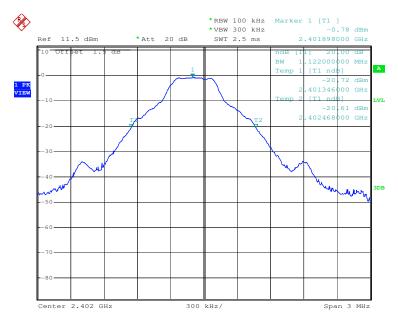



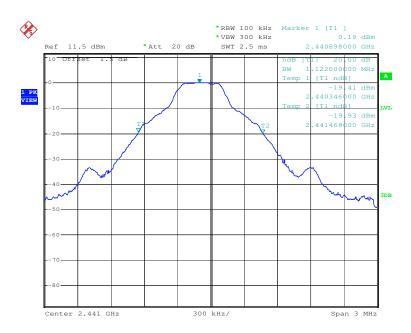




Report No.: SZEM110600136901

Page : 19 of 48

Test mode: GFSK Test channel: Highest

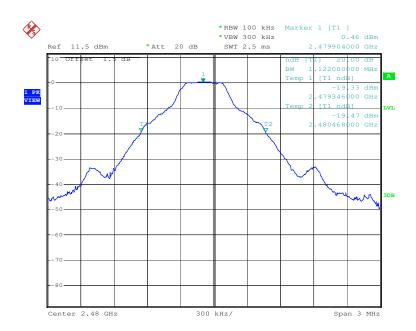



Report No.: SZEM110600136901

Page : 20 of 48

5.5 Carrier Frequencies Separation

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test state:	Hopping transmitting with all kind of modulation.	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 4.8 for details	
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)	
Test results:	Pass	

Measurement Data

modelation and a second			
GFSK mode			
Test channel Carrier Frequencies Limit (KHz) Result			
Lowest	1000	≥748.0	Pass
Middle	1000	≥748.0	Pass
Highest	1000	≥748.0	Pass

Note: According to section 5.4,


Mode	20dB bandwidth (KHz)	Limit (KHz)	
Mode	(worse case)	(Carrier Frequencies Separation)	
GFSK	1122	748.0	




Report No.: SZEM110600136901

Page : 21 of 48

Test plot as follows:

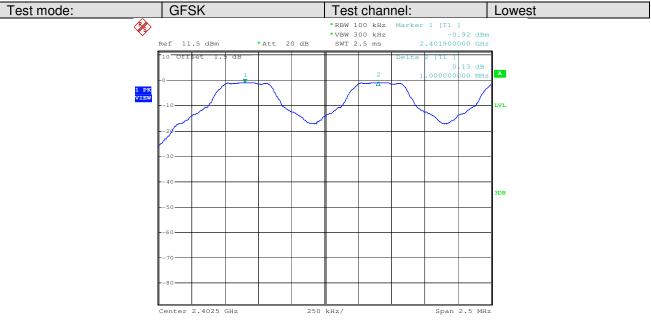



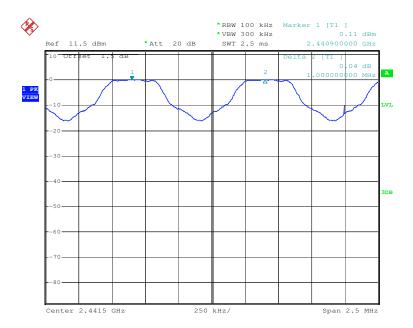




Report No.: SZEM110600136901

Page : 22 of 48

Test mode: GFSK Test channel: Highest

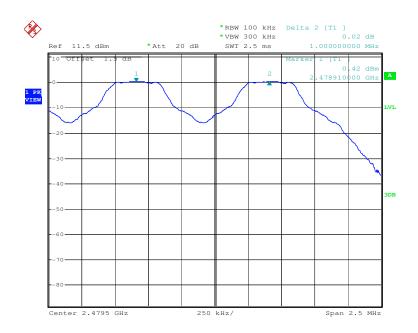



Report No.: SZEM110600136901

Page : 23 of 48

5.6 Hopping Channel Number

Test Requirement:	FCC Part15 C Section 15.247 (b)	
Test Method:	ANSI C63.10:2009	
Requirement:	≥75 channels	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 4.8 for details	
Test state:	Hopping transmitting with all kind of modulation.	
Test results:	Pass	

Measurement Data

Mode	Hopping channel	Requirement
GFSK	79	≥75




Report No.: SZEM110600136901

Page : 24 of 48

Test plot as follows

Test mode: GFSK

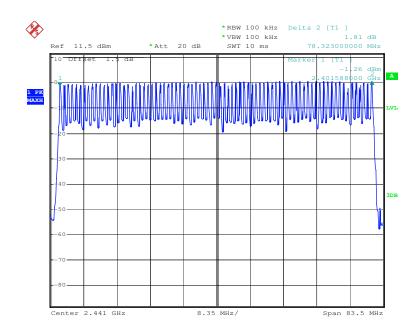



Report No.: SZEM110600136901

Page : 25 of 48

5.7 Dwell Time

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Limit:	≤ 0.4 Second	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 4.8 for details	
Test state:	Hopping transmitting with all kind of modulation.	
Test results:	Pass	

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
	DH1	0.1616	≤0.4
GFSK	DH3	0.2824	≤0.4
	DH5	0.3187	≤0.4

Test Result:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as blow

DH1 time slot=0.505(ms)*(1600/ (2*79))*31.6=161.6ms

DH3 time slot=1.765(ms)*(1600/ (4*79))*31.6=282.4ms


DH5 time slot=2.99(ms)*(1600/ (6*79))*31.6=318.7ms




Report No.: SZEM110600136901

Page : 26 of 48

Test plot as follows

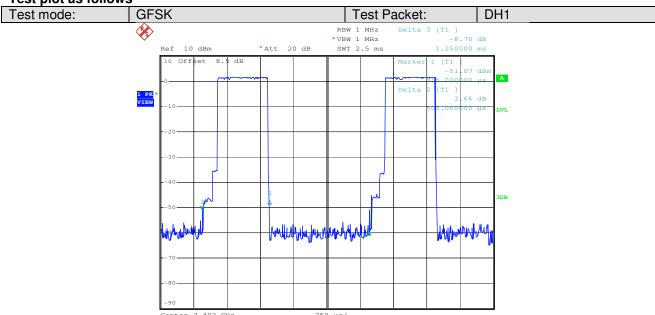



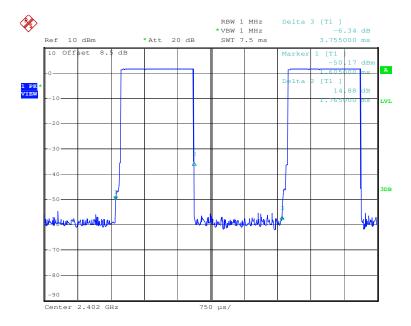




Report No.: SZEM110600136901

Page : 27 of 48

Test mode: GFSK Test Packet: DH5

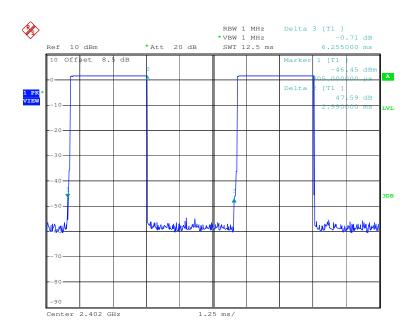



Report No.: SZEM110600136901

Page : 28 of 48

5.8 Band Edge

Test Requirement:	FCC Part15 C Section 15.247 (d)				
Test Method:	ANSI C63.10:2009				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test setup:					
	Spectrum Analyzer E.U.T Non-Conducted Table				
	Ground Reference Plane				
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.				
Test Instruments:	Refer to section 4.8 for details				
Test state:	Hopping transmitting with all kinds of modulation.				
Test results:	Pass				





Report No.: SZEM110600136901

Page : 29 of 48

Test plot as follows:

Test mode: GFSK Test channel: Lowest

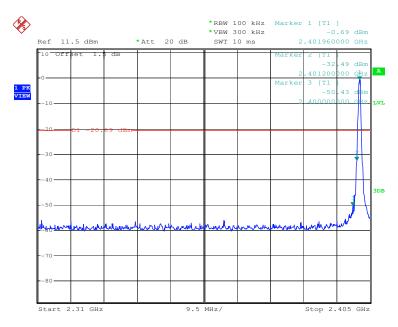

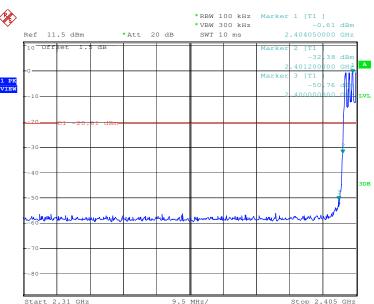





Report No.: SZEM110600136901

Page : 30 of 48

Test mode: GFSK Test channel: Highest

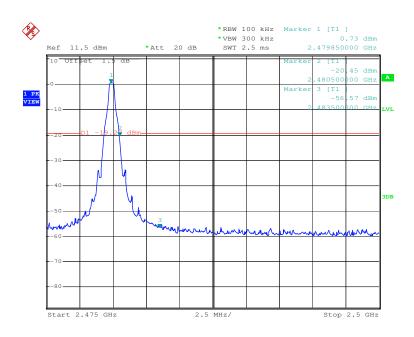

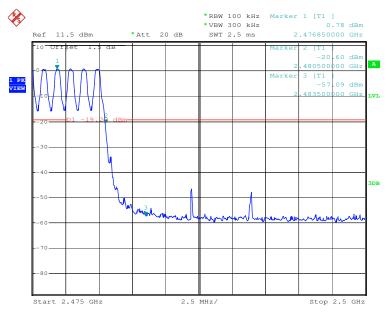



Report No.: SZEM110600136901

Page : 31 of 48


5.9 RF Antenna Conducted spurious emissions

Test Requirement:	FCC Part15 C Section 15.247 (d)				
Test Method:	ANSI C63.10:2009				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.				
Test Instruments:	Refer to section 4.8 for details				
Test results:	Pass				




Report No.: SZEM110600136901

Page : 32 of 48

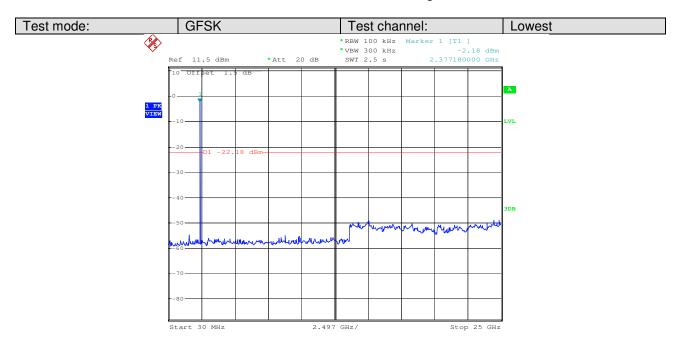



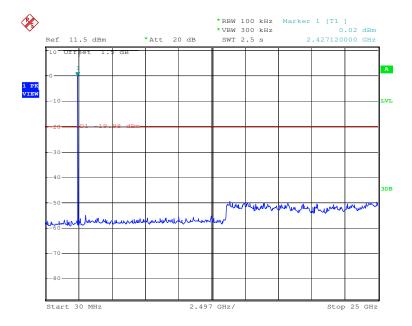




Report No.: SZEM110600136901

Page : 33 of 48

Test mode: GFSK Test channel: Highest

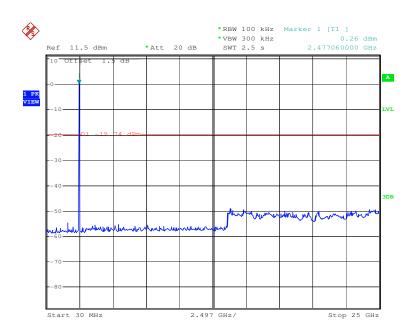



Report No.: SZEM110600136901

Page : 34 of 48

5.10 Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 -1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEM110600136901

Page : 35 of 48


5.11 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205							
Test Method:	ANSI C63.10: 2009							
Test Frequency Range:	30MHz to 25GHz							
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver setup:								
	Frequency	Frequency Detector		VBW	Remark			
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value			
	Above 1GHz	Peak	1MHz	3MHz	Peak Value			
	Above IGHZ	Peak	1MHz	10Hz	Average Value			
Limit:								
	Frequency 30MHz-88MHz 88MHz-216MHz 216MHz-960MHz		Limit (dBuV/m @3m)		Remark			
			40.0		Quasi-peak Value			
			43.5		Quasi-peak Value			
			46.0		Quasi-peak Value			
	960MHz-1GHz		54.0		Quasi-peak Value			
	Above 1GHz		54.0		Average Value			
			74.0		Peak Value			
Test Procedure:	 The EUT is placed on a turntable, which is 0.8m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. Maximum procedure was performed on the six highest emissions to ensure EUT compliance. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. Repeat above procedures until the measurements for all frequencies are complete. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report. 							
Test Instruments:	Refer to section 4.8 for details							
Test mode:	Transmitting mode.							
Test results:	Pass							



Report No.: SZEM110600136901

Page : 36 of 48

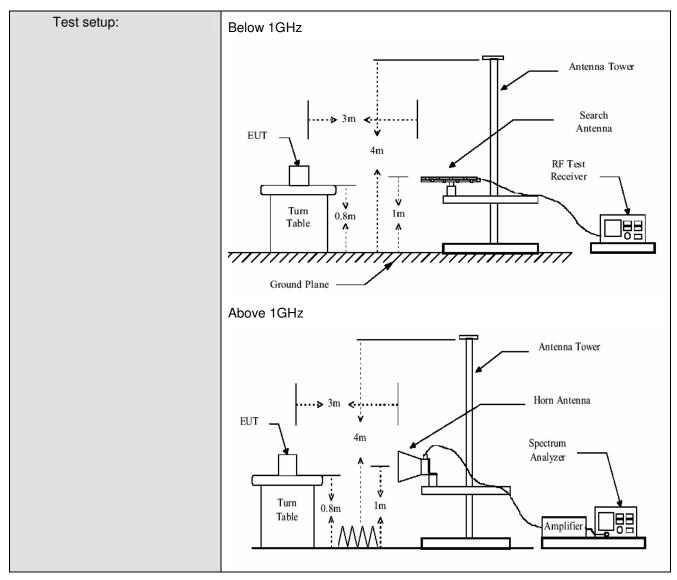

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor




Report No.: SZEM110600136901

Page : 37 of 48

5.11.1 Radiated emission below 1GHz

Transmitting mode

Vertical

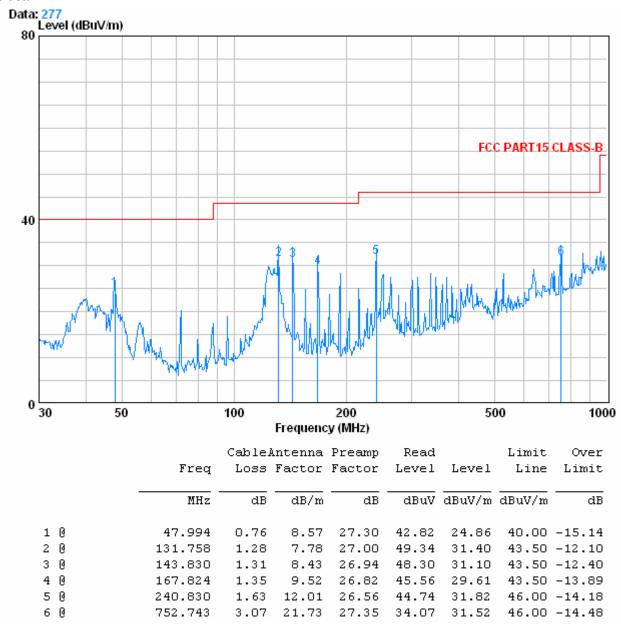




Report No.: SZEM110600136901

Page : 38 of 48

Horizontal

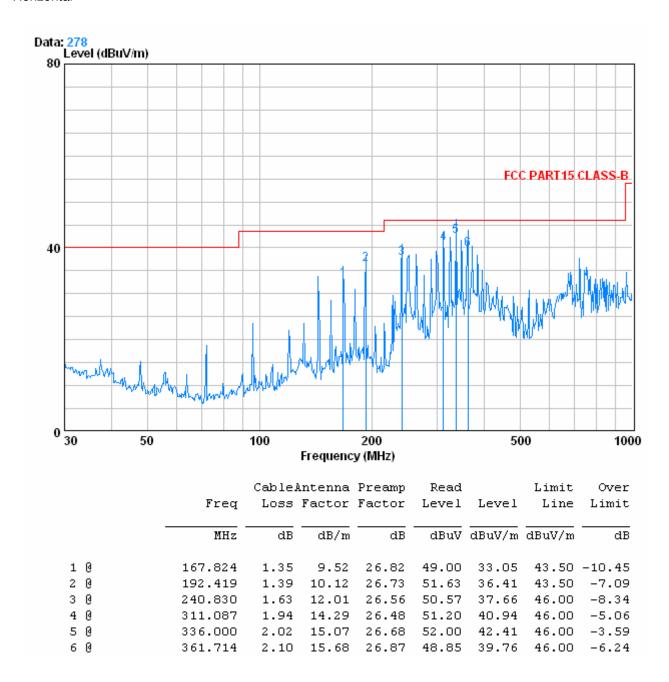

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110600136901

Page : 39 of 48

5.11.2 Transmitter emission above 1GHz

Test mode:		GFSK	Test	channel:	Lowest	Rema	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization
1593.340	2.58	28.84	39.39	55.18	47.21	74.00	-26.79	Vertical
2987.923	3.31	33.38	40.30	51.36	47.75	74.00	-26.25	Vertical
3672.110	3.88	33.41	40.80	49.80	46.29	74.00	-27.71	Vertical
4676.696	4.61	34.92	41.54	50.49	48.48	74.00	-25.52	Vertical
6219.512	5.19	35.96	40.73	50.78	51.20	74.00	-22.80	Vertical
7470.558	6.08	35.99	39.64	51.08	53.51	74.00	-20.49	Vertical
1593.340	2.58	28.84	39.39	54.87	46.90	74.00	-27.10	Horizontal
2987.923	3.31	33.38	40.30	52.36	48.75	74.00	-25.25	Horizontal
4096.875	4.23	34.08	41.11	50.18	47.38	74.00	-26.62	Horizontal
4785.075	4.68	34.73	41.61	54.28	52.08	74.00	-21.92	Horizontal
6347.466	5.22	36.12	40.63	50.74	51.45	74.00	-22.55	Horizontal
8615.126	6.17	36.29	38.65	49.85	53.66	74.00	-20.34	Horizontal

Test mode:		GFSK Te		t channel:	Middle	Middle Ren		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization
1621.985	2.59	29.09	39.41	54.52	46.79	74.00	-27.21	Vertical
3672.110	3.88	33.41	40.80	49.61	46.10	74.00	-27.90	Vertical
4490.048	4.48	35.15	41.40	49.72	47.95	74.00	-26.05	Vertical
5560.500	4.97	34.98	41.30	49.92	48.57	74.00	-25.43	Vertical
7941.185	6.21	36.00	39.24	49.81	52.78	74.00	-21.22	Vertical
10916.260	6.20	38.47	37.83	46.96	53.80	74.00	-20.20	Vertical
1621.985	2.59	29.09	39.41	54.06	46.33	74.00	-27.67	Horizontal
2995.538	3.31	33.38	40.30	51.07	47.46	74.00	-26.54	Horizontal
3709.691	3.91	33.45	40.83	50.38	46.91	74.00	-27.09	Horizontal
4983.987	4.77	34.43	41.77	51.52	48.95	74.00	-25.05	Horizontal
6347.466	5.22	36.12	40.63	49.77	50.48	74.00	-23.52	Horizontal
8022.456	6.20	36.01	39.16	49.93	52.98	74.00	-21.02	Horizontal



Report No.: SZEM110600136901

Page : 40 of 48

Test mode:		GFSK	Tes	t channel:	Highest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization
1655.354	2.62	29.33	39.42	54.08	46.61	74.00	-27.39	Vertical
4547.561	4.53	35.12	41.44	49.77	47.98	74.00	-26.02	Vertical
6032.401	5.13	35.74	40.89	50.30	50.28	74.00	-23.72	Vertical
7489.599	6.10	36.00	39.62	49.57	52.05	74.00	-21.95	Vertical
8703.294	6.17	36.36	38.59	48.01	51.95	74.00	-22.05	Vertical
11486.410	6.34	38.40	38.06	45.98	52.66	74.00	-21.34	Vertical
1642.761	2.60	29.21	39.42	53.31	45.70	74.00	-28.30	Horizontal
2987.923	3.31	33.38	40.30	51.77	48.16	74.00	-25.84	Horizontal
3903.444	4.08	33.70	40.97	51.12	47.93	74.00	-26.07	Horizontal
4983.987	4.77	34.43	41.77	51.48	48.91	74.00	-25.09	Horizontal
6299.178	5.20	36.06	40.66	49.83	50.43	74.00	-23.57	Horizontal
8355.943	6.19	36.14	38.88	50.05	53.50	74.00	-20.50	Horizontal

Remark: 1.The disturbance above 13GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

2. As shown in this section, the peak field strength of any emission shall not exceed the maximum permitted average limits So, only the peak measurements were shown in the report.




Report No.: SZEM110600136901

Page : 41 of 48

5.11.3 Band edge (Radiated Emission)

Test mode: Transmitting Test channel: Lowest Remark: Peak Vertical

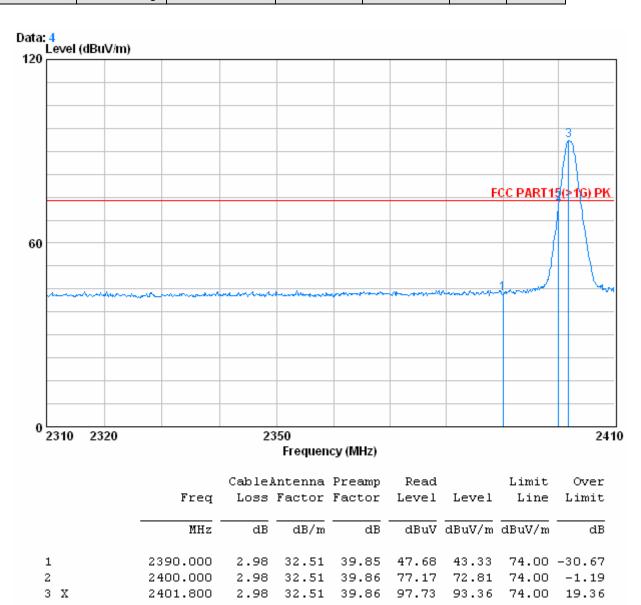


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110600136901

Page : 42 of 48

Test mode: Transmitting Test channel: Lowest Remark: Peak Horizontal

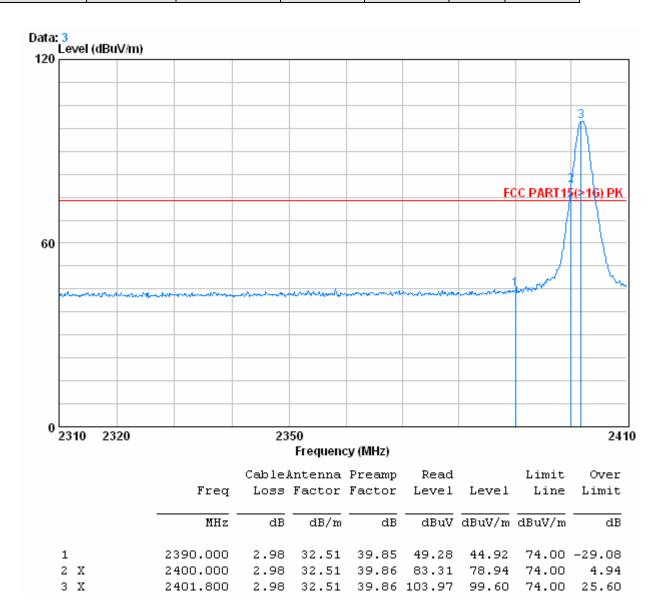




Report No.: SZEM110600136901

Page : 43 of 48

Test mode: Transmitting Test channel: Lowest Remark: Average Vertical

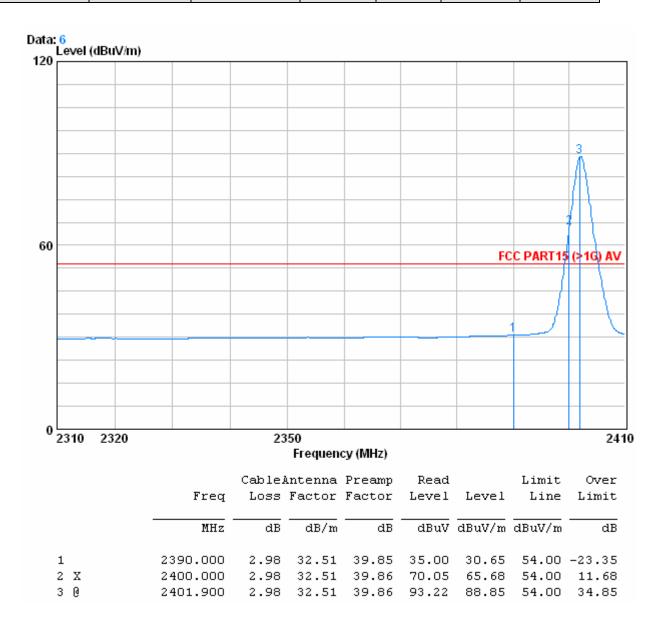


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110600136901

Page : 44 of 48

Test mode: Transmitting Test channel: Lowest Remark: Average Horizontal

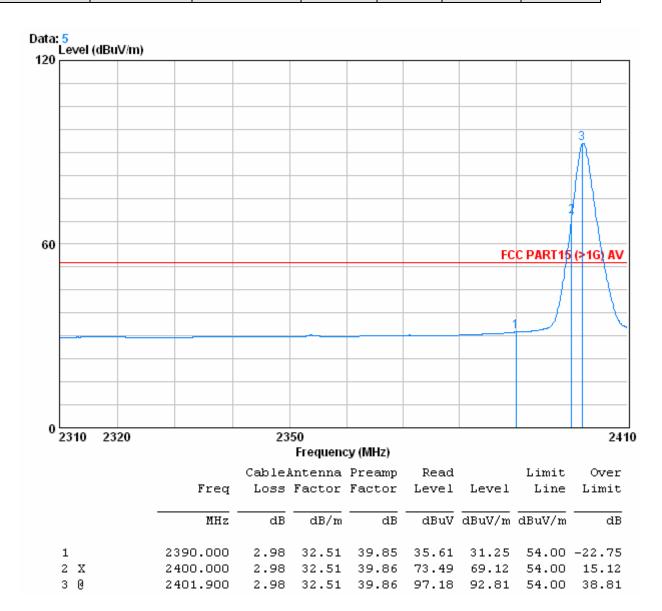




Report No.: SZEM110600136901

Page : 45 of 48

Test mode: Transmitting Test channel: Highest Remark: Peak Vertical

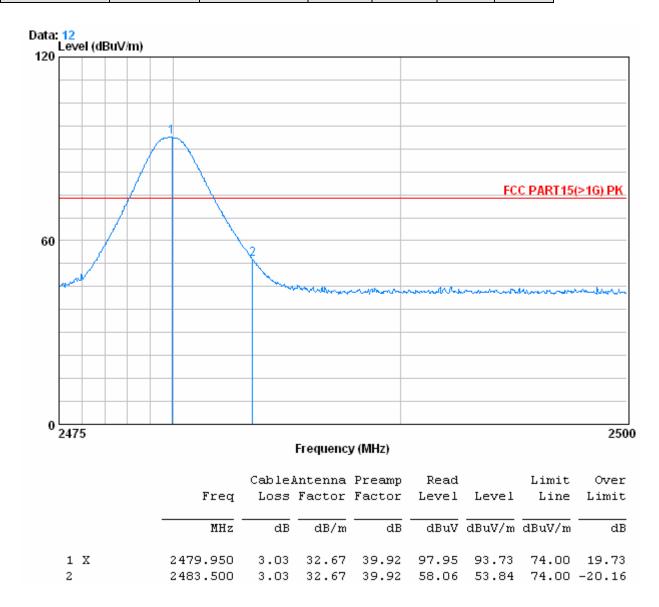


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110600136901

Page : 46 of 48

Test mode: Transmitting Test channel: Highest Remark: Peak Horizontal

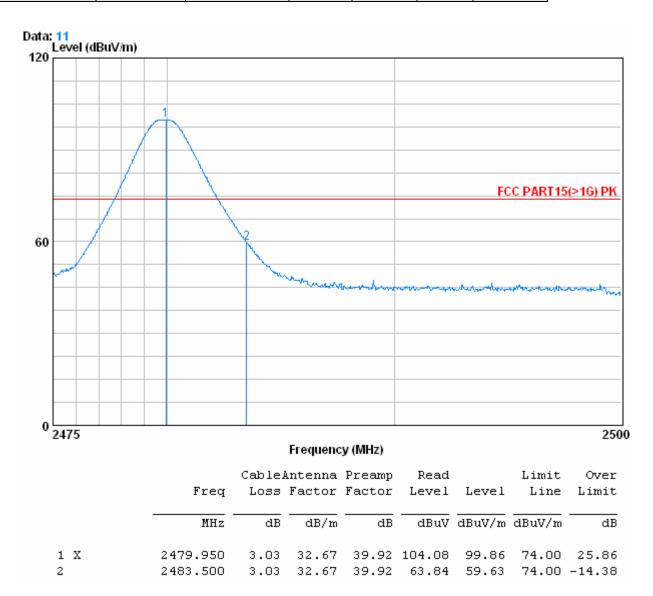




Report No.: SZEM110600136901

Page : 47 of 48

Test mode: Transmitting Test channel: Highest Remark: Average Vertical

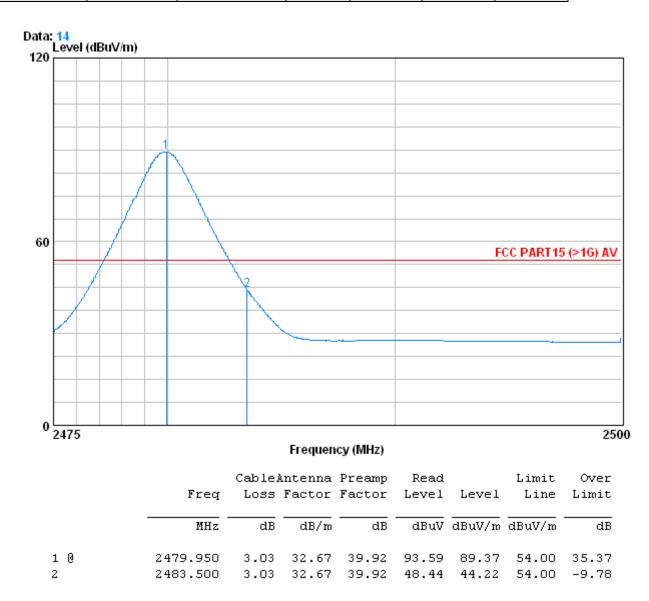

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110600136901

Page : 48 of 48

Test mode: Transmitting Test channel: Highest Remark: Average Horizontal

