

EMI Test Report


Model Name: USB HUB
Model Number: DX-B7PORT
Brand Name: DYNEX
Trade Mark: DYNEX

FCC ID: XJIBLKDXB7PORT

Prepared for Belkin Electronics (Changzhou) Co., Ltd.

According to FCC Part 15, Class B

<i>Test Report #:</i>	<i>SHA-0909-8350-FCC</i>
<i>Prepared by:</i>	<i>Cloud Feng</i>
<i>Reviewed by:</i>	<i>Harry Zhao</i>
<i>QC Manager:</i>	<i>Paul Chen</i>

Test Report Released by: 
Paul Chen

2009, July 13

Date

Test Location

Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room performed testing.

Test Site Location: *ECMG Worldwide Certification
Solution, Inc. (China)
Building 2, 1298 Lian Xi Road,
Pu Dong New Area, Shanghai,
P.R. China 201204*

Tel: *86-21-51909300*

Fax: *86-21-51909333*

FCC Registration Number: *172634*

Table of Contents

<i>GOVERNMENT DISCLAIMER NOTICE</i>	<i>1</i>
<i>REPRODUCTION CLAUSE</i>	<i>1</i>
<i>ADMINISTRATIVE DATA</i>	<i>2</i>
<i>EUT DESCRIPTION</i>	<i>2</i>
<i>TEST SUMMARY</i>	<i>3</i>
<i>TEST MODE JUSTIFICATION</i>	<i>4</i>
<i>EUT EXERCISE SOFTWARE</i>	<i>4</i>
<i>EQUIPMENT MODIFICATION</i>	<i>5</i>
<i>TEST SYSTEM DETAILS</i>	<i>6</i>
<i>CONFIGURATION OF TESTED SYSTEM</i>	<i>8</i>
<i>ATTACHMENT 1 - CONDUCTED EMISSION TEST RESULTS</i>	<i>9</i>
<i>ATTACHMENT 2 - RADIATED EMISSION TEST RESULTS</i>	<i>12</i>

Government Disclaimer Notice

When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by any agency of the U.S. Government.

Reproduction Clause

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from ECMG Worldwide Certification Solution, Inc., 684 West Maude Avenue Sunnyvale, CA 94085.

Administrative Data

Test Sample : USB HUB

Model Tested : DX-B7PORT

Trade Mark : DYNEX

Serial Number : Engineering Sample

Date Tested : 2009, October 09th

*Applicant : Belkin Electronics (Changzhou) Co., Ltd.
Bldg 6C, No.8 Xi-Hu Road, Wujin Hi-Tech
Industrial Zone, Jiangsu*

Telephone : 86-519-86220991

Fax : 86-519-86226020

*Manufacturer : Belkin Electronics (Changzhou) Co., Ltd.
Bldg 6C, No.8 Xi-Hu Road, Wujin Hi-Tech
Industrial Zone, Jiangsu*

EUT Description

Belkin Electronics (Changzhou) Co., Ltd., model DX-B7PORT (referred to as the EUT in this report) is a USB HUB.

The highest frequency generated by the EUT is 480 MHz, so the frequency range tested is from 30MHz – 2000MHz.

Test Summary

The Electromagnetic Compatibility requirements on model DX-B7PORT for this test are stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

<i>Emission Tests</i>				
<i>Specifications</i>	<i>Description</i>	<i>Test Results</i>	<i>Test Point</i>	<i>Remark</i>
<i>FCC Part 15.107 (150kHz – 30MHz)</i>	<i>Conducted Emission</i>	<i>For DX-B7PORT: Passed by 19.75 dB of QP Passed by 18.95 dB of AVE</i>	<i>AC Input Port</i>	<i>Attachment 1</i>
<i>FCC Part 15.109 (30MHz – 2000MHz)</i>	<i>Radiated Emission</i>	<i>For DX-B7PORT: Passed by 1.88 dB of QP</i>	<i>Enclosure</i>	<i>Attachment 2</i>

Test Mode Justification

This device complies with Part 15 Class B of the FCC rules. The system was tested in the Transmitting data mode.

The EUT connects one U-disk and the other ports connect with USB cables. Pursuant to section 6.1.3(4) of ANSI C63.4, Where there are multiple ports all of the same type, additional connecting cables or wires shall be added to the EUT to determine the effect these cables or wires have on both radiated and conducted emissions from the EUT. The number of additional cables or wires should be limited to the condition where the addition of another cable or wire does not significantly affect the emission level, i.e., varies less than 2 dB, provided, of course, that the EUT remains compliant. These additional cables or wires need not be terminated.


EUT Exercise Software

The software transmit.bat runs on windowsXP, which was used to exercise the EUT during testing. The files are copying and deleting continuously from the U-disk attached on the USB port of EUT to the PC.

Equipment Modification

There is a copper cover the USB connector. This modification is made to the EUT to bring the EUT into compliance with the appropriate specifications, that the product will have all of the modification incorporated into the product when manufactured and placed on the market.

The copper's dimension is 70mm 20mm, Manufacturer: lairdcateron, Kunshan.*

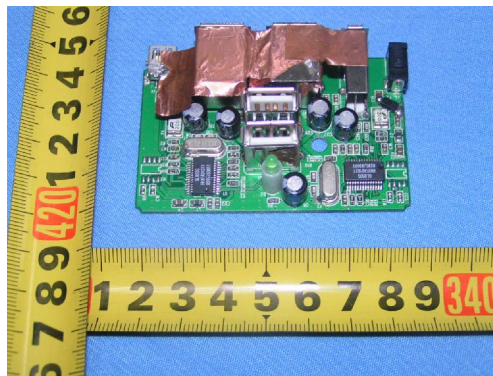

There were no modifications installed by ECMG Worldwide Certification Solution, Inc (China) test personnel.



Test System Details

EUT				
Model Number:	DX-B7PORT			
Trade Mark:	DYNEX			
Input Voltage:	5V DC			
Serial Number:	Engineering Sample			
Description:	USB HUB			
Manufacturer:	Belkin Electronics (Changzhou) Co., Ltd.			
EUT Power Supply				
Model Numbers:	DSA-30W-05 US			
Input:	100-240V 50/60Hz 0.8A			
Output:	5V 3.8A			
Support Equipment				
Description	Model Number	Serial Number	Manufacturer	Power Cable Description
PC	OPTIPLEX 330	HBSF92X	DELL	1.8m unshielded
Monitor	E178FPC	CN0WR979641 807CA7L4C	DELL	1.8m unshielded
Keyboard	L100	CN0RH656658 907C401F9	DELL	N/A
Mouse	MOC5UO	G1D02BPQ	DELL	N/A
Printer converter	45CV	961217	INTEL LIGENT	N/A
Remote control box	IT-251B	N/A	N/A	N/A

Continue on to the next page...

<i>U disk</i>	<i>iPod shuffle MB683</i>	<i>03285</i>	<i>Apple</i>	<i>1.2m unshielded</i>	
<i>Cable Description</i>					
<i>Description</i>	<i>From</i>	<i>To</i>	<i>Length (Meters)</i>	<i>Shielded (Y/N)</i>	<i>Ferrite (Y/N)</i>
<i>Power Cable</i>	<i>Adaptor</i>	<i>EUT</i>	<i>1.5m</i>	<i>N</i>	<i>N</i>
<i>USB Cable</i>	<i>EUT</i>	<i>PC</i>	<i>1.2m</i>	<i>Y</i>	<i>N</i>
<i>Parallel Cable</i>	<i>Converter</i>	<i>PC</i>	<i>0.5m</i>	<i>N</i>	<i>N</i>
<i>Serial Cable</i>	<i>Remote box</i>	<i>PC</i>	<i>1.5m</i>	<i>N</i>	<i>N</i>
<i>USB Cable</i>	<i>Udisk</i>	<i>EUT</i>	<i>1.2m</i>	<i>Y</i>	<i>N</i>
<i>USB CableX6</i>	<i>EUT</i>		<i>1.2m</i>	<i>N</i>	<i>N</i>

Configuration of Tested System

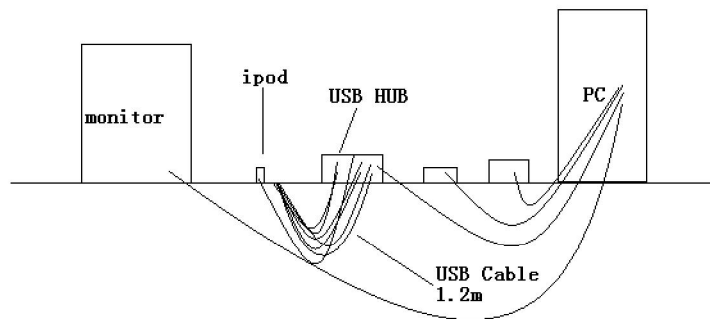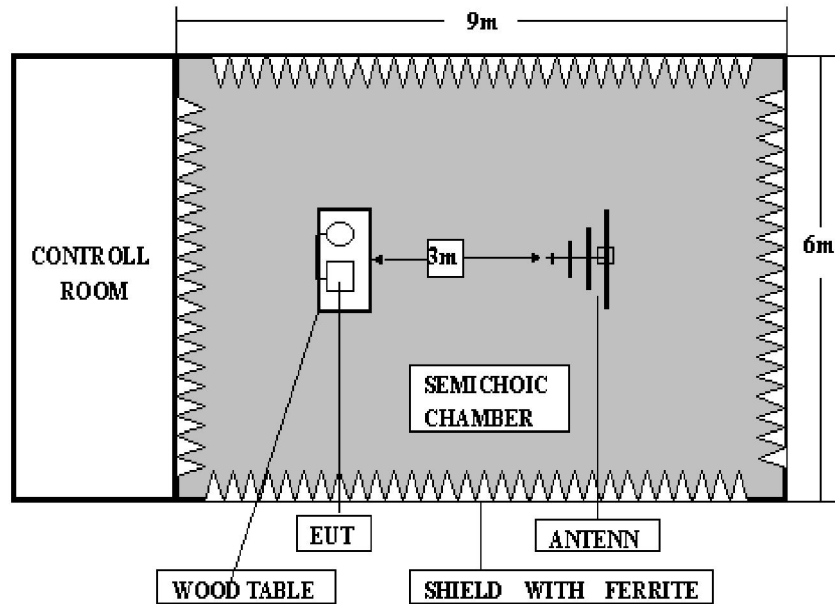


EUT arrangements Layout View


ATTACHMENT 1 - CONDUCTED EMISSION TEST RESULTS

CLIENT:	Belkin Electronics (Changzhou) Co., Ltd.	TEST REFERENCE:	FCC Part 15 subpart B Class B
MODEL TESTED:	DX-B7PORT	PRODUCT:	USB HUB
SERIAL NO.:	Engineering Sample	EUT DESIGNATION:	ITE equipment
TEMPERATURE:	25°C	HUMIDITY:	52%
ATM PRESSURE:	101.7Pa	GROUNDING:	Grounding through USB
TESTED BY:	Cloud Feng	DATE OF TEST:	2009, October 09
SETUP METHOD:	ANSI C63.4-2003		
TEST PROCEDURE:	<p>a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.</p> <p>b. Connect EUT to the power mains through a line impedance stabilization network(LISN)</p> <p>c. The LISN provides 50ohm coupling impedance for the measuring instrument</p> <p>d. Both sides of AC line were checked for maximum conducted interference.</p> <p>e. The frequency range from 150KHz to 30MHz was searched.</p> <p>f. Set the test-receiver system to Peak Detect Function and Specified bandwidth.</p> <p>g. If the emission level of the EUT in peak mode was 20 dB lower than the specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be tested using the quasi-peak method in about six maximal points and the results will be reported.</p>		
TESTED RANGE:	150kHz to 30MHz		
TEST VOLTAGE:	120VAC/60Hz		
RESULTS:	<p>For DX-B7PORT:</p> <p>The EUT meets the requirements of test reference for Conducted Emissions on line L by 19.75 dB of Quasi-Peak detector and by 18.95 dB of Average detector.</p> <p>The test results relate only to the equipment under test provided by client.</p>		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Worldwide Certification Solution, Inc (China) test personnel.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp ± 2.6 dB		

For DX-B7PORT:

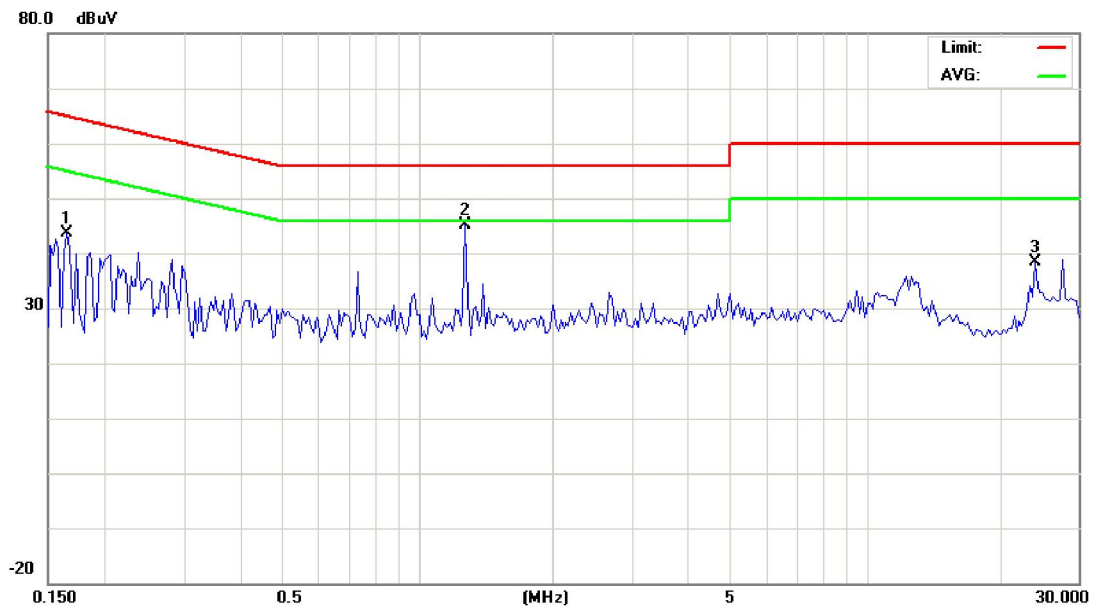

Line L Conducted Emission Graph

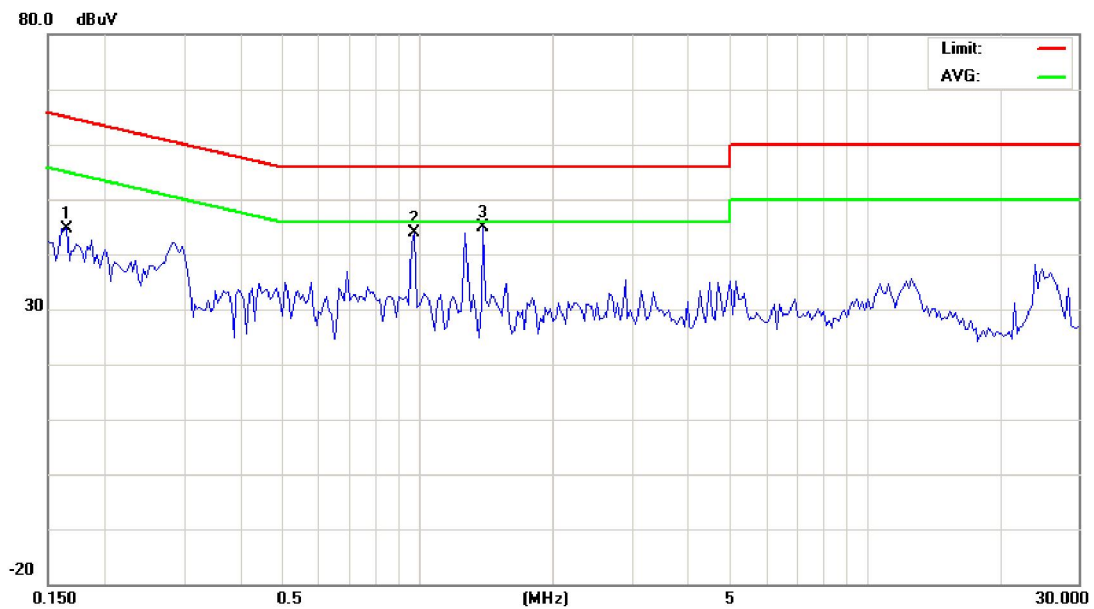

Line N Conducted Emission Graph

Line L (Hot Lead)								
Signal	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AVE Level (dBuV)	Limits AVE (dBuV)	Margin AVE (dB)
1	0.165	43.54	65.23	-21.69	0.165	36.28	55.23	-18.95
2	1.282	36.25	56.00	-19.75	1.282	25.15	46.00	-20.85
3	23.951	38.40	60.00	-21.60	23.951	27.05	50.00	-22.95
Line N (Neutral Lead)								
Signal	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AVE Level (dBuV)	Limits AVE (dBuV)	Margin AVE (dB)
1	0.165	44.65	65.22	-20.57	0.165	34.28	55.22	-20.94
2	0.984	34.00	56.00	-22.00	0.984	26.31	46.00	-19.69
3	1.407	34.90	56.00	-21.10	1.407	26.67	46.00	-19.33
Note: All readings are using a bandwidth of 9 kHz, with a 30 ms sweep time. A video filter was not used.								

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due Date
EMI Receiver	HP	85462A	3650A00363	11/29/08	11/28/09
LISN	R&S	ESH3-Z5	844249/018	12/04/08	12/03/09
LISN 2	EMCO	3816/2	00084033	12/04/08	12/03/09
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.					

SIGNED BY: Chou Feng
ENGINEER

REVIEWED BY: Hongzhan
SENIOR ENGINEER

ATTACHMENT 2 - RADIATED EMISSION TEST RESULTS

CLIENT:	Belkin Electronics (Changzhou) Co., Ltd.	TEST REFERENCE:	FCC Part 15, Class B
MODEL TESTED:	DX-B7PORT	PRODUCT:	USB HUB
SERIAL NO.:	Engineering Sample	EUT DESIGNATION:	ITE equipment
TEMPERATURE:	25°C	HUMIDITY:	52%
ATM PRESSURE:	101.7Pa	GROUNDING:	Grounding through USB
TESTED BY:	Cloud Feng	DATE OF TEST:	2009, October 09
SETUP METHOD:	ANSI C63.4-2003		
TEST PROCEDURE:	<p>a. The EUT was placed on a rotatable table with 0.8 meters above ground.</p> <p>b. The EUT was set 3 meters from the interference-receiving antenna, which was mounted on the top of a variable height antenna tower.</p> <p>c. For each suspected emission the EUT was arranged to its worst case and turn table (from 0 degree to 360 degree) to find the maximum reading.</p> <p>d. If the emission level of the EUT in peak mode was 20 dB lower than the specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be tested using the quasi-peak method in about six maximal points and the results will be reported.</p> <p>Explanation of the Correction Factor are given as follows:</p> $FS = RA + AF + CF - AG$ <p>Where: FS = Field Strength RA = Receiver Amplitude AF = Antenna Factor CF = Cable Attenuation Factor AG = Amplifier Gain</p>		
TESTED RANGE:	30MHz to 2000MHz		
TEST VOLTAGE:	120VAC / 60Hz		
RESULTS:	<p>For DX-B7PORT: The EUT meets the requirements of test reference for Radiated Emissions on Horizontal polarization by 1.88 dB at 240.978 MHz.</p> <p>The test results relate only to the equipment under test provided by client.</p>		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Worldwide Certification Solution, Inc (China) test personnel.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp ± 2.6 dB		

*For DX-B7PORT:
30MHz-1000MHz*




Field strength Emission Plot (Peak, Max Hold Mode Horizontal)




Field strength Emission Plot (Peak, Max Hold Mode Vertical)

30MHz-1000MHz							
Horizontal							
Signal	Frequency (MHz)	Factor (dB)	Corrected QP Level dB(uV/m)	3 Meter Limits dB(uV/m)	Margin (dB)	Angle of Turner (degree)	Height of Tower (cm)
1	240.978	14.42	44.12	46.00	-1.88	318	172
2	708.753	22.82	43.55	46.00	-2.45	156	114
3	960.158	25.88	48.41	54.00	-5.59	349	201
Vertical							
Signal	Frequency (MHz)	Factor (dB)	Corrected QP Level dB(uV/m)	3 Meter Limits dB(uV/m)	Margin (dB)	Angle of Turner (degree)	Height of Tower (cm)
1	219.152	13.99	41.49	46.00	-4.51	195	175
2	720.105	22.98	41.09	46.00	-4.91	255	111
3	960.151	25.88	50.17	54.00	-3.83	274	102
Set-up/Configuration: ANSI C63.4-2003							
Comments: None							
Note: All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 30 ms sweep time. A video filter was not used.							

1000MHz- 2000MHz

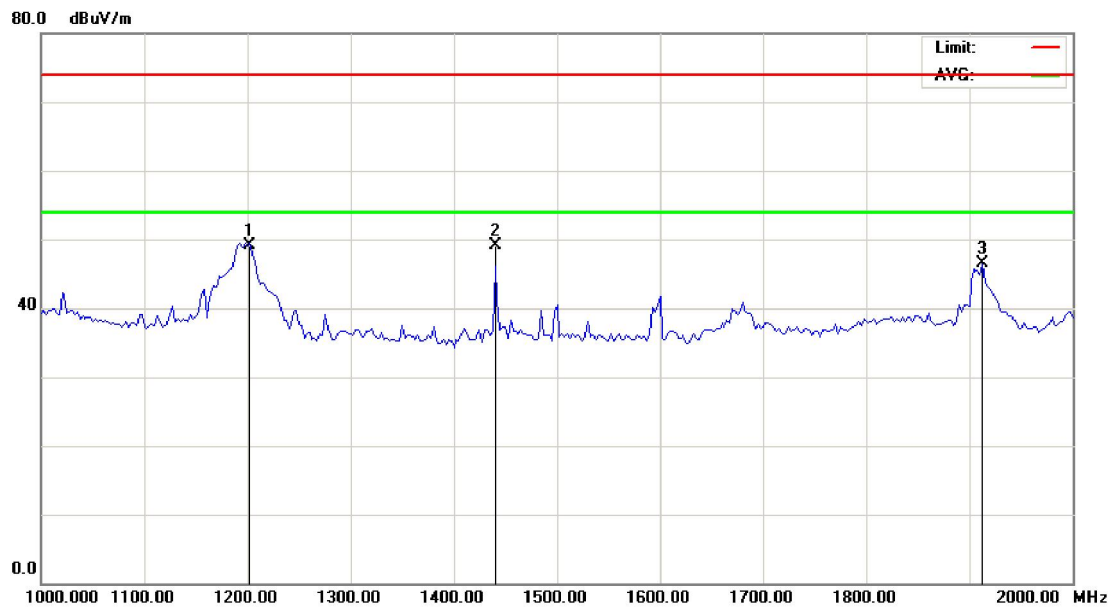

Horizontal Radiated Emission Plot (Peak, Max Hold Mode)

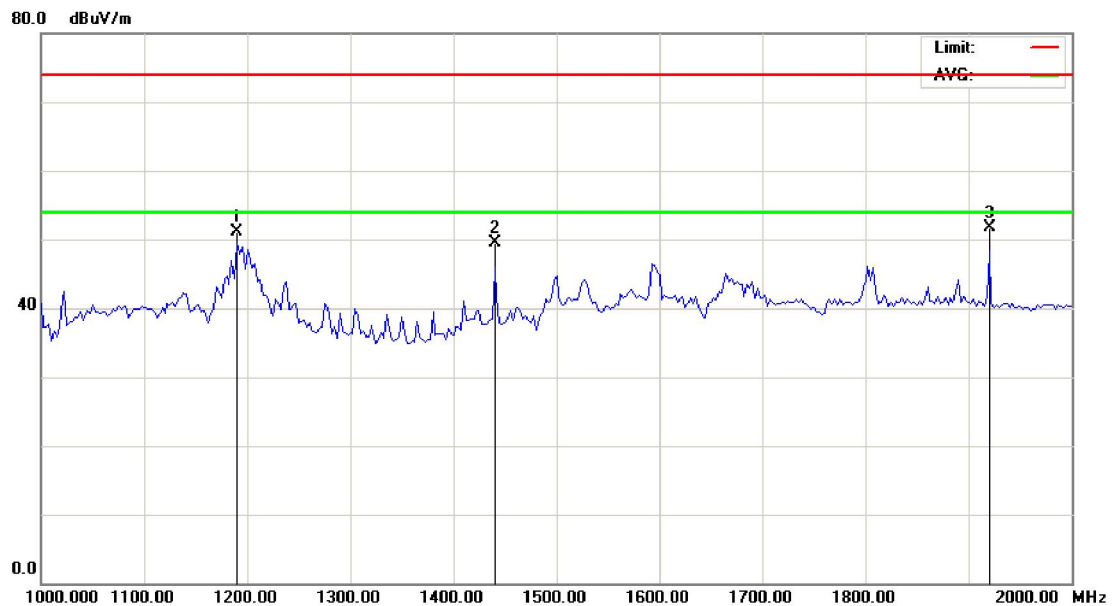

Vertical Radiated Emission Plot (Peak, Max Hold Mode)

1000MHz-2000MHz								
Horizontal								
Signal	Frequency (MHz)	Factor (dB)	Corrected PK Level (dBuV/m)	3 Meter PK Limits (dB uV/m)	Margin (dB)	Corrected AV Level (dBuV/m)	3 Meter AV Limits (dBuV/m)	Margin (dB)
1	1202.5	24.28	48.33	74.00	-25.67	25.33	54.00	-28.67
2	1440.3	25.77	49.36	74.00	-24.64	26.24	54.00	-27.76
3	1920.2	28.80	46.46	74.00	-27.54	26.92	54.00	-27.08
Vertical								
Signal	Frequency (MHz)	Factor (dB)	Corrected PK Level (dBuV/m)	3 Meter PK Limits (dB uV/m)	Margin (dB)	Corrected AV Level (dBuV/m)	3 Meter AV Limits (dBuV/m)	Margin (dB)
1	1190.3	24.20	49.36	74.00	-24.64	26.15	54.00	-27.85
2	1440.1	25.77	49.28	74.00	-24.72	26.34	54.00	-27.66
3	1920.3	28.80	50.22	74.00	-23.78	26.92	54.00	-27.08
Note: All readings are peak and average unless stated otherwise, using a bandwidth of 1000kHz, with a 30 ms sweep time. A video filter was not used.								

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due Date
EMI Receiver	HP	85462A	3650A00363	11/29/08	11/28/09
Broadband Antenna	Sunol	JB5	A110503	11/29/08	11/28/09
Broadband Horn Antenna	Schwarzbek	BBHA9120D	430	11/29/08	11/28/09
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.					

SIGNED BY: Chou Feng
ENGINEER

REVIEWED BY: Hongzhu
SENIOR ENGINEER

EMC Test Report #: BEL-0909-8350-FCC
Prepared for Belkin Electronics (Changzhou) Co., Ltd.
Prepared by ECMG Worldwide Certification Solution, Inc.

Page 16 of 16