

FCC PART 15B

TEST REPORT

For

SHUOYING INDUSTRIAL(SHENZHEN)CO., LTD.

NO.1 Shuoying Rd., Hebei Industry Area, Dalang, Longhua Town, Baoan, Shenzhen, China

FCC ID: XJN-PX0880

Report Type: Original Report	Product Type: Mobile Internet Devices
Test Engineer: Ares Liu <i>Ares Liu</i>	
Report Number: R2DG130407004-00C	
Report Date: 2013-05-23	
Reviewed By: RF Leader Ivan Cao <i>Ivan Cao</i>	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★" (Rev.2). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	4
JUSTIFICATION	4
EUT EXERCISE SOFTWARE	4
EQUIPMENT MODIFICATIONS	4
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL CABLE.....	6
PRINTER	6
KEYBOARD	6
EUT	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....	9
MEASUREMENT UNCERTAINTY	9
EUT SETUP	9
EMI TEST RECEIVER SETUP.....	10
TEST PROCEDURE	10
CORRECTED AMPLITUDE & MARGIN CALCULATION	10
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST RESULTS SUMMARY	11
TEST DATA	11
FCC §15.109 - RADIATED EMISSIONS	16
MEASUREMENT UNCERTAINTY	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST RESULTS SUMMARY	18
TEST DATA	18

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *SHUOYING INDUSTRIAL(SHENZHEN)CO.,LTD.*'s product, model number: *PX0880 (FCC ID: XJN-PX0880)* (the "EUT") in this report was a *Mobile Internet Devices*, which was measured approximately: 20.9 cm (L) x 14.7 cm (W) x 1.0 cm (H), rated input voltage: DC 3.7 V from lithium battery or DC 5V from adapter.

Adapter information: Meic
Model: MN-A110-L120
Input: AC 100-240V, 50/60Hz, 0.3A max
Output: DC 5V, 2A

** All measurement and test data in this report was gathered from production sample serial number: 130407004 (Assigned by BACL.Dongguan). The EUT was received on 2013-04-08.*

Objective

This report is prepared on behalf of *SHUOYING INDUSTRIAL(SHENZHEN)CO.,LTD.* in accordance with Part 2, Subpart J, Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine compliance with FCC Part 15B, Class B.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: *XJN-PX0880* for Wifi.
FCC Part 15C DSS submissions with FCC ID: *XJN-PX0880* for Bluetooth.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at <http://ts.nist.gov/standards/scopes/5000690.htm>

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user). The highest operating frequency is 1200 MHz.

Test mode 1: USB Downloading


Test mode 2: HDMI Playing

EUT Exercise Software


No software was used.

Equipment Modifications

1. Paste the conductive foam in the area of point 1, 2, 3 like the following figure, and to ensure that the other side is in good contact with the conductive foam.

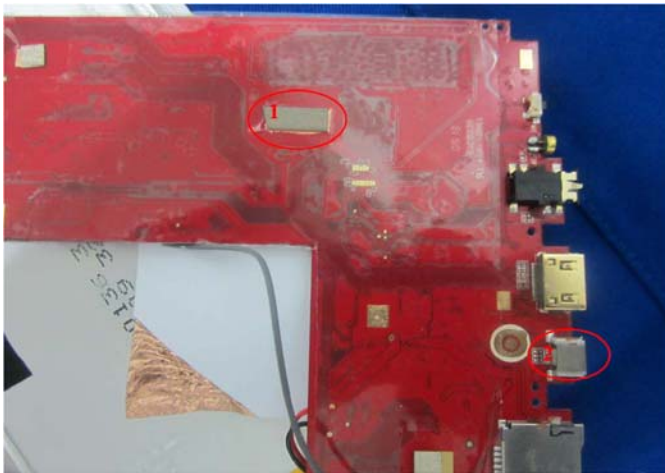


2. As shown in figure 4, make the screen data cable shielded and grounded with conductive fabric screen.

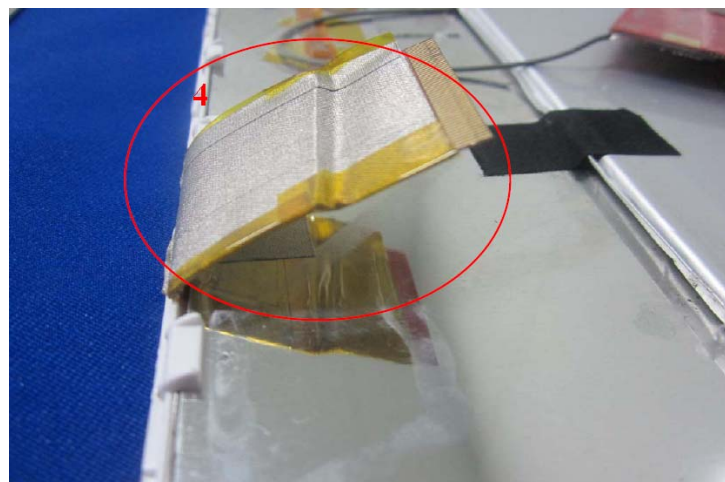

3. As shown in figure 5, make the area of processor and it's nearby shielded and grounded by copper foil.



4. Paste the copper foil in the area of point 6 like the following figure, so that the USB cradle can good contacts with the conductive foam on it.

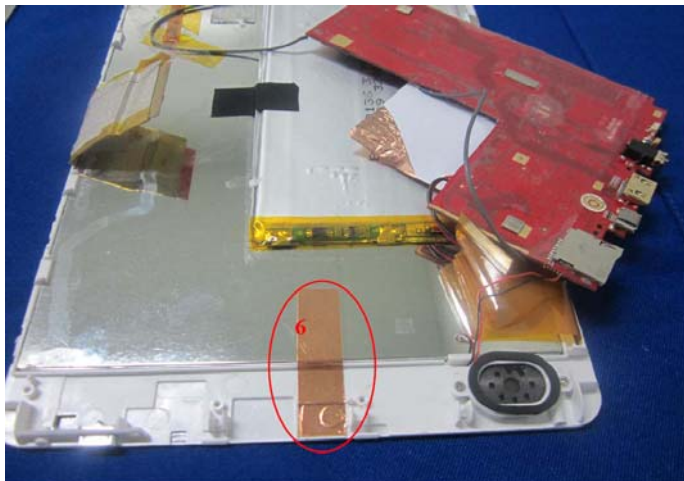

5. Plus two rings on the USB cable like the following figure 7 and 8.



Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
HP	Printer	C3941A	JPTVOB2337
SAST	Modem	AEM-2100	0293
DELL	Keyboard	L100	CNORH656658907BL05DC
DELL	Laptop	PP11L	N/A
DELL	Monitor	U3011t	CN-OPH5NY-74445-16T-290L

External Cable


Cable Description	Length (m)	From Port	To
Shielded Detachable Printer Cable	1.2	Parallel Port of Laptop	Printer
Shielded Detachable Serial Cable	1.2	Serial Port of Laptop	Modem
Shielded Detachable Keyboard Cable	1.5	Keyboard Port of Laptop	Keyboard
Shielded Detachable USB Cable	0.8	Adapter	EUT
Shielded Detachable HDMI Cable	2.0	EUT	Monitor

Block Diagram of Test Setup

USB Downloading:

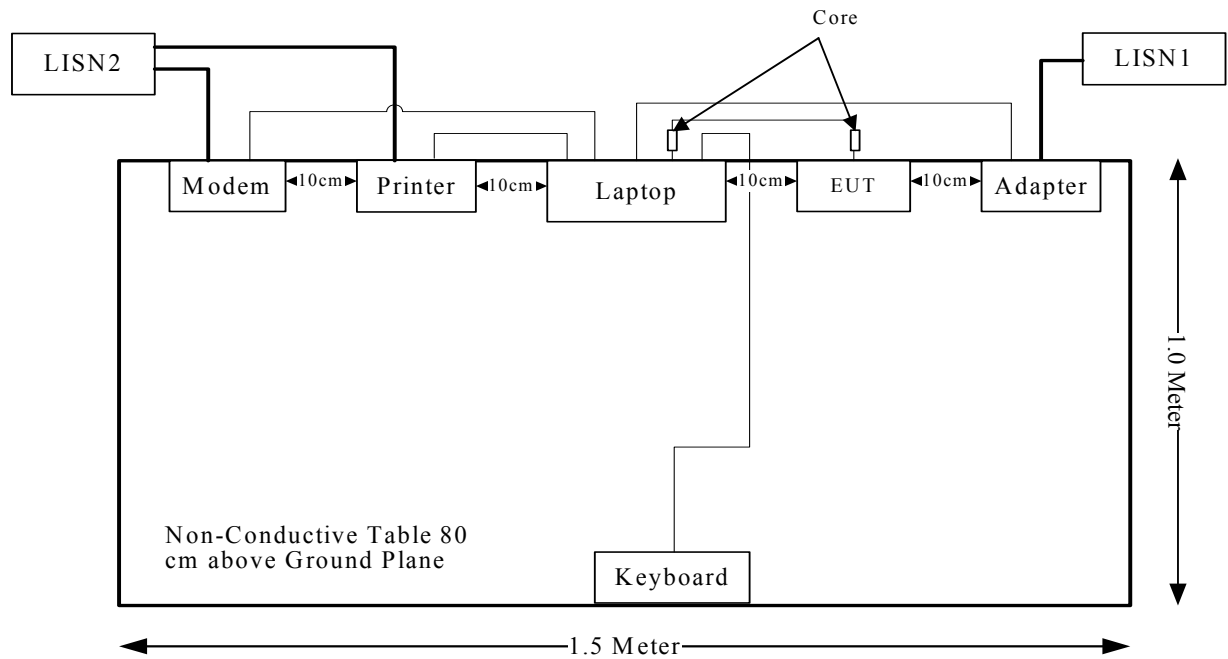

HDMI Playing:

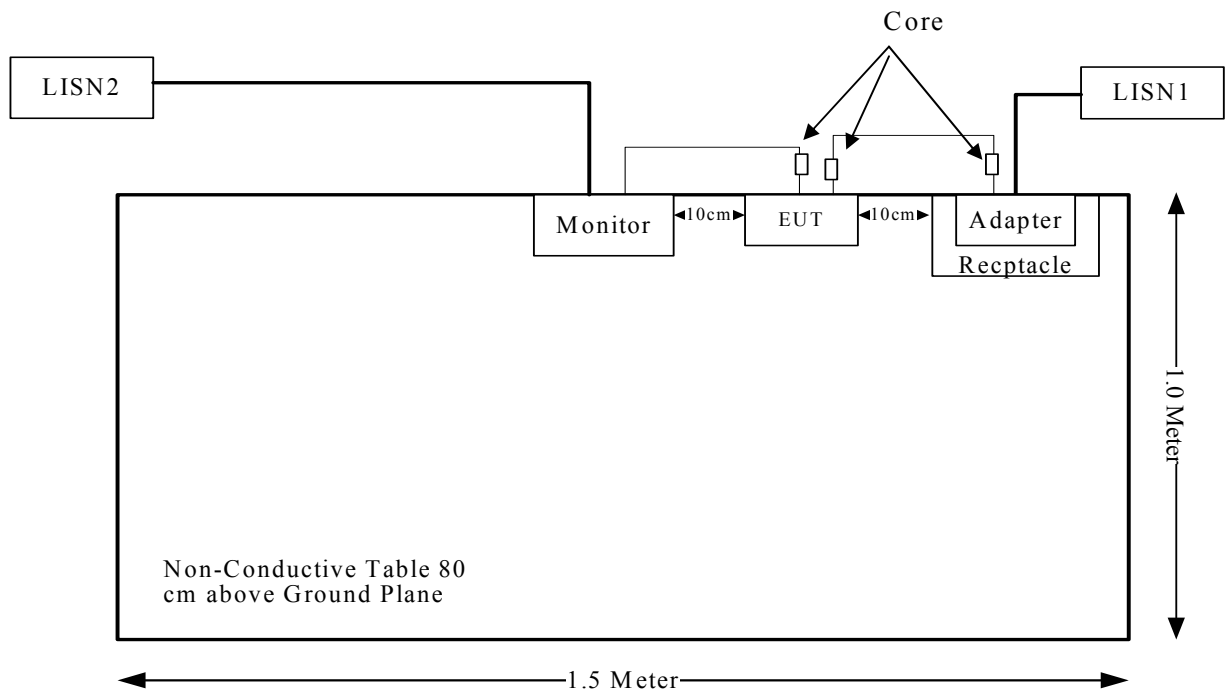

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

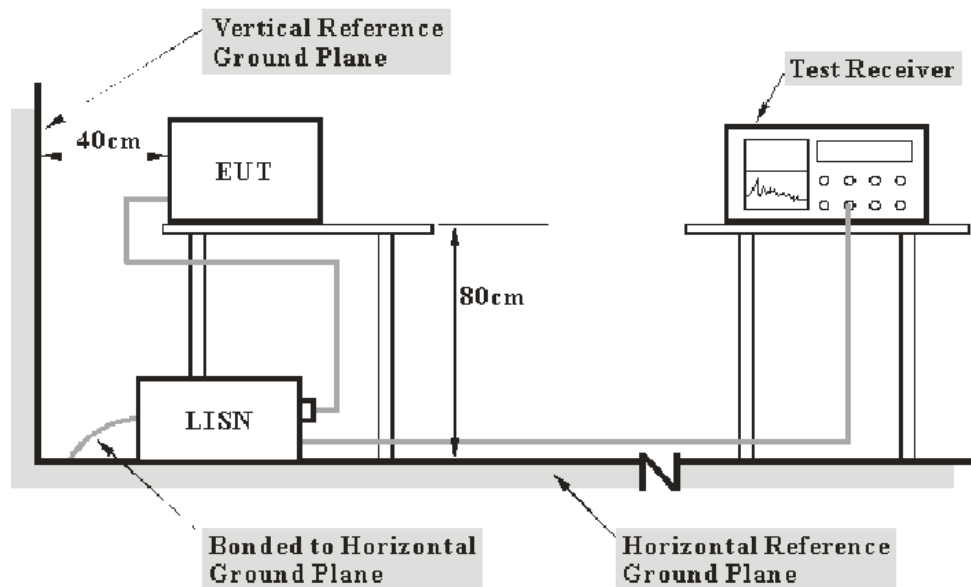

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.107 Class B limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u>Frequency Range</u>	<u>IF B/W</u>
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI TEST RECIEVER	ESCS 30	830245/006	2013-1-10	2014-1-9
R&S	L.I.S.N	ESH3-Z5	843331/015	2012-9-17	2013-9-16
R&S	L.I.S.N	ESH3-Z5	100113	2012-11-29	2013-11-28
BACL	Test Software	BACL-EMC	V1.0-2010	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.107, with the worst margin reading of:

3.86 dB at 0.150 MHz in the **Neutral** conducted mode of HDMI Playing mode.


Test Data**Environmental Conditions**

Temperature:	23.5 °C
Relative Humidity:	61 %
ATM Pressure:	101 kPa

The testing was performed by Ares Liu on 2013-04-11.

Test mode: USB Downloading

120 V, 60 Hz, Line:

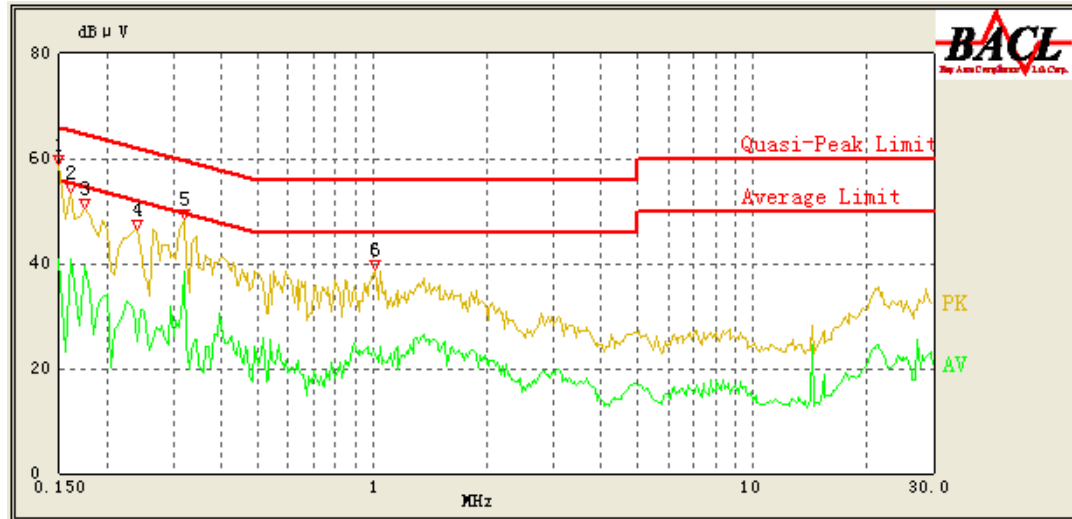


Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.150	52.81	1.06	66.00	13.19	QP
0.150	40.91	1.06	56.00	15.09	AV
0.160	52.69	1.04	65.71	13.02	QP
0.160	40.96	1.04	55.71	14.75	AV
0.175	49.08	1.02	65.29	16.21	QP
0.175	39.57	1.02	55.29	15.72	AV
0.240	39.41	0.91	63.43	24.02	QP
0.240	25.16	0.91	53.43	28.27	AV
0.320	42.49	0.78	61.14	18.65	QP
0.320	38.65	0.78	51.14	12.49	AV
1.015	27.24	0.32	56.00	28.76	QP
1.000	23.55	0.32	46.00	22.45	AV

120 V, 60 Hz, Neutral:


Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.155	50.43	1.81	65.86	15.43	QP
0.155	46.39	1.81	55.86	9.47	AV
0.175	47.39	1.71	65.29	17.90	QP
0.175	43.10	1.71	55.29	12.19	AV
0.320	41.98	1.02	61.14	19.16	QP
0.320	40.63	1.02	51.14	10.51	AV
0.390	39.53	0.84	59.14	19.61	QP
0.390	35.22	0.84	49.14	13.92	AV
0.635	37.04	0.46	56.00	18.96	QP
0.635	30.73	0.46	46.00	15.27	AV
1.035	35.00	0.23	56.00	21.00	QP
1.035	29.95	0.23	46.00	16.05	AV

Test mode: HDMI Playing

120 V, 60 Hz, Line:

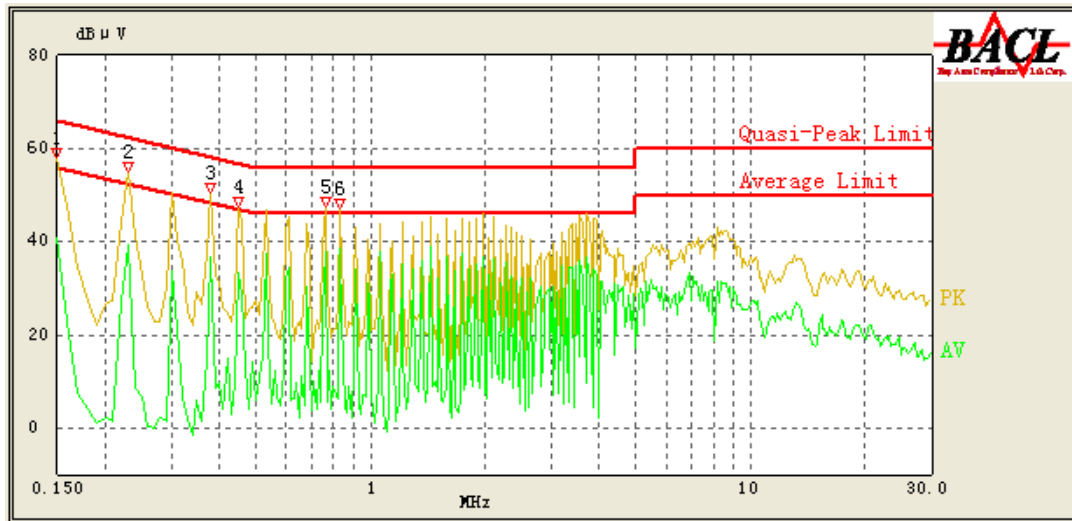

Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.150	55.51	1.06	66.00	10.49	QP
0.150	40.85	1.06	56.00	15.15	AV
0.230	52.67	0.93	63.71	11.04	QP
0.230	39.25	0.93	53.71	14.46	AV
0.380	48.40	0.70	59.43	11.03	QP
0.380	36.76	0.70	49.43	12.67	AV
0.450	43.64	0.60	57.43	13.79	QP
0.450	33.48	0.60	47.43	13.95	AV
0.760	45.73	0.42	56.00	10.27	QP
0.760	37.82	0.42	46.00	8.18	AV
0.830	43.62	0.39	56.00	12.38	QP
0.830	38.47	0.39	46.00	7.53	AV

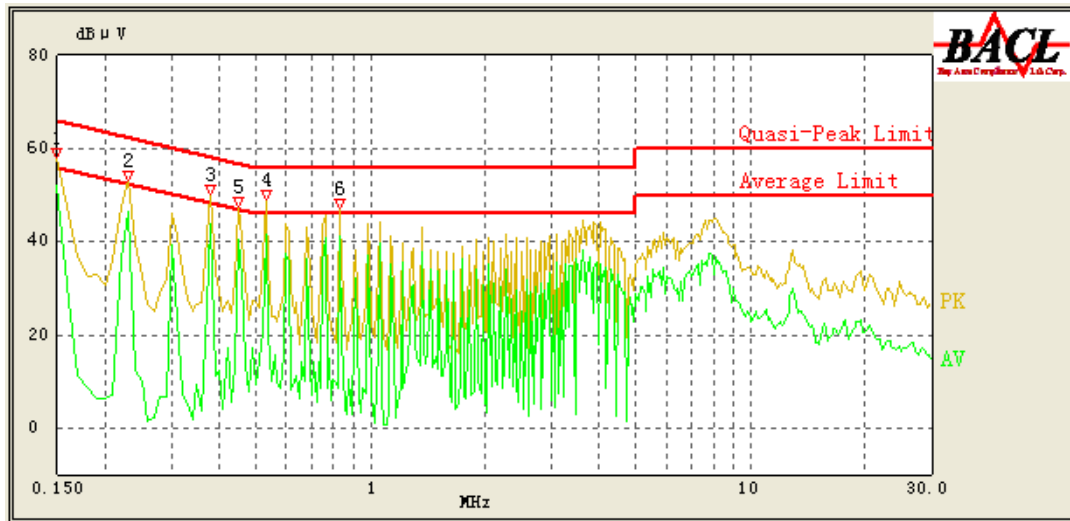120 V, 60 Hz, Neutral:

Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.150	56.92	1.84	66.00	9.08	QP
0.150	52.14	1.84	56.00	3.86	AV
0.230	52.34	1.43	63.71	11.37	QP
0.230	46.32	1.43	53.71	7.39	AV
0.380	50.57	0.86	59.43	8.86	QP
0.380	43.67	0.86	49.43	5.76	AV
0.530	48.34	0.53	56.00	7.66	QP
0.530	41.69	0.53	46.00	4.31	AV
0.450	46.86	0.68	57.43	10.57	QP
0.450	40.58	0.68	47.43	6.85	AV
0.830	45.54	0.34	56.00	10.46	QP
0.830	41.03	0.34	46.00	4.97	AV

FCC §15.109 - RADIATED EMISSIONS

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB


Table 2 – Values of U_{cisp}

Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1 GHz:

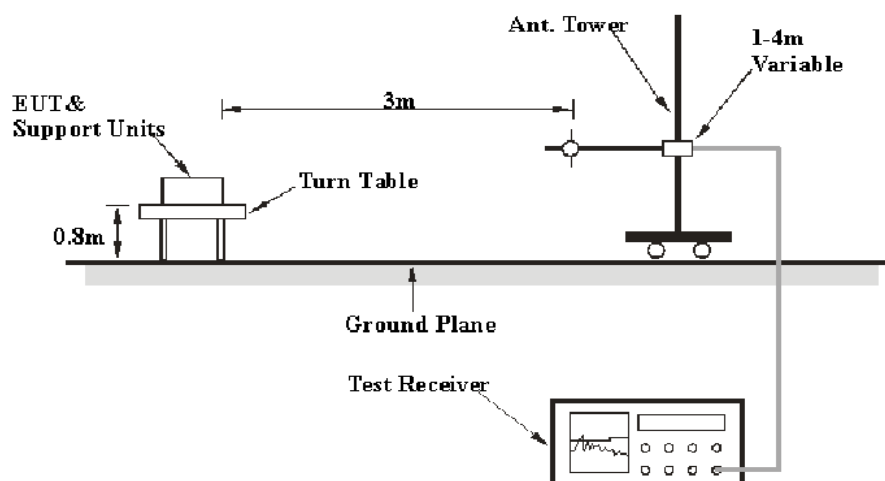

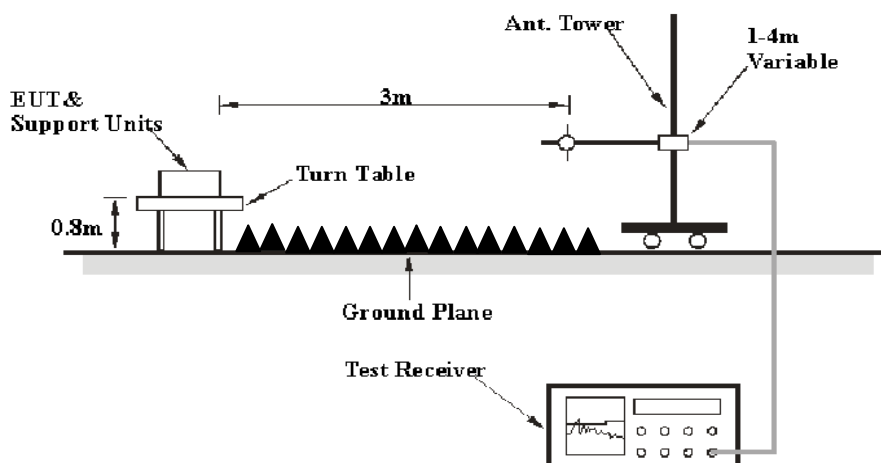Above 1GHz:

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15.109, Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

According to FCC 15.33 requirements, the system was measured from 30 MHz to 6 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30 MHz – 1000 MHz	120 kHz	300 kHz	QP
Above 1 GHz	1MHz	3 MHz	Peak
Above 1 GHz	1MHz	10 Hz	Ave

Test Procedure

For the radiated emissions test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in Quasi-peak detection mode for 30 MHz to 1 GHz, Peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI TEST RECEIVER	ESCI	100224	2013-5-6	2014-5-5
Sunol Sciences	Antenna	JB3	A060611-1	2012-9-6	2015-9-5
HP	HP AMPLIFIER	8447E	2434A02181	N/A	N/A
R&S	Spectrum analyzer	FSEM 30	849016/001	2012-9-4	2013-9-3
ETS LINDGREN	horn antenna	3115	000 527 35	2012-9-6	2015-9-5
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	N/A	N/A
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109, Class B, with the worst margin reading of:


1.92 dB at 578.0500 MHz in the Horizontal polarization of HDMI Playing mode below 1GHz

Test Data

Environmental Conditions

Temperature:	25.5 °C
Relative Humidity:	63 %
ATM Pressure:	99.7 kPa

The testing was performed by Ares Liu on 2013-05-21.

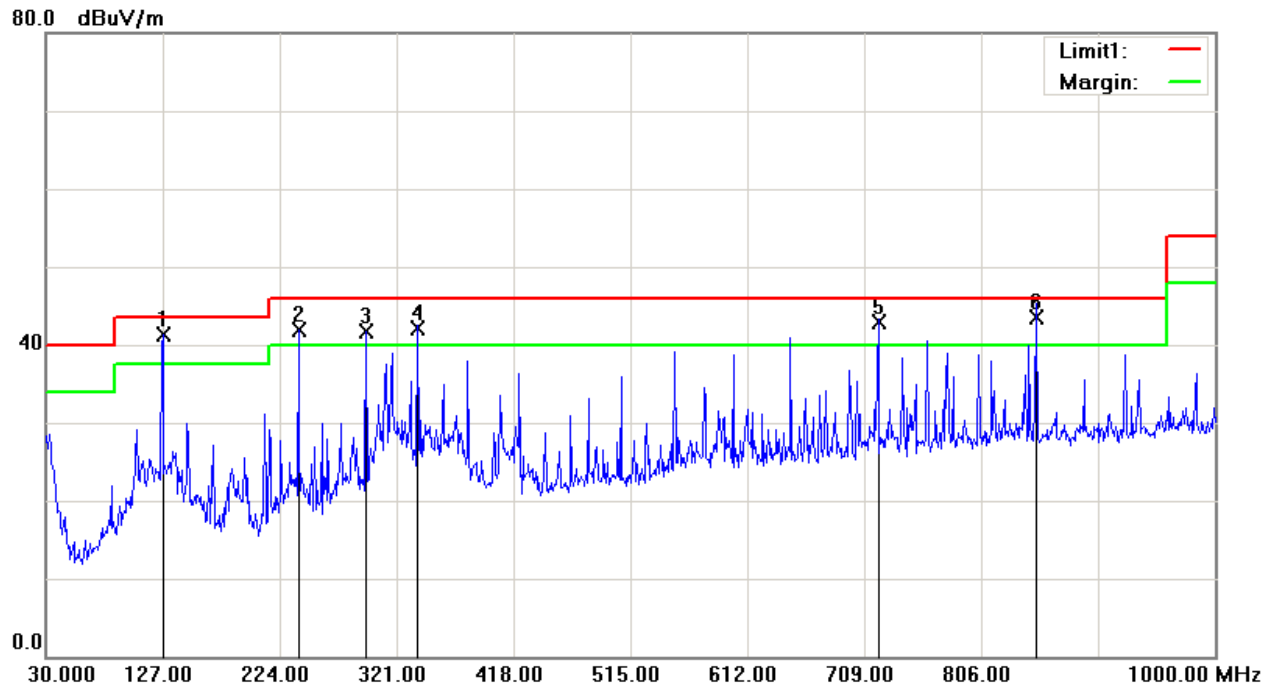
Below 1G:*Test mode: USB Downloading***Horizontal:**

Frequency (MHz)	Receiver Reading (dBuV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
127.0000	46.45	QP	-6.27	40.18	43.50	3.32*
239.5200	49.92	QP	-8.11	41.81	46.00	4.19*
295.7800	47.93	QP	-6.27	41.66	46.00	4.34*
338.4600	47.56	QP	-5.47	42.09	46.00	3.91*
720.6400	42.34	QP	0.61	42.95	46.00	3.05*
851.5900	41.47	QP	2.13	43.60	46.00	2.40*

*Within measurement uncertainty!

Vertical:


80.0 dBuV/m

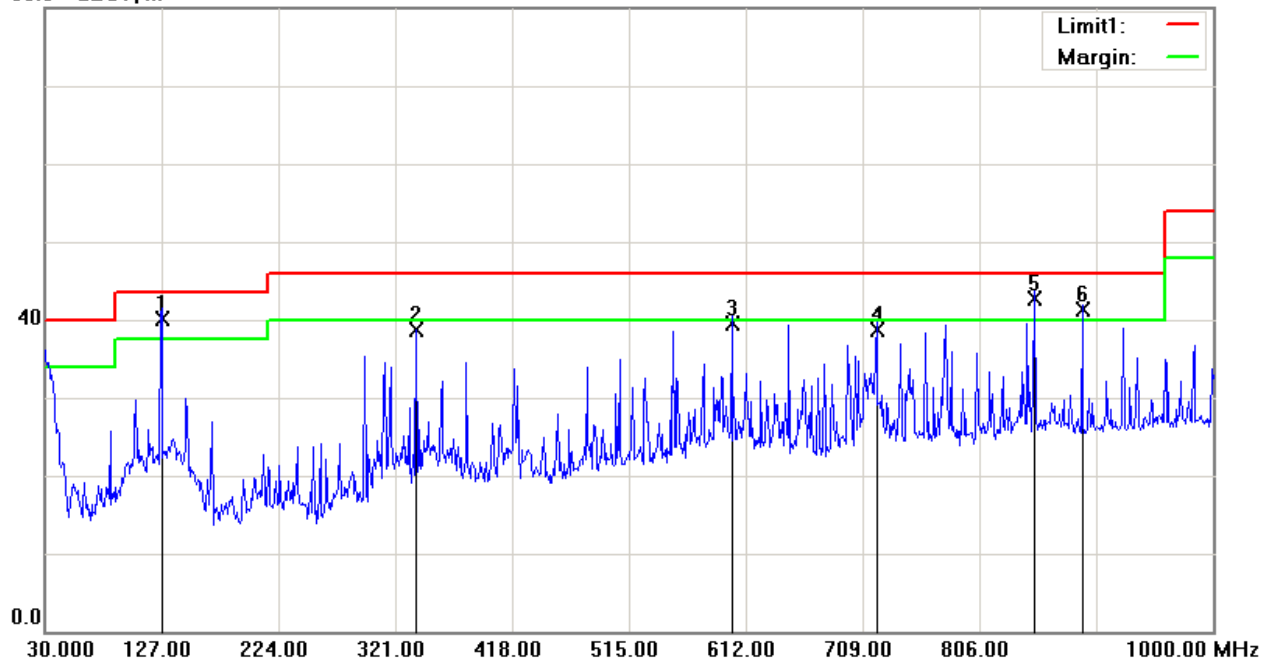

Frequency (MHz)	Receiver Reading (dBuV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
127.0000	46.47	QP	-6.27	40.20	43.50	3.30*
338.4600	44.19	QP	-5.47	38.72	46.00	7.28
600.3600	40.48	QP	-1.07	39.41	46.00	6.59
720.6400	38.05	QP	0.61	38.66	46.00	7.34
851.5900	40.48	QP	2.13	42.61	46.00	3.39*
891.3600	38.43	QP	2.85	41.28	46.00	4.72*

*Within measurement uncertainty!

Test mode: HDMI Playing

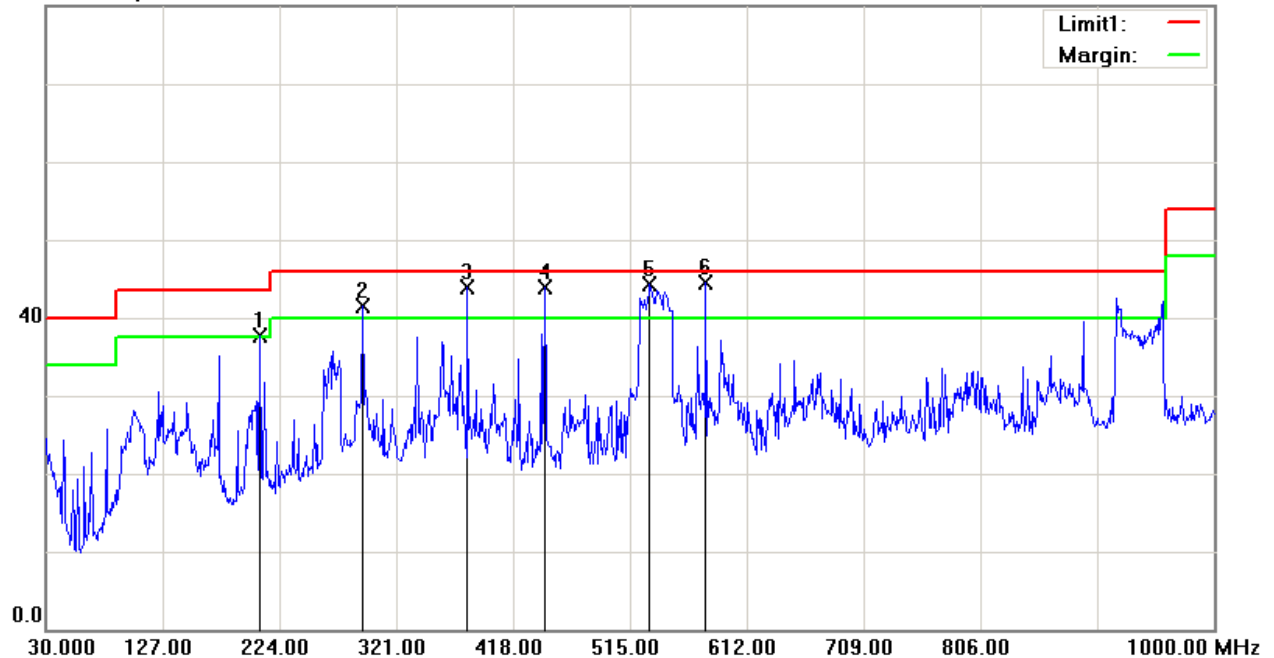
Horizontal:
80.0 dBuV/m

Frequency (MHz)	Receiver Reading (dBuV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
207.5100	46.58	QP	-9.09	37.49	43.50	6.01*
292.8700	47.07	QP	-6.31	40.76	46.00	5.24*
380.1700	48.22	QP	-4.50	43.72	46.00	2.28*
444.1900	46.91	QP	-3.27	43.64	46.00	2.36*
531.4900	45.78	QP	-1.97	43.81	46.00	2.19*
578.0500	45.08	QP	-1.00	44.08	46.00	1.92*

*Within measurement uncertainty!

Vertical:

80.0 dBuV/m

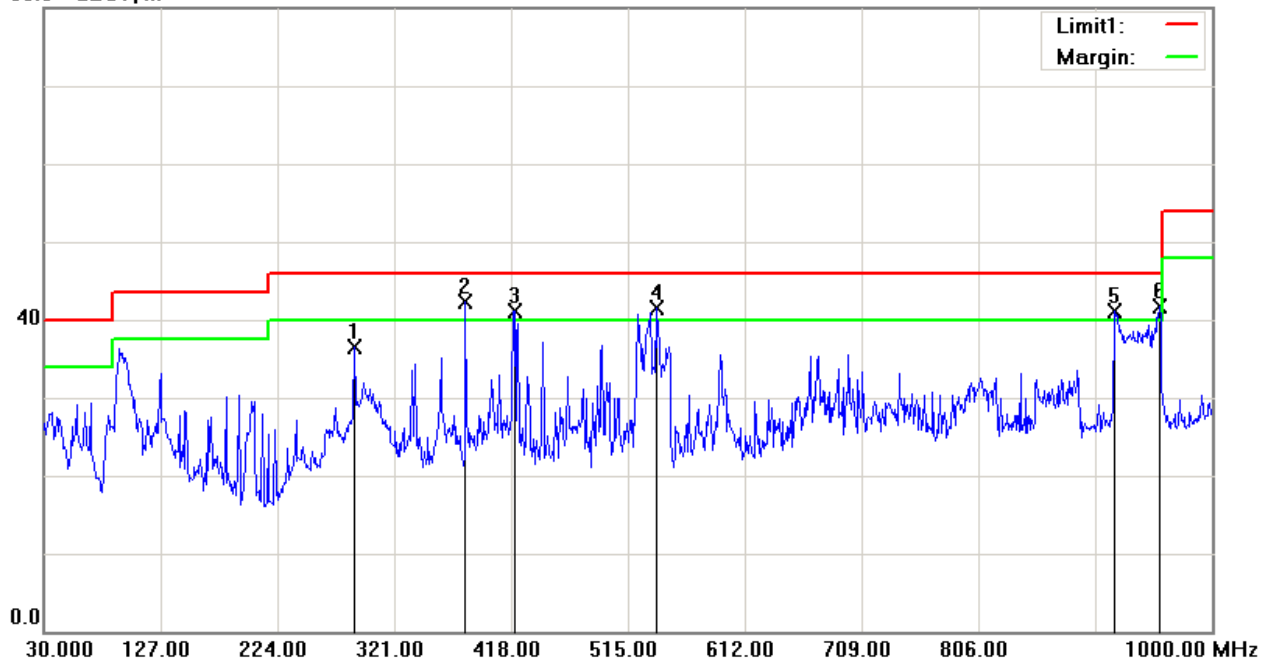


Frequency (MHz)	Receiver Reading (dBuV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
288.0200	41.45	QP	-6.33	35.12	46.00	4.55*
380.1700	46.43	QP	-4.50	41.93	46.00	4.07*
420.9100	44.43	QP	-3.57	40.86	46.00	5.14*
538.2800	43.45	QP	-1.86	41.59	46.00	4.41*
919.4900	37.80	QP	3.07	40.87	46.00	5.13*
956.3500	37.64	QP	3.71	41.35	46.00	4.65*

*Within measurement uncertainty!

Above 1G:*Test mode: USB Downloading***Horizontal:**


100.0 dBuV/m

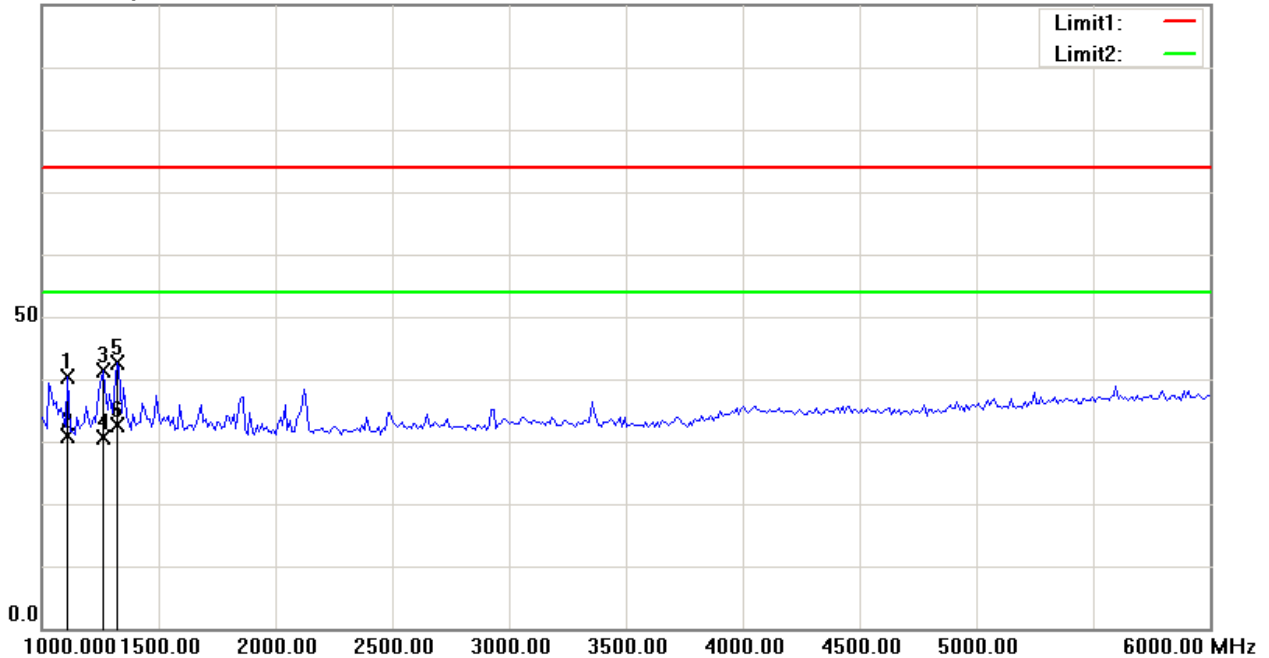

Frequency (MHz)	Receiver Reading (dBuV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1110.220	45.06	peak	-4.62	40.44	74.00	33.56
1110.220	35.44	AVG	-4.62	30.82	54.00	23.18
1260.521	45.54	peak	-4.24	41.30	74.00	32.70
1260.521	34.80	AVG	-4.24	30.56	54.00	23.44
1320.641	46.63	peak	-4.06	42.57	74.00	31.43
1320.641	36.68	AVG	-4.06	32.62	54.00	21.38

Vertical:

100.0 dBuV/m

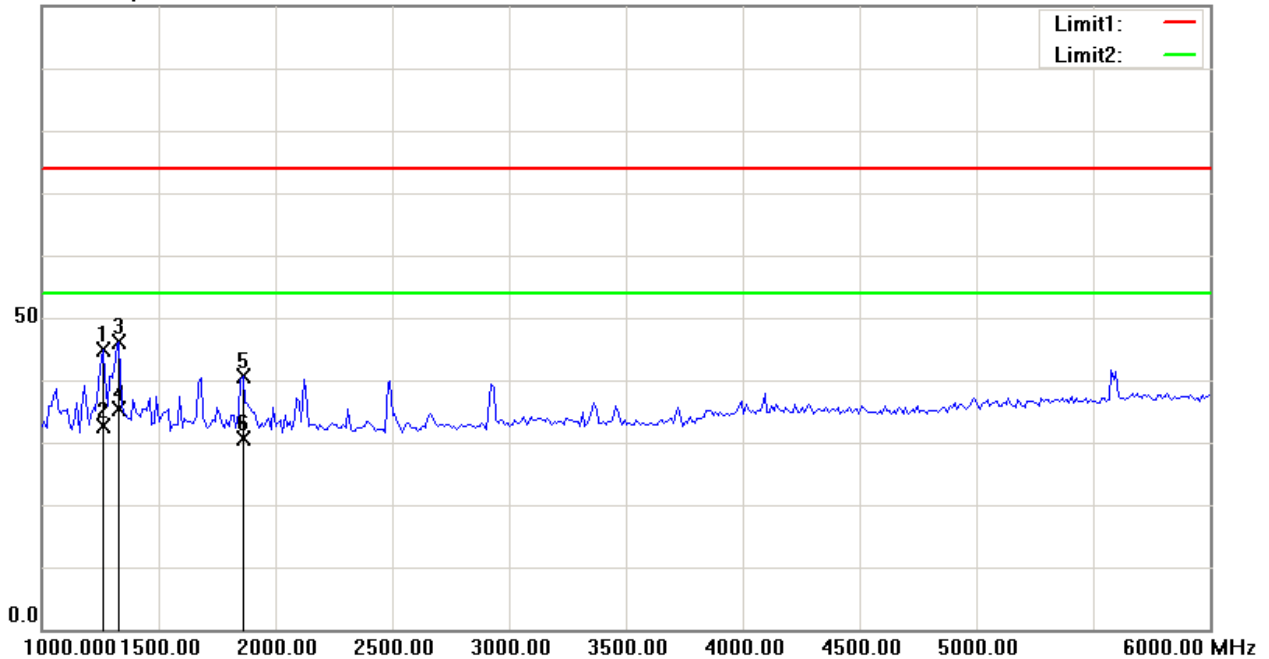


Frequency (MHz)	Receiver Reading (dBuV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1260.521	49.04	peak	-4.24	44.80	74.00	29.20
1260.521	36.93	AVG	-4.24	32.69	54.00	21.31
1330.661	50.13	peak	-4.02	46.11	74.00	27.89
1330.661	39.50	AVG	-4.02	35.48	54.00	18.52
1861.723	43.48	peak	-2.73	40.75	74.00	33.25
1861.723	33.31	AVG	-2.73	30.58	54.00	23.42

Test mode: HDMI Playing

Horizontal:


100.0 dBuV/m

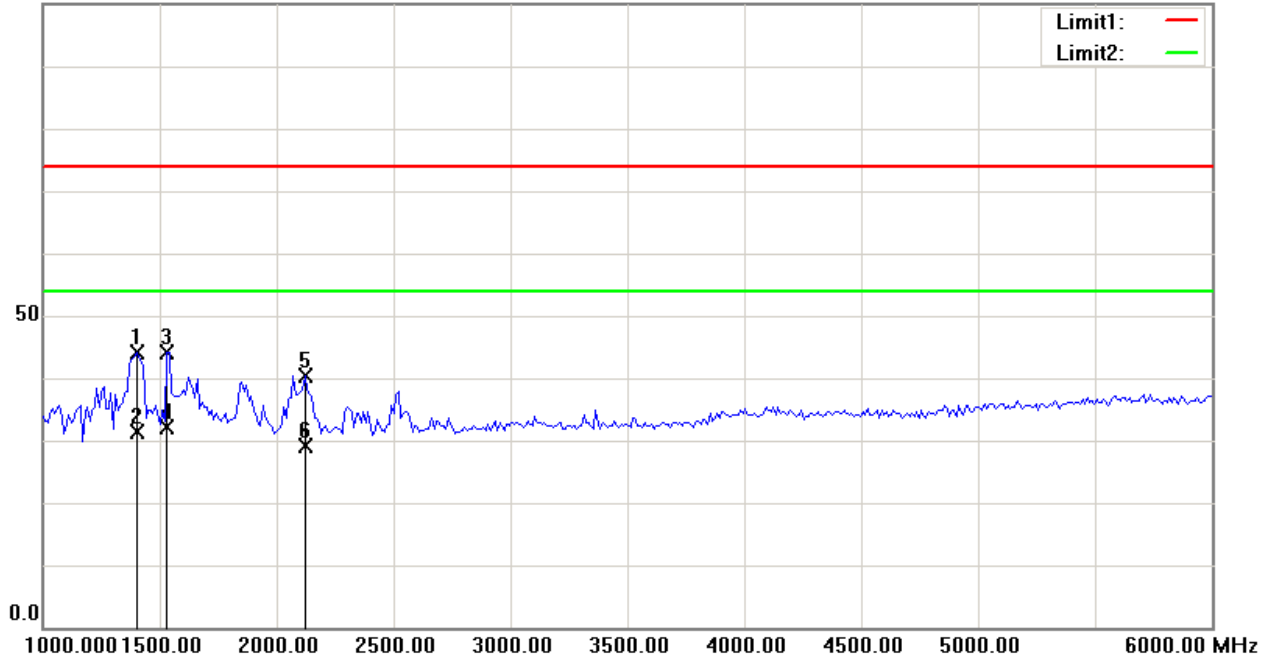

Frequency (MHz)	Receiver Reading (dBuV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1400.802	47.95	peak	-3.80	44.15	74.00	29.85
1400.802	35.08	AVG	-3.80	31.28	54.00	22.72
1531.062	47.57	peak	-3.32	44.25	74.00	29.75
1531.062	35.33	AVG	-3.32	32.01	54.00	21.99
2122.244	42.63	peak	-2.29	40.34	74.00	33.66
2122.244	31.46	AVG	-2.29	29.17	54.00	24.83

Vertical:

100.0 dBuV/m

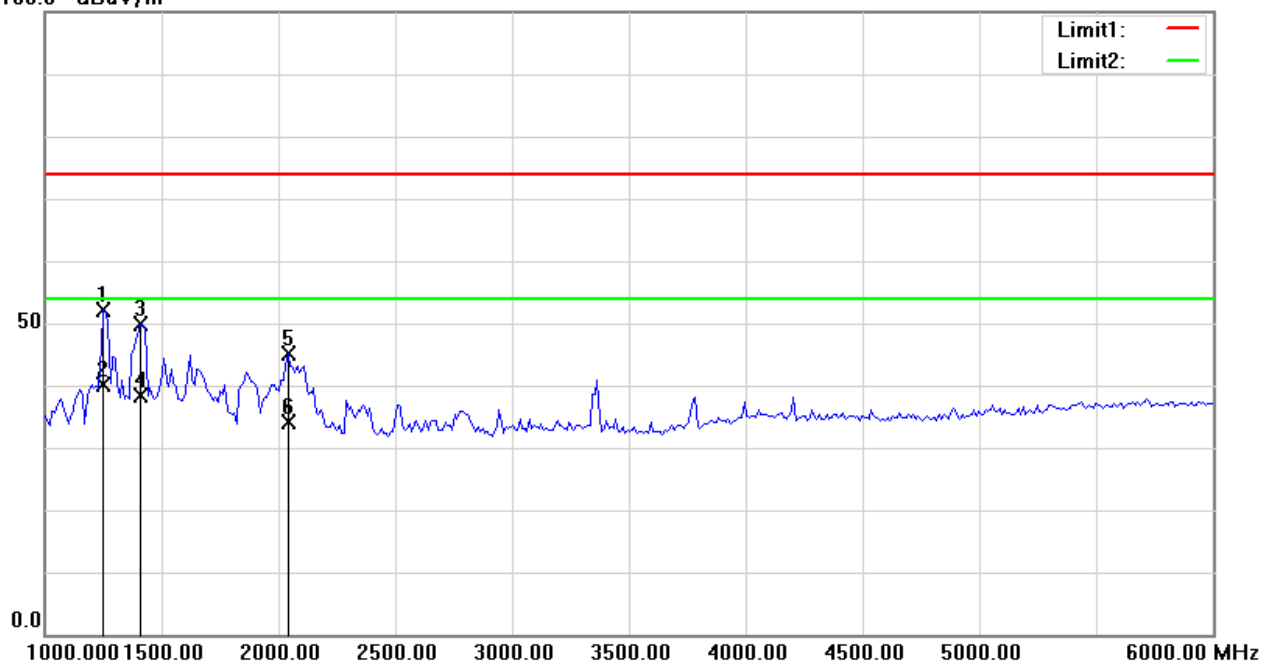

Frequency (MHz)	Receiver Reading (dBuV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1250.501	56.32	peak	-4.28	52.04	74.00	21.96
1250.501	44.41	AVG	-4.28	40.13	54.00	13.87
1410.822	53.63	peak	-3.76	49.87	74.00	24.13
1410.822	42.02	AVG	-3.76	38.26	54.00	15.74
2042.084	47.55	peak	-2.45	45.10	74.00	28.90
2042.084	36.52	AVG	-2.45	34.07	54.00	19.93

******* END OF REPORT *******