

TEST REPORT



Applicant	SHUOYING INDUSTRIAL (SHENZHEN) CO.,LTD
Address	shuoying Road, Hebei Industry Area, Dalang, Longhua Town, Baoan, Shenzhen, China.

Manufacturer or Supplier	SHUOYING INDUSTRIAL (SHENZHEN) CO.,LTD
Address	shuoying Road, Hebei Industry Area, Dalang, Longhua Town, Baoan, Shenzhen, China
Product	MID
Brand Name	N/A
Model	PA0956
Additional Model & Model Difference	N/A
Date of tests	Aug. 08, 2013 ~ Sep. 24, 2013

the tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C, Section 15.247(2012-10)**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Venless long Project Engineer / EMC Department	Approved by Glyn He Supervisor / EMC Department
	 Date: Sep. 24, 2013

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
2 MEASUREMENT UNCERTAINTY.....	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	7
3.2.1. CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	8
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 TEST TYPES AND RESULTS.....	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	12
4.1.2 TEST INSTRUMENTS.....	12
4.1.3 TEST PROCEDURES	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	17
4.2.2 TEST INSTRUMENTS.....	18
4.2.3 TEST PROCEDURES	19
4.2.4 DEVIATION FROM TEST STANDARD	19
4.2.5 TEST SETUP	20
4.2.6 EUT OPERATING CONDITIONS	20
4.2.7 TEST RESULTS	21
4.3 6dB BANDWIDTH MEASUREMENT.....	32
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	32
4.3.2 TEST INSTRUMENTS.....	32
4.3.3 TEST PROCEDURE.....	32
4.3.4 DEVIATION FROM TEST STANDARD	32
4.3.5 TEST SETUP	33
4.3.6 EUT OPERATING CONDITIONS	33



4.3.7	TEST RESULTS	34
4.4	CONDUCTED OUTPUT POWER.....	37
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	37
4.4.2	TEST SETUP	37
4.4.3	TEST INSTRUMENTS.....	37
4.4.4	TEST PROCEDURES	37
4.4.5	DEVIATION FROM TEST STANDARD	38
4.4.6	EUT OPERATING CONDITIONS	38
4.4.7	TEST RESULTS	38
4.4.7.1	MAXIMUM PEAK OUTPUT POWER	38
4.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	39
4.5	POWER SPECTRAL DENSITY MEASUREMENT	40
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	40
4.5.2	TEST SETUP	40
4.5.3	TEST INSTRUMENTS.....	40
4.5.4	TEST PROCEDURE.....	40
4.5.5	DEVIATION FROM TEST STANDARD	40
4.5.6	EUT OPERATING CONDITION	40
4.5.7	TEST RESULTS	41
4.6	OUT OF BAND EMISSION MEASUREMENT	44
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	44
4.6.2	TEST SETUP	44
4.6.3	TEST INSTRUMENTS.....	44
4.6.4	TEST PROCEDURE.....	44
4.6.5	DEVIATION FROM TEST STANDARD	45
4.6.6	EUT OPERATING CONDITION	45
4.6.7	TEST RESULTS	46
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	49
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	50



Test Report No.: RF130820N001

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130820N001	Original release	Sep. 24, 2013



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -9.56dB at 0.18075MHz.
15.205 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -2.2dB at 2400.0MHz
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	WLAN No antenna connector is used

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.67dB
Radiated emissions	9KHz ~ 30MHz	2.74dB
	30MHz ~ 1GMHz	4.81dB
	1GHz ~ 18GHz	4.3dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	MID
MODEL NO.	PA0956
FCC ID	XJN-PA0956X
NOMINAL VOLTAGE	3.7VDC from battery, 5VDC from USB or 5VDC from adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20)
PEAK POWER	16.95 dBm (Maximum)
ANTENNA TYPE	Wire antenna with 2dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTE:

1. The EUT was powered by the following adapter:

ADAPTER	
BRAND:	N/A
MODEL:	TAX-050250KD
INPUT:	AC 100-240V, 50/60Hz 0.65A
OUTPUT:	DC 5V, 2.5A
DC LINE:	Unshielded, Undetachable, 1.2m, with one core

2. The EUT provides one transmitter and one receiver.

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX
802.11n (HT20)	1TX

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.



3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	√	√	Powered by adapter with wifi link
B	√	-	-	-	Powered by USB with wifi link
C	√	-	-	-	Powered by Battery with wifi link

Where **RE<1G**: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11g	1 to 11	6	CCK	DBPSK	1.0	X
B	802.11g	1 to 11	6	CCK	DBPSK	1.0	X
C	802.11g	1 to 11	6	CCK	DBPSK	1.0	X

**RADIATED EMISSION TEST (ABOVE 1GHz):**

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0	X
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	X
A	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5	X

POWER LINE CONDUCTED EMISSION TEST:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11g	1 to 11	6	CCK	DBPSK	1.0

BANDEDGE MEASUREMENT:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
A	802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n HT20	1 to 11	1,6, 11	OFDM	BPSK	6.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	22deg. C, 60%RH	DC 5V By Adapter	Yin Yuqiang
RE≥1G	22deg. C, 60%RH	DC 5V By Adapter	Yin Yuqiang
PLC	25deg. C, 60%RH	DC 5V By Adapter	Venless Long
APCM	22deg. C, 60%RH	DC 5V By Adapter	Venless Long



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247(2012-10)

558074 D01 DTS Meas Guidance v03r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Doc). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1.The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU 26	100005	May 14,13	May 13,14
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	May 14,13	May 13,14
Impedance Stabilization Network	TESEQ	ISN T800	27957	May 14,13	May 13,14
Test software	ADT	ADT_Conc _V7.3.7	N/A	N/A	N/A

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA and NIM/CHINA

2. The test was performed in Shielding Room 553.

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



4.1.5 TEST SETUP

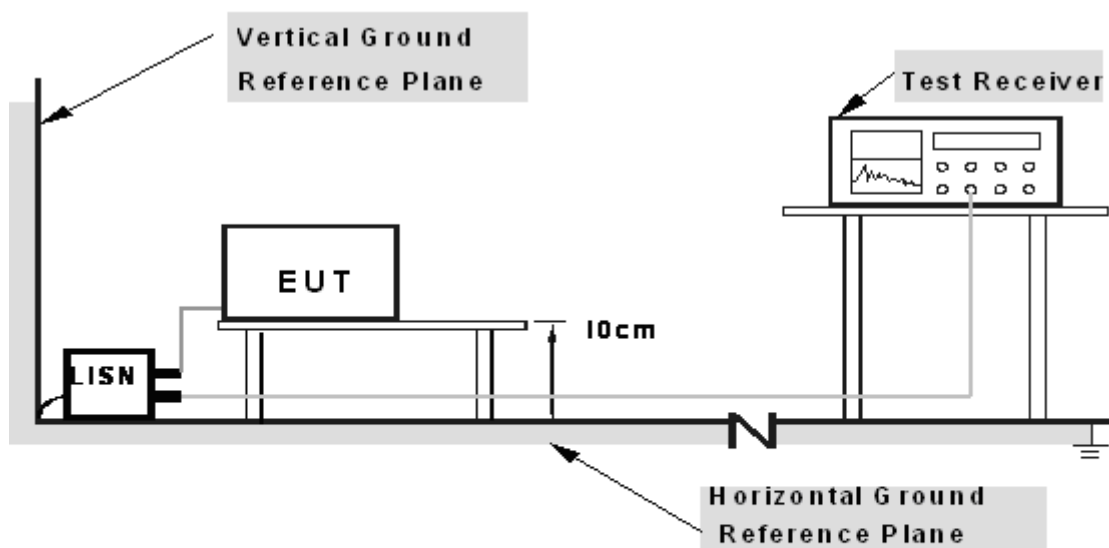

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Turned on the power and connected of all equipment.
- EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: 802.11g-CH6

PHASE	Line	6dB BANDWIDTH	9kHz
-------	------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18075	10.58	44.31	28.07	54.89	38.65	64.45	54.45	-9.56	-15.8
2	0.22851	10.47	34.72	22.57	45.19	33.04	62.5	52.5	-17.31	-19.46
3	0.30055	10.46	28.2	14.27	38.66	24.73	60.23	50.23	-21.57	-25.5
4	2.19884	9.9	20.64	11.21	30.54	21.11	56.00	46.00	-25.46	-24.89
5	4.06782	9.93	21.08	10.54	31.01	20.47	56.00	46.00	-24.99	-25.53
6	8.70899	10.03	22.57	14.32	32.6	24.35	60.00	50.00	-27.4	-25.65

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

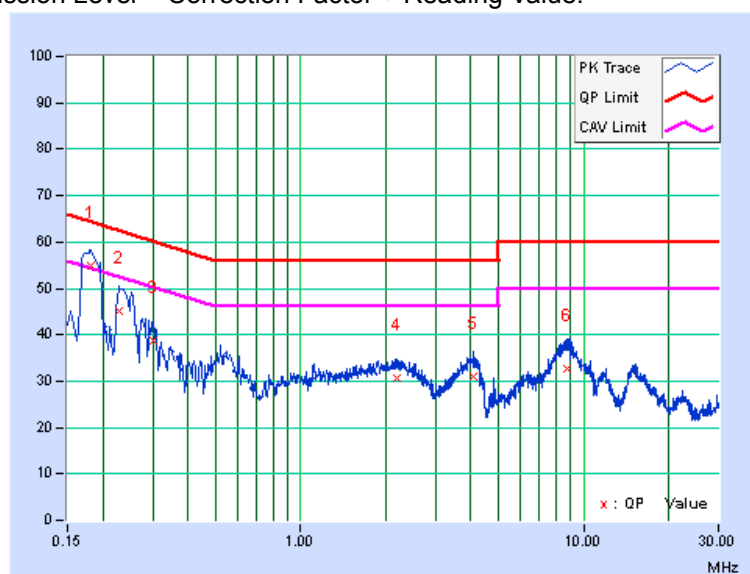




**BUREAU
VERITAS**

Test Report No.: RF130820N001

PHASE	Neutral	6dB BANDWIDTH	9kHz
--------------	---------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18122	10.47	43.7	27.85	54.17	38.32	64.43	54.43	-10.26	-16.11
2	0.23898	10.38	35.7	17.59	46.08	27.97	62.13	52.13	-16.05	-24.16
3	0.5213	10.52	23.05	11.27	33.57	21.79	56.00	46.00	-22.43	-24.21
4	4.04436	9.74	20.1	9.78	29.84	19.52	56.00	46.00	-26.16	-26.48
5	11.61021	10.07	18.34	10.65	28.41	20.72	60.00	50.00	-31.59	-29.28
6	14.87897	10.31	16.9	9.01	27.21	19.32	60.00	50.00	-32.79	-30.68

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

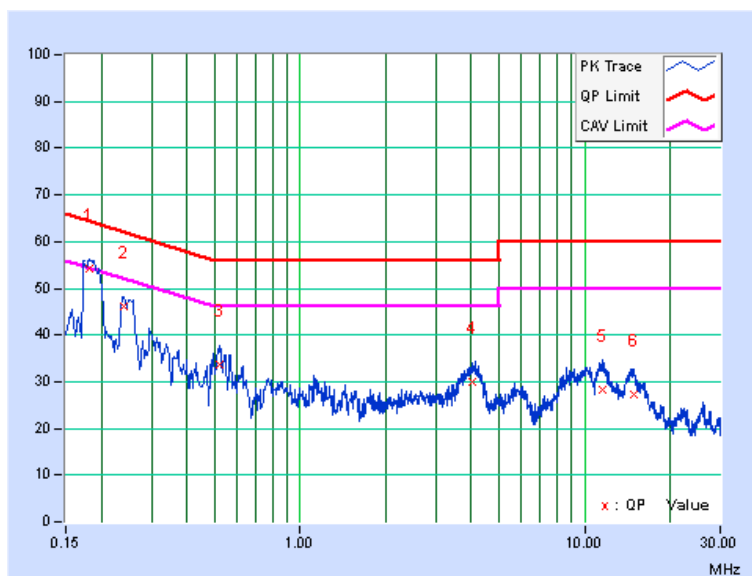



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	Agilent	E4446A	MY46180622	April 24,13	April 23,14
EMI Test Receiver	Rohde&Schwarz	ESVD	847398/003	May 14,13	May 13,14
Loop antenna (9kHz~30MHz)	Daze	ZN30900A	0708	Nov. 28,12	Nov. 27,13
Bilog Antenna (20M-2GHz)	Teseq	CBL 6111D	25757	Nov. 22,12	Nov. 21,13
Horn Antenna (1GHz -18GHz)	EMCO	3117	00062558	Oct.18,12	Oct.17,13
Horn Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 04,11	Jan. 03,14
Pre-Amplifier (9kHz~1GHz)	SONOMA	310D	186955	Mar. 06,13	Mar. 05,14
Pre-Amplifier (20MHz-3GHz)	EMCI	EMC 330	980095	Nov. 02,12	Nov.01,13
Pre-Amplifier (100MHz-26.5GHz)	Agilent	8449B	3008A00409	May 14,13	May 13,14
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 04,12	Nov. 03,13
10m Semi-anechoic Chamber	CHANGLING	21.4m*12.1m*8 .8m	NSEMC006	Mar. 24,13	Mar. 23,14
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 31,12	Oct. 30,13
Test Software	ADT	ADT_Radiated _V7.6.15	N/A	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in Chamber.
 3. The horn antenna are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 502831.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation



4.2.5 TEST SETUP

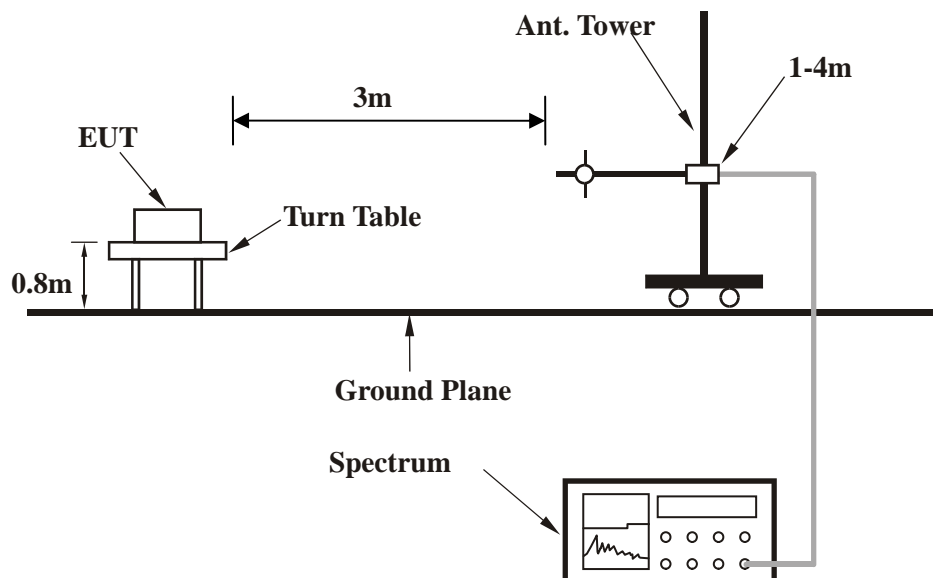

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



4.2.7 TEST RESULTS


BELOW 1GHz WORST-CASE DATA: 802.11g- CH1

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.08	16.3 QP	40.0	-23.7	1.00 H	73	0.80	15.50
2	474.58	28.3 QP	46.0	-17.7	1.00 H	119	7.97	20.35
3	571.58	25.8 QP	46.0	-20.3	1.00 H	134	2.74	23.01
4	597.45	27.5 QP	46.0	-18.5	1.00 H	104	4.27	23.19
5	623.32	27.5 QP	46.0	-18.5	1.00 H	90	3.83	23.68
6	650.80	26.7 QP	46.0	-19.3	1.00 H	190	2.74	23.95

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. For the test results, the EUT had been tested from 9KHz ~25GHz. But only the worst case was shown in test report.

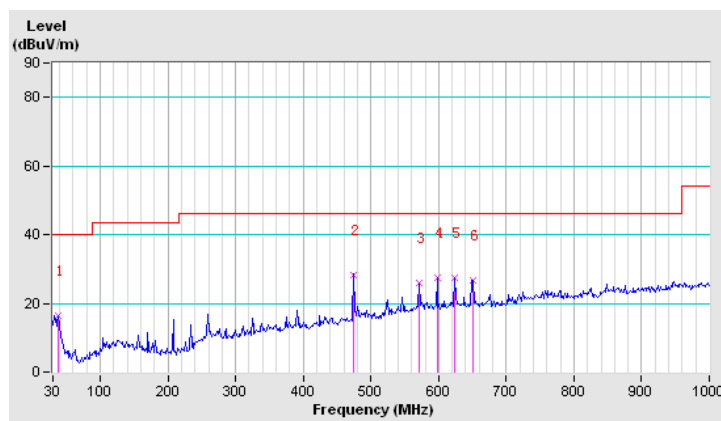




CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	364.65	19.2 QP	46.0	-26.8	1.39 V	81	2.05	17.16
2	390.52	20.3 QP	46.0	-25.7	1.39 V	128	2.39	17.92
3	416.38	20.1 QP	46.0	-26.0	1.39 V	112	1.12	18.93
4	474.58	28.6 QP	46.0	-17.4	1.39 V	218	8.24	20.35
5	597.45	27.5 QP	46.0	-18.5	1.39 V	166	4.28	23.19
6	903.00	34.6 QP	46.0	-11.5	1.39 V	151	7.12	27.43

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. For the test results, the EUT had been tested from 9KHz ~25GHz. But only the worst case was shown in test report.

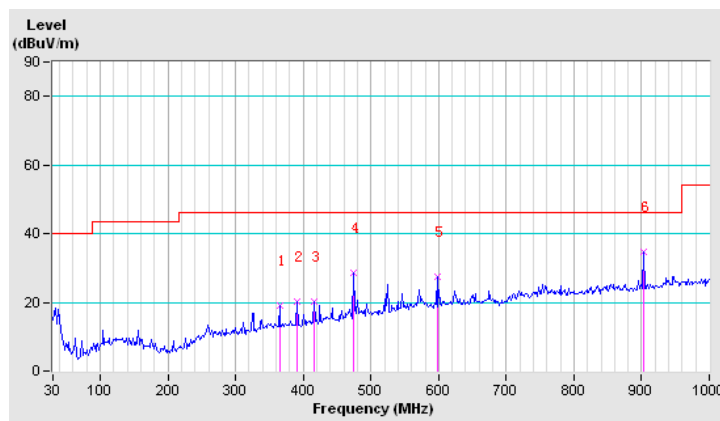



ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	48.6 PK	74.0	-25.4	1.00 H	164	11.48	37.12
2	2390.00	37.1 AV	54.0	-16.9	1.00 H	164	-0.02	37.12
3	2400.00	49.3 PK	67.7	-18.4	1.00 H	164	12.17	37.13
4	2400.00	38.5 AV	64.7	-26.2	1.00 H	164	1.37	37.13
5	*2412.00	87.7 PK			1.00 H	164	50.56	37.14
6	*2412.00	84.7 AV			1.00 H	164	47.56	37.14
7	4824.00	49.5 PK	74.0	-24.5	1.00 H	153	10.35	39.15
8	4824.00	37.6 AV	54.0	-16.4	1.00 H	153	-1.55	39.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.5 PK	74.0	-24.5	1.00 V	358	12.38	37.12
2	2390.00	38.2 AV	54.0	-15.8	1.00 V	358	1.08	37.12
3	2400.00	51.5 PK	71.8	-20.3	1.00 V	358	14.37	37.13
4	2400.00	41.8 AV	68.5	-26.7	1.00 V	358	4.67	37.13
5	*2412.00	91.8 PK			1.00 V	358	54.66	37.14
6	*2412.00	88.5 AV			1.00 V	358	51.36	37.14
7	4824.00	48.5 PK	74.0	-25.5	1.00 V	355	9.35	39.15
8	4824.00	37.2 AV	54.0	-16.8	1.00 V	355	-1.95	39.15

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	87.1 PK			1.00 H	167	49.95	37.15
2	*2437.00	83.3 AV			1.00 H	167	46.15	37.15
3	4874.00	48.3 PK	74.0	-25.7	1.00 H	154	9.14	39.16
4	4874.00	37.2 AV	54.0	-16.8	1.00 H	154	-1.96	39.16
5	7311.00	49.2 PK	74.0	-24.8	1.05 H	166	8.03	41.17
6	7311.00	37.1 AV	54.0	-16.9	1.05 H	166	-4.07	41.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	90.8 PK			1.00 V	359	53.65	37.15
2	*2437.00	87.3 AV			1.00 V	359	50.15	37.15
3	4874.00	48.1 PK	74.0	-25.9	1.00 V	350	8.94	39.16
4	4874.00	36.5 AV	54.0	-17.5	1.00 V	350	-2.66	39.16
5	7311.00	49.5 PK	74.0	-24.5	1.00 V	352	8.33	41.17
6	7311.00	36.8 AV	54.0	-17.2	1.00 V	352	-4.37	41.17

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	84.5 PK			1.00 H	170	47.33	37.17
2	*2462.00	81.3 AV			1.00 H	170	44.13	37.17
3	2483.50	46.5 PK	74.0	-27.5	1.00 H	170	9.32	37.18
4	2483.50	34.2 AV	54.0	-19.8	1.00 H	170	-2.98	37.18
5	4824.00	47.5 PK	74.0	-26.5	1.02 H	174	8.35	39.15
6	4824.00	36.8 AV	54.0	-17.2	1.02 H	174	-2.35	39.15
7	7386.00	49.2 PK	74.0	-24.8	1.05 H	173	8.06	41.14
8	7386.00	37.1 AV	54.0	-16.9	1.05 H	173	-4.04	41.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	86.8 PK			1.00 V	360	49.63	37.17
2	*2462.00	82.4 AV			1.00 V	360	45.23	37.17
3	2483.50	56.6 PK	74.0	-17.4	1.00 V	360	19.42	37.18
4	2483.50	35.4 AV	54.0	-18.6	1.00 V	360	-1.78	37.18
5	4924.00	48.2 PK	74.0	-25.8	1.00 V	345	9.03	39.17
6	4924.00	36.9 AV	54.0	-17.1	1.00 V	345	-2.27	39.17
7	7386.00	49.6 PK	74.0	-24.4	1.00 V	352	8.46	41.14
8	7386.00	37.2 AV	54.0	-16.8	1.00 V	352	-3.94	41.14

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.0 PK	74.0	-15.0	1.00 H	332	21.88	37.12
2	2390.00	39.2 AV	54.0	-14.8	1.00 H	332	2.08	37.12
3	2400.00	66.1 PK	68.8	-2.7	1.00 H	332	28.97	37.13
4	2400.00	45.6 AV	59.2	-13.6	1.00 H	332	8.47	37.13
5	*2412.00	88.8 PK			1.00 H	332	51.66	37.14
6	*2412.00	79.2 AV			1.00 H	332	42.06	37.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.2 PK	74.0	-10.8	1.00 V	360	26.08	37.12
2	2390.00	43.2 AV	54.0	-10.8	1.00 V	360	6.08	37.12
3	2400.00	68.9 PK	75.6	-6.7	1.00 V	360	31.77	37.13
4	2400.00	51.0 AV	62.3	-11.3	1.00 V	360	13.87	37.13
5	*2412.00	95.6 PK			1.00 V	360	58.46	37.14
6	*2412.00	82.3 AV			1.00 V	360	45.16	37.14
7	4824.00	46.9 PK	74.0	-27.1	1.00 V	355	7.75	39.15
8	4824.00	36.5 AV	54.0	-17.5	1.00 V	355	-2.65	39.15

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	87.4 PK			1.00 H	165	50.25	37.15
2	*2437.00	76.8 AV			1.00 H	165	39.65	37.15
3	4874.00	47.4 PK	74.0	-26.6	1.00 H	170	8.24	39.16
4	4874.00	36.8 AV	54.0	-17.2	1.00 H	170	-2.36	39.16
5	7311.00	50.1 PK	74.0	-23.9	1.00 H	162	8.93	41.17
6	7311.00	38.6 AV	54.0	-15.4	1.00 H	162	-2.57	41.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	91.5 PK			1.00 V	355	54.35	37.15
2	*2437.00	80.2 AV			1.00 V	355	43.05	37.15
3	4874.00	47.1 PK	74.0	-26.9	1.00 V	300	7.94	39.16
4	4874.00	36.3 AV	54.0	-17.7	1.00 V	300	-2.86	39.16
5	7311.00	49.8 PK	74.0	-24.2	1.00 V	312	8.63	41.17
6	7311.00	37.9 AV	54.0	-16.1	1.00 V	312	-3.27	41.17

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	85.6 PK			1.00 H	165	48.43	37.17
2	*2462.00	76.3 AV			1.00 H	165	39.13	37.17
3	2483.50	53.7 PK	74.0	-20.3	1.00 H	165	16.52	37.18
4	2483.50	35.3 AV	54.0	-18.7	1.00 H	165	-1.88	37.18
5	4924.00	47.5 PK	74.0	-26.5	1.00 H	163	8.33	39.17
6	4924.00	36.2 AV	54.0	-17.8	1.00 H	163	-2.97	39.17
7	7386.00	49.2 PK	74.0	-24.8	1.00 H	155	8.06	41.14
8	7386.00	37.2 AV	54.0	-16.8	1.00 H	155	-3.94	41.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	88.1 PK			1.00 V	357	50.93	37.17
2	*2462.00	77.5 AV			1.00 V	357	40.33	37.17
3	2483.50	58.4 PK	74.0	-15.6	1.00 V	357	21.22	37.18
4	2483.50	36.3 AV	54.0	-17.7	1.00 V	357	-0.88	37.18
5	4924.00	49.3 PK	74.0	-24.7	1.00 V	314	10.13	39.17
6	4924.00	36.5 AV	54.0	-17.5	1.00 V	314	-2.67	39.17
7	7386.00	50.4 PK	74.0	-23.6	1.00 V	325	9.26	41.14
8	7386.00	37.2 AV	54.0	-16.8	1.00 V	325	-3.94	41.14

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	1.00 H	185	22.18	37.12
2	2390.00	37.2 AV	54.0	-16.8	1.00 H	185	0.08	37.12
3	2400.00	65.7 PK	67.9	-2.2	1.00 H	185	28.57	37.13
4	2400.00	43.6 AV	57.9	-14.3	1.00 H	185	6.47	37.13
5	*2412.00	87.9 PK			1.00 H	185	50.76	37.14
6	*2412.00	77.9 AV			1.00 H	185	40.76	37.14
7	4824.00	48.5 PK	74.0	-25.5	1.00 H	164	9.35	39.15
8	4824.00	37.2 AV	54.0	-16.8	1.00 H	164	-1.95	39.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.6 PK	74.0	-16.4	1.00 V	354	20.48	37.12
2	2390.00	36.2 AV	54.0	-17.8	1.00 V	354	-0.92	37.12
3	2400.00	63.5 PK	72.6	-9.1	1.00 V	354	26.37	37.13
4	2400.00	42.1 AV	61.8	-19.7	1.00 V	354	4.97	37.13
5	*2412.00	92.6 PK			1.00 V	354	55.46	37.14
6	*2412.00	81.8 AV			1.00 V	354	44.66	37.14
7	4824.00	49.3 PK	74.0	-24.7	1.00 V	351	10.15	39.15
8	4824.00	38.4 AV	54.0	-15.6	1.00 V	351	-0.75	39.15

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	86.5 PK			1.00 H	174	49.35	37.15
2	*2437.00	75.8 AV			1.00 H	174	38.65	37.15
3	4874.00	47.8 PK	74.0	-26.2	1.00 H	158	8.64	39.16
4	4874.00	36.9 AV	54.0	-17.1	1.00 H	158	-2.26	39.16
5	7311.00	49.2 PK	74.0	-24.8	1.00 H	168	8.03	41.17
6	7311.00	37.3 AV	54.0	-16.7	1.00 H	168	-3.87	41.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	90.5 PK			1.00 V	360	53.35	37.15
2	*2437.00	79.2 AV			1.00 V	360	42.05	37.15
3	4874.00	47.5 PK	74.0	-26.5	1.00 V	354	8.34	39.16
4	4874.00	36.3 AV	54.0	-17.7	1.00 V	354	-2.86	39.16
5	7311.00	49.3 PK	74.0	-24.7	1.00 V	350	8.13	41.17
6	7311.00	37.8 AV	54.0	-16.2	1.00 V	350	-3.37	41.17

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	84.5 PK			1.02 H	172	47.33	37.17
2	*2462.00	73.9 AV			1.02 H	172	36.73	37.17
3	2483.50	52.3 PK	74.0	-21.7	1.00 H	172	15.12	37.18
4	2483.50	44.5 AV	54.0	-9.5	1.00 H	172	7.32	37.18
5	4924.00	46.9 PK	74.0	-27.1	1.00 H	150	7.73	39.17
6	4924.00	36.8 AV	54.0	-17.2	1.00 H	150	-2.37	39.17
7	7386.00	49.2 PK	74.0	-24.8	1.00 H	169	8.06	41.14
8	7386.00	37.4 AV	54.0	-16.6	1.00 H	169	-3.74	41.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	87.2 PK			1.00 V	358	50.03	37.17
2	*2462.00	76.2 AV			1.00 V	358	39.03	37.17
3	2483.50	53.1 PK	74.0	-20.9	1.00 V	358	15.92	37.18
4	2483.50	45.2 AV	54.0	-8.8	1.00 V	358	8.02	37.18
5	4924.00	47.3 PK	74.0	-26.7	1.00 V	348	8.13	39.17
6	4924.00	36.8 AV	54.0	-17.2	1.00 V	348	-2.37	39.17
7	7386.00	50.1 PK	74.0	-23.9	1.00 V	352	8.96	41.14
8	7386.00	38.0 AV	54.0	-16.0	1.00 V	352	-3.14	41.14

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer (9KHz-40GHz)	Agilent	E4446A	MY46180622	Apr. 24,13	Apr. 23,14
Spectrum Analyzer (9KHz-25GHz)	Agilent	E7405A	MY45118807	May 14,13	May 13,14
Digital Multimeter	FLUKE	15B	A1220010D G	Oct. 31,12	Oct. 30,13

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA and NIM/CHINA

2. The test was performed in Oven room

4.3.3 TEST PROCEDURE


1. Set resolution bandwidth (RBW) = 100KHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.



4.3.5 TEST SETUP

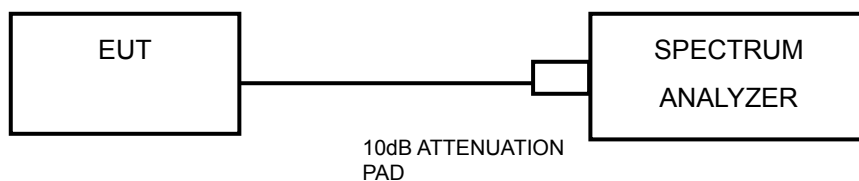

4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	7.56	0.5	PASS
6	2437	7.57	0.5	PASS
11	2462	7.09	0.5	PASS

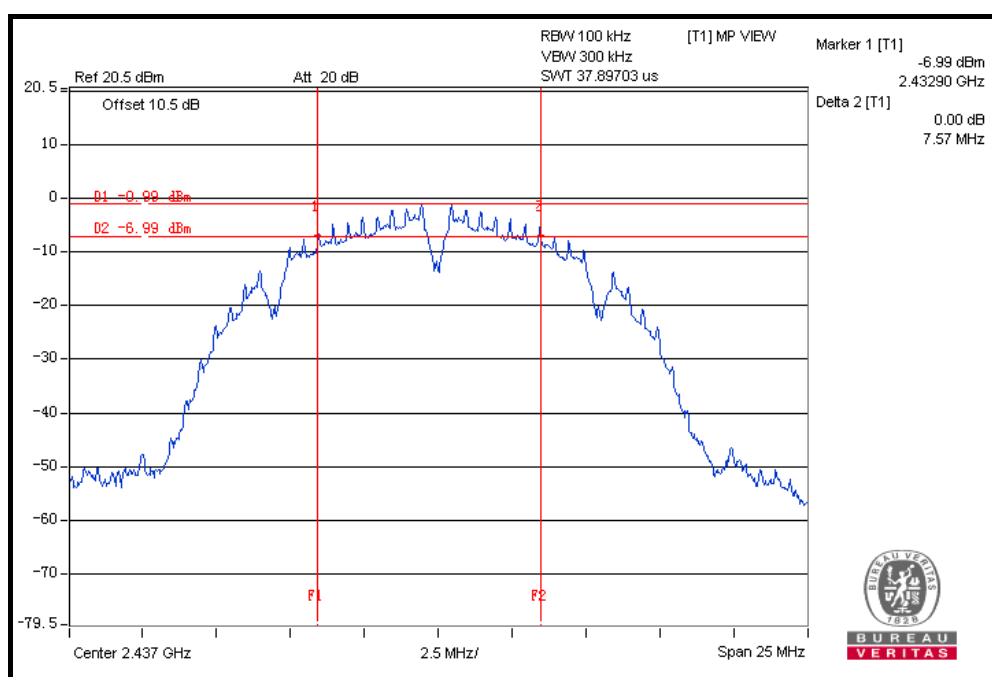




BUREAU
VERITAS

Test Report No.: RF130820N001

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	15.12	0.5	PASS
6	2437	15.14	0.5	PASS
11	2462	15.14	0.5	PASS

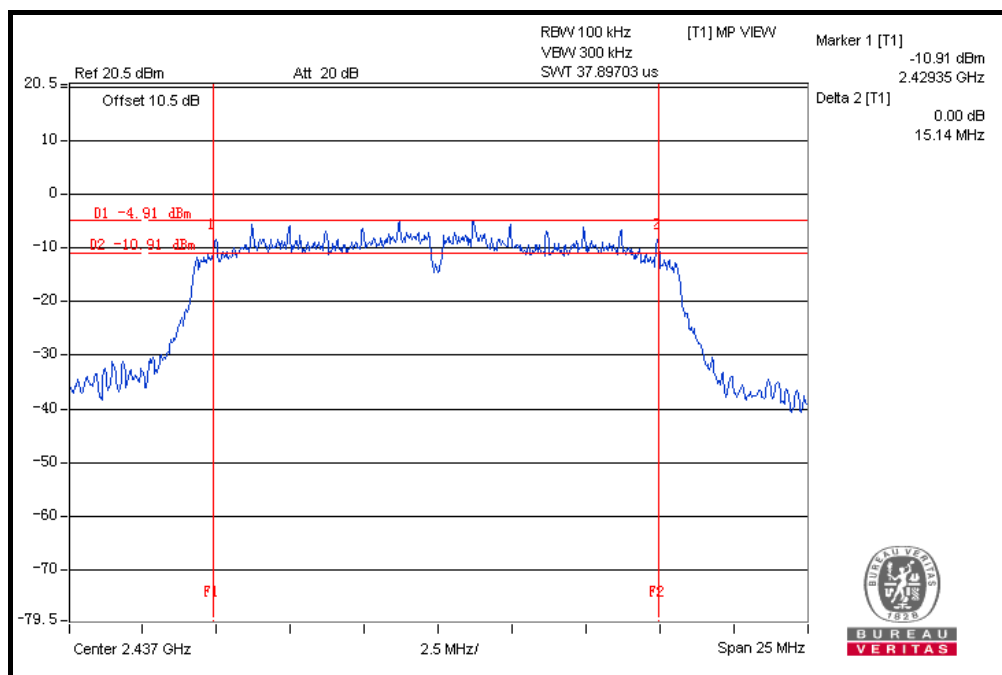




BUREAU
VERITAS

Test Report No.: RF130820N001

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	15.13	0.5	PASS
6	2437	15.13	0.5	PASS
11	2462	15.13	0.5	PASS

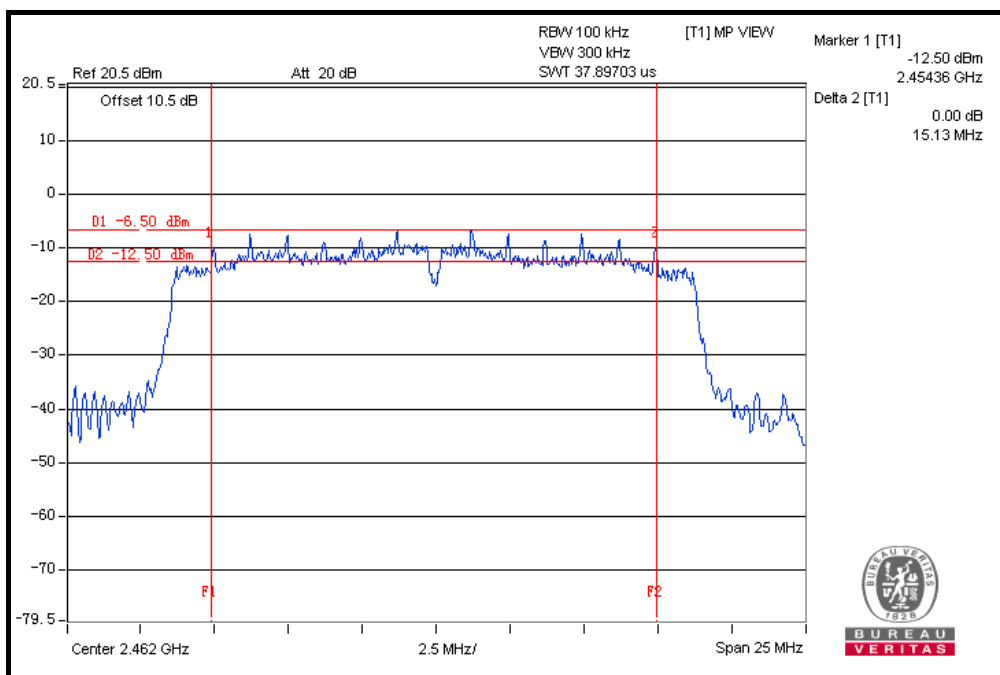




4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.4.2 TEST SETUP

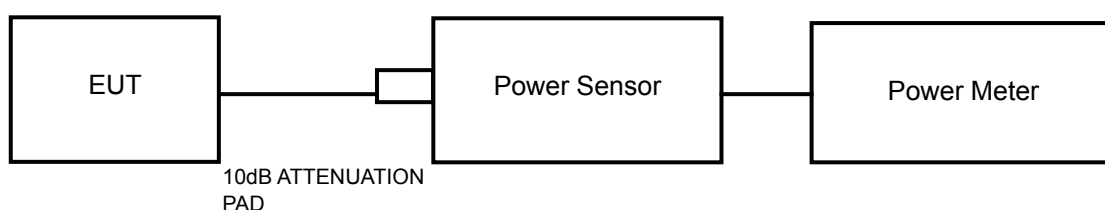

4.4.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer (9KHz-25GHz)	Agilent	E7405A	MY45118807	May 14,13	May 13,14
Power Meter	Anritsu	ML2495A	1139001	Nov. 04,12	Nov. 03,13
Digital Multimeter	FLUKE	15B	A1220010D G	Oct. 31,12	Oct. 30,13
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 01,12	Oct. 01,13
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 26,12	Nov. 25,13

4.4.4 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.



4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.7 TEST RESULTS

4.4.7.1 MAXIMUM PEAK OUTPUT POWER

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	12.33	30	PASS
6	2437	11.73	30	PASS
11	2462	11.43	30	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.95	30	PASS
6	2437	15.16	30	PASS
11	2462	16.24	30	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.22	30	PASS
6	2437	15.63	30	PASS
11	2462	15.34	30	PASS

**4.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)**

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	8.26	N/A
6	2437	8.03	N/A
11	2462	7.84	N/A

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	7.15	N/A
6	2437	7.62	N/A
11	2462	7.23	N/A

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	6.53	N/A
6	2437	6.27	N/A
11	2462	6.61	N/A




4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 100 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as item 4.3.6




BUREAU
VERITAS

Test Report No.: RF130820N001

4.5.7 TEST RESULTS

802.11b


Channel	FREQ. (MHz)	PSD (dBm/100kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	2.54	8	PASS
6	2437	1.75	8	PASS
11	2462	1.40	8	PASS

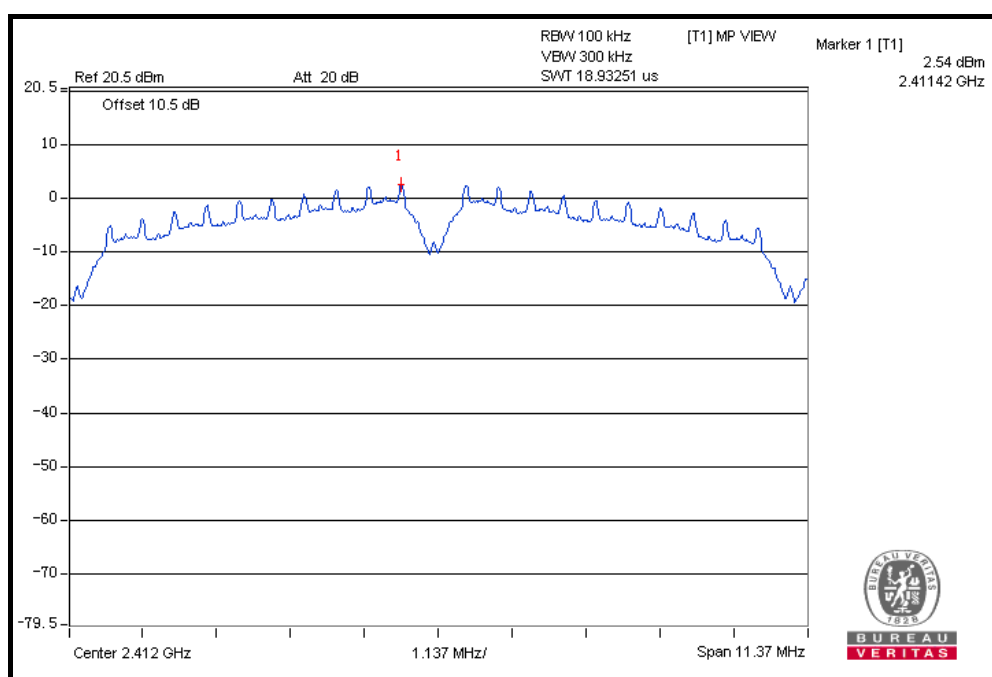



802.11g

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-1.55	8	PASS
6	2437	-2.38	8	PASS
11	2462	-2.88	8	PASS

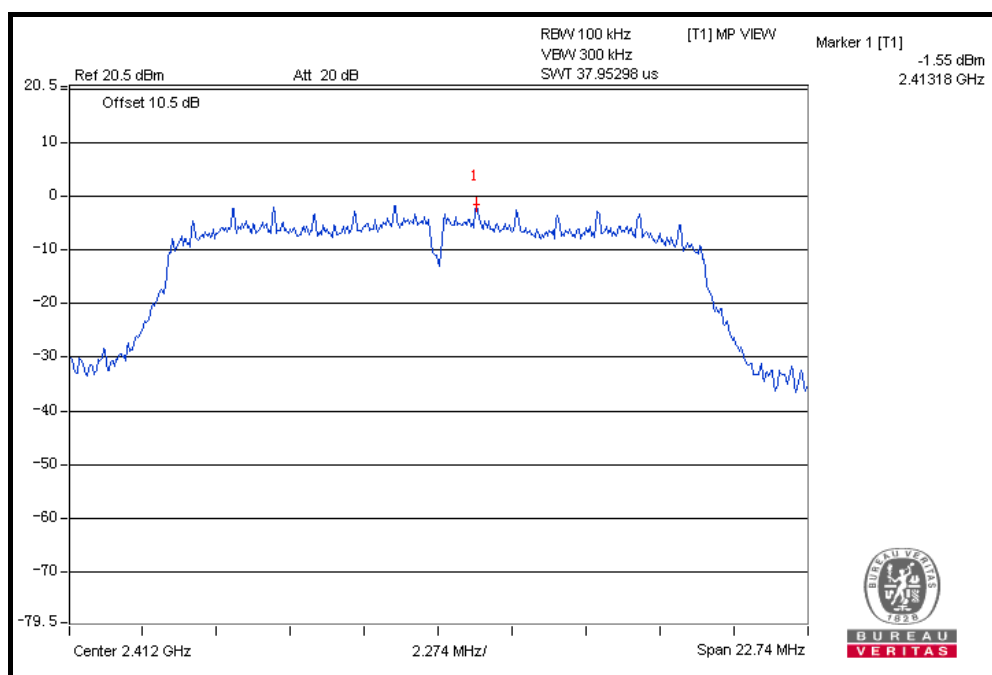



BUREAU
VERITAS

Test Report No.: RF130820N001

802.11n (20MHz)

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-2.66	8	PASS
6	2437	-3.18	8	PASS
11	2462	-3.95	8	PASS

