



LCIE

# Rapport d'essai / Test report

N° 539318-R1-E

JDE : 118533

## DELIVRE A / ISSUED TO

: INGENICO

9 Avenue de la Gare  
Rovaltain TGV - Quartier de la gare  
26958 VALENCE - FRANCE

## Objet / Subject

: Essais de compatibilité électromagnétique conformément aux normes  
**FCC CFR 47 Part 15, Subpart B et C**  
**RSS-210 Issue 8**  
*Electromagnetic compatibility tests according to the standards*  
**FCC CFR 47 Part 15, Subpart B and C**  
**RSS-210 Issue 8**

## Matériel testé / Apparatus under test :

- Produit / Product : **Lecteur sans contact / Contactless reader**
- Marque / Trade mark : **INGENICO**
- Constructeur / Manufacturer : **INGENICO**
- Type / Model : **IUC180-11T2308 / IUC180-11T2226**
- Type sous test / Model under test : **IUC180-11T2226**
- N° de série / serial number : **12365UN09990003 and 12365UN09990005**
- FCC ID : **XKB-IUC18X-RF**
- IC : **2586D-IUC18XRF**

## Date des essais / Test date

: Du 10 au 21 Janvier 2013 / From January 10<sup>th</sup> to 21<sup>st</sup>, 2013

## Lieu d'essai / Test location

: **LCIE SUD-EST**  
ZI Centr'Alp – 170 rue de Chatagnon  
38430 MOIRANS - FRANCE

## Test réalisé par / Test performed by

: Anthony MERLIN

**Ce document comporte / Composition of document : 28 pages.**

Ecrit par / Written by,  
Anthony MERLIN

MOIRANS, LE 20 FEVRIER 2013 / FEBRUARY 20TH, 2013

Approuvé par / Approved by  
Jacques LEBLANC

LABORATOIRE CENTRAL DES  
INDUSTRIES ELECTRIQUES  
LCIE SUD-EST  
ZI Centr'Alp  
170, Rue de Chatagnon  
38430 MOIRANS  
Tél. 04 76 07 36 36  
Fax 04 76 55 90 88

La reproduction de ce document n'est autorisée que sous sa forme intégrale. Toute reproduction partielle ou toute insertion de résultats dans un texte d'accompagnement en vue de leur diffusion doit recevoir un accord préalable et formel du LCIE. Ce document résulte d'essais effectués sur un spécimen, un échantillon ou une éprouvette. Il ne préjuge pas de la conformité de l'ensemble des produits fabriqués à l'objet essayé. Sauf indication contraire, la décision de conformité prend en compte l'incertitude de mesures. Il ne préjuge en aucun cas d'une décision de certification.

*This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the item tested. It does not imply the conformity of the whole production to the item tested. Unless otherwise specified; the decision of conformity takes into account the uncertainty of measures. This document does not anticipate any certification decision.*

LCIE

33, av du Général Leclerc

BP 8

92266 Fontenay-aux-Roses cedex

France

Tél : +33 1 40 95 60 60

Fax : +33 1 40 95 86 56

contact@lcie.fr

www.lcie.fr

Société par Actions Simplifiée

au capital de 15 745 984 €

RCS Nanterre B 408 363 174

www.lcie.com



**SUMMARY**

1.	TEST PROGRAM .....	3
2.	SYSTEM TEST CONFIGURATION.....	4
3.	CONDUCTED EMISSION DATA.....	7
4.	RADIATED EMISSION DATA .....	10
5.	MAXIMUM PEAK OUTPUT POWER (15.247) .....	16
6.	BAND EDGE MEASUREMENT (15.247) .....	18
7.	ANNEX 1 (GRAPHS) .....	21
8.	UNCERTAINTIES CHART .....	28



## 1. TEST PROGRAM

**Standard:** - FCC Part 15, Subpart C 15.247 - ANSI C63.4 (2003)  
- RSS-210 Issue 8 – Dec 2010 - RSS-Gen Issue 3 – Dec 2010

EMISSION TEST	LIMITS			RESULTS (Comments)
<b>Limits for conducted disturbance at mains ports</b> 150kHz-30MHz	<b>Frequency</b>	<b>Quasi-peak value (dBµV)</b>	<b>Average value (dBµV)</b>	<b>PASS</b>
	150-500kHz	66 to 56	56 to 46	
	0.5-5MHz	56	46	
	5-30MHz	60	50	
<b>Radiated emissions</b> 9kHz-30MHz CFR 47 §15.209 (a) CFR 47 §15.247 (d) and §15.225 RSS-210 §A8.5	<b>Measure at 300m</b> 9kHz-490kHz : 67.6dBµV/m /F(kHz) <b>Measure at 30m</b> 490kHz-1.705MHz : 87.6dBµV/m /F(kHz) 1.705MHz-30MHz : 29.5 dBµV/m			<b>PASS</b>
<b>Radiated emissions</b> 30MHz-25GHz* CFR 47 §15.209 (a) CFR 47 §15.247 (d) and §15.225 RSS-210 §A8.5	<b>Measure at 3m</b> 30MHz-88MHz : 40 dBµV/m 88MHz-216MHz : 43.5 dBµV/m 216MHz-960MHz : 46.0 dBµV/m Above 960MHz : 54.0 dBµV/m			<b>PASS</b>
<b>Maximum Peak Output Power</b> CFR 47 §15.247 (b) RSS-210 §A8.4(1)	<b>Limit: 21dBm</b> Conducted or Radiated measurement			<b>PASS</b>
<b>Hopping Channel Separation</b> CFR 47 §15.247 (a) (1) RSS-210 §A8.1(b)	<b>Minimum between:</b> Two-third 20dB Bandwidth or 25kHz Whichever is greater			<b>Not Performed</b> <b>See test report</b> <b>221171-A1-R1-E</b>
<b>Number of Hopping Frequencies</b> CFR 47 §15.247 (a) (1) (iii) RSS-210 §A8.1(d)	<b>At least 15 channels used</b>			<b>Not Performed</b> <b>See test report</b> <b>221171-A1-R1-E</b>
<b>Time of Occupancy (Dwell Time)</b> CFR 47 §15.247 (a) (1) (iii) RSS-210 §A8.1(d)	<b>Maximum 0.4 sec within 31.6sec</b>			<b>Not Performed</b> <b>See test report</b> <b>221171-A1-R1-E</b>
<b>Band Edge Measurement</b> CFR 47 §15.209 (a) and CFR 47 §15.247 (d) RSS-210 §A8.5	<b>Limit: -20dBc</b>			<b>PASS</b>
<b>Occupied bandwidth</b> RSS-Gen §4.6.1	<b>No limit</b>			<b>Not Performed</b> <b>See test report</b> <b>221171-A1-R1-E</b>
<b>Receiver Spurious Emission**</b> RSS-Gen §4.10	<b>See RSS-Gen §4.10</b>			<b>Not Applicable</b>
<b>Fundamental field strength limit</b> CFR 47 §15.225 and RSS-210 §A2.6	<b>Operation within the band</b> <b>13.110-14.010 MHz</b>			<b>Not Performed</b> <b>See test report</b> <b>221171-A1-R1-E</b>
<b>Fundamental frequency tolerance</b> CFR 47 §15.225 and RSS-210 §A2.6	<b>Operation within the band</b> <b>13.110-14.010 MHz</b>			<b>Not Performed</b> <b>See test report</b> <b>221171-A1-R1-E</b>
<b>Band edge compliance</b> CFR 47 §15.225 and RSS-210 §A2.6	<b>Operation within the band</b> <b>13.110-14.010 MHz</b>			<b>Not Performed</b> <b>See test report</b> <b>221171-A1-R1-E</b>

\*§15.33: The highest internal source of a testing device is defined like more the highest frequency generated or used in the testing device or on which the testing device works or agrees.

- If the highest frequency of the internal sources of the testing device is lower than 108 MHz, measurement must be only performed until 1GHz.

- If the highest frequency of the internal sources of the testing device ranges between 108 MHz and 500 MHz, measurement must be only performed until 2GHz.

- If the highest frequency of the internal sources of the testing device ranges between 500 MHz and 1 GHz, measurement must be only performed until 5GHz.

If the highest frequency of the internal sources of the testing device is above 1 GHz, measurement must be only performed until 5 times the highest frequency or 40 GHz, while taking smallest of both.

\*\*Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.



## 2. SYSTEM TEST CONFIGURATION

### 2.1. JUSTIFICATION

The system was configured for testing in a typical fashion (as a customer would normally use it).

The equipment IUC180 can be used with several internal option cards:

- COM2 + MDB + Bluetooth Configuration n°1 – IUC180-00T1999
- COM2 + MDB + Bluetooth + GPRS modular approval Configuration n°2 – IUC180-00T1651

The Equipment Under Test will be the configuration n°2 to represent others configurations. (Worst case)

IUC180 has to be integrated in unattended devices. The test configuration is given by the manufacturer

***New version from precedent equipment tested, RF part not changed, only partial tests performed.***

### 2.2. HARDWARE IDENTIFICATION

- **Equipment under test (EUT):**

IUC180-11T2226

Serial number: 12365UN09990003 and 12365UN09990005

- Internal max frequencies <500MHz (Declaration of provider)

- **Power supply:**

- DC voltage, 10-45VDC, tested at 12VDC (worst case)

During all the tests, EUT is supplied by an AC/DC adaptor, not supplied with EUT so not tested, PHIHONG PSM36W-120TW, 100-240VAC / 1.5A / 50-60Hz, output 12VDC / 3A.

- **Input/output:**

- 1 x Power supply connector, 2 wires
- 5 x USB
- 1 x LAN
- 2 x COM
- 1 x Earth
- 1 x Jack "Clock"
- 1 x MDB master
- 1 x MDB slave, same connector that power supply
- 2 x SMA connector, GPRS and Bluetooth
- 2 x SAM
- 1 x SIM
- 1 x MicroSD

- **Modular Approval contained:**

- 1 x GPRS module, SAGEMCOM, HILO V2 INGENICO, FCC ID: VW3HILOV2

- **Antennas:**

- 1 x GPRS antenna, GC300M-011-2500, highest gain, only one tested.
- 1 x Bluetooth antenna, EAD-FBTS35024-SM-ST, highest gain, only one tested.

**• Auxiliaries used for testing:**

- 1 x Laptop TOSHIBA SATELLITE, PS141E-04YC, Sn: 13594938G
- 2 x SAM
- 1 x SIM
- 1 x Contactless card

**• I/O cables used for testing:**

- 1 x AC power cord, 2 wires, unshielded: 2m
- 1 x DC power supply cable (fixed on mains power unit), unshielded: 1.75m
- 1 x Ethernet cable Type: STP Cat 5e, shielded: 1m
- 5 x USB cables, shielded: 1m
- 2 x RS232 Com cables, RJ11, unshielded, 1.5m (COM 0 & COM 2)
- 1 x MDB-slave '6 pins' <-> MDB-master '8 pins' cable, unshielded, 4 wires, length: 1m
- 1 x Jack cable, unshielded, length: 0.2cm

**• Equipment information – 13.56MHz:**

- Type: ☒RFID
- Frequency band: [13.56] MHz
- Number of channel: 1
- RF mode: ☒TX/RX ☐RX ☐Standby
- Antenna type: Internal
- Antenna connector: ☐Permanent external ☒Permanent internal
- Antenna connector: ☐None ☐Temporary (only for tests)
- Normal power source: 12VDC (host)

**• Equipment information:**

- Type: ☒Bluetooth ☐Other:
- Frequency band: [2400.0 – 2483.5] MHz
- Number of channel: 79
- Channel tested: Full test on 2402MHz / 2441MHz / 2480MHz
- Modulation Technology: ☒FHSS ☐DSSS
- Modulation type: ☒GFSK ☒Pi/4 DQPSK ☒8DPSK
- Packet type: DH1 DH3 DH5
- Transfert data rate: 1Mbps 2Mbps 3Mbps
- RF mode: ☒TX/RX ☐RX ☐Standby
- Antenna type: SMA connector + Whip antenna (not supplied)
- Antenna connector: ☒Permanent external ☐Permanent internal
- Antenna connector: ☐None ☐Temporary (only for tests)
- Normal power source: 12VDC (host)

### 2.3. EUT CONFIGURATION

#### **For all tests:**

A generic program test is loaded on EUT, in order to perform in loop following functions:

- Reading / writing SAM card (SAM1 & SAM2)
- Reading / writing  $\mu$ SD card (MMC)
- RX/TX on Serial port (COM0 & COM2)
- RX/TX between MDB master and slave
- Reading Contactless card

With laptop:

- Continuous Ethernet communication is performed from EUT to Laptop (Ping)

#### **For special Bluetooth tests:**

With a special mode of EUT a communication is performed with CMU, a permanent link with followings parameters is tested (worst case):

- Lowest, middle, highest channel
- Max power
- EDR / DH5
- Hopping mode: ON or OFF following test

### 2.4. EQUIPMENT MODIFICATIONS

A ferrite (integrated secondary power supply PHIHONG PSM36W-120TW) is set on two wires which provided 12VDC (MDB slave connector side).

A ferrite type WE 74271222(Two turns) is set on others MDB slave wires



### 2.5. SPECIAL ACCESSORIES

None



### 3. CONDUCTED EMISSION DATA

#### 3.1. CLIMATIC CONDITIONS

Date of test : January 16<sup>th</sup>, 2013  
Test performed by : Majid MOURZAGH  
Atmospheric pressure : 984hPa  
Relative humidity : 24%  
Ambient temperature : 22°C

#### 3.2. SETUP FOR CONDUCTED EMISSIONS MEASUREMENT

The product has been tested according to ANSI C63.4-(2003) and FCC Part 15 subpart B and C.

The product has been tested with 110V/60Hz power line voltage and compared to the FCC Part 15 subpart B §15.107 and C §15.207 limits. Measurement bandwidth was 9kHz from 150 kHz to 30 MHz.

Measurement is made with a Rohde & Schwarz ESU8 receiver in peak mode. This was followed by a Quasi-Peak, i.e. CISPR measurement for any strong signal. If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary. The LISN (measure) is 50Ω / 50μH.

The Peak data are shown on plots in annex 1. Quasi-Peak and Average measurements are detailed in a table with frequencies and levels measured.



Interconnecting cables and equipment's were moved to position that maximized emission. A summary of the worst case emissions found in all test configurations and modes is shown on the following page.

#### 3.3. TEST SETUP

The EUT is placed on the ground reference plane, at 80cm from the LISN. The distance between the EUT and the vertical ground plane is 40cm.

Auxiliaries are powered by another LISN.

The cable has been shorted to 1meter length. The EUT is powered trough the LISN (measure).

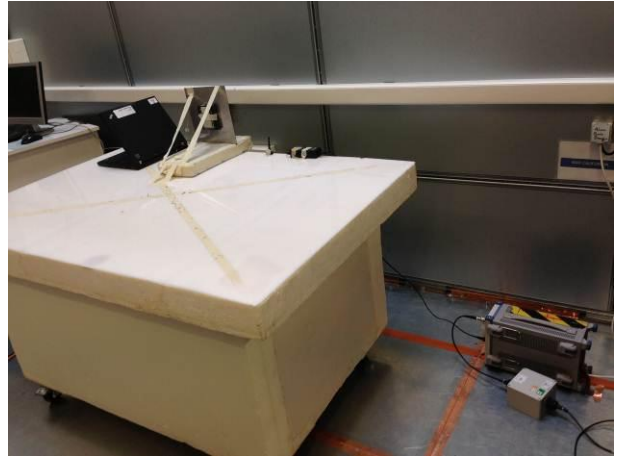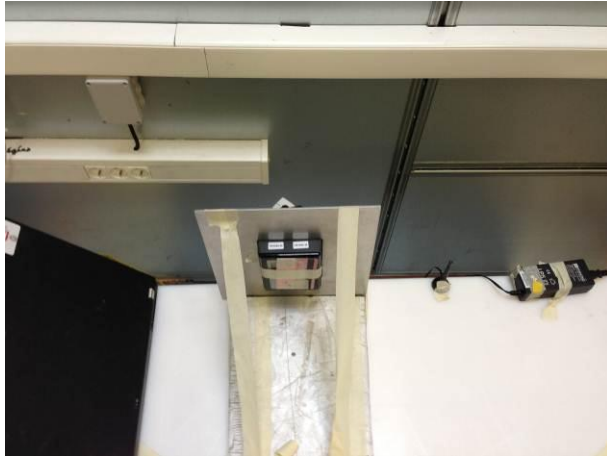

Conducted emission test setup



**3.4. TEST EQUIPMENT LIST**

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Cable	-	-	A5329578
Conducted emission comb generator	BARDET	-	A3169049
LISN	RHODE & SCHWARZ	ENV216	C2320123
Receiver 20Hz – 8GHz	ROHDE & SCHWARZ	ESU8	A2642019
Thermo-hygrometer	OREGON	BAR916HG-G	B4206011
Transient limiter	RHODE & SCHWARZ	ESH3-Z2	A7122204

**3.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION**

None

**3.6. TEST SEQUENCE AND RESULTS**

Measurements are performed on the phase (L1) and neutral (N) of power line voltage.

Graphs are obtained in PEAK detection.

Measures are also performed in Quasi-Peak and Average for any strong signal.

Measure on L1:	graph Emc#1	<i>All functions, worst cases presented</i>	(see annex 1)
Measure on N:	graph Emc#2	<i>All functions, worst cases presented</i>	(see annex 1)

**RESULT: PASS**

## 4. RADIATED EMISSION DATA


### 4.1. CLIMATIC CONDITIONS

Date of test : January 21<sup>st</sup>, 2013  
Test performed by : A.MERLIN  
Atmospheric pressure : 993hPa  
Relative humidity : 36%  
Ambient temperature : 21°C

### 4.2. TEST SETUP

The installation of EUT is identical for pre-characterization measurement in a 3 meters semi anechoic chamber and for measures on a 10 meters Open site.



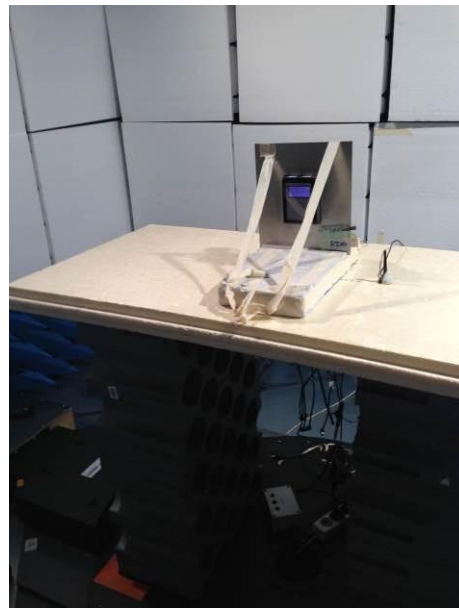

Radiated emission test setup



#### 4.3. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Antenna Bi-log	CHASE	CBL6111A	C2040051
Antenna Loop	ELECTRO-METRICS	EM-6879	C2040052
Antenna Bi-log	CHASE	CBL6111A	C2040172
Antenna horn	EMCO	3115	C2042027
Cable N/N	-	-	A5329038
Cable	SUCOFLEX	106G	A5329061
Cable	-	-	A5329183
Cable OATS (Mast at 10m)	UTIFLEX	-	A5329188
Cable	UTIFLEX	-	A5329189
Cable	-	-	A5329191
Cable OATS (Mast at 10m)	UTIFLEX	-	A5329199
Semi-Anechoic chamber #1	SIEPEL	-	D3044016
Semi-Anechoic chamber #3	SIEPEL	-	D3044017
Radiated emission comb generator	BARDET	-	A3169050
OATS	-	-	F2000409
Receiver 20Hz – 8GHz	ROHDE & SCHWARZ	ESU8	A2642019
Receiver 9kHz - 6GHz	ROHDE & SCHWARZ	FSL6	A2642020
Thermo-hygrometer	OREGON	BAR206	B4204078
Antenna mast (OATS)	LCIE	-	F2000288
Turntable chamber (Cage#3)	ETS Lingren	Model 2165	F2000371
Turntable / Mast controller (OATS)	ETS Lindgren	Model 2066	F2000372
Turntable controller (Cage#2-3)	ETS Lingren	Model 2066	F2000393
Turntable (OATS)	ETS Lindgren	Model 2187	F2000403
Turntable chamber (Cage#2)	ETS Lingren	Model 2165	F2000404
Turntable chamber (Cage#1)	MATURO Gmbh	TT 2.0 SI	F2000406
Antenna mast (Cage#1)	MATURO Gmbh	AM 4.0	F2000407
Turntable controller (Cage#1)	MATURO Gmbh	Control Unit	F2000408
Table	LCIE	-	F2000438

#### 4.4. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



#### 4.5. TEST SEQUENCE AND RESULTS

##### 4.5.1. Pre-characterization at 3 meters [9kHz-30MHz]

A pre-scan of all the setup has been performed in a 3 meters semi anechoic chamber. The distance between EUT and antenna is 3 meters. For Pre-characterization, the loop antenna was rotated during the test for maximized the emission measurement. Measurement performed on 3 axis of EUT.

Frequency band investigated is 9kHz to 30MHz.

The pre-characterization graphs are obtained in PEAK detection.

See graph for 9kHz-30MHz band:

Emr#1 (See annex 1)

##### 4.5.2. Pre-characterization [30MHz-25GHz]

For frequency band 30MHz to 1GHz, a pre-scan of all the setup has been performed in a 3 meters semi anechoic chamber.

The distance between EUT and antenna is 3 meters. Test is performed in horizontal (H) and vertical (V) polarization with a log-periodic antenna. The EUT is being rotated on 360° and on 3 axis during the measurement. The pre-characterization graphs are obtained in PEAK detection.

For frequency band 1GHz to 26GHz, a search is performed in the semi-anechoic chamber in order to determine frequencies radiated by the EUT (Measuring distance reduced to 1m and 20cm for frequencies from 12GHz to 26GHz).

See graphs for 30MHz-1GHz:

H polarization	All functions without RF	Emr#2	(See annex 1)
V polarization	All functions without RF	Emr#3	(See annex 1)
H polarization	RFID + GPRS + Bluetooth (worst case)	Emr#4	(See annex 1)
V polarization	RFID + GPRS + Bluetooth (worst case)	Emr#5	(See annex 1)

##### 4.5.3. Characterization on 10 meters open site below 30 MHz

The product has been tested according to ANSI C63.4 (2003), FCC part 15 subpart C. Radiated Emissions were measured on an open area test site. A description of the facility is on file with the FCC. The product has been tested at a distance of **10 meters** from the antenna and compared to the FCC part 15 subpart C §15.109 limits and C §15.209 and FCC part 15 subpart C §15.225 limits in the frequency range 13.553MHz 13.567MHz. Antenna height was 1m for both horizontal and vertical polarization. Antenna was rotated around its vertical axis. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on 3 axis of EUT. A summary of the worst case emissions found in all test configurations and modes is shown in following tables.

Frequency (MHz)	QPeak Limit (dBμV/m) @ 30m	Qpeak (dBμV/m)	Qpeak-Limit (Margin dB)	Turntable Angle (deg)	Ant. Pol./ Angle (deg)	Tot Corr (dB)
13.56* <sup>1</sup>	84.0	30.3	-53.7	270	0	35.3

\*<sup>1</sup>: Measure have been done at 10m distance and corrected according to requirements of 15.209.e) (M@30m = M@10m-19.1dB)

##### Limits Sub clause §15.225

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
13.553-13.567	15 848 84 dBμV/m	30
13.410-13.553 13.567-13.710	334 50.5 dBμV/m	30
13.110-13.410 13.710-14.010	106 40.5 dBμV/m	30

See chapter corresponding of this test report for band edge measurements.



#### 4.5.4. Characterization on 10 meters open site from 30MHz to 25GHz

The product has been tested at a distance of **10 meters** from the antenna and compared to the FCC part 15 subpart B §15.109 limits and C §15.209 limits. Measurement bandwidth was 120kHz from 30 MHz to 1GHz and 1MHz from 1GHz to 25GHz.

Antenna height search was performed from 1m to 4m for both horizontal and vertical polarization. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on 3 axis of EUT.

A summary of the worst case emissions found in all test configurations and modes is shown on clause 3.2

#### Worst case final data result:

##### All configurations:

No	Frequency (MHz)	QPeak Limit (dBμV/m)	Qpeak * (dBμV/m)	Qpeak-Limit (Margin, dB)	Angle (deg)	Pol	Hgt (cm)	Tot Corr (dB)	Comments
1	30.543	40.0	33.8	-6.2	330	V	100	21.0	
2	40.679	40.0	39.8	-0.2	330	V	100	15.1	
3	45.568	40.0	32.2	-7.8	300	V	100	12.6	
4	45.569	40.0	35.7	-4.3	250	V	100	12.6	
5	47.459	40.0	34.4	-5.6	80	V	100	11.8	
6	47.798	40.0	35.9	-4.1	200	V	100	11.6	
7	54.239	40.0	33.1	-6.9	120	V	100	9.2	
8	61.019	40.0	30.6	-9.4	0	V	100	8.2	
9	67.799	40.0	27.4	-12.6	90	V	100	8.5	
10	140.333	43.5	35.5	-8.0	20	V	100	14.7	
11	193.528	43.5	39.4	-4.1	320	V	100	11.8	
12	193.528	43.5	39.0	-4.5	320	V	100	11.8	
13	217.719	46.0	26.8	-19.2	310	V	140	12.3	
14	314.483	46.0	31.1	-14.9	10	H	340	16.4	
15	324.997	46.0	34.7	-11.3	290	V	310	16.8	
16	499.995	46.0	34.1	-11.9	265	V	210	21.4	
17	624.994	46.0	44.0	-2.0	200	V	200	24.1	
18	624.994	46.0	44.0	-2.0	200	V	200	24.1	
19	999.999	54.0	44.2	-9.8	300	H	320	29.7	

\*: Measure have been done at 10m distance and corrected according to requirements of 15.209.e)  
(M@3m = M@10m+10.5dB)



**Frequency band 1GHz to 25GHz**

Measurements are performed using a PEAK and Average detection. (RBW = 1MHz)

All configurations:

No	Frequency (MHz)	Limit Average (dBµV/m)	Measure Average (dBµV/m)	Margin (Mes-Lim) (dB)	Angle Table (deg)	Pol Ant.	Ht Ant. (cm)	Correc. Factor (dB)	Comments
1	4804.000	54.0	50.9	-3.1	95	V	110	3.5	
2	7206.000	54.0	52.9	-1.1	90	V	100	6.7	
3	9608.000	54.0	43.9	-10.1	95	V	110	8.7	
4	4882.000	54.0	50.5	-3.5	95	V	110	3.6	
5	7323.000	54.0	50.1	-3.9	90	V	100	6.8	
	9764.000	54.0	45.9	-8.1	90	V	100	8.7	
	4960.000	54.0	50.9	-3.1	90	V	100	3.6	
	7440.000	54.0	45.1	-8.9	95	V	100	6.9	
6	9920.000	54.0	41.3	-12.7	95	V	110	8.8	

No	Frequency (MHz)	Limit Peak (dBµV/m)	Measure Peak (dBµV/m)	Margin (Mes-Lim) (dB)	Angle Table (deg)	Pol Ant.	Ht Ant. (cm)	Correc. Factor (dB)	Comments
1	4804.000	74.0	66.40	-7.60	95	V	110	3.5	
2	7206.000	74.0	64.00	-10.00	90	V	100	6.7	
	9608.000	74.0	54.30	-19.70	95	V	110	8.7	
	4882.000	74.0	65.90	-8.10	95	V	110	3.6	
	7323.000	74.0	60.00	-14.00	90	V	100	6.8	
3	9764.000	74.0	55.90	-18.10	90	V	100	8.7	
4	4960.000	74.0	65.30	-8.70	90	V	100	3.6	
5	7440.000	74.0	55.60	-18.40	95	V	100	6.9	
6	9920.000	74.0	51.10	-22.90	95	V	110	8.8	

Note: Measures have been done at 3m distance.

**RESULTS: PASS**

#### 4.6. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow:

$$FS = RA + AF + CF - AG$$

Where  
 FS = Field Strength  
 RA = Receiver Amplitude  
 AF = Antenna Factor  
 CF = Cable Factor  
 AG = Amplifier Gain

Assume a receiver reading of 52.5dBµV is obtained. The antenna factor of 7.4 and a cable factor of 1.1 are added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dBµV/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dBµV/m value can be mathematically converted to its corresponding level in µV/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}.$$

**5. MAXIMUM PEAK OUTPUT POWER (15.247)****5.1. TEST CONDITIONS**

Date of test : January 21<sup>st</sup>, 2013  
Test performed by : A.MERLIN  
Atmospheric pressure : 987hPa  
Relative humidity : 39%  
Ambient temperature : 22°C

**5.2. EQUIPMENT CONFIGURATION*****Worst case presented:***

Modulation: 8DPSK  
Packet Type: DH5  
Hopping sequence: NO

**5.3. SETUP*****Conducted measurement:***

The EUT is turned ON and connected to measurement instrument; the center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10MHz VBW.

The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

**5.4. TEST EQUIPMENT LIST**

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Cable SMA/SMA	-	-	A5329373
Digital Radiocommunication Tester	ROHDE & SCHWARZ	CMU200	A2440004
Receiver 20Hz – 8GHz	ROHDE & SCHWARZ	ESU8	A2642019

**5.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION**


None



Channel	Channel Frequency (MHz)	Peak Output Power (dBm)	Power Limit (dBm)	PASS / FAIL
0	2402	3.5	21	P
39	2441	3.6	21	P
78	2480	3.1	21	P

Attenuation of cable = 1.6dB

Graph:

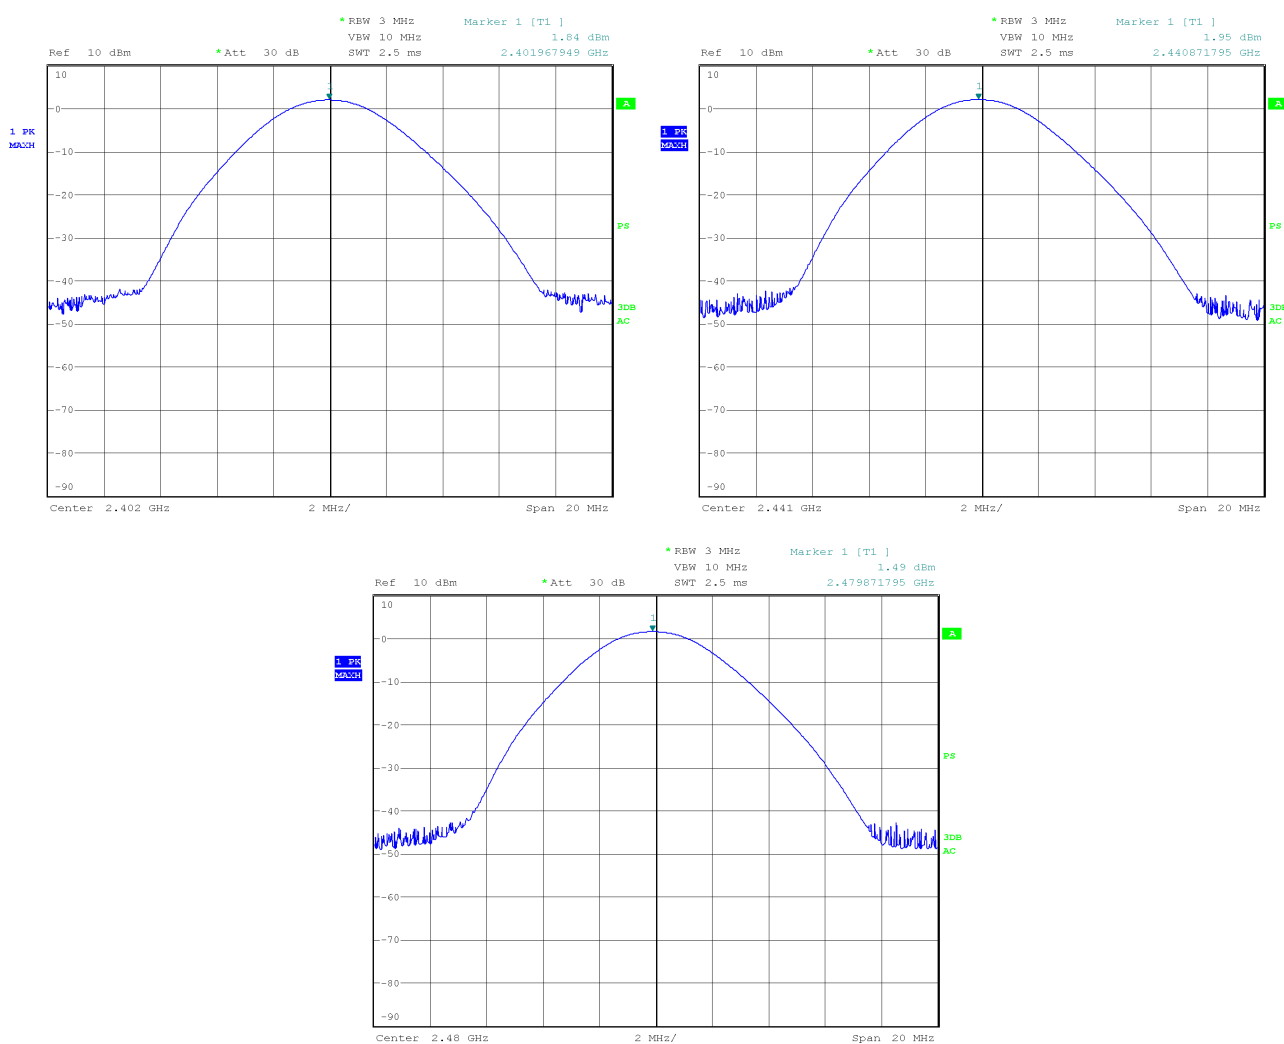

**6. BAND EDGE MEASUREMENT (15.247)****6.1. TEST CONDITIONS**

Date of test : January 21<sup>st</sup>, 2013  
Test performed by : A.MERLIN  
Atmospheric pressure : 987hPa  
Relative humidity : 39%  
Ambient temperature : 22°C

**6.2. LIMIT**

In Bandedge, the limit of spurious emissions are below -20dB of the highest emission level of operating band (in 100kHz RBW).

In the restrict band (2310-2390MHz) and (2483.5-2500MHz) including bandedge, the limit of spurious emissions are 15.209. (RBW:1MHz / VBW:3MHz)

**6.3. EQUIPMENT CONFIGURATION*****Worst case presented:***

Modulation: 8DPSK  
Packet Type: DH5  
Hopping sequence: ON

**6.4. SETUP**

The EUT is placed in an anechoic chamber; levels have been corrected to be in compliant with Peak Output Power measurement. The EUT is turn ON; the graphs of the restrict frequency band are recorded with a display line indicating the highest level and other the 20dB offset below to show compliance with 15.247 (d) and 15.205. The emissions in restricted bands are compared to 15.209 limits.

RBW: 100kHz  
VBW: 300kHz

**6.5. TEST EQUIPMENT LIST**





DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Cable SMA/SMA	-	-	A5329373
Digital Radiocommunication Tester	ROHDE & SCHWARZ	CMU200	A2440004
Receiver 20Hz – 8GHz	ROHDE & SCHWARZ	ESU8	A2642019


**6.6. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION**

None




## 6.7. RESULTS

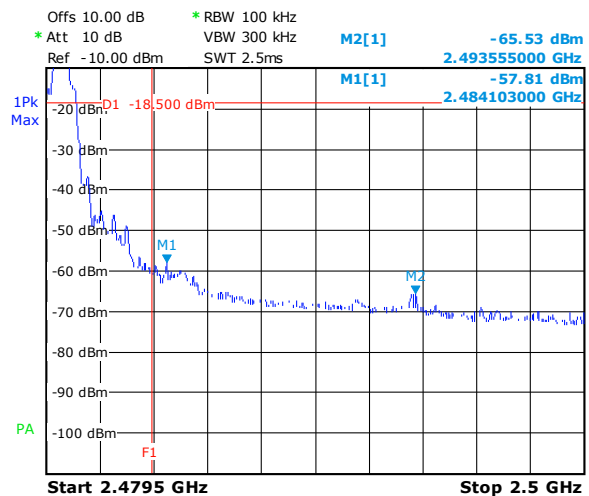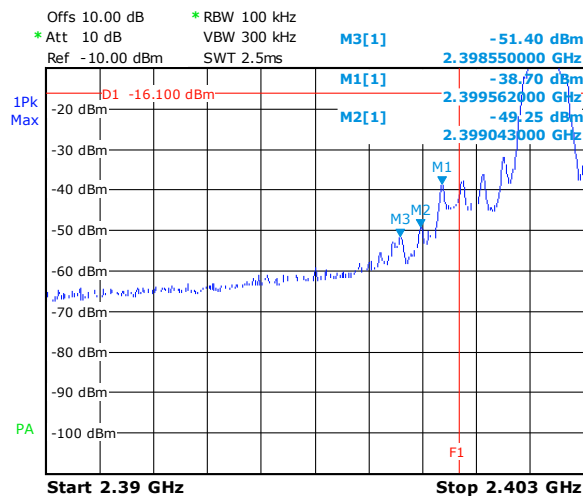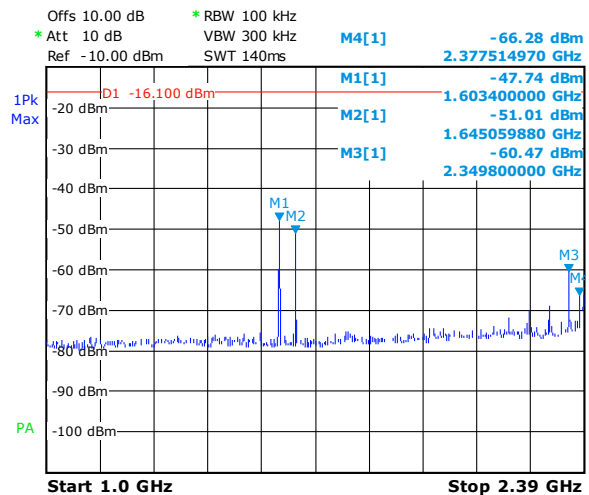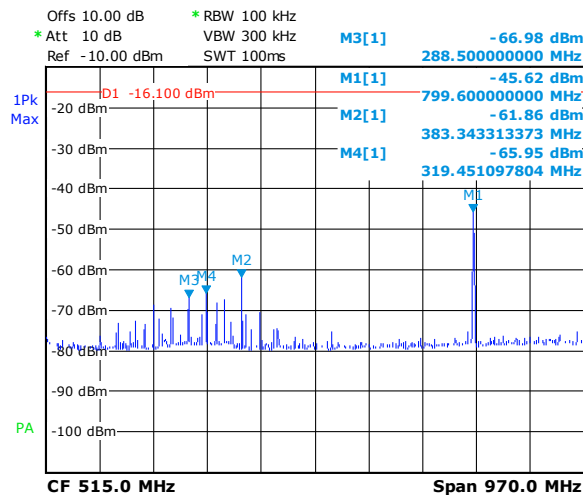
No	Frequency (GHz)	Limit Average (dBμV/m)	Measure Average (dBμV/m)	Margin (Mes-Lim) (dB)	Limit Peak (dBμV/m)	Measure Peak (dBμV/m)	Margin (Mes-Lim) (dB)
1	1.603	54.00	34.90	-19.10	74.00	46.80	-27.20
2	2.350	54.00	30.20	-23.80	74.00	36.90	-37.10
3	2.377	54.00	23.80	-30.20	74.00	31.70	-42.30
4	2.484	54.00	34.80	-19.20	74.00	41.20	-32.80
5	2.493	54.00	33.10	-20.90	74.00	39.60	-34.40
6	3.303	54.00	33.10	-20.90	74.00	42.60	-31.40

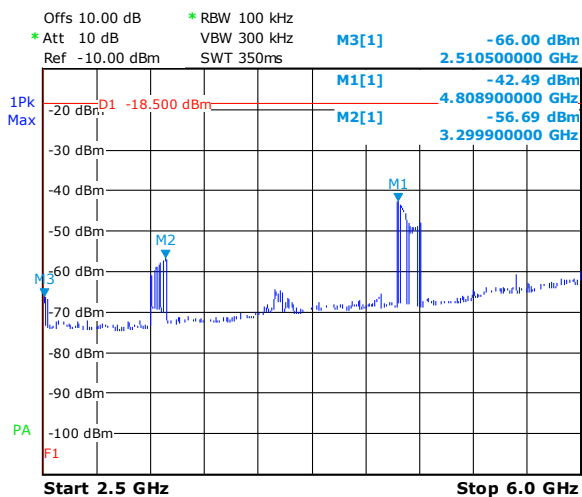



## 7. ANNEX 1 (GRAPHS)

CONDUCTED EMISSIONS				
Graph name :	Emc#1	Test configuration:		
Limit :	EN 55022			
Class :	B			
PARAMETERS				
Voltage / Frequency :	110VAC / 60Hz	Legend:		
Line :	Phase		Peak Measure	 Average Measure
RBW :	9kHz			QPeak Limit
VBW :	30kHz			
Frequency :	150kHz- 30MHz			

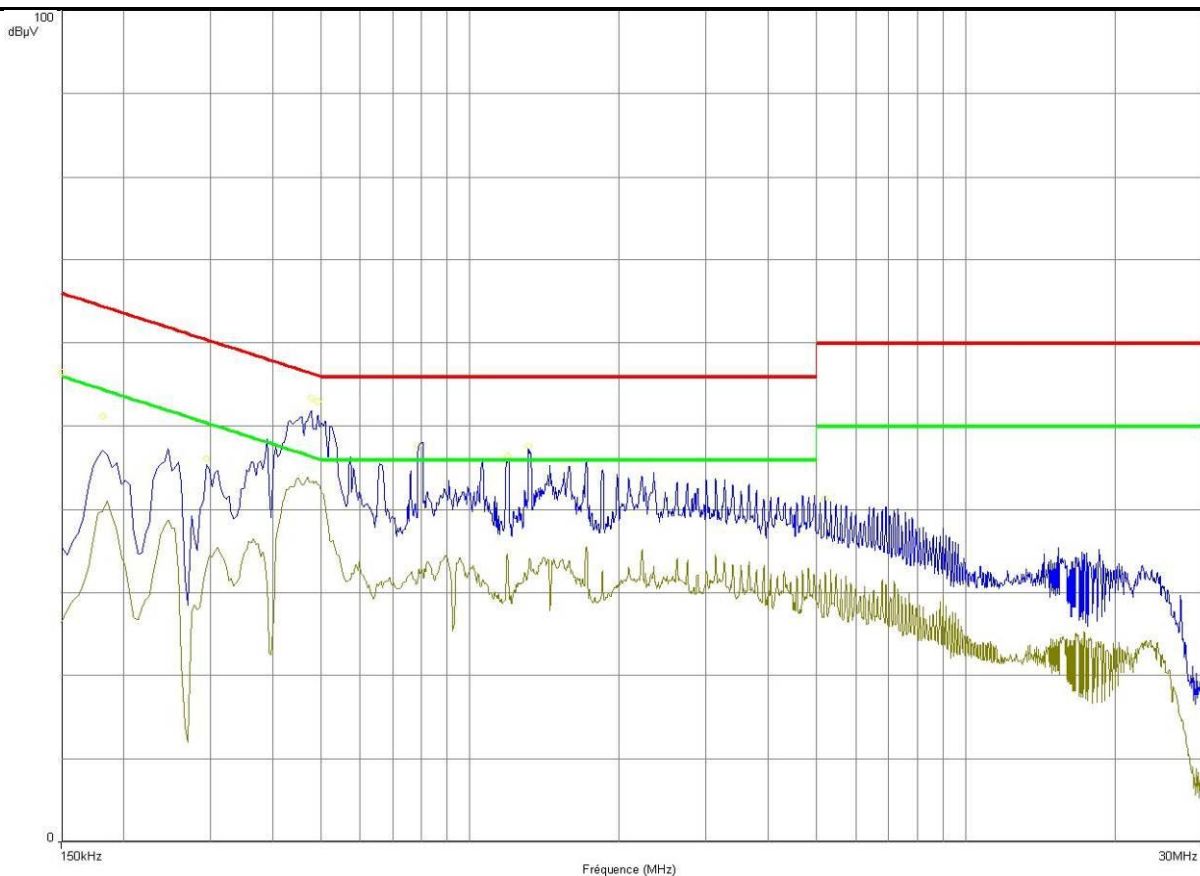


Frequency (MHz)	Avg (dBμV)	Lim Avg (dBμV)	Avg-LimAvg (dBμV)	QPeak (dBμV)	LimQPeak (dBμV)	QPeak-LimQPeak (dBμV)
0.150	46.17	51.89	-5.73	49.47	61.89	-12.42
0.182	40.29	54.39	-14.11	46.48	64.39	-17.92
0.294	32.83	50.41	-17.58	41.63	60.41	-18.78
0.478	42.90	46.37	-3.47	49.23	56.37	-7.14
0.494	42.43	46.10	-3.67	49.40	56.10	-6.70
0.786	30.74	46.00	-15.26	40.77	56.00	-15.23
1.194	29.77	46.00	-16.23	38.80	56.00	-17.20
1.314	32.46	46.00	-13.54	41.40	56.00	-14.60
5.214	27.23	50.00	-22.77	34.74	60.00	-25.26



L C I E

CONDUCTED EMISSIONS				
Graph name :	Emc#2	Test configuration:		
Limit :	EN 55022			
Class :	B			
PARAMETERS				
Voltage / Frequency :	110VAC / 60Hz	Legend:		
Line :	Neutral	Peak Measure		Average Measure
RBW :	9kHz			
VBW :	30kHz	QPeak Limit		Average Limit
Frequency :	150kHz- 30MHz			

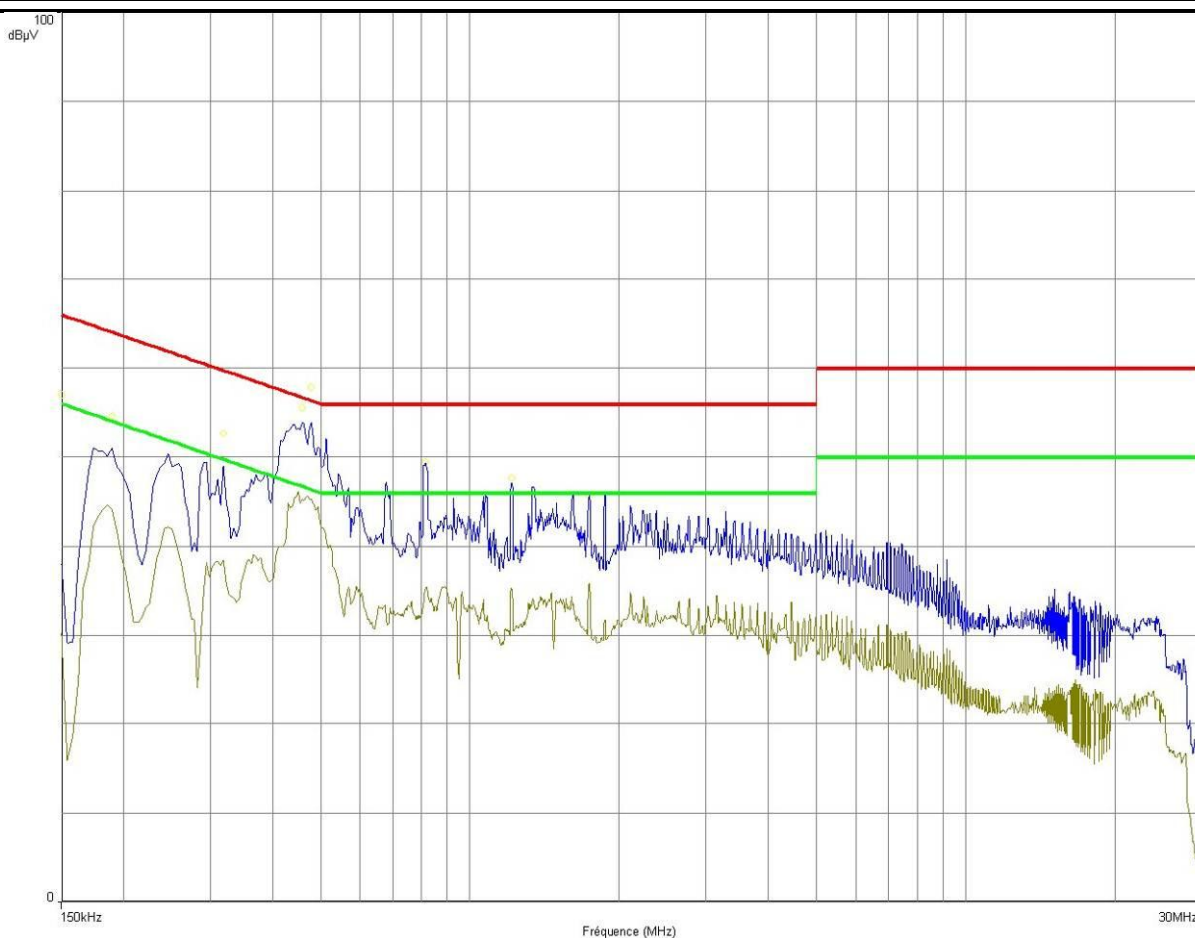



Frequency (MHz)	Avg (dBμV)	Lim Avg (dBμV)	Avg-LimAvg (dBμV)	QPeak (dBμV)	LimQPeak (dBμV)	QPeak-LimQPeak (dBμV)
0.150	47.67	51.89	-4.22	50.71	61.89	-11.18
0.190	44.80	54.04	-9.24	52.24	64.04	-11.79
0.318	38.29	49.76	-11.47	48.76	59.76	-11.00
0.458	42.99	46.73	-3.74	50.03	56.73	-6.70
0.478	45.45	46.37	-0.93	53.68	56.37	-2.70
0.814	34.06	46.00	-11.94	43.75	56.00	-12.25
1.214	31.97	46.00	-14.03	40.68	56.00	-15.32
1.338	32.38	46.00	-13.62	39.97	56.00	-16.03
1.742	32.29	46.00	-13.71	40.61	56.00	-15.39
0.150	47.67	51.89	-4.22	50.71	61.89	-11.18



**RADIATED EMISSIONS**


<b>Graph name :</b>	Emr#1	<b>Test configuration:</b>
<b>Limit :</b>	FCC Part15C	RFID + BLUETOOTH + GPRS (Worst case)
<b>Class :</b>	B	

**PARAMETERS**

<b>Antenna polarization:</b>	0° (worst case)	<b>Legend:</b>
<b>Azimuth :</b>	0° - 360°	 <b>Peak Measure</b>
<b>RBW :</b>	100Hz	
<b>VBW :</b>	300Hz	 <b>QPeak Limit@3m</b>
<b>Frequency :</b>	9kHz- 150kHz	

**PARAMETERS**

<b>Antenna polarization:</b>	0° (worst case)	<b>Legend:</b>
<b>Azimuth :</b>	0° - 360°	 <b>Peak Measure</b>
<b>RBW :</b>	10kHz	
<b>VBW :</b>	30kHz	 <b>QPeak Limit@3m</b>
<b>Frequency :</b>	150kHz- 30MHz	

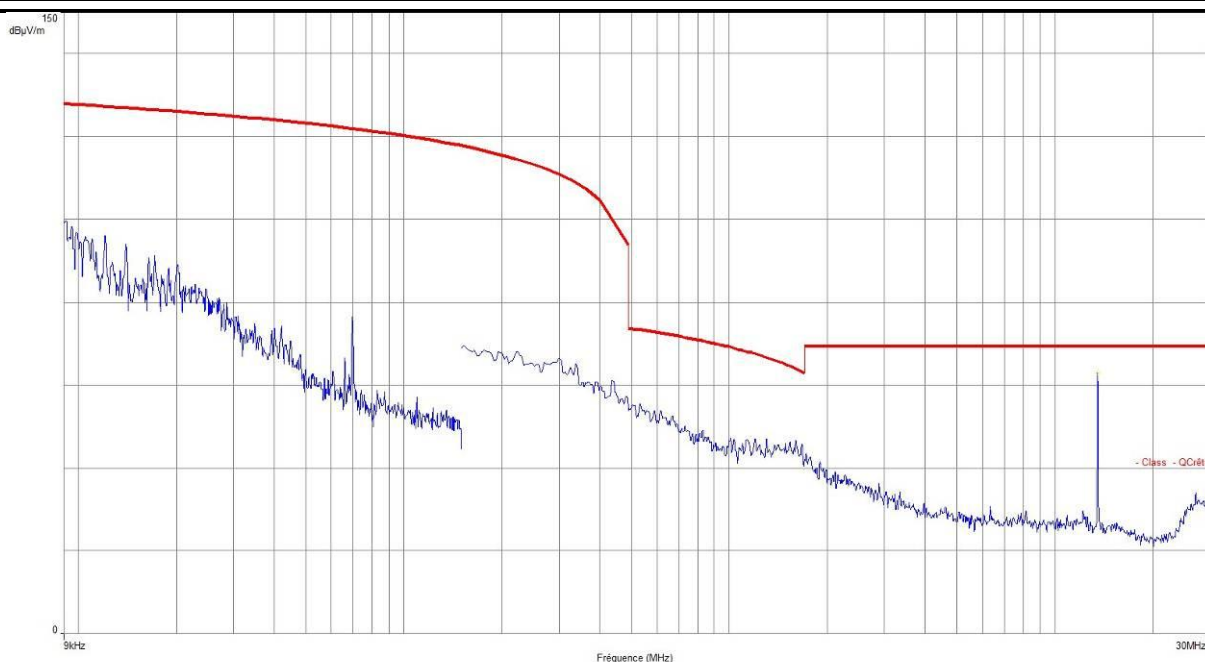

Frequency (MHz)	Peak (dBμV/m)
13.561605*	63.18

\*Carrier frequency




L C I E

**RADIATED EMISSIONS**

<b>Graph name :</b>	Emr#2	<b>Test configuration:</b>
<b>Limit :</b>	FCC Part15B	All functions without RF
<b>Class :</b>	B	

**PARAMETERS**

<b>Antenna polarization:</b>	Horizontale	<b>Legend:</b>
<b>Azimuth :</b>	0° - 360°	<div></div> <b>Peak Measure</b>
<b>RBW :</b>	100kHz	
<b>VBW :</b>	300kHz	<div></div> <b>QPeak Limit@3m</b>
<b>Frequency :</b>	30MHz- 1.001GHz	

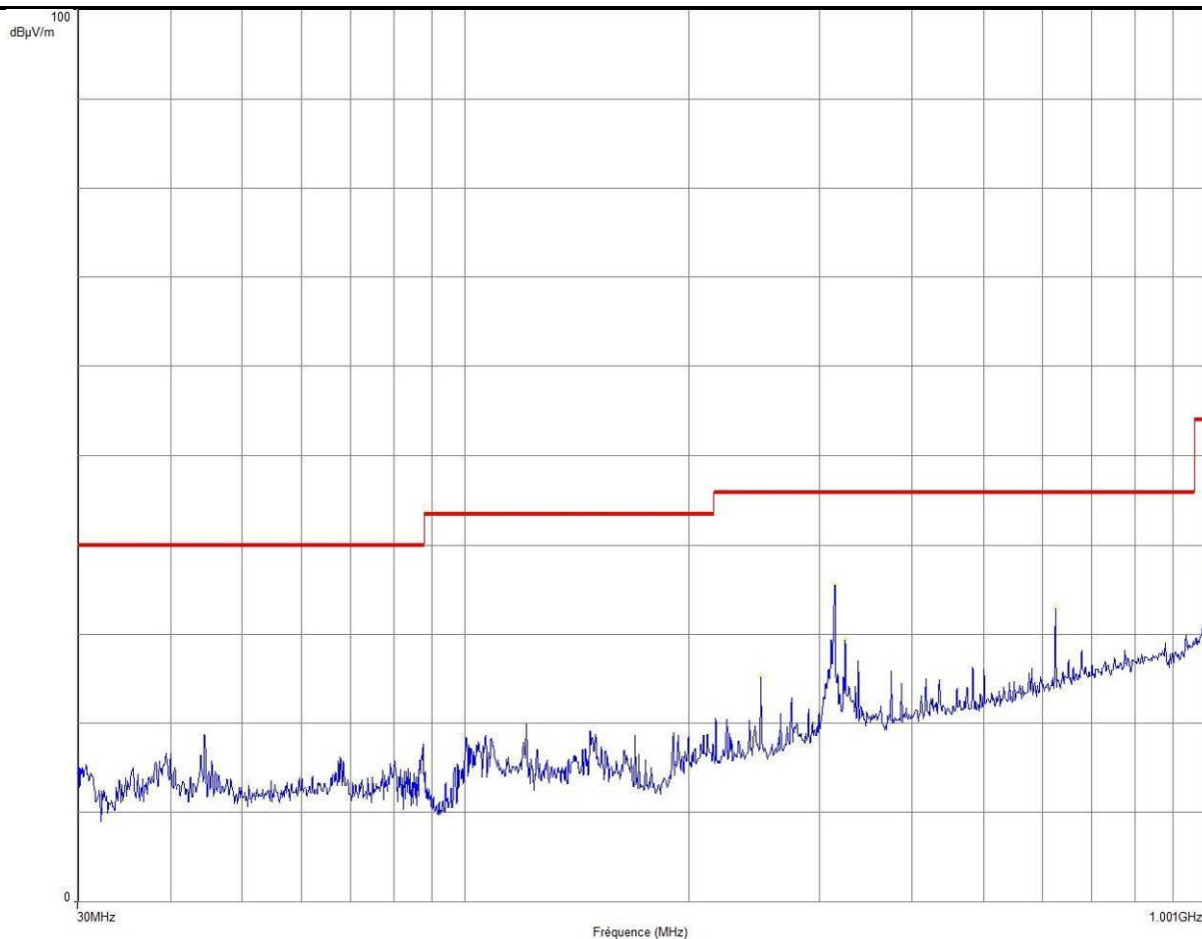

Frequency (MHz)	Peak (dBμV/m)
250.08	25.23
314.52	35.55
324.88	29.41
624.96	32.81
999.96	37






L C I E

**RADIATED EMISSIONS**

Graph name :	Emr#3	Test configuration:
Limit :	FCC Part15B	All functions without RF
Class :	B	

**PARAMETERS**

Antenna polarization:	Verticale	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	100kHz	
VBW :	300kHz	QPeak Limit@3m
Frequency :	30MHz- 1.001GHz	

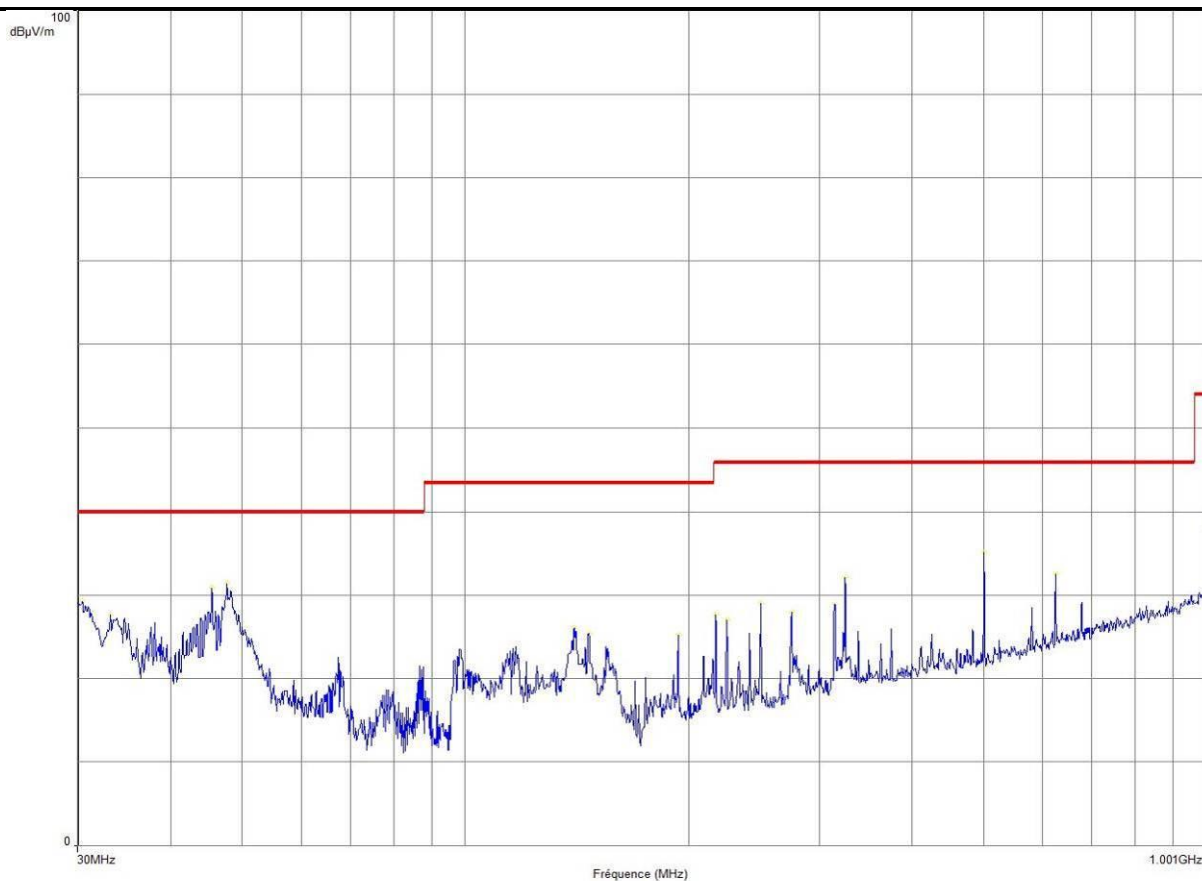

Frequency (MHz)	Peak (dBµV/m)
30.44	29.3
33.24	27.64
45.52	30.94
47.64	31.41
140.24	26.1
146.72	25.4
193.6	25.25
217.6	27.72
224.96	27.08
249.92	29.03
275	27.97
314.52	28.95
324.88	32.11
499.92	35.15
624.92	32.51
999.92	38.09




L C I E

**RADIATED EMISSIONS**

Graph name :	Emr#4	Test configuration:
Limit :	FCC Part15C	RFID + BLUETOOTH + GPRS (Worst case)
Class :	B	

**PARAMETERS**

Antenna polarization:	Horizontale	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	100kHz	QPeak Limit@3m
VBW :	300kHz	
Frequency :	30MHz- 1.001GHz	

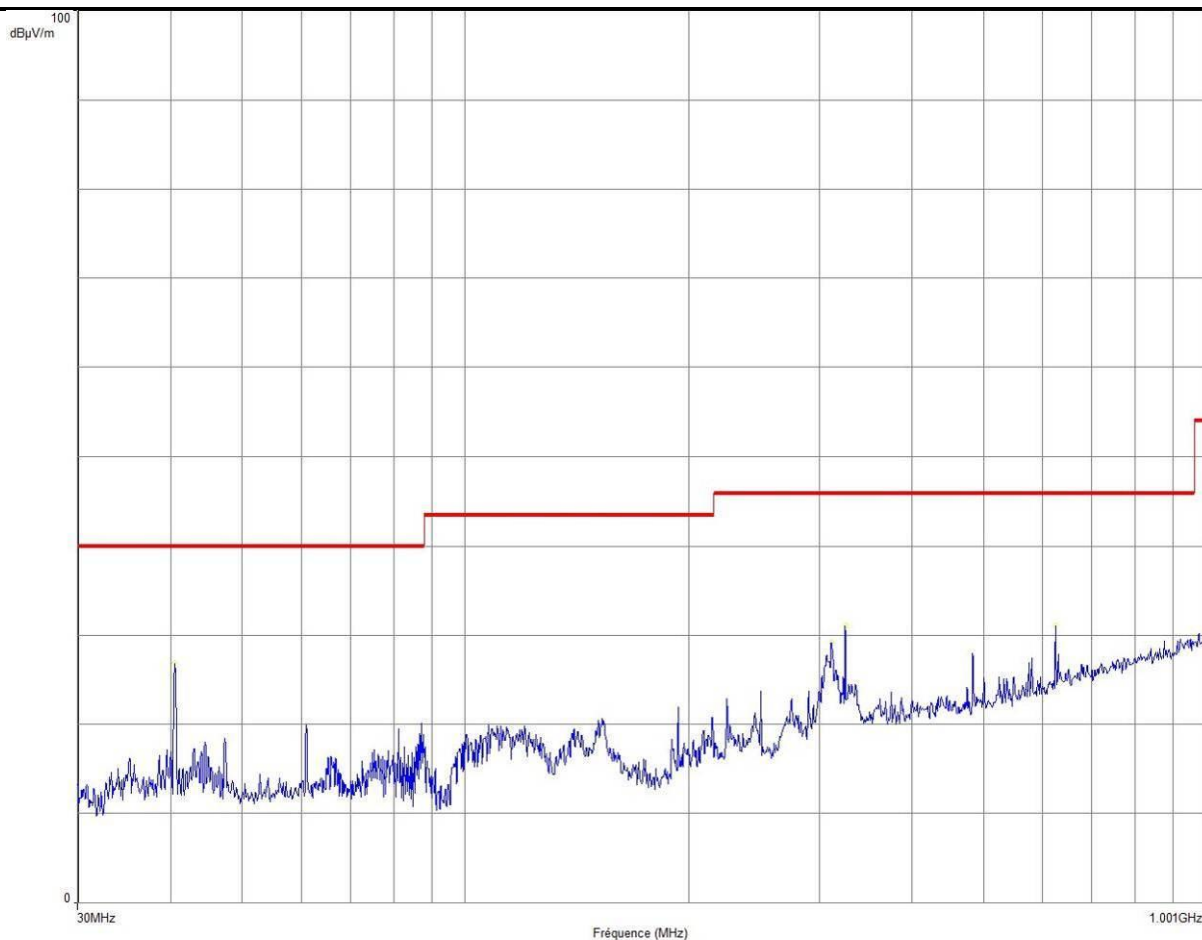

Frequency (MHz)	Peak (dBμV/m)
40.52	26.82
311.68	29.23
324.92	31.11
624.96	31.11




L C I E

**RADIATED EMISSIONS**

Graph name :	Emr#5	Test configuration:
Limit :	FCC Part15C	RFID + BLUETOOTH + GPRS (Worst case)
Class :	B	

**PARAMETERS**

Antenna polarization:	Verticale	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	100kHz	QPeak Limit@3m
VBW :	300kHz	
Frequency :	30MHz- 1.001GHz	

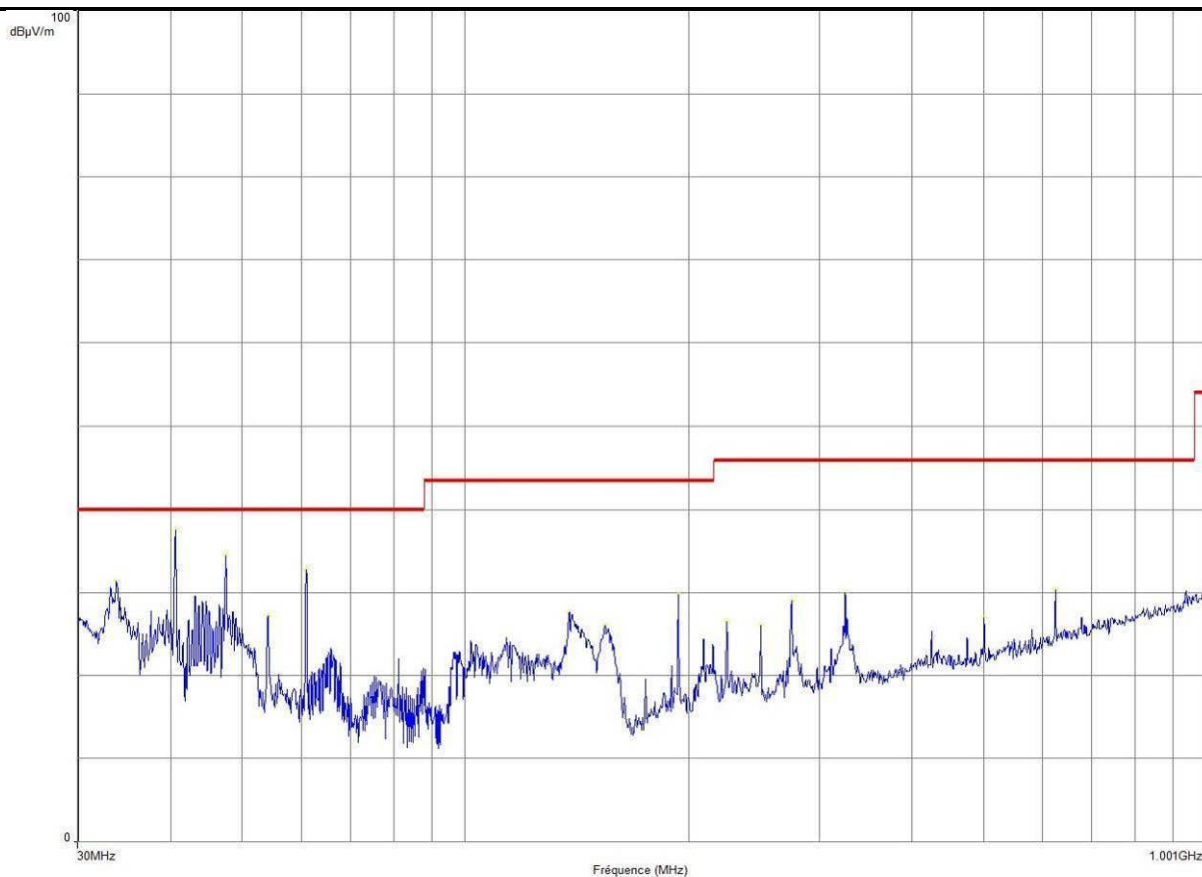

Frequency (MHz)	Peak (dBμV/m)
33.8	31.37
40.6	37.52
47.52	34.51
54.16	27.31
60.96	32.77
138.24	27.73
154.24	26.16
193.44	29.74
225	26.58
249.84	26.02
275	29.07
324.88	30.11
499.88	26.95
624.92	30.41

**8. UNCERTAINTIES CHART**

Type de mesure / Kind of measurement	Incertitude élargie laboratoire / Wide uncertainty laboratory (k=2) ± x	Incertitude limite du CISPR / CISPR uncertainty limit ± y
Mesure des perturbations conduites en tension sur le réseau d'énergie <i>Measurement of conducted disturbances in voltage on the power port</i>	3.57 dB	3.6 dB
Mesure des perturbations conduites en tension sur le réseau de télécommunication <i>Measurement of conducted disturbances in voltage on the telecommunication port.</i>	3.28 dB	A l'étude / Under consid.
Mesure des perturbations discontinues conduites en tension <i>Measurement of discontinuous conducted disturbances in voltage</i>	3.47 dB	3.6 dB
Mesure des perturbations conduites en courant <i>Measurement of conducted disturbances in current</i>	2.90 dB	A l'étude / Under consid.
Mesure du champ électrique rayonné sur le site en espace libre de Moirans <i>Measurement of radiated electric field on the Moirans open area test site</i>	5.07 dB	5.2 dB

Les valeurs d'incertitudes calculées du laboratoire étant inférieures aux valeurs d'incertitudes limites établies par la norme, la conformité de l'échantillon est établie directement par les niveaux limites applicables. / The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the standard. The conformity of the sample is directly established by the applicable limits values.