

Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 1 of 107

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 22 SUBPART H and PART 24 SUBPART E AND INDUSTRY CANADA RSS-132 and RSS-133 REQUIREMENT **Class II Permissive Change**

OF

Product Name: POS terminal

Brand Name: ingenico

iPA280, IPA280-MWLS1019C, **Model Name:**

IPA280-MWLS1310A

Model Difference: Different models for different market.

FCC ID: XKBIPA280

IC Number: 2586D-IPA280

Report No.: EH/2010/50053

Issue Date: Nov. 23, 2010

FCC Rule Part: 2,22H & 24E

RSS 132, Issue 2 and RSS 133, Issue 4 IC Rule Part:

Prepared for: INGENICO

1 rue Claude Chappe BP346 Guilherand-Granges

France

Prepared by: SGS Taiwan Ltd.

Electronics & Communication Laboratory

No. 134, Wu Kung Rd., Wuku Industrial Zone,

Taipei County, Taiwan.

Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and con nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alt tion, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 2 of 107

VERIFICATION OF COMPLIANCE

Applicant: INGENICO

1 rue Claude Chappe BP346 Guilherand-Granges France

Product Name: POS terminal

XKBIPA280 FCC ID:

2586D-IPA280 IC Number:

Brand Name: ingenico

Model No.: iPA280, IPA280-MWLS1019C, IPA280-MWLS1310A

Different models for different market. **Model Difference:**

EH/2010/50053 File Number:

Nov. 25, 2009 ~ Nov. 03, 2010 Date of test:

Mar. 27, 2009 **Date of EUT Received:**

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-C-2004, Issue 2 of RSS-Gen and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rule PART 22 subpart H, PART 24 subpart E and IC standards Issue 2 of RSS-129, Issue 4 of RSS-133.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Lazz Huang	Date	Nov. 23, 2010
_	Jazz Huang / Engineer		
Prepared By:	Gigi yeh	Date	Nov. 23, 2010
	Gigi Yeh / Clerk	_	
Approved By:	Almo Hsieh	Date	Nov. 23, 2010
_	Arno Hsieh / Asst. Supervisor	_	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 3 of 107

Version

Version No.	Date	Description
00	Nov. 23, 2010	Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

f (886-2) 2298-0488

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 4 of 107

Table of Contents

1.	GEN	NERAL INFORMATION	7
	1.2	Related Submittal(s) / Grant (s)	10
	1.3	Test Methodology	10
	1.4	Test Facility	10
	1.5	Special Accessories	10
	1.6	Equipment Modifications	10
2.	SYS'	TEM TEST CONFIGURATION	11
	2.1	EUT Configuration	11
	2.2	EUT Exercise	11
	2.3	Test Procedure	11
	2.4	Configuration of Tested System	12
3.	SUM	IMARY OF TEST RESULTS	13
4.	DES	CRIPTION OF TEST MODES	13
5.	RF F	POWER OUTPUT MEASUREMENT	14
	5.1	Standard Applicable	14
	5.2	Test Set-up:	14
	5.3	Measurement Procedure	15
	5.4	Measurement Equipment Used:	15
	5.5	Measurement Result	16
6.	ERP	, EIRP MEASUREMENT	18
	6.1	Standard Applicable	18
	6.2	Test SET-UP (Block Diagram of Configuration)	18
	6.3	Measurement Procedure	20
	6.4	Measurement Equipment Used:	21
	6.5	Measurement Result	22
7.	99%	OCCUPIED BANDWIDTH MEASUREMENT	26
	7.1	Standard Applicable	26
	7.2	Test Set-up:	26
	7.3	Measurement Procedure	26
	7.4	Measurement Equipment Used:	27
	7.5	Measurement Result:	28
8.	OUT	T OF BAND EMISSION AT ANTENNA TERMINALS (TX)	
	8.1	Standard Applicable	35
	8.2	Test SET-UP	37
	8.3	Measurement Procedure	37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 5 of 107

	8.4	Measurement Equipment Used:	38
	8.5	Measurement Result	39
9.	FIEL	D STRENGTH OF SPURIOUS RADIATION MEASUREMENT (TX)	47
	9.1	Standard Applicable	
	9.2	EUT Setup (Block Diagram of Configuration)	49
	9.3	Measurement Procedure	51
	9.4	Measurement Equipment Used:	52
	9.5	Measurement Result	52
10.	FRE(QUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	65
	10.1	Standard Applicable	
	10.2	Test Set-up:	65
	10.3	Measurement Procedure	65
	10.4	Measurement Equipment Used:	66
	10.5	Measurement Result	67
11.	FRE(QUENCY STABILITY V.S. VOLTAGE MEASUREMENT	68
	11.1	Standard Applicable	68
	11.2	Test Set-up:	68
	11.3	Measurement Procedure	68
	11.4	Measurement Equipment Used:	69
	11.5	Measurement Result	70
12.	AC P	OWER LINE CONDUCTED EMISSION TEST	71
	12.1	Standard Applicable	71
	12.2	EUT Setup	71
	12.3	Measurement Procedure	71
	12.4	Measurement Equipment Used:	72
	12.5	Measurement Result	72
13.	SPUR	RIOUS RADIATED EMISSION TEST (RX)	81
	13.1	Standard Applicable	81
	13.2	EUT Setup	81
	13.3	Measurement Procedure	81
	13.4	Test SET-UP (Block Diagram of Configuration)	82
	13.5	Measurement Equipment Used:	83
	13.6	Field Strength Calculation	83
	13.7	Measurement Result	83
14.	Maxi	mum Permissible Exposure (MPE)	104
	14.1	Related Submittal(s) / Grant (s)	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 6 of 107

14.2	Special Accessories	104
14.3	Equipment Modifications	104
14.4	Limitation	104
14.5	Maximum Permissible Exposure (MPE) Evaluation	105

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 7 of 107

1. GENERAL INFORMATION

General:

	General.			
Product Name:	POS terminal			
Brand Name:	ingenico			
Model Name:	iPA280, IPA280-MWLS1019C, IPA280-MWLS1310A			
Model Difference:	Different models for different market.			
Class II Permissive change:	 Adding new power Connector for charging by new cradle or car kit. DC Jack for charging by PSU 			
		argeable battery or 5Vdc by AC/DC power adapter		
Power Supply	Battery:	Model: IPA200-BAT, Supplier: ingenico		
	Adapter:	Model: T010WM0512		

GSM / DCS:

	Operation Band	Frequency Range	Rated Power	
	GSM/ GPRS/ EDGE 850 Class 10 824.2 MHz– 848.8 MHz		33 dBm	
Cellular Phone Standards Frequency Range and Power	GSM/ GPRS/EDGE 900 Class 10	880.2MHz – 914.8MHz	33 dBm	
	GSM/ GPRS/EDGE 1800 Class 10	1710.2MHz – 1784.8MHz	30 dBm	
	GSM/ GPRS/EDGE 1900 Class 10 1850.2MHz – 1909.8MHz		30 dBm	
Type of Emission	300KGXW			
Hardware Version	DVT			
Software Version	OS v.51			
IMEI	354060011335375			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號
14(886-2) 2290-3270 ft/886-2) 2290-3170 ft/886-2) 2290-3170 ft/886-2) 2290-3170 ft/886-20 2290-3170



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 8 of 107

WLAN:

Frequency Range:	2412 – 2472 MHz
Channel number:	11 channels
Max. Output Power:	802.11 b: 16.61 dBm (Peak) 802.11 g: 16.54 dBm (Peak)
Modulation Technology:	DSSS, OFDM
Modulation type:	CCK, DQPSK, DBPSK for DSSS 64QAM. 16QAM, QPSK, BPSK for OFDM
Transition Rate:	802.11 b: 1/2/5.5/11 Mbps; 802.11 g: 6/9/12/18/24/36/48/54 Mbps
Antenna Designation:	PIFA Antenna /-0.51dBi.

The EUT is compliance with IEEE 802.11 b/g Standard.

Bluetooth:

Diuetootii.			
Bluetooth Version	 V1.1 (GFSK) V1.2 (GFSK) V2.0 (GFSK) V2.0 + EDR (GFSK + /4DQPSK + 8DPSK) V2.1 + EDR (GFSK + /4DQPSK + 8DPSK) 		
Frequency Range	2402 – 2480MHz		
Channel number	79 channels max.		
Rated Power	1.93 dBm (Peak)		
Modulation type	Frequency Hopping Spread Spectrum		
Antenna Designation	PIFA Antenna / -0.42dBi.		

The EUT is compliance with Bluetooth 2.1 Standard.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

CST Taiwan Ltd* No 134 NW Lymp Road Wilky Indication Taiwan Ltd***

CST Taiwan Ltd

***No 134 NW Lymp Road Wilky Indication Taiwan Taiwan Ltd**

***No 134 NW Lymp Road Wilky Indication Taiwan Taiwan Ltd**

***No 134 NW Lymp Road Wilky Indication Taiwan Taiwan Ltd**

***No 134 NW Lymp Road Wilky Indication Taiwan Taiw



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 9 of 107

RFID:

Operating Frequency	13.56MHz
Transmit Power	< 123dBuV/m at 3m.
Number of Channels	1
Operating Mode	Point-to-Point
Antenna Type	Print antenna
Module Type	ASK

The EUT is compliance with RFID Standard.

GPS:

Receiver Frequency	L1 Band, 1575.42MHz
Frequency Conversion oscillator	26MHz
Antenna Designation	Patch

This test report applies for GSM/GPRS/EDGE 850/1900 MHz and GPS



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 10 of 107

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: XKBIPA280 filing to comply with Section Part 22 subpart H, Part 24 subpart E of the FCC CFR 47 Rules.

And IC: <u>2586D-IPA280</u> filing to comply with issue 2 of RSS-129, issue 4 of RSS-133.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on chapter 13 of ANSI C63.4 (2003) and FCC 47 CFR 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, issue 2 of RSS-132 and issue 3 of RSS-133.

1.4 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-1

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

All equipment is calibrated externally and traceable to SI (International System of Unit).

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this less report reier only to the sample(s) lessed and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 11 of 107

SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 AC Power Line Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Conducted Measurement at Antenna Port:

According to measurement procured TIA/EIA 603C and RSS-Gen, the EUT is placed on a turn table which is 0.8 m above ground plane. A low loss of RF cable was used to con- nect the antenna port of EUT to measurement equipment.

2.3.3 Radiated Emissions (ERP/EIRP):

According to measurement procured TIA/EIA 603C and RSS-Gen. The EUT is placed on a turn table which is 1.0 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the rela- tive positions of this hand-held transmitter (EUT) was rotated through three or- thogonal axes according to the requirements.

A standard antenna was used to replace the EUT and connect to the SG. Adjust the SG output level to reach the max emission level which were measured above.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the results shown in this less report relief only to the sample(s) tested and south sample(s) are retained for 90 days only. When the state of 90 days only. obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 12 of 107

Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed Channel)

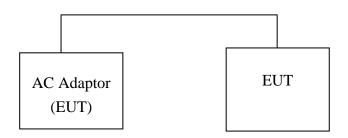

Remote Side

CMU200

Table 2-1 Equipment Used in Tested System

Ite	n Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	Universal Radio Com- munication Tester	R&S	CMU200	102189	N/A	Un-shielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 13 of 107

SUMMARY OF TEST RESULTS

FCC Rules	IC Rules	Description Of Test	Result	
§2.1046(a)				
§22.913(a)(2)	N/A	RF Conducted Power Output	Compliant	
§24.232(c)				
§2.1046(a)	§4.8 (RSS-Gen)			
§22.913(a)(2)	§4.4 (RSS-132)	ERP/EIRP measurement	Compliant	
§24.232(c)	§6.4 (RSS-133)			
\$2.1040(b)	§4.6.1 (RSS-Gen)	000/ 0 1 D 1 144	C1:	
§2.1049(h)	§2.3 (RSS-133)	99% Occupied Bandwidth	Compliant	
§2.1051	§4.9 (RSS-Gen)	O . CD III		
§22.917(a)	§4.5 (RSS-132)	Out of Band Emissions at Antenna Terminals	Compliant	
§24.238(a)	§6.5 (RSS-133)	Terminars		
§2.1053	§4.9 (RSS-Gen)	F: 11 C		
§22.917(a)	§4.5 (RSS-132)	Field Strength of Spurious Radiation (TX)	Compliant	
§24.238(a)	§6.5 (RSS-133)	(1A)		
§2.1055(a)(1)	§4.7 (RSS-Gen)			
§22.355	§4.3 (RSS-132)	Frequency Stability vs. Temperature	Compliant	
§24.235	§6.3 (RSS-133)			
§2.1055(d)(2)	§4.7 (RSS-Gen)			
§22.355	§4.3 (RSS-132)	Frequency Stability vs. Voltage	Compliant	
§24.235	§6.3 (RSS-133)			
	§4.10 (RSS-Gen)			
N/A	§4.6 (RSS-132)	Receiver Spurious Emissions	Compliant	
	§6.6 (RSS-133)			
§15.207(a)	§7.2.2 (RSS-Gen)	AC Power Line Conducted Emission	Compliant	

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

EUT staying in continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for GSM with power adaptor. The worst-case of E2 position for GSM 850 band, E1 position for PCS 1900 band were reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the results shown in this less report relief only to the sample(s) tested and south sample(s) are retained for 90 days only. When the state of 90 days only. obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**


Page: 14 of 107

RF POWER OUTPUT MEASUREMENT

5.1 Standard Applicable

According to FCC §2.1046(a), §22.913(a)(2) and §24.232(c).

5.2 **Test Set-up:**

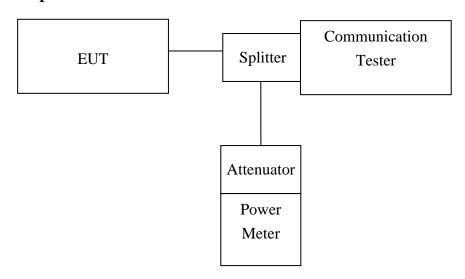

Note: Measurement setup for testing on Antenna connector

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 15 of 107

5.3 **Measurement Procedure**

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a power meter. Transmitter output was read off the power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the power meter reading.

5.4 **Measurement Equipment Used:**

	Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.						
TYPE		NUMBER	NUMBER	CAL.							
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010						
Spectrum Analyzer	Agilent	E4440A	US41160416	01/23/2008	01/22/2010						
Radio Communication Analyzer	R&S	CMU200	102189	05/13/208	05/12/2010						
DC Block	Agilent	BLK-18	155452	07/05/2009	07/04/2010						
Attenuator	Mini-Circuit	BW-S20W5	N/A	07/05/2009	07/04/2010						
Attenuator	Mini-Circuit	BW-S10W5	N/A	07/05/2009	07/04/2010						
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2009	07/04/2010						
Splitter	Agilent	11636B	N/A	07/05/2009	07/04/2010						



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 16 of 107

5.5 Measurement Result

EUT Mode	Frequency (MHz)	СН	Peak Power (1DN 1UP) (dBm)	Avg. Power (1DN 1UP) (dBm)	Peak Power (1DN 2UP) (dBm)	Avg. Power (1DN 2UP) (dBm)
CDDG 050	824.2	128	32.80	32.70	32.70	32.60
GPRS 850	836.6	190	32.90	32.80	32.80	32.70
(Class 10)	848.8	251	32.90	32.80	32.80	32.70

EUT Mode	Frequency (MHz)	СН	Peak Power (1DN 1UP) (dBm)	Avg. Power (1DN 1UP) (dBm)	Peak Power (1DN 2UP) (dBm)	Avg. Power (1DN 2UP) (dBm)
CDDG 1000	1850.2	512	28.90	28.80	28.90	28.70
GPRS 1900	1880.0	661	28.60	28.50	28.60	28.50
(Class 10)	1909.8	810	28.40	28.30	28.40	28.30

EUT Mode	Frequency (MHz)	СН	Peak Power (1DN 1UP) (dBm)	Avg. Power (1DN 1UP) (dBm)	Peak Power (1DN 2UP) (dBm)	Avg. Power (1DN 2UP) (dBm)
EDGE 050	824.2	128	29.30	26.00	29.20	26.00
EDGE 850	836.6	190	29.10	25.90	29.00	25.90
(Class 10)	848.8	251	29.00	25.70	29.00	25.70

EUT Mode	Frequency (MHz)	СН	Peak Power (1DN 1UP) (dBm)	Avg. Power (1DN 1UP) (dBm)	Peak Power (1DN 2UP) (dBm)	Avg. Power (1DN 2UP) (dBm)
ED CE 1000	1850.2	512	28.80	25.50	28.90	25.50
EDGE 1900	1880.0	661	28.70	25.40	28.80	25.40
(Class 10)	1909.8	810	28.50	25.40	28.50	25.40

Note: offset:0.5dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號
14(886-2) 2290-3270 ft/886-2) 2290-3170 ft/886-2) 2290-3170 ft/886-2) 2290-3170 ft/886-20 2290-3170



Report No.: EH/2010/50053 Issue Date: Nov. 23, 2010

Page: 17 of 107

Minimum Communications Power Measurement: PCS1900 band

PCL	0	1	2	3	4	5	6	7	8
Output power (dBm)	28.7	27.2	25.3	23.4	21.4	19.4	17.4	15.4	13.4
PCL	9	10	11	12	13	14	15	16	17
Output power (dBm)	11.4	9.3	7.2	5.2	3.1	1	-1.1		

Minimum Communications Power Measurement: EDGE1900 band

PCL	0	1	2	3	4	5	6	7	8	
Output power (dBm)	25.5	25.5	25.5	25.5	25.5	25.5	24.5	22.3	20.5	
PCL	9	10	11	12	13	14	15	16	17	18
Output power (dBm)	18.4	16.5	14.4	12.5	10.4	8.4	6.4	4.4	2.4	0.5

Note: The EUT output power was controlled by simulator. Set Communication Tester CMU200 PCL as above, and get the mobile phone output power reading.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 18 of 107

ERP, EIRP MEASUREMENT

Standard Applicable

According to FCC §2.1046(a)

FCC 22.913(a) Mobile station are limited to 7W ERP.

FCC 24.232(c) Mobile station are limited to 2W EIRP.


According to IC RSS-133 §6.4

The peak e.i.r.p. for transmitters operating in the band 1850-1910 MHz shall not exceed the limits 2W which given in SRSP-510.

According to issue 2 of RSS 132, section 4.4. The transmitter output power shall not exceed the limits given in SRSP-503.

Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

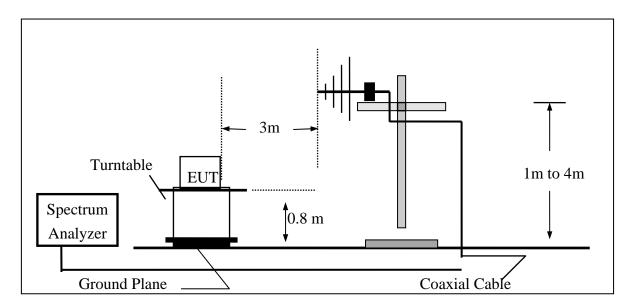

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within and phisolated instructions, if any. The Company's sociented in a construction of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any the limits of Client's instruction in the limits of Client's instruction in th cation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 www.tw.sgs.com




Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 19 of 107

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

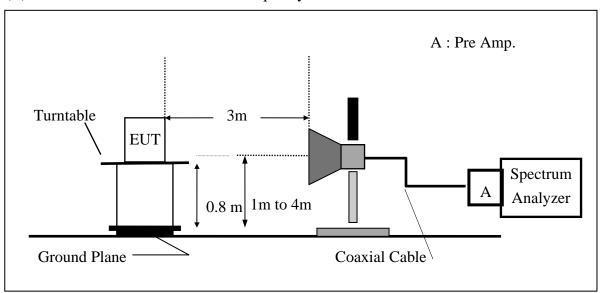

(C) Substituted Method Test Set-UP

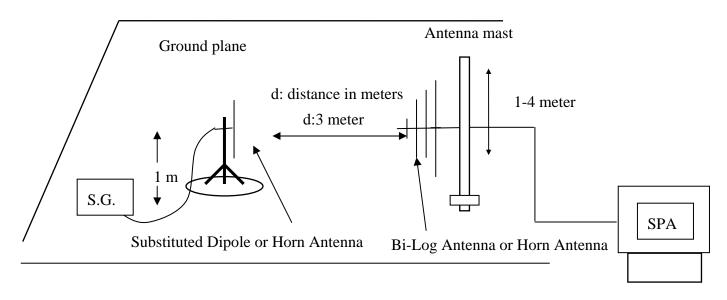

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the results shown in this less report relief only to the sample(s) tested and south sample(s) are retained for 90 days only. When the state of 90 days only. obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 20 of 107

6.3 Measurement Procedure

The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824.2 –848.80MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

ERP = S.G. output (dBm) + Antenna Gain (dBd) - Cable Loss (dB)

EIRP = S.G. output (dBm) + Antenna Gain (dBi) – Cable Loss (dB)



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 21 of 107

6.4 Measurement Equipment Used:

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2009	02/11/2010
Bilog Antenna	SCHWAZBECK	VULB9160	9160-3136	11/15/2009	11/14/2010
Dipole Antenna	SCHWAZBECK	VHAP	908/909	07/10/2008	07/09/2010
Dipole Antenna	SCHWAZBECK	UHAP	891/892	07/10/2008	07/09/2010
Hor.n antenna	SCHWAZBECK	BBHA 9120D	309	01/22/2008	01/21/2010
Horn antenna	SCHWAZBECK	BBHA 9120D	9120D-673	05/09/2008	05/08/2010
Signal Generator	R&S	SMR40	100210	01/22/2008	01/21/2010
Signal Generator	Agilent	E4438C	MY45093613	05/22/2009	05/21/2010
Pre-Amplifier	Agilent	8447D	1937A02834	11/30/2009	11/29/2010
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2009	01/04/2010
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2009	07/04/2010
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2009	07/04/2010
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2009	07/04/2010
Radio Communication Analyzer	R&S	CMU200	102189	05/13/2008	05/12/2010
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		01/04/2010
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	2		01/04/2010
3m Site	SGS	966 chamber	N/A	11/08/2009	11/09/2010



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 22 of 107

6.5 Measurement Result

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)						
				V	123.15	36.76	-7.87	3.62	25.26	38.45						
			Н	Н	129.53	43.26	-7.87	3.62	31.76	38.45						
	02420	100	E1	V	126.96	40.57	-7.87	3.62	29.07	38.45						
	824.20	128	EI	Н	122.52	36.25	-7.87	3.62	24.75	38.45						
			E2	V	119.73	33.34	-7.87	3.62	21.84	38.45						
			EZ	Н	130.71	44.44	-7.87	3.62	32.94	38.45						
			Н	V	122.35	36.10	-7.88	3.65	24.57	38.45						
		190	п	Н	129.03	42.80	-7.88	3.65	31.27	38.45						
	836.60		E1	V	126.44	40.19	-7.88	3.65	28.66	38.45						
GSM 850	830.00	190	90 E1	Н	122.65	36.42	-7.88	3.65	24.89	38.45						
			E2	V	119.68	33.43	-7.88	3.65	21.90	38.45						
			E2	Н	130.33	44.10	-7.88	3.65	32.57	38.45						
									Н	V	120.67	34.55	-7.88	3.68	22.99	38.45
			п	Н	127.18	40.99	-7.88	3.68	29.43	38.45						
	848.80	251	E1	V	125.39	39.27	-7.88	3.68	27.71	38.45						
		_	51 E1	Н	121.88	35.69	-7.88	3.68	24.13	38.45						
			E2	V	129.47	43.35	-7.88	3.68	31.79	38.45						
			EZ	Н	119.01	32.82	-7.88	3.68	21.26	38.45						

Remark:

The RBW, VBW of SPA for frequency (1)

RBW=300 KHz, VBW=1MHz,

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號

16(86.2) 2009. 3270 ft/886.2) 2009. 3270 ft/886.2) 2009. 3270 ft/886.2)



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 23 of 107

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	
				V	120.88	16.49	9.90	5.56	20.83	33.00	
			Н	Н	125.34	21.16	9.90	5.56	25.50	33.00	
	1070.00		E1	V	125.91	21.52	9.90	5.56	25.86	33.00	
	1850.20	512	EI	Н	127.01	22.83	9.90	5.56	27.17	33.00	
				E2	V	126.45	22.06	9.90	5.56	26.40	33.00
			EZ	Н	126.25	22.07	9.90	5.84	26.13	33.00	
			Н	V	119.71	15.35	9.99	5.61	19.73	33.00	
		661	11	Н	124.99	20.85	9.99	5.61	25.22	33.00	
P.GG 1000	1880.00		E1	V	125.66	21.30	9.99	5.61	25.68	33.00	
PCS 1900	1000.00		EI	Н	129.07	24.93	9.99	5.61	29.30	33.00	
			E2	V	125.34	20.98	9.99	5.61	25.36	33.00	
			EZ	Н	126.02	21.88	9.99	5.61	26.25	33.00	
				Н	V	117.04	12.71	10.08	5.66	17.13	33.00
			п	Н	123.29	19.18	10.08	5.66	23.60	33.00	
	1909.80	910	E1	V	125.01	20.68	10.08	5.66	25.10	33.00	
		9.80 810	EI	Н	126.58	22.47	10.08	5.66	26.89	33.00	
			E2	F2	V	126.87	22.54	10.08	5.66	26.96	33.00
						EZ	Н	126.73	22.62	10.08	5.66

Remark:

(1) The RBW, VBW of SPA for frequency RBW=300 KHz, VBW=1MHz,

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction row exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台上縣五股工業區五工路 134 號 16.86-2) 2299-3279 f(886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 24 of 107

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
			**	V	119.35	32.96	-7.87	3.62	21.46	38.45
			Н	Н	125.15	38.88	-7.87	3.62	27.38	38.45
	024.20	100	E1	V	123.00	36.61	-7.87	3.62	25.11	38.45
	824.20	128	LI	Н	116.32	30.05	-7.87	3.62	18.55	38.45
			E2	V	114.47	28.08	-7.87	3.62	16.58	38.45
			LZ	Н	126.60	40.33	-7.87	3.62	28.83	38.45
			Н	V	119.51	33.26	-7.88	3.65	21.73	38.45
		190	11	Н	125.62	39.39	-7.88	3.65	27.86	38.45
EDGE 050	836.60) E1	V	123.06	36.81	-7.88	3.65	25.28	38.45
EDGE 850	030.00	170	O LI	Н	117.42	31.19	-7.88	3.65	19.66	38.45
			E2	V	114.94	28.69	-7.88	3.65	17.16	38.45
			LZ	Н	127.11	40.88	-7.88	3.65	29.35	38.45
			Н	V	119.83	33.71	-7.88	3.68	22.15	38.45
	848.80 25		11	Н	125.85	39.66	-7.88	3.68	28.10	38.45
		251	F1	V	122.73	36.61	-7.88	3.68	25.05	38.45
		848.80 251	51 E1 -	Н	118.45	32.26	-7.88	3.68	20.70	38.45
			E2	V	116.58	30.46	-7.88	3.68	18.90	38.45
			L:Z	Н	127.30	41.11	-7.88	3.68	29.55	38.45

Remark:

(1) The RBW, VBW of SPA for frequency RBW=300 KHz, VBW=1MHz,

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction row exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台上縣五股工業區五工路 134 號 16.86-2) 2299-3279 f(886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 25 of 107

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
	1850.20			V	120.88	16.49	9.90	5.56	(dBm) (dBm) 20.83 33.00 27.01 33.00 26.22 33.00 27.84 33.00 26.44 33.00 27.27 33.00 24.89 33.00 24.33 33.00 26.24 33.00	
			Н	Н	126.85	22.67	9.90	5.56	27.01	33.00
		-10	E1	V	126.27	21.88	9.90	5.56		33.00
		512	EI	Н	127.68	23.50	9.90	5.56		33.00
			E2	V	126.49	22.10	9.90	5.56	26.44	33.00
				Н	127.39	23.21	9.90	5.84	27.27	33.00
	1880.00		Н	V	118.28	13.92	9.99	5.61	18.30	33.00
			11	Н	124.66	20.52	9.99	5.61	18.30 3 24.89 3 24.33 3	33.00
ED CE 1000		661	E1	V	124.31	19.95	9.99	5.61		33.00
EDGE 1900		001	LI	Н	126.01	21.87	9.99	5.61		33.00
			E2	V	124.91	20.55	9.99	5.61	24.93	33.00
			LZ	Н	126.79	22.65	9.99	5.61	27.02	33.00
	1909.80		Н	V	116.18	11.85	10.08	5.66	16.27	33.00
			11	Н	122.38	18.27	10.08	5.66	22.69	33.00
		810	E1	V	122.65	18.32	10.08	5.66	22.74	33.00
		010	ЕТ	Н	124.84	84 20.73	10.08	5.66	25.15	33.00
			E2	V	123.64	19.31	10.08	5.66	23.73	33.00
			LL2	Н	125.63	21.52	10.08	5.66	25.94	33.00

Remark:

(1) The RBW, VBW of SPA for frequency RBW=300 KHz, VBW=1MHz,

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號

16(86.2) 2009.3270 ft/886.2) 2009.3270 ft/886.2) 2009.3270 ft/886.2)



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 26 of 107

99% OCCUPIED BANDWIDTH MEASUREMENT


7.1 Standard Applicable

According to FCC§2.1049(h).

According to IC RSS-Gen §4.6.1

According to IC RSS-133 §2.3

7.2 Test Set-up:

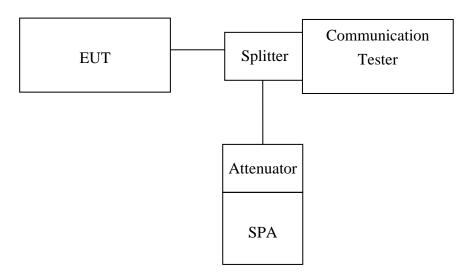

Note: Measurement setup for testing on Antenna connector

7.3 Measurement Procedure

The EUT's output RF connector was connected with a short cable to the spectrum analyzer, RBW (10KHz) was set to about 1% of emission BW, VBW= 30KHz, -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within and phisotection issues defined the entry include of the savised that information contained referent releases the company's and mining at the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 27 of 107

7.4 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010
Spectrum Analyzer	Agilent	E4440A	US41160416	01/23/2008	01/22/2010
Radio Communication Analyzer	R&S	CMU200	102189	05/13/2008	05/12/2010
Radio Communication Analyzer	Anritsu	MT8820A	6200307563	04/16/2008	04/15/2010
DC Block	Agilent	BLK-18	155452	07/05/2009	07/04/2010
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2009	07/04/2010
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2009	07/04/2010
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2009	07/04/2010
Splitter	Agilent	11636B	N/A	07/05/2009	07/04/2010
DC Power Supply	HP	6038A	2929A-07548	06/27/2009	06/26/2011
DC Power Supply	Topward	3303D	981327	10/26/2009	10/25/2011



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 28 of 107

7.5 Measurement Result:

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
GSM 850	824.20	128	0.2407
	836.60	190	0.2407
	848.80	251	0.2340

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
GSM 1900	1850.20	512	0.2402
	1880.00	661	0.2333
	1909.80	810	0.2375

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
EDGE 850	824.20	128	0.2427
	836.60	190	0.2365
	848.80	251	0.2401

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
EDGE 1900	1850.20	512	0.2394
	1880.00	661	0.2364
	1909.80	810	0.2432

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號
14(886-2) 2290-3270 ft/886-2) 2290-3170 ft/886-2) 2290-3170 ft/886-2) 2290-3170 ft/886-20 2290-3170

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 29 of 107

Figure 7-1: GSM 850 Channel Low


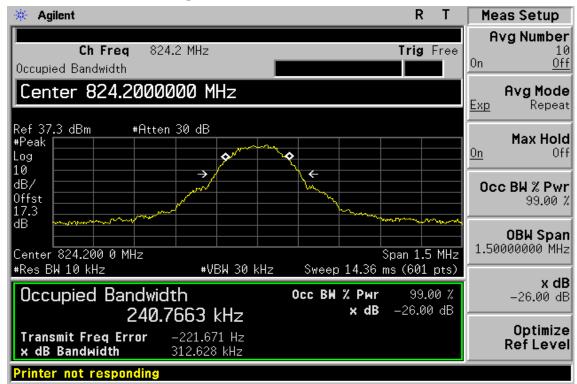


Figure 7-2 GSM 850 Channel Mid

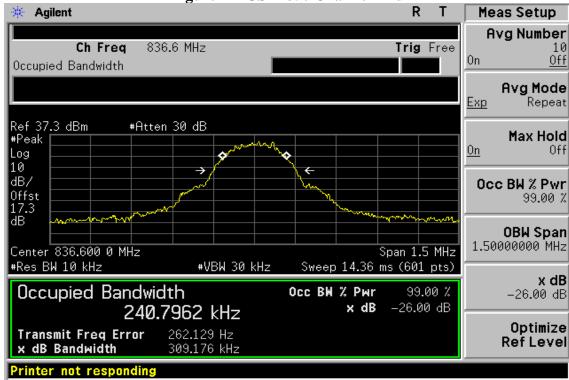

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this less report reier only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: EH/2010/50053 Issue Date: Nov. 23, 2010

Page: 30 of 107

Figure 7-3: GSM 850 Channel High


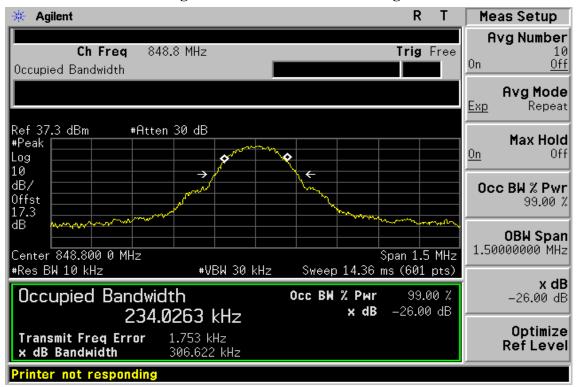


Figure 7-4: PCS 1900 Channel Low

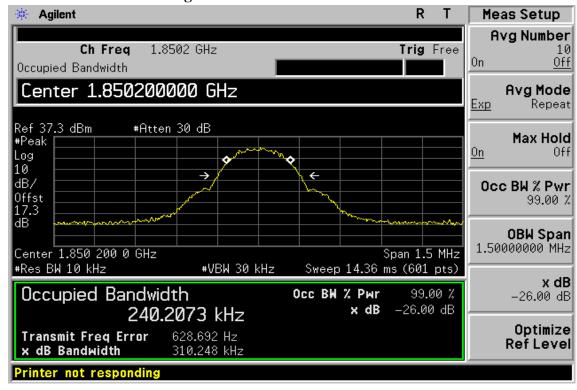

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the testins shirtly in the testine of the state of the st

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

36-2) 2299-3279 f (886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 31 of 107

Figure 7-5 PCS 1900 Channel Mid


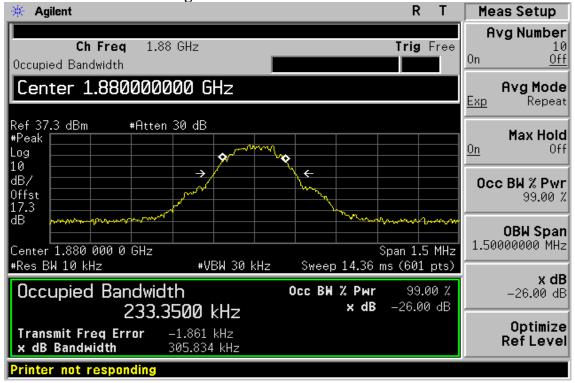


Figure 7-6: PCS 1900 Channel High

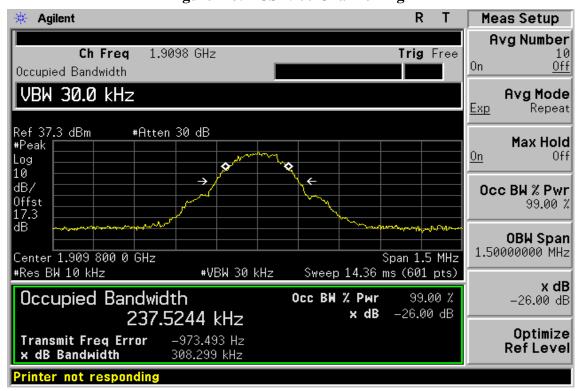

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the testiles shown in this less report reter only to the sample(s) tested and such sample(s) tested and sample(s) tested and such sample(s) tested and such sample(s) tested and such sample(s) tested and sample(s) teste obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 32 of 107

Figure 7-1: EDGE 850 Channel Low


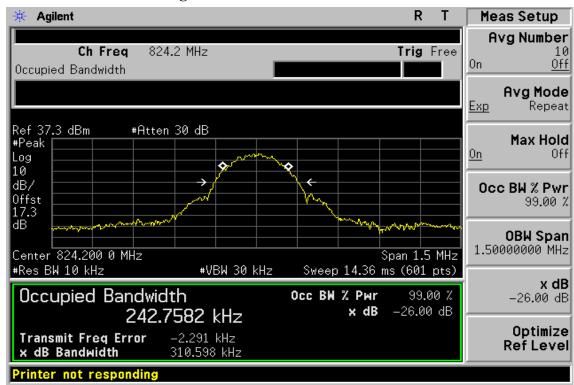


Figure 7-2 EDGE 850 Channel Mid

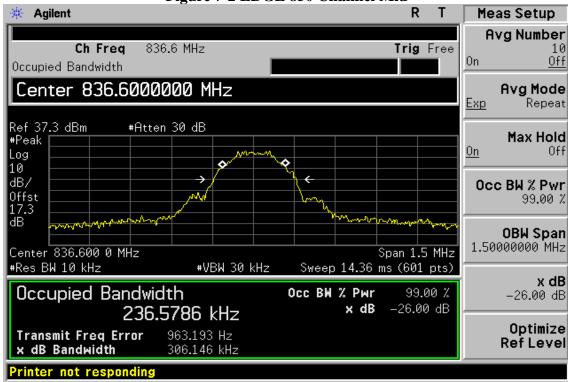

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this less report reier only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 33 of 107

Figure 7-3: EDGE 850 Channel High


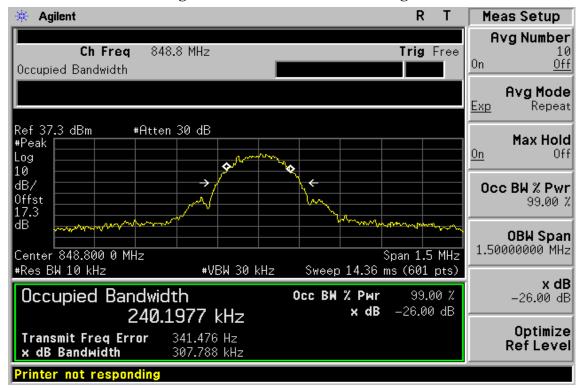


Figure 7-4: EDGE 1900 Channel Low

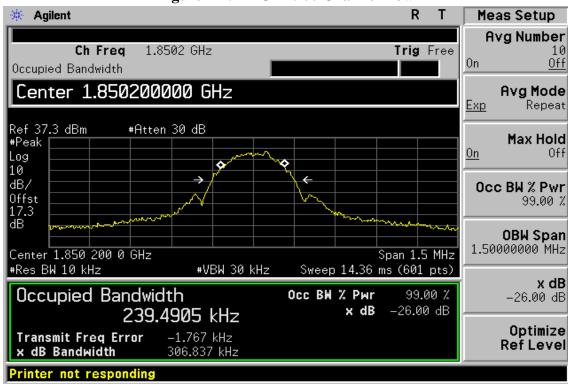

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the testiles shown in this less report reter only to the sample(s) tested and such sample(s) tested and sample(s) tested and such sample(s) tested and such sample(s) tested and such sample(s) tested and sample(s) teste obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 34 of 107

Figure 7-5 EDGE 1900 Channel Mid


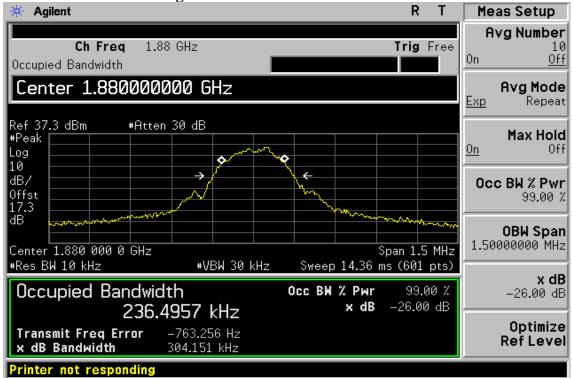


Figure 7-6: EDGE 1900 Channel High

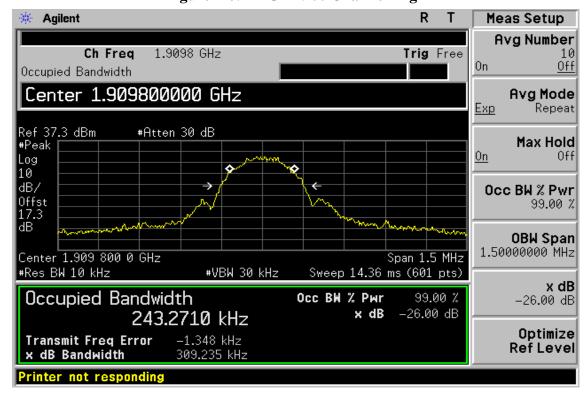

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this less report reier only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 35 of 107

OUT OF BAND EMISSION AT ANTENNA TERMINALS (TX)

8.1 Standard Applicable

According to FCC §2.1051.

FCC §22.917(a),§24.238(a), the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than 43 + 10 log (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

According to RSS-132 §4.5

4.5.1 Out-of-block Emissions

Mobile and base station equipment with emission bandwidth less than or equal to 4 MHz shall comply with 4.5.1.1. Mobile station equipment with emission bandwidth greater than 4 MHz shall comply with 4.5.1.2. Base station equipment with emission bandwidth greater than 4 MHz shall comply with either 4.5.1.2 or 4.5.1.3.

4.5.1.1 In the first 1.0 MHz band immediately outside and adjacent to the licensee's frequency block, the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log (P)$, dB. After the first 1.0 MHz, the power of emissions shall be attenuated below the transmitter output power by at least

 $43 + 10 \log (P)$, dB, in any 100 kHz bandwidth.

4.5.1.2 In the first 1.0 MHz band immediately outside and adjacent to the licensee's frequency block, the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least 43 + 10 log (P), dB. After the first 1.0 MHz, the power of emissions shall be attenuated below the transmitter output power by at least

 $43 + 10 \log (P)$, dB, in any 1 MHz bandwidth

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the results shown in this less report relief only to the sample(s) tested and south sample(s) are retained for 90 days only. When the state of 90 days only. obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 36 of 107

According to RSS-133 §6.5

6.5.1 Out-of-Block Emissions

a. Mobile stations must comply with subsection i. below.

In the first 1.0MHz band immediately outside and adjacent to the licensee's frequency block. the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log (P) dB$.

b. After the first 1.0 MHz (for equipment that complies with a.i. of this subsection) or 1.5 MHz (for equipment that complies with all of this subsection), the power of emissions shall be attenuated below the transmitter output power by at least $43 + 10 \log (P)$, dB, per any MHz of bandwidth.

(Note: If the test result using 1% of the emission bandwidth is used, then power integration over 1.0 MHz is required; alternatively, the spectrum analyzer resolution and video bandwidths can be increased to 1.0 MHz for this measurement).

6.5.2 Out-of-Sub-band Emissions

Outside the sub-bands 1850-1910 MHz and 1930-1990 MHz, the attenuation shall be equal to or greater than the out-of-block emission limits in Section 6.5.1.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 37 of 107

8.2 Test SET-UP

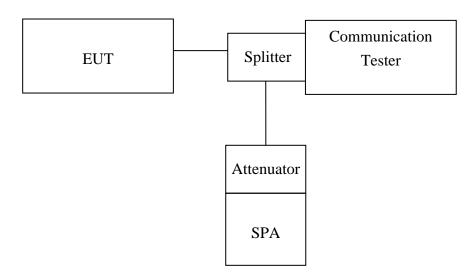

Note: Measurement setup for testing on Antenna connector

8.3 Measurement Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10th harmonic. Limit = -13dBm

Band Edge Requirements(1850MHz and 1910MHz): In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within and phisotection issues defined the entry include of the savised that information contained referent releases the company's and mining at the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 www.tw.sgs.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 38 of 107

8.4 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010		
Spectrum Analyzer	Agilent	E4440A	US41160416	01/23/2008	01/22/2010		
Radio Communication Analyzer	R&S	CMU200	102189	05/13/2008	05/12/2010		
800 – 1000MHz Filter	Micro-Tronics	BRM13462	001	01/05/2009	01/04/2010		
1800 – 2000MHz Filter	Micro-Tronics	Micro-Tronics BRM13463		01/05/2009	01/04/2010		
Temperature Chamber	TERCHY	MHG-120LF	911009	04/14/2008	04/13/2010		
Temperature Chamber	GIANT FORCE	GTH-150-40- CP-AR	MAA0512-018	02/05/2008	02/04/2010		
DC Block	Agilent	BLK-18	155452	07/05/2009	07/04/2010		
Attenuator	Mini-Circuit	BW-S20W5	N/A	07/05/2009	07/04/2010		
Attenuator	Mini-Circuit	BW-S10W5	N/A	07/05/2009	07/04/2010		
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2009	07/04/2010		
Splitter	Agilent	11636B	N/A	07/05/2009	07/04/2010		
DC Power Supply	HP	6038A	2929A-07548	06/27/2009	06/26/2011		
DC Power Supply	Topward	3303D	981327	10/26/2009	10/25/2011		





Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 39 of 107

8.5 Measurement Result

Figure 8-1: Out of Band emission at antenna terminals—GSM 850 Channel Lowest

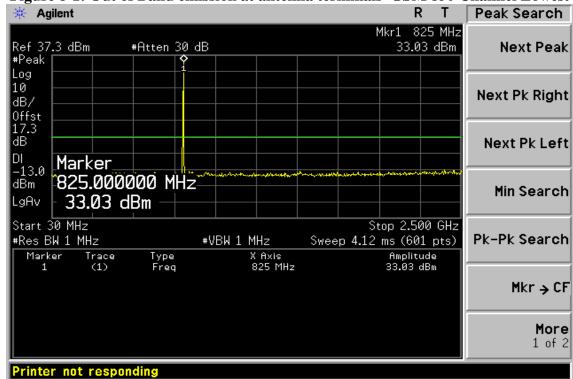

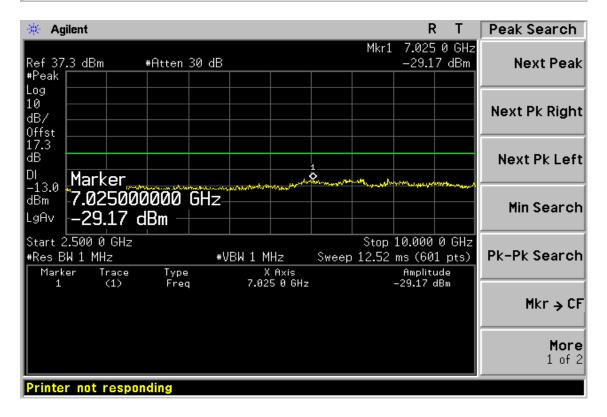

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the testiles shown in this less report reter only to the sample(s) tested and such sample(s) tested and sample(s) tested and such sample(s) tested and samp obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279


f (886-2) 2298-0488 www.tw.sgs.com




Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 40 of 107

Figure 8-2: Out of Band emission at antenna terminals -GSM 850 Channel Mid

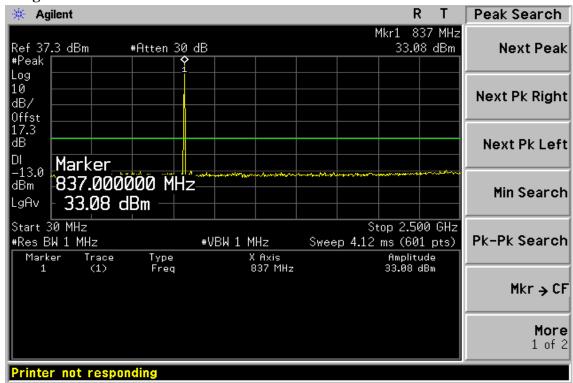

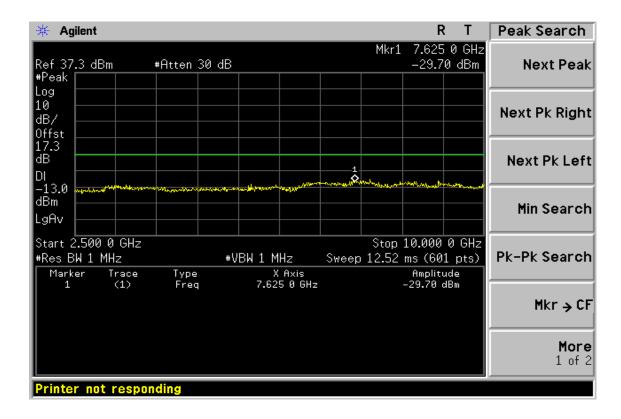

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the testiles shown in this less report reter only to the sample(s) tested and such sample(s) tested and sample(s) tested and such sample(s) tested and samp obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279




Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 41 of 107

Figure 8-3: Out of Band emission at antenna terminals-GSM 850 Channel Highest

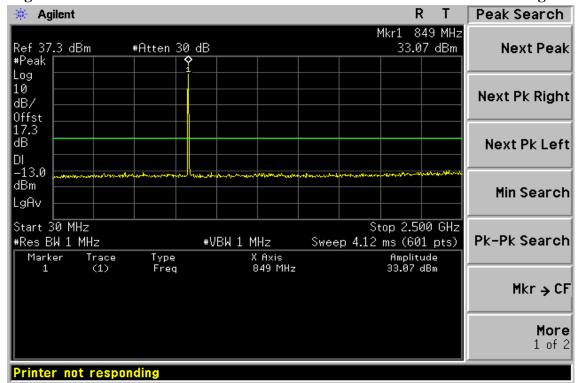

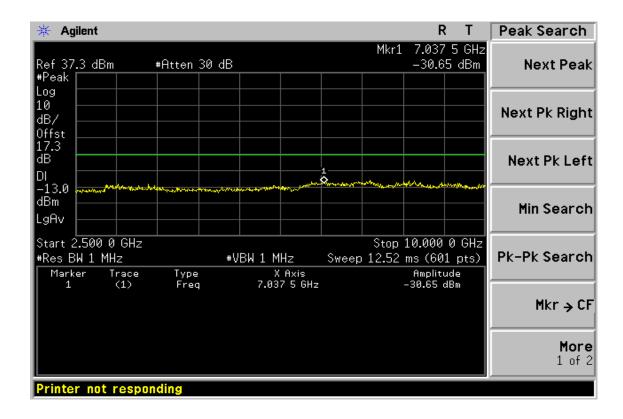

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the testiles shown in this less report reter only to the sample(s) tested and such sample(s) tested and sample(s) tested and such sample(s) tested and samp obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 42 of 107

Figure 8-4: Band edge emission at antenna terminals –GSM 850 Channel Lowest


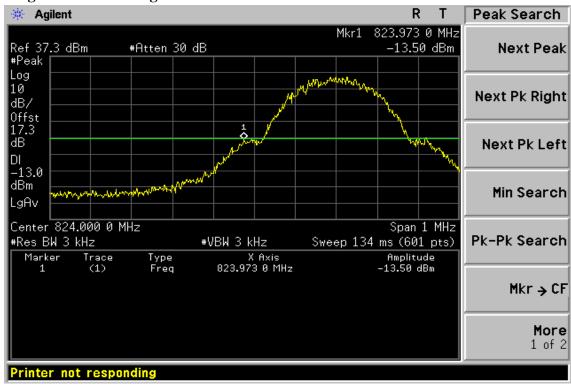


Figure 8-5: Band edge emission at antenna terminals -GPRS 850 Channel Highest

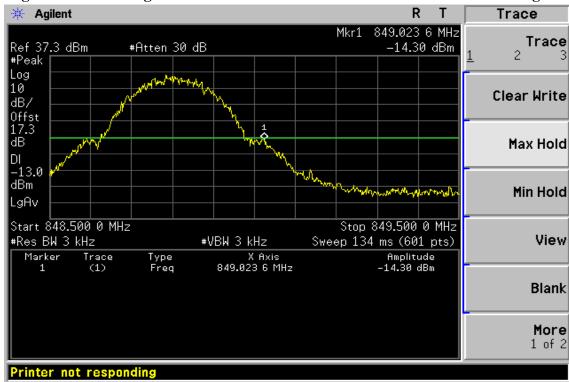

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the results shown in this less report relief only to the sample(s) tested and south sample(s) are retained for 90 days only. When the state of 90 days only. When t obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279


f (886-2) 2298-0488 www.tw.sgs.com




Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 43 of 107

Figure 8-6: Out of Band emission at antenna terminals-PCS 1900 Channel Lowest

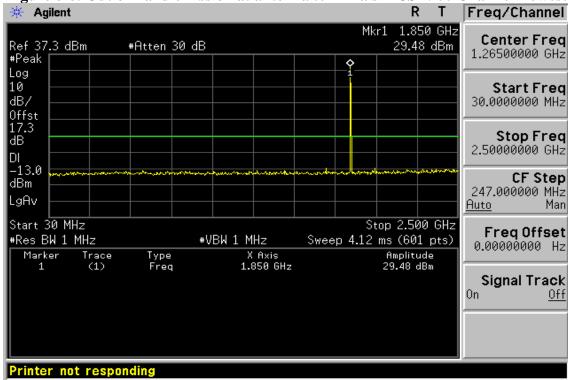

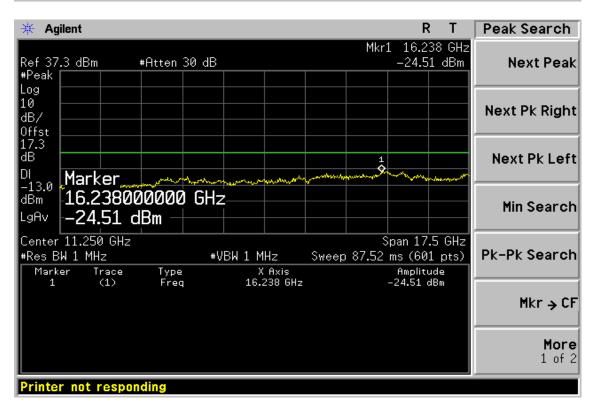

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the testiles shown in this less report reter only to the sample(s) tested and such sample(s) tested and sample(s) tested and such sample(s) tested and samp obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488


www.tw.sgs.com




Report No.: EH/2010/50053 Issue Date: Nov. 23, 2010

Page: 44 of 107

Figure 8-7: Out of Band emission at antenna terminals -PCS 1900 Channel Mid

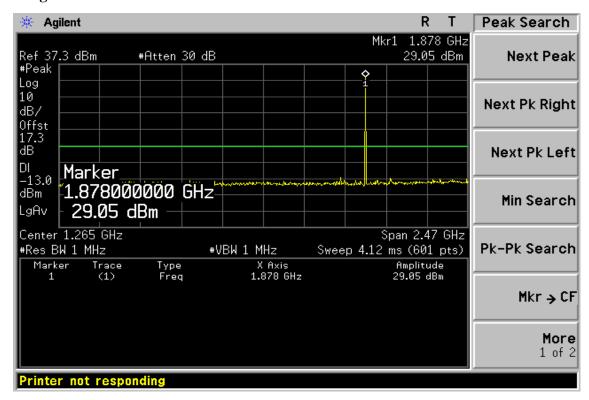

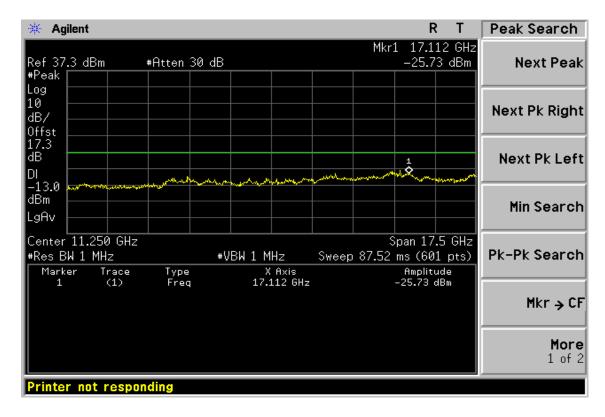

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the testins shirtly in the testine of the state of the st

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279


6-2) 2299-3279 f (886-2) 2298-0488




Report No.: EH/2010/50053 Issue Date: Nov. 23, 2010

Page: 45 of 107

Figure 8-8: Out of Band emission at antenna terminals-PCS 1900 Channel Highest

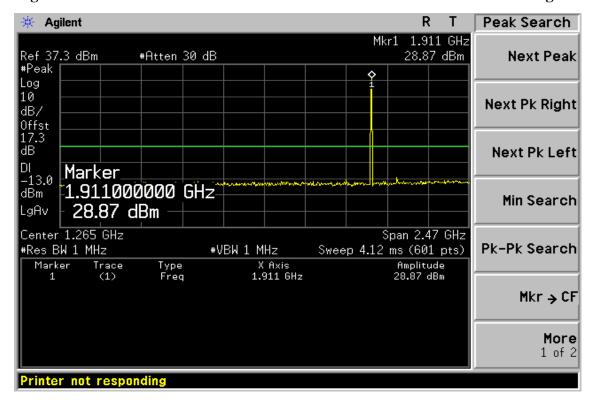

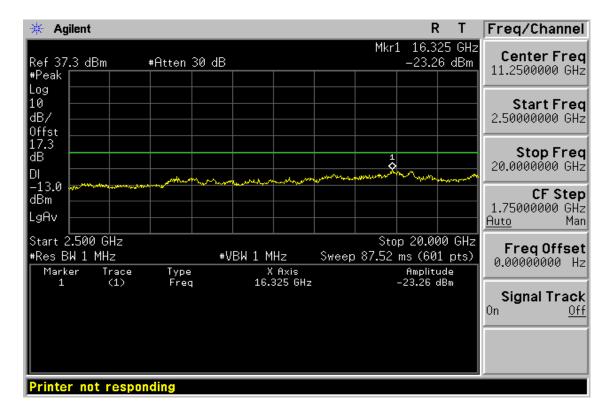

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the testins shirtly in the testine of the state of the st

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t

t (886-2) 2299-3279



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 46 of 107

Figure 8-9: Band edge emission at antenna terminals –PCS 1900 Channel Lowest


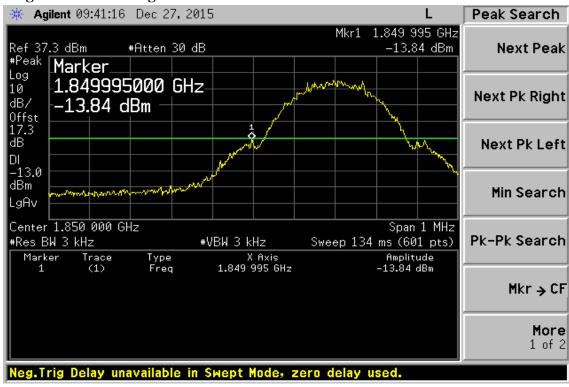


Figure 8-10: Band edge emission at antenna terminals –PCS 1900 Channel Highest

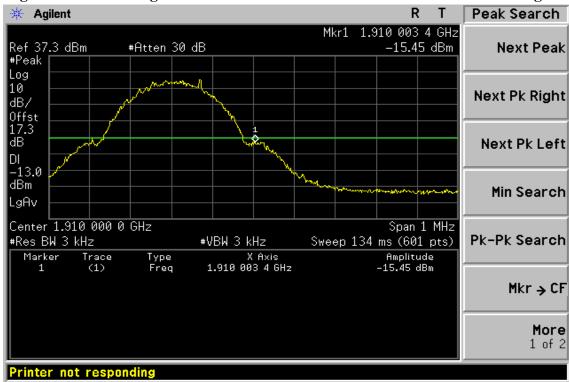

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this less report reier only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 47 of 107

FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT (TX)

9.1 Standard Applicable

According to FCC §2.1053,

FCC §22.917(a),§24.238(a), the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than 43 + 10 log (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

According to RSS-132 §4.5

4.5.1 Out-of-block Emissions

Mobile and base station equipment with emission bandwidth less than or equal to 4 MHz shall comply with 4.5.1.1. Mobile station equipment with emission bandwidth greater than 4 MHz shall comply with 4.5.1.2. Base station equipment with emission bandwidth greater than 4 MHz shall comply with either 4.5.1.2 or 4.5.1.3.

4.5.1.1 In the first 1.0 MHz band immediately outside and adjacent to the licensee's frequency block, the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log (P)$, dB. After the first 1.0 MHz, the power of emissions shall be attenuated below the transmitter output power by at least

 $43 + 10 \log (P)$, dB, in any 100 kHz bandwidth.

4.5.1.2 In the first 1.0 MHz band immediately outside and adjacent to the licensee's frequency block, the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least 43 + 10 log (P), dB. After the first 1.0 MHz, the power of emissions shall be attenuated below the transmitter output power by at least

 $43 + 10 \log (P)$, dB, in any 1 MHz bandwidth

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the results shown in this less report relief only to the sample(s) tested and south sample(s) are retained for 90 days only. When the state of 90 days only. When t obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 48 of 107

According to RSS-133 §6.5

6.5.1 Out-of-Block Emissions

a. Mobile stations must comply with subsection i. below.

In the first 1.0MHz band immediately outside and adjacent to the licensee's frequency block. the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log (P) dB$.

b. After the first 1.0 MHz (for equipment that complies with a.i. of this subsection) or 1.5 MHz (for equipment that complies with all of this subsection), the power of emissions shall be attenuated below the transmitter output power by at least $43 + 10 \log (P)$, dB, per any MHz of bandwidth.

(Note: If the test result using 1% of the emission bandwidth is used, then power integration over 1.0 MHz is required; alternatively, the spectrum analyzer resolution and video bandwidths can be increased to 1.0 MHz for this measurement).

6.5.2 Out-of-Sub-band Emissions

Outside the sub-bands 1850-1910 MHz and 1930-1990 MHz, the attenuation shall be equal to or greater than the out-of-block emission limits in Section 6.5.1.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 49 of 107

9.2 EUT Setup (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

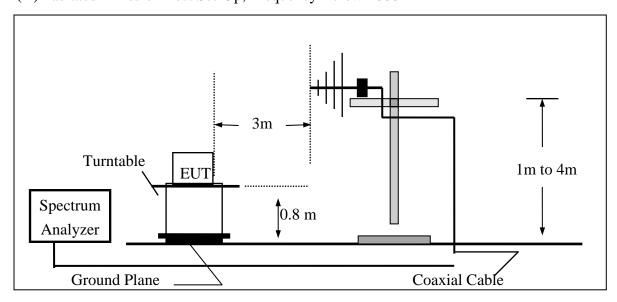

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

cation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 f (886-2) 2298-0488


台灣檢驗科技股份有限公司 t (886-2) 2299-3279




Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 50 of 107

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

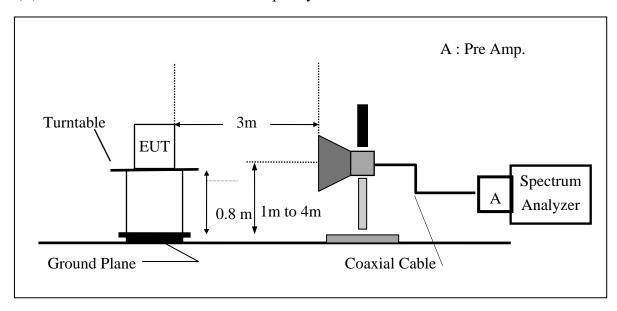

(C) Substituted Method Test Set-UP

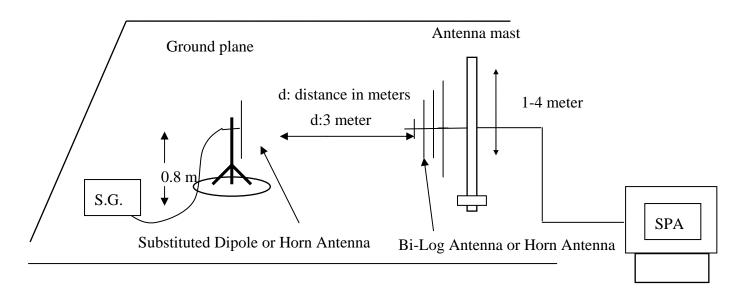

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

cation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 www.tw.sgs.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 51 of 107

9.3 Measurement Procedure

The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824.2 –848.8 MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

ERP = S.G. output (dBm) + Antenna Gain (dBd) - Cable Loss (dB)

EIRP = S.G. output (dBm) + Antenna Gain (dBi) – Cable Loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 52 of 107

9.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2009	02/11/2010
Bilog Antenna	SCHWAZBECK	VULB9160	9160-3136	11/15/2009	11/14/2010
Dipole Antenna	SCHWAZBECK	VHAP	908/909	07/10/2008	07/09/2010
Dipole Antenna	SCHWAZBECK	UHAP	891/892	07/10/2008	07/09/2010
Hor.n antenna	SCHWAZBECK	BBHA 9120D	309	01/22/2008	01/21/2010
Horn antenna	SCHWAZBECK	BBHA 9120D	9120D-673	05/09/2008	05/08/2010
Signal Generator	R&S	SMR40	100210	01/22/2008	01/21/2010
Signal Generator	Agilent	E4438C	MY45093613	05/22/2009	05/21/2010
Pre-Amplifier	Agilent	8447D	1937A02834	11/30/2008	11/29/2009
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2009	01/04/2010
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2009	07/04/2010
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2009	07/04/2010
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2009	07/04/2010
Radio Communication Analyzer	R&S	CMU200	102189	05/13/208	05/12/2010
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2009	01/04/2010
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2009	01/04/2010
3m Site	SGS	966 chamber	N/A	11/08/2009	11/09/2010

9.5 Measurement Result

Refer to attach tabular data sheets.



Report No.: EH/2010/50053 Issue Date: Nov. 23, 2010

Page: 53 of 107

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH Low E2 Mode Test Date: Nov. 28, 2009

Fundamental Frequency : 824.20 MHz Test By: Jazz **Temperature** Pol: Ver : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
75.59	42.65	V	-68.87	-1.85	1.19	-71.92	-13.00	-58.92
94.99	42.22	V	-60.34	-7.75	1.31	-69.41	-13.00	-56.41
153.19	33.39	V	-64.19	-7.80	1.60	-73.59	-13.00	-60.59
342.34	31.07	V	-66.65	-7.68	2.33	-76.67	-13.00	-63.67
463.59	31.76	V	-62.23	-7.71	2.70	-72.63	-13.00	-59.63
654.68	32.46	V	-56.51	-7.81	3.17	-67.50	-13.00	-54.50
824.00	77.14	V	-9.25	-7.87	3.62	-20.75	-13.00	-7.75
1648.40	78.28	V	-26.30	9.29	5.23	-22.24	-13.00	-9.24
2472.60	60.49	V	-40.52	10.08	6.53	-36.97	-13.00	-23.97
3296.80	56.58	V	-42.29	12.17	7.71	-37.84	-13.00	-24.84
4121.00	47.60	V	-48.52	12.61	8.86	-44.77	-13.00	-31.77
4945.20	40.56	V	-51.91	12.65	9.74	-49.00	-13.00	-36.00
5769.40		V		13.55	10.54		-13.00	
6593.60		V		12.05	11.30		-13.00	
7417.80		V		11.49	12.10		-13.00	
8242.00		V		11.48	12.71		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

www.tw.sgs.com

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No.: EH/2010/50053 Issue Date: Nov. 23, 2010

Page: 54 of 107

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH Low E2 Mode Test Date: Nov. 28, 2009

Fundamental Frequency : 824.20 MHz Test By: Jazz **Temperature** Pol: Hor : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
75.59	44.80	Н	-67.56	-1.85	1.19	-70.60	-13.00	-57.60
90.14	42.27	Н	-61.46	-7.75	1.27	-70.48	-13.00	-57.48
179.38	33.80	Н	-66.25	-7.82	1.66	-75.73	-13.00	-62.73
390.84	35.97	Н	-60.60	-7.66	2.48	-70.74	-13.00	-57.74
547.98	36.75	Н	-55.04	-7.76	2.95	-65.75	-13.00	-52.75
649.83	37.03	Н	-52.69	-7.81	3.16	-63.66	-13.00	-50.66
824.00	82.90	Н	-3.37	-7.87	3.62	-14.87	-13.00	-1.87
1648.40	75.45	Н	-28.95	9.29	5.23	-24.89	-13.00	-11.89
2472.60	61.13	Н	-39.78	10.08	6.53	-36.23	-13.00	-23.23
3296.80	50.70	Н	-48.40	12.17	7.71	-43.94	-13.00	-30.94
4121.00	53.70	Н	-42.55	12.61	8.86	-38.80	-13.00	-25.80
4945.20	44.19	Н	-48.45	12.65	9.74	-45.53	-13.00	-32.53
5769.40	38.98	Н	-51.33	13.55	10.54	-48.32	-13.00	-35.32
6593.60		Н		12.05	11.30		-13.00	
7417.80		Н		11.49	12.10		-13.00	
8242.00		Н		11.48	12.71		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 55 of 107

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH Mid E2 Mode Test Date: Nov. 28, 2009

Fundamental Frequency: 836.60 MHz Test By: Jazz Ver Temperature Pol: : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
75.59	43.76	V	-67.76	-1.85	1.19	-70.81	-13.00	-57.81
94.99	43.79	V	-58.77	-7.75	1.31	-67.84	-13.00	-54.84
153.19	33.50	V	-64.08	-7.80	1.60	-73.48	-13.00	-60.48
303.54	32.84	V	-65.37	-7.90	2.18	-75.45	-13.00	-62.45
410.24	31.63	V	-63.55	-7.67	2.54	-73.76	-13.00	-60.76
754.59	32.23	V	-54.84	-7.87	3.48	-66.19	-13.00	-53.19
1673.20	80.96	V	-23.60	9.36	5.27	-19.50	-13.00	-6.50
2509.80	54.02	V	-46.76	10.09	6.58	-43.26	-13.00	-30.26
3346.40	57.74	V	-41.12	12.28	7.79	-36.64	-13.00	-23.64
4183.00		V		12.62	8.93		-13.00	
5019.60		V		12.67	9.81		-13.00	
5856.20		V		13.68	10.62		-13.00	
6692.80		V		11.95	11.39		-13.00	
7529.40		V		11.45	12.20		-13.00	
8366.00		V		11.59	12.81		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the results shown in this less report relief only to the sample(s) tested and south sample(s) are retained for 90 days only. When the state of 90 days only. When t obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 f (886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 56 of 107

Radiated Spurious Emission Measurement Result: GSM Mode

Operation Mode : TX CH Mid E2 Mode Test Date: Nov. 28, 2009

Fundamental Frequency: 836.60 MHz Test By: Jazz Temperature Pol: Hor : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
41.64	40.28	Н	-63.23	-2.31	0.93	-66.47	-13.00	-53.47
75.59	45.49	Н	-66.87	-1.85	1.19	-69.91	-13.00	-56.91
159.98	33.14	Н	-65.40	-7.81	1.61	-74.83	-13.00	-61.83
256.98	35.28	Н	-63.72	-7.89	2.02	-73.63	-13.00	-60.63
387.93	35.98	Н	-60.64	-7.66	2.47	-70.76	-13.00	-57.76
557.68	36.37	Н	-55.19	-7.76	2.97	-65.93	-13.00	-52.93
1673.20	73.12	Н	-31.26	9.36	5.27	-27.16	-13.00	-14.16
2509.80	55.45	Н	-45.25	10.09	6.58	-41.75	-13.00	-28.75
3346.40	48.22	Н	-50.84	12.28	7.79	-46.36	-13.00	-33.36
4183.00	39.67	Н	-56.36	12.62	8.93	-52.67	-13.00	-39.67
5019.60		Н		12.67	9.81		-13.00	
5856.20		Н		13.68	10.62		-13.00	
6692.80		Н		11.95	11.39		-13.00	
7529.40		Н		11.45	12.20		-13.00	
8366.00		Н		11.59	12.81		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the results shown in this less report relief only to the sample(s) tested and south sample(s) are retained for 90 days only. When the state of 90 days only. When t obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 www.tw.sgs.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 57 of 107

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH High E2 Mode Test Date: Nov. 28, 2009

Fundamental Frequency: 848.80 MHz Test By: Jazz Temperature Pol: Ver : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
75.59	43.64	V	-67.88	-1.85	1.19	-70.93	-13.00	-57.93
102.75	41.96	V	-59.71	-7.76	1.37	-68.84	-13.00	-55.84
153.19	32.41	V	-65.17	-7.80	1.60	-74.57	-13.00	-61.57
247.28	31.92	V	-68.07	-7.89	1.97	-77.93	-13.00	-64.93
465.53	32.64	V	-61.36	-7.71	2.70	-71.76	-13.00	-58.76
649.83	32.21	V	-56.71	-7.81	3.16	-67.68	-13.00	-54.68
850.00	72.44	V	-13.67	-7.88	3.68	-25.23	-13.00	-12.23
1697.60	79.83	V	-24.71	9.44	5.31	-20.58	-13.00	-7.58
2546.40	54.42	V	-46.22	10.20	6.63	-42.66	-13.00	-29.66
3395.20	55.89	V	-42.96	12.38	7.87	-38.45	-13.00	-25.45
4244.00	40.19	V	-55.47	12.63	9.00	-51.84	-13.00	-38.84
5092.80		V		12.74	9.88		-13.00	
5941.60		V		13.81	10.70		-13.00	
6790.40		V		11.86	11.48		-13.00	
7639.20		V		11.40	12.27		-13.00	
8488.00		V		11.70	12.91		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this less report reier only to the sample(s) lessed and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/50053 Issue Date: Nov. 23, 2010

Page: 58 of 107

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH High E2 Mode Test Date: Nov. 28, 2009

Fundamental Frequency: 848.80 MHz Test By: Jazz Temperature Pol: Hor : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
75.59	46.45	Н	-65.91	-1.85	1.19	-68.95	-13.00	-55.95
90.14	41.90	Н	-61.83	-7.75	1.27	-70.85	-13.00	-57.85
159.98	33.64	Н	-64.90	-7.81	1.61	-74.33	-13.00	-61.33
264.74	33.34	Н	-65.42	-7.90	2.04	-75.36	-13.00	-62.36
390.84	34.39	Н	-62.18	-7.66	2.48	-72.32	-13.00	-59.32
565.44	35.29	Н	-56.12	-7.77	2.98	-66.87	-13.00	-53.87
649.83	36.24	Н	-53.48	-7.81	3.16	-64.45	-13.00	-51.45
850.00	80.57	Н	-5.62	-7.88	3.68	-17.18	-13.00	-4.18
1697.60	78.56	Н	-25.79	9.44	5.31	-21.66	-13.00	-8.66
2546.40	56.52	Н	-44.08	10.20	6.63	-40.52	-13.00	-27.52
3395.20	52.12	Н	-46.91	12.38	7.87	-42.39	-13.00	-29.39
4244.00	40.81	Н	-55.00	12.63	9.00	-51.38	-13.00	-38.38
5092.80		Н		12.74	9.88		-13.00	
5941.60		Н		13.81	10.70		-13.00	
6790.40		Н		11.86	11.48		-13.00	
7639.20		Н		11.40	12.27		-13.00	
8488.00		Н		11.70	12.91		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- $4 \text{ ERP/EIRP } (dBm) = SG \text{ Setting}(dBm) + Antenna Gain } (dB/dBi) Cable loss } (dB)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 59 of 107

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Low E1 Mode Test Date: Nov. 28, 2009

Fundamental Frequency: 1850.20MHz Test By: Jazz Ver Temperature Pol: : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
101.78	44.84	V	-56.92	-7.76	1.37	-66.04	-13.00	-53.04
153.19	31.90	V	-65.68	-7.80	1.60	-75.08	-13.00	-62.08
318.09	32.02	V	-66.01	-7.82	2.24	-76.06	-13.00	-63.06
441.28	31.25	V	-62.95	-7.69	2.63	-73.28	-13.00	-60.28
604.24	32.94	V	-56.57	-7.79	3.04	-67.41	-13.00	-54.41
807.97	31.81	V	-54.75	-7.87	3.59	-66.21	-13.00	-53.21
1850.00	78.66	V	-25.73	9.90	5.56	-21.39	-13.00	-8.39
3700.40	49.06	V	-48.87	12.61	8.31	-44.57	-13.00	-31.57
5550.60	45.47	V	-45.37	13.23	10.33	-42.47	-13.00	-29.47
7400.80		V		11.50	12.08		-13.00	
9251.00		V		11.92	13.50		-13.00	
11101.20		V		11.66	15.11		-13.00	
12951.40		V		13.63	16.60		-13.00	
14801.60		V		12.76	17.95		-13.00	
16651.80		V		15.92	19.14		-13.00	
18502.00		V		18.75	10.40		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this less report reier only to the sample(s) lessed and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 60 of 107

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Low E1 Mode Test Date: Nov. 28, 2009

Fundamental Frequency: 1850.20MHz Test By: Jazz Temperature Pol: Hor : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
75.59	44.42	Н	-67.94	-1.85	1.19	-70.98	-13.00	-57.98
159.98	32.99	Н	-65.55	-7.81	1.61	-74.98	-13.00	-61.98
211.39	35.62	Н	-65.48	-7.85	1.77	-75.10	-13.00	-62.10
256.98	34.78	Н	-64.22	-7.89	2.02	-74.13	-13.00	-61.13
387.93	35.78	Н	-60.84	-7.66	2.47	-70.96	-13.00	-57.96
649.83	34.40	Н	-55.32	-7.81	3.16	-66.29	-13.00	-53.29
1850.00	79.58	Н	-24.60	9.90	5.56	-20.26	-13.00	-7.26
3700.40	50.31	Н	-47.73	12.61	8.31	-43.43	-13.00	-30.43
5550.60	40.57	Н	-50.48	13.23	10.33	-47.58	-13.00	-34.58
7400.80		Н		11.50	12.08		-13.00	
9251.00		Н		11.92	13.50		-13.00	
11101.20		Н		11.66	15.11		-13.00	
12951.40		Н		13.63	16.60		-13.00	
14801.60		Н		12.76	17.95		-13.00	
16651.80		Н		15.92	19.14		-13.00	
18502.00		Н		18.75	10.40		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this less report reier only to the sample(s) lessed and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 61 of 107

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Mid E1 Mode Nov. 28, 2009 Test Date:

Fundamental Frequency: 1880MHz Test By: Jazz Temperature Ver : 25 Pol:

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
74.62	42.23	V	-69.34	-1.72	1.19	-72.24	-13.00	-59.24
101.78	44.20	V	-57.56	-7.76	1.37	-66.68	-13.00	-53.68
153.19	31.84	V	-65.74	-7.80	1.60	-75.14	-13.00	-62.14
402.48	32.01	V	-63.41	-7.66	2.52	-73.59	-13.00	-60.59
523.73	33.63	V	-59.73	-7.74	2.88	-70.34	-13.00	-57.34
730.34	31.40	V	-56.63	-7.87	3.40	-67.89	-13.00	-54.89
3760.00	49.64	V	-48.02	12.60	8.39	-43.80	-13.00	-30.80
5640.00	46.33	V	-44.25	13.36	10.41	-41.30	-13.00	-28.30
7520.00		V		11.45	12.19		-13.00	
9400.00		V		11.93	13.61		-13.00	
11280.00		V		11.92	15.27		-13.00	
13160.00		V		13.33	16.71		-13.00	
15040.00		V		13.76	18.15		-13.00	
16920.00		V		15.27	19.32		-13.00	
18800.00		V		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this less report reier only to the sample(s) lessed and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 f (886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 62 of 107

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Mid E1 Mode Nov. 28, 2009 Test Date:

Fundamental Frequency: 1880MHz Test By: Jazz Temperature : 25 Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
75.59	43.91	Н	-68.45	-1.85	1.19	-71.49	-13.00	-58.49
101.78	39.92	Н	-62.89	-7.76	1.37	-72.02	-13.00	-59.02
225.94	36.15	Н	-64.24	-7.87	1.86	-73.96	-13.00	-60.96
387.93	35.52	Н	-61.10	-7.66	2.47	-71.22	-13.00	-58.22
594.54	32.88	Н	-57.93	-7.79	3.02	-68.74	-13.00	-55.74
652.74	34.10	Н	-55.51	-7.81	3.17	-66.49	-13.00	-53.49
3760.00	50.87	Н	-46.90	12.60	8.39	-42.69	-13.00	-29.69
5640.00	42.48	Н	-48.27	13.36	10.41	-45.32	-13.00	-32.32
7520.00		Н		11.45	12.19		-13.00	
9400.00		Н		11.93	13.61		-13.00	
11280.00		Н		11.92	15.27		-13.00	
13160.00		Н		13.33	16.71		-13.00	
15040.00		Н		13.76	18.15		-13.00	
16920.00		Н		15.27	19.32		-13.00	
18800.00		Н		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this less report reier only to the sample(s) lessed and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 63 of 107

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH High E1 Mode Nov. 28, 2009 Test Date:

Fundamental Frequency: 1909.8 MHz Test By: Jazz Temperature Ver : 25 Pol:

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
94.99	43.76	V	-58.80	-7.75	1.31	-67.87	-13.00	-54.87
458.74	31.93	V	-62.04	-7.70	2.68	-72.42	-13.00	-59.42
611.03	33.09	V	-56.34	-7.79	3.06	-67.19	-13.00	-54.19
870.99	32.32	V	-53.22	-7.91	3.73	-64.85	-13.00	-51.85
1910.00	80.23	V	-24.10	10.08	5.66	-19.68	-13.00	-6.68
3814.00	44.41	V	-53.01	12.60	8.46	-48.87	-13.00	-35.87
3981.60		V		12.60	8.69		-13.00	
5718.00	41.72	V	-48.63	13.48	10.49	-45.64	-13.00	-32.64
5972.40		V		13.86	10.73		-13.00	
7963.20		V		11.27	12.49		-13.00	
9954.00		V		12.08	14.24		-13.00	
11944.80		V		13.08	15.87		-13.00	
13935.60		V		11.82	17.21		-13.00	
15926.40		V		17.08	18.70		-13.00	
17917.20		V		9.63	19.97		-13.00	
19908.00		V		18.88	21.24		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this less report reier only to the sample(s) lessed and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 f (886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 64 of 107

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH High E1 Mode Nov. 28, 2009 Test Date:

Fundamental Frequency: 1909.8 MHz Test By: Jazz Temperature : 25 Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
75.59	44.97	Н	-67.39	-1.85	1.19	-70.43	-13.00	-57.43
387.93	34.28	Н	-62.34	-7.66	2.47	-72.46	-13.00	-59.46
475.23	33.93	Н	-59.74	-7.71	2.73	-70.18	-13.00	-57.18
647.89	34.45	Н	-55.31	-7.81	3.15	-66.28	-13.00	-53.28
1910.00	79.13	Н	-24.98	10.08	5.66	-20.56	-13.00	-7.56
3814.00	41.53	Н	-56.00	12.60	8.46	-51.86	-13.00	-38.86
3981.60		Н		12.60	8.69		-13.00	
5718.00	45.21	Н	-45.28	13.48	10.49	-42.29	-13.00	-29.29
5972.40		Н		13.86	10.73		-13.00	
7963.20		Н		11.27	12.49		-13.00	
9954.00		Н		12.08	14.24		-13.00	
11944.80		Н		13.08	15.87		-13.00	
13935.60		Н		11.82	17.21		-13.00	
15926.40		Н		17.08	18.70		-13.00	
17917.20		Н		9.63	19.97		-13.00	
19908.00		Н		18.88	21.24		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this less report reier only to the sample(s) lessed and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 65 of 107

10. FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT

10.1 Standard Applicable

According to FCC §2.1055(a)(1), §22.355, §24.235.

Frequency Tolerance: +/-2.5 ppm for 850MHz band


+/-2.5 ppm for 1900MHz band

According to RSS-133 §6.3, RSS-132 §4.3

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

10.2 Test Set-up:

Temperature Chamber

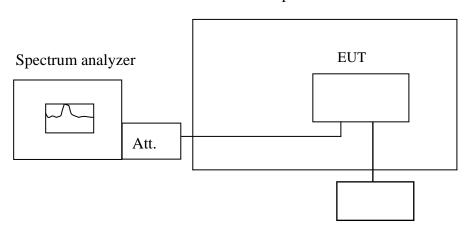

Variable Power Supply

Note: Measurement setup for testing on Antenna connector

10.3 Measurement Procedure

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to 5°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this less report reier only to the sample(s) lessed and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 www.tw.sgs.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 66 of 107

10.4 Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010			
Spectrum Analyzer	Agilent	E4440A	US41160416	01/23/2008	01/22/2010			
Radio Communication Analyzer	R&S	CMU200	102189	05/13/2008	05/12/2010			
Temperature Chamber	TERCHY	MHG-120LF	911009	04/14/2008	04/13/2010			
Temperature Chamber	GIANT FORCE	GTH-150-40- CP-AR	MAA0512-018	02/05/2008	02/04/2010			
DC Block	Agilent	BLK-18	155452	07/05/2009	07/04/2010			
Attenuator	Mini-Circuit	BW-S20W5	N/A	07/05/2009	07/04/2010			
Attenuator	Mini-Circuit	BW-S10W5	N/A	07/05/2009	07/04/2010			
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2009	07/04/2010			
Splitter	Agilent	11636B	N/A	07/05/2009	07/04/2010			
DC Power Supply	HP	6038A	2929A-07548	06/27/2009	06/26/2011			
DC Power Supply	Topward	3303D	981327	10/26/2009	10/25/2011			



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 67 of 107

10.5 Measurement Result

Reference Frequency: GSM Mid Channel 836.6 MHz @ 25°C						
	Limit	: +/- 2.5 ppm = 209	91 Hz			
Power Supply	Environment	Frequency	Dolto (II-) Limit (II-)			
Vdc	Temperature (°C)	(MHz)	Delta (Hz)	Limit (Hz)		
3.6	-30	836.600001	-3.00	2091		
3.6	-20	836.599996	2.00	2091		
3.6	-10	836.599994	4.00	2091		
3.6	0	836.599997	1.00	2091		
3.6	10	836.599994	4.00	2091		
3.6	20	836.599998	0.00	2091		
3.6	30	836.599999	-1.00	2091		
3.6	40	836.599995	3.00	2091		
3.6	50	836.599997	1.00	2091		

Reference Frequency: PCS Mid Channel 1880 MHz @ 25℃							
	Limit: +/- 2.5 ppm = 4700 Hz						
Power Supply	Environment	Frequency	Dolto (Uz)	Limit (Hz)			
Vdc	Temperature (°C)	(MHz)	Delta (Hz)	Limit (Hz)			
3.6	-30	1879.999988	10.00	4700			
3.6	-20	1879.999997	1.00	4700			
3.6	-10	1879.999995	3.00	4700			
3.6	0	1879.999993	5.00	4700			
3.6	10	1879.999997	1.00	4700			
3.6	20	1879.999998	0.00	4700			
3.6	30	1880.000002	-4.00	4700			
3.6	40	1879.999994	4.00	4700			
3.6	50	1879.999993	5.00	4700			

Note: The battery is rated 3.6V dc.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 68 of 107

11. FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT

11.1 Standard Applicable

According to FCC §2.1055(d)(1), §22.355, §24.235)

Frequency Tolerance: +/-2.5ppm for 850MHz band


+/-2.5ppm for 1900MHz band

According to RSS-133 §6.3, RSS-132 §4.3

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

11.2 Test Set-up:

Temperature Chamber

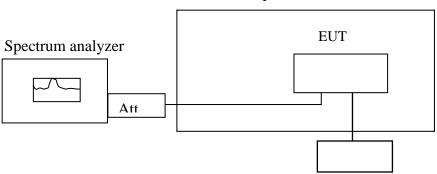

Variable DC Power Supply

Note: Measurement setup for to.....

11.3 Measurement Procedure

Set chamber temperature to 25°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only.

脉非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification is the content of the law. cation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 www.tw.sgs.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 69 of 107

11.4 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010		
Spectrum Analyzer	Agilent	E4440A	US41160416	01/23/2008	01/22/2010		
Radio Communication Analyzer	R&S	CMU200	102189	05/13/2008	05/12/2010		
800 – 1000MHz Filter	Micro-Tronics	BRM13462	001	01/05/2009	01/04/2010		
1800 – 2000MHz Filter	Micro-Tronics	BRM13463	001	01/05/2009	01/04/2010		
Temperature Chamber	TERCHY	MHG-120LF	911009	04/14/2008	04/13/2010		
Temperature Chamber	GIANT FORCE	GTH-150-40- CP-AR	MAA0512-018	02/05/2008	02/04/2010		
DC Block	Agilent	BLK-18	155452	07/05/2009	07/04/2010		
Attenuator	Mini-Circuit	BW-S20W5	N/A	07/05/2009	07/04/2010		
Attenuator	Mini-Circuit	BW-S10W5	N/A	07/05/2009	07/04/2010		
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2009	07/04/2010		
Splitter	Agilent	11636B	N/A	07/05/2009	07/04/2010		
DC Power Supply	HP	6038A	2929A-07548	06/27/2009	06/26/2011		
DC Power Supply	Topward	3303D	981327	10/26/2009	10/25/2011		



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 70 of 107

11.5 Measurement Result

Reference Frequency: GSM Mid Channel 836.6 MHz @ 25°C							
	Limit: +/- 2.5 ppm = 2091 Hz						
Power Supply	Power Supply Environment Frequency						
Vdc	Temperature ($^{\circ}$ C)	(MHz)	Delta (Hz)	Limit (Hz)			
4.2	25.00	836.599996	0.00	2091.00			
3.6	25.00	836.599993	3.00	2091.00			
3.5	25.00	836.599992	4.00	2091.00			
3.4	25.00	926 500090	7.00	2001.00			
(Endpoint)	25.00	836.599989	7.00	2091.00			

Reference Frequency: PCS Mid Channel 1880 MHz @ 25°C							
	Limit: +/- 2.5 ppm = 4700 Hz						
Power Supply	Environment Frequency Dalta (II-)						
Vdc	Temperature (°C)	(MHz)	Delta (Hz)	Limit (Hz)			
4.2	25	1879.999999	0.00	4700			
3.6	25	1879.999997	2.00	4700			
3.5	25	1879.999994	5.00	4700			
3.4	25	1070 00000	7.00	4700			
(Endpoint)	25	1879.999992	7.00	4700			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號
14(886-2) 2290-3270 ft/886-2) 2290-3170 ft/886-2) 2290-3170 ft/886-2) 2290-3170 ft/886-20 2290-3170

www.tw.sgs.com

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 71 of 107

12. AC POWER LINE CONDUCTED EMISSION TEST

12.1 Standard Applicable

According to §15.207. The emission value for frequency within 150KHz to 30MHz shall not exceed criteria of below chart.

Frequency range	Limits dB(uV)		
MHz	Quasi-peak	Average	
0.15 to 0.50	66 to 56	56 to 46	
0.50 to 5	56	46	
5 to 30	60	50	

Note

12.2 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The EUT was plug-in DC power adaptort and was placed on the center of the back edge on the test table. The peripherals like earphone was placed on the side of the EUT. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The Power adaptor was connected with 110Vac/60Hz power source.

12.3 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the results shown in this less report relief only to the sample(s) tested and south sample(s) are retained for 90 days only. When the state of 90 days only. When t obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

^{1.} The lower limit shall apply at the transition frequencies

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 72 of 107

12.4 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESCS30	828985/004	09/15/2009	09/14/2010		
LISN	Rolf-Heine	NNB-2/16Z	99012	02/02/2010	02/01/2011		
LISN	FCC	FCC-LISN-50/25 0-25-2-01	04034	02/02/2010	02/01/2011		
Coaxial Cables	N/A	WK CE Cable	N/A	11/28/2009	11/27/2010		

12.5 Measurement Result

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the results shown in this less report relief only to the sample(s) tested and south sample(s) are retained for 90 days only. When the state of 90 days only. When t obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 f (886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**


> Humidity: Air Pressure:

hpa

Page: 73 of 107

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	GSM 850 LINK			Test Date:	Nov. 02, 2010
Temperature:	23 ℃	Humidity:	58 %	Test By:	Jazz

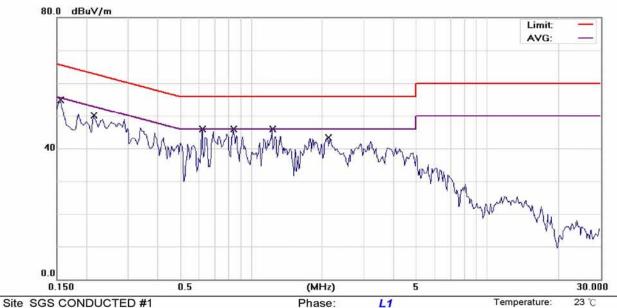

Power:

Distance:

11

AC 120V/60Hz

Site SGS CONDUCTED #1

Limit: FCC Class B Conduction(QP)

EUT: POS terminal

M/N: M81B

12

2.1152

Note: GSM 850 LINK

No. Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.1549	50.06	0.17	50.23	65.73	-15.50	QP	
2	0.1549	37.27	0.17	37.44	55.73	-18.29	AVG	
3	0.2150	45.20	0.12	45.32	63.01	-17.69	QP	
4	0.2150	33.55	0.12	33.67	53.01	-19.34	AVG	
5	0.6180	37.19	0.07	37.26	56.00	-18.74	QP	
6	0.6180	22.14	0.07	22.21	46.00	-23.79	AVG	
7	0.8387	40.32	0.08	40.40	56.00	-15.60	QP	
8 *	0.8387	30.92	0.08	31.00	46.00	-15.00	AVG	
9	1.2292	36.52	0.10	36.62	56.00	-19.38	QP	
10	1.2292	25.54	0.10	25.64	46.00	-20.36	AVG	
11	2.1152	33.86	0.13	33.99	56.00	-22.01	QP	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

22.18

0.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
First pathing the state of the sample of the samp

46.00

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 www.tw.sgs.com

-23.82

AVG

台灣檢驗科技股份有限公司

22.05

t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**


Humidity:

Air Pressure:

58 %

hpa

Page: 74 of 107

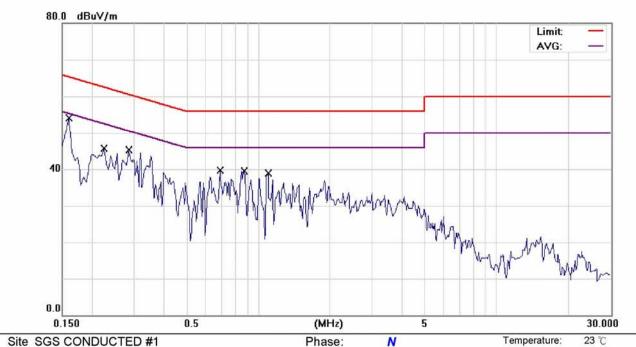

Power:

Distance:

Site SGS CONDUCTED #1

Limit: FCC Class B Conduction(QP)

EUT: POS terminal

M/N: M81B

Note: GSM 850 LINK

No. N	Иk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	(0.1597	42.82	0.18	43.00	65.48	-22.48	QP	
2	(0.1597	28.60	0.18	28.78	55.48	-26.70	AVG	
3	(0.2250	36.50	0.14	36.64	62.63	-25.99	QP	
4	(0.2250	23.40	0.14	23.54	52.63	-29.09	AVG	
5	(0.2850	36.12	0.13	36.25	60.67	-24.42	QP	
6	(0.2850	20.35	0.13	20.48	50.67	-30.19	AVG	
7 '	* (0.6900	35.80	0.11	35.91	56.00	-20.09	QP	
8	(0.6900	22.36	0.11	22.47	46.00	-23.53	AVG	
9	(0.8700	30.61	0.11	30.72	56.00	-25.28	QP	
10	(0.8700	19.12	0.11	19.23	46.00	-26.77	AVG	
11		1.1000	30.10	0.12	30.22	56.00	-25.78	QP	
12		1.1000	16.10	0.12	16.22	46.00	-29.78	AVG	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
First pathing the state of the sample of the samp

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488

AC 120V/60Hz

www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Humidity:


Air Pressure:

58 %

Page: 75 of 107

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	GSM 1900 Link			Test Date:	Nov. 02, 2010
Temperature:	23 ℃	Humidity:	58 %	Test By:	Jazz

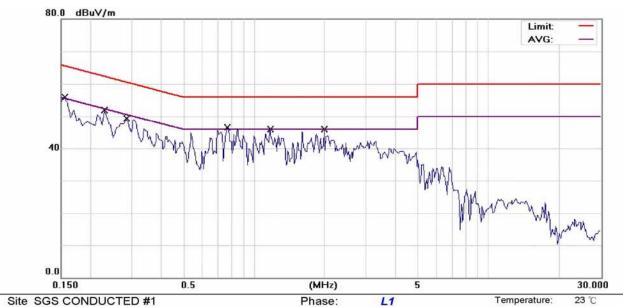

Power:

Distance:

Site SGS CONDUCTED #1

Limit: FCC Class B Conduction(QP)

EUT: POS terminal

M/N: M81B

Note: GSM 1900 LINK

No. Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	0.1550	50.32	0.17	50.49	65.73	-15.24	QP	
2	0.1550	39.35	0.17	39.52	55.73	-16.21	AVG	
3	0.2294	44.88	0.11	44.99	62.47	-17.48	QP	
4	0.2294	32.22	0.11	32.33	52.47	-20.14	AVG	
5	0.2846	42.23	0.10	42.33	60.68	-18.35	QP	
6	0.2846	31.34	0.10	31.44	50.68	-19.24	AVG	
7	0.7664	40.46	0.08	40.54	56.00	-15.46	QP	
8	0.7664	29.10	0.08	29.18	46.00	-16.82	AVG	
9	1.1677	36.87	0.10	36.97	56.00	-19.03	QP	
10	1.1677	25.49	0.10	25.59	46.00	-20.41	AVG	
11	1.9938	35.00	0.13	35.13	56.00	-20.87	QP	
12	1.9938	23.69	0.13	23.82	46.00	-22.18	AVG	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
First pathing the state of the sample of the samp

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279


f (886-2) 2298-0488

AC 120V/60Hz



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 76 of 107

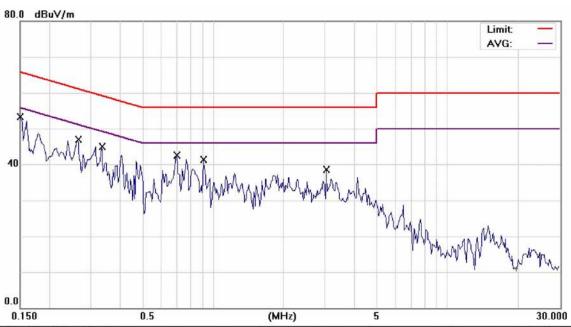

Site SGS CONDUCTED #1

Limit: FCC Class B Conduction(QP)

EUT: POS terminal

M/N: M81B

Note: GSM 1900 LINK

Phase: Temperature: 23 ℃

AC 120V/60Hz Humidity: Power: Distance: Air Pressure: hpa

No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.1508	45.90	0.19	46.09	65.96	-19.87	QP	
2		0.1508	29.25	0.19	29.44	55.96	-26.52	AVG	
3		0.2650	40.50	0.13	40.63	61.27	-20.64	QP	
4		0.2650	24.50	0.13	24.63	51.27	-26.64	AVG	
5		0.3350	37.32	0.12	37.44	59.33	-21.89	QP	
6		0.3350	25.20	0.12	25.32	49.33	-24.01	AVG	
7		0.6970	32.18	0.11	32.29	56.00	-23.71	QP	
8		0.6970	21.32	0.11	21.43	46.00	-24.57	AVG	
9		0.9110	32.25	0.12	32.37	56.00	-23.63	QP	
10		0.9110	19.27	0.12	19.39	46.00	-26.61	AVG	
11		3.0560	33.31	0.16	33.47	56.00	-22.53	QP	
12		3.0560	21.55	0.16	21.71	46.00	-24.29	AVG	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
First pathing the state of the sample of the samp

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Humidity:

Air Pressure:


58 %

hpa

Page: 77 of 107

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	EGPS 850 LINK			Test Date:	Nov. 02, 2010
Temperature:	23 ℃	Humidity:	58 %	Test By:	Jazz

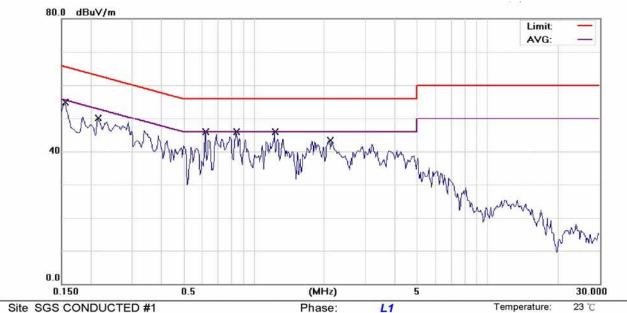

Power:

Distance:

AC 120V/60Hz

Site SGS CONDUCTED #1

Limit: FCC Class B Conduction(QP)

EUT: POS terminal

M/N: M81B

Note: EDGE 850 LINK

No. M	lk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *		0.1559	48.06	0.17	48.23	65.68	-17.45	QP	
2		0.1559	35.27	0.17	35.44	55.68	-20.24	AVG	
3		0.2150	43.20	0.12	43.32	63.01	-19.69	QP	
4		0.2150	30.55	0.12	30.67	53.01	-22.34	AVG	
5		0.6182	35.09	0.07	35.16	56.00	-20.84	QP	
6		0.6182	20.14	0.07	20.21	46.00	-25.79	AVG	
7		0.8367	38.32	0.08	38.40	56.00	-17.60	QP	
8		0.8367	26.90	0.08	26.98	46.00	-19.02	AVG	
9		1.2292	35.52	0.10	35.62	56.00	-20.38	QP	
10		1.2292	23.54	0.10	23.64	46.00	-22.36	AVG	
11		2.1052	32.86	0.13	32.99	56.00	-23.01	QP	
12		2.1052	20.05	0.13	20.18	46.00	-25.82	AVG	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

CST Taiwan Ltd* No 134 NW Lymp Road Wilky Indication Taiwan Ltd***

CST Taiwan Ltd

***No 134 NW Lymp Road Wilky Indication Taiwan Taiwan Ltd**

***No 134 NW Lymp Road Wilky Indication Taiwan Taiwan Ltd**

***No 134 NW Lymp Road Wilky Indication Taiwan Taiwan Ltd**

***No 134 NW Lymp Road Wilky Indication Taiwan Taiw

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**


Page: 78 of 107

Humidity:

Air Pressure:

58 %

hpa

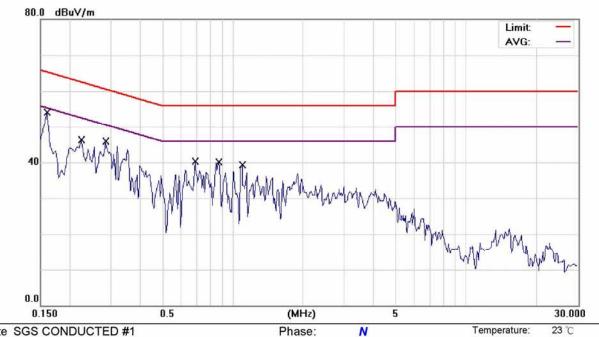

Power:

Distance:

Site SGS CONDUCTED #1

Limit: FCC Class B Conduction(QP)

Reading

Level

dBuV/m

43.82

28.60

35.50

22.40

37.12

22.35

34.80

21.36

31.61

20.12

29.10

18.10

EUT: POS terminal

M/N: M81B

No. Mk.

1

2

3

4

5

6

7

8

9

10

11

12

Note: EDGE 850 LINK

Freq.

MHz

0.1597

0.1597

0.2250

0.2250

0.2850

0.2850

0.6900

0.6900

0.8700

0.8700

1.1000

1.1000

F4	Measure-		0			
Factor	ment	Limit	Over			
dB	dBuV/m	dBuV/m	dB	Detector	Comment	
0.18	44.00	65.48	-21.48	QP		
0.18	28.78	55.48	-26.70	AVG		
0.14	35.64	62.63	-26.99	QP		
0.14	22.54	52.63	-30.09	AVG		
0.13	37.25	60.67	-23.42	QP		
0.13	22.48	50.67	-28.19	AVG		
0.11	34.91	56.00	-21.09	QP		
0.11	21.47	46.00	-24.53	AVG		
0.11	31.72	56.00	-24.28	QP		

AVG

QP

AVG

AC 120V/60Hz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

20.23

29.22

18.22

0.11

0.12

0.12

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
First pathing the state of the sample of the samp

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

-25.77

-26.78

-27.78

46.00

56.00

46.00

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com




Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 79 of 107

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	EGPS 1900 Link			Test Date:	Nov. 02, 2010
Temperature:	23 ℃	Humidity:	58 %	Test By:	Jazz

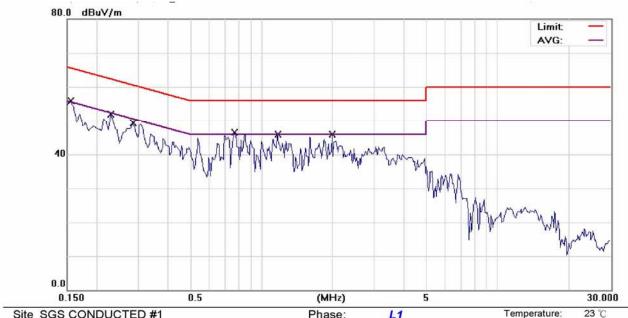

Site SGS CONDUCTED #1

Limit: FCC Class B Conduction(QP)

EUT: POS terminal

M/N: M81B

Note: EDGE 1900 LINK

Phase:	L1	Temperatu	re:
Power:	AC 120V/60Hz	Humidity:	58
Distance	1	Air Pressur	e:

No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.1555	49.32	0.17	49.49	65.70	-16.21	QP	
2		0.1555	38.35	0.17	38.52	55.70	-17.18	AVG	
3		0.2284	43.88	0.11	43.99	62.51	-18.52	QP	
4		0.2284	30.22	0.11	30.33	52.51	-22.18	AVG	
5		0.2817	41.23	0.10	41.33	60.77	-19.44	QP	
6		0.2817	30.34	0.10	30.44	50.77	-20.33	AVG	
7		0.7644	39.46	80.0	39.54	56.00	-16.46	QP	
8		0.7644	27.10	0.08	27.18	46.00	-18.82	AVG	
9		1.1607	35.87	0.10	35.97	56.00	-20.03	QP	
10		1.1607	23.49	0.10	23.59	46.00	-22.41	AVG	
11		1.9910	34.00	0.13	34.13	56.00	-21.87	QP	
12		1.9910	22.69	0.13	22.82	46.00	-23.18	AVG	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
First pathing the state of the sample of the samp

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 80 of 107

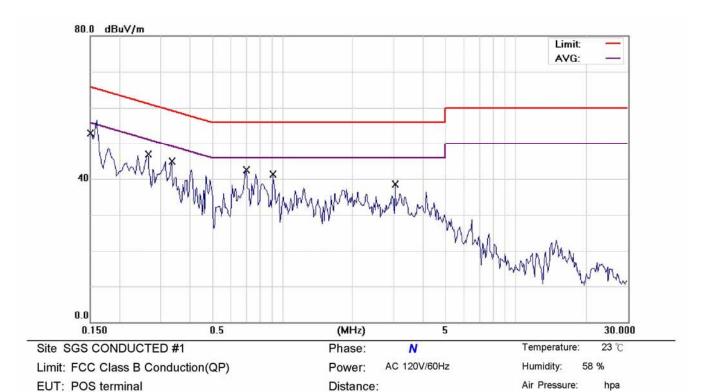

M/N: M81B

Note: EDGE 1900 LINK

No. Mk	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	0.1518	44.90	0.19	45.09	65.90	-20.81	QP	
2	0.1518	28.25	0.19	28.44	55.90	-27.46	AVG	
3	0.2650	39.50	0.13	39.63	61.27	-21.64	QP	
4	0.2650	27.50	0.13	27.63	51.27	-23.64	AVG	
5	0.3350	36.32	0.12	36.44	59.33	-22.89	QP	
6	0.3350	26.20	0.12	26.32	49.33	-23.01	AVG	
7	0.6970	31.00	0.11	31.11	56.00	-24.89	QP	
8	0.6970	20.32	0.11	20.43	46.00	-25.57	AVG	
9	0.9110	31.20	0.12	31.32	56.00	-24.68	QP	
10	0.9110	20.17	0.12	20.29	46.00	-25.71	AVG	
11	3.0560	32.15	0.16	32.31	56.00	-23.69	QP	
12	3.0560	20.88	0.16	21.04	46.00	-24.96	AVG	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
First pathing the state of the sample of the samp

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 81 of 107

13. SPURIOUS RADIATED EMISSION TEST (RX)

13.1 Standard Applicable

According to RSS 132 §4.6, all spurious emissions shall comply with the limits of Table 2. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emissions measurements below 1.0 GHz, and 1.0 MHz for measurements above 1.0 GHz.

Frequency (MHz)	Field strength $\mu V/m$	Distance (m)	Field strength at 3m dBµV/m
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

According to RSS 133 \(\) \(\) 6.6, Receiver spurious emissions shall comply with the limits specified in RSS-Gen.

13.2 EUT Setup

- 1. The radiated emission tests were performed in the 3 meter open-test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The EUT was put in the front of the test table. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The spacing between the peripherals was 10 centimeters.
- 4. External I/O cables were draped along the edge of the test table and bundle when necessary.
- 5. The host was connected with 110Vac/60Hz power source.

13.3 Measurement Procedure

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 5. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only.
kip #3.4 path #3.4 path #4.4 path #4. cation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**


Page: 82 of 107

13.4 Test SET-UP (Block Diagram of Configuration)

Radiated Emission Test Set-Up, Frequency Below 1000MHz

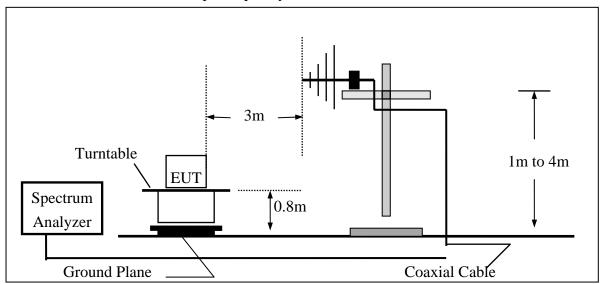

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

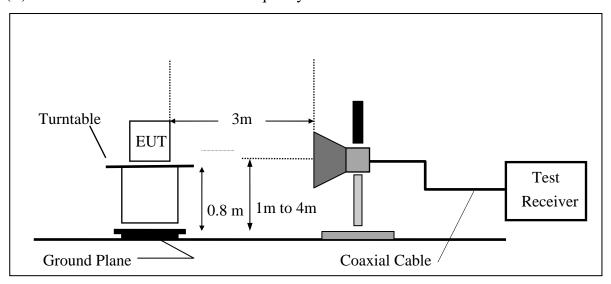

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this less report reier only to the sample(s) lessed and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 83 of 107

13.5 Measurement Equipment Used:

e measurement E	quipment obcu:				
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2009	02/11/2010
Bilog Antenna	SCHWAZBECK	VULB9160	9160-3136	11/15/2009	11/14/2010
Hor.n antenna	SCHWAZBECK	BBHA 9120D	309	01/22/2008	01/21/2010
Horn antenna	SCHWAZBECK	BBHA 9120D	9120D-673	05/09/2008	05/08/2010
Pre-Amplifier	Agilent	8447D	1937A02834	11/30/2009	11/29/2010
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2009	01/04/2010
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2009	07/04/2010
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2009	07/04/2010
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2009	07/04/2010
Radio Communica- tion Analyzer	R&S	CMU200	102189	05/13/208	05/12/2010
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2009	01/04/2010
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2009	01/04/2010
3m Site	SGS	966 chamber	N/A	11/08/2009	11/09/2010

13.6 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

13.7 Measurement Result

Refer to attach tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

CST Taiwan Ltd* No 134 NW Lymp Road Wilky Indication Taiwan Ltd***

CST Taiwan Ltd

***No 134 NW Lymp Road Wilky Indication Taiwan Taiwan Ltd**

***No 134 NW Lymp Road Wilky Indication Taiwan Taiwan Ltd**

***No 134 NW Lymp Road Wilky Indication Taiwan Taiwan Ltd**

***No 134 NW Lymp Road Wilky Indication Taiwan Taiw

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 84 of 107

Radiated Spurious Emission Measurement Result (below 1GHz)

GSM 850 CH Low Operation Mode **Test Date** Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Temperature Pol Ver./Hor 25 °C

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Ant./CL/	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV) A	Amp. CF(dB	3) (dBuV/m)	(dBuV/m)	(dB)
101.78	V	Peak	44.36	-16.87	27.49	43.50	-16.01
153.19	V	Peak	32.40	-13.00	19.40	43.50	-24.10
349.13	V	Peak	31.93	-11.82	20.11	46.00	-25.89
478.14	V	Peak	31.87	-8.56	23.31	46.00	-22.69
606.18	V	Peak	33.38	-5.88	27.50	46.00	-18.50
868.08	V	Peak	32.76	-1.63	31.13	46.00	-14.87
75.59	Н	Peak	44.22	-17.13	27.09	40.00	-12.91
90.14	Н	Peak	41.87	-17.62	24.25	43.50	-19.25
208.48	Н	Peak	35.89	-15.32	20.57	43.50	-22.93
387.93	Н	Peak	35.35	-10.41	24.94	46.00	-21.06
475.23	Н	Peak	33.35	-8.56	24.79	46.00	-21.21
649.83	Н	Peak	37.63	-4.95	32.68	46.00	-13.32

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Tailwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台上縣五股工業區五工路 134 號
14(886-2) 2209-2379 (1988-2) 2208-2088.



Report No.: EH/2010/50053 Issue Date: Nov. 23, 2010

Page: 85 of 107

Radiated Spurious Emission Measurement Result (below 1GHz)

GSM 850 CH Mid Operation Mode **Test Date** Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Temperature Pol Ver./Hor 25 °C

Humidity 65 %

F	req.	Ant.Pol.	Detector Mode	Reading	Ant./CL/	Actual FS	Limit3m	Safe Margin
(N	IHz)	H/V	(PK/QP)	(dBuV)	Amp. CF(dB)	(dBuV/m)	(dBuV/m)	(dB)
10	1.78	V	Peak	45.02	-16.87	28.15	43.50	-15.35
16	2.89	V	Peak	33.45	-13.57	19.88	43.50	-23.62
32	0.03	V	Peak	33.49	-12.55	20.94	46.00	-25.06
42	9.64	V	Peak	32.15	-9.14	23.01	46.00	-22.99
48	0.08	V	Peak	32.52	-8.56	23.96	46.00	-22.04
64	4.98	V	Peak	32.56	-5.10	27.46	46.00	-18.54
7:	5.59	Н	Peak	44.33	-17.13	27.20	40.00	-12.80
94	1.99	Н	Peak	40.76	-17.26	23.50	43.50	-20.00
21	8.18	Н	Peak	34.60	-14.99	19.61	46.00	-26.39
26	4.74	Н	Peak	34.79	-13.59	21.20	46.00	-24.80
38	7.93	Н	Peak	37.22	-10.41	26.81	46.00	-19.19
64	9.83	Н	Peak	34.87	-4.95	29.92	46.00	-16.08

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only.

脉非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification is the content of the law. cation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 86 of 107

Radiated Spurious Emission Measurement Result (below 1GHz)

GSM 850 CH High Operation Mode **Test Date** Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Temperature Pol Ver./Hor 25 °C

Humidity 65 %

F	req.	Ant.Pol.	Detector Mode	Reading	Ant./CL/	Actual FS	Limit3m	Safe Margin
(N	IHz)	H/V	(PK/QP)	(dBuV)	Amp. CF(dB	(dBuV/m)	(dBuV/m)	(dB)
10	1.78	V	Peak	45.73	-16.87	28.86	43.50	-14.64
15	3.19	V	Peak	32.98	-13.00	19.98	43.50	-23.52
28	6.08	V	Peak	32.62	-13.26	19.36	46.00	-26.64
43	1.58	V	Peak	32.04	-9.09	22.95	46.00	-23.05
65	7.59	V	Peak	32.79	-4.98	27.81	46.00	-18.19
83	4.13	V	Peak	32.48	-2.28	30.20	46.00	-15.80
7	5.59	Н	Peak	43.34	-17.13	26.21	40.00	12.70
								-13.79
94	4.99	Н	Peak	41.56	-17.26	24.30	43.50	-19.20
20	8.48	Н	Peak	35.21	-15.32	19.89	43.50	-23.61
29	3.84	Н	Peak	33.41	-13.19	20.22	46.00	-25.78
38	7.93	H	Peak	38.57	-10.41	28.16	46.00	-17.84
64	9.83	Н	Peak	37.77	-4.95	32.82	46.00	-13.18

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only.

脉非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification is the content of the law. cation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 87 of 107

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode GSM 850 CH Low Test Date Nov. 28, 2009

Fundamental Frequency Test By N/A Jazz Temperature Pol Ver 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	$\mathbf{A}\mathbf{V}$		
Freq.	Reading	Reading	Ant/CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1648.4	35.61		-5.22	30.39		74.00	54.00	-23.61	Peak
2472.6									
3296.8									
4121.0									
4945.2									
5769.4									
6593.6									
7417.8									
8242.0									

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 88 of 107

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode GSM 850 CH Low Test Date Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Temperature Pol Hor 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	ıal FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1648.4	35.64		-5.22	30.42		74.00	54.00	-23.58	Peak
2472.6									
3296.8									
4121.0									
4945.2									
5769.4									
6593.6									
7417.8									
8242.0									

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 89 of 107

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode GSM 850 CH Mid Test Date Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Pol Temperature Ver 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		A c tu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1673.2	34.89		-5.04	29.85		74.00	54.00	-24.15	Peak
2509.8									
3346.4									
4183.0									
5019.6									
5856.2									
6692.8									
7529.4									
8366.0									

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within and pulsations assess defined interest. All youter or into accoment a autoration contained interest in electric property is mining, at the limits of Client's instructions, if any. The Company's society is the limits of Client's instructions, if any. The Company's society is and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 90 of 107

Radiated Spurious Emission Measurement Result (above 1GHz)

GSM 850 CH Mid Operation Mode Test Date Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Temperature Pol Hor 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1673.2	35.28		-5.04	30.24		74.00	54.00	-23.76	Peak
2509.8									
3346.4									
4183.0									
5019.6									
5856.2									
6692.8									
7529.4									
8366.0									

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental fre-
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within and phisotection instructions, if any. The Company's sole responsibility is to its Client and this document does not export at the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not export at parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 91 of 107

Radiated Spurious Emission Measurement Result (above 1GHz)

GSM 850 CH High Operation Mode Test Date Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Temperature Pol Ver 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	$\mathbf{A}\mathbf{V}$	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1697.6	35.04		-4.96	30.08		74.00	54.00	-23.92	Peak
2546.4									
3395.2									
4244.0									
5092.8									
5941.6									
6790.4									
7639.2									
8488.0									

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within and phisotection instructions, if any. The Company's sole responsibility is to its Client and this document does not export at the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not export at parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 92 of 107

Radiated Spurious Emission Measurement Result (above 1GHz)

GSM 850 CH High Operation Mode Test Date Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Temperature Pol Hor 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant/CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1697.6	35.41		-4.96	30.45		74.00	54.00	-23.55	Peak
2546.4									
3395.2									
4244.0									
5092.8									
5941.6									
6790.4									
7639.2									
8488.0									

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within and pulsations assess defined interest. All youter or into accoment a autoration contained interest in electric property is mining, at the limits of Client's instructions, if any. The Company's society is the limits of Client's instructions, if any. The Company's society is and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/50053 Issue Date: Nov. 23, 2010

Page: 93 of 107

Radiated Spurious Emission Measurement Result (below 1GHz)

PCS 1900 CH Low Operation Mode Test Date Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Temperature Pol Ver./Hor 25 °C

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Ant./CL/	Actual FS	Limit3m	Safe Margin
MHz)	H/V	(PK/QP)	(dBuV) A	Amp. CF(dB) (dBuV/m)	(dBuV/m)	(dB)
30.00	V	Peak	42.60	-14.97	27.63	40.00	-12.37
101.78	V	Peak	42.89	-16.87	26.02	43.50	-17.48
153.19	V	Peak	33.59	-13.00	20.59	43.50	-22.91
110.24	V	Peak	31.59	-9.64	21.95	46.00	-24.05
594.54	V	Peak	33.68	-6.18	27.50	46.00	-18.50
334.13	V	Peak	33.16	-2.28	30.88	46.00	-15.12
75.59	Н	Peak	43.19	-17.13	26.06	40.00	-13.94
208.48	Н	Peak	37.98	-15.32	22.66	43.50	-20.84
295.78	H	Peak	34.69	-13.17	21.52	46.00	-24.48
390.84	H	Peak	35.63	-10.31	25.32	46.00	-20.68
119.94	H	Peak	34.83	-9.39	25.44	46.00	-20.56
549.83	Н	Peak	35.77	-4.95	30.82	46.00	-15.18
	MHz) 30.00 101.78 153.19 410.24 594.54 334.13 75.59 208.48 295.78 390.84 419.94	MHz) H/V 30.00 V 101.78 V 153.19 V 410.24 V 594.54 V 334.13 V 75.59 H 208.48 H 295.78 H 390.84 H 419.94 H	Freq. Ant.Pol. Mode MHz) H/V (PK/QP) 30.00 V Peak 101.78 V Peak 153.19 V Peak 410.24 V Peak 594.54 V Peak 334.13 V Peak 208.48 H Peak 295.78 H Peak 390.84 H Peak 419.94 H Peak	Mode Mode Reading MHz H/V (PK/QP) (dBuV) Ant.Pol. 30.00 V Peak 42.60 42.60 101.78 V Peak 42.89 42.89 153.19 V Peak 33.59 31.59 410.24 V Peak 33.68 33.68 334.13 V Peak 33.16 75.59 H Peak 43.19 208.48 H Peak 37.98 295.78 H Peak 34.69 390.84 H Peak 35.63 419.94 H Peak 34.83	Mode Reading Ant./CL/ MHz) H/V (PK/QP) (dBuV) Amp. CF(dB 30.00 V Peak 42.60 -14.97 101.78 V Peak 42.89 -16.87 153.19 V Peak 33.59 -13.00 410.24 V Peak 31.59 -9.64 594.54 V Peak 33.68 -6.18 334.13 V Peak 33.16 -2.28 75.59 H Peak 43.19 -17.13 208.48 H Peak 37.98 -15.32 295.78 H Peak 34.69 -13.17 390.84 H Peak 35.63 -10.31 419.94 H Peak 34.83 -9.39	MHz) H/V (PK/QP) (dBuV) Amp. CF(dB) (dBuV/m) 30.00 V Peak 42.60 -14.97 27.63 101.78 V Peak 42.89 -16.87 26.02 153.19 V Peak 33.59 -13.00 20.59 410.24 V Peak 31.59 -9.64 21.95 594.54 V Peak 33.68 -6.18 27.50 334.13 V Peak 33.16 -2.28 30.88 75.59 H Peak 43.19 -17.13 26.06 208.48 H Peak 37.98 -15.32 22.66 295.78 H Peak 34.69 -13.17 21.52 390.84 H Peak 35.63 -10.31 25.32 419.94 H Peak 34.83 -9.39 25.44	Freq. Ant.Pol. Mode Mode Mode Reading MHz) Ant./CL/Actual FS Limit3m MHz) H/V (PK/QP) (dBuV) Amp. CF(dB) (dBuV/m) (dBuV/m) 30.00 V Peak 42.60 -14.97 27.63 40.00 101.78 V Peak 42.89 -16.87 26.02 43.50 153.19 V Peak 33.59 -13.00 20.59 43.50 410.24 V Peak 31.59 -9.64 21.95 46.00 594.54 V Peak 33.68 -6.18 27.50 46.00 334.13 V Peak 33.16 -2.28 30.88 46.00 75.59 H Peak 43.19 -17.13 26.06 40.00 208.48 H Peak 37.98 -15.32 22.66 43.50 390.84 H Peak 34.69 -13.17 21.52 46.00 419.94 H Peak 34.83 <td< td=""></td<>

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only.

脉非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification is the content of the law. cation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 94 of 107

Radiated Spurious Emission Measurement Result (below 1GHz)

PCS 1900 CH Mid Operation Mode **Test Date** Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Temperature Pol Ver./Hor 25 °C

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Ant./CL/	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV) A	Amp. CF(dB	3) (dBuV/m)	(dBuV/m)	(dB)
101.78	V	Peak	44.36	-16.87	27.49	43.50	-16.01
153.19	V	Peak	33.71	-13.00	20.71	43.50	-22.79
329.73	V	Peak	33.06	-12.24	20.82	46.00	-25.18
417.03	V	Peak	32.75	-9.46	23.29	46.00	-22.71
615.88	V	Peak	33.18	-5.70	27.48	46.00	-18.52
875.84	V	Peak	33.49	-1.51	31.98	46.00	-14.02
75.59	Н	Peak	43.81	-17.13	26.68	40.00	-13.32
90.14	Н	Peak	42.00	-17.62	24.38	43.50	-19.12
159.98	Н	Peak	32.88	-13.40	19.48	43.50	-24.02
240.49	Н	Peak	35.24	-14.11	21.13	46.00	-24.87
390.84	Н	Peak	36.06	-10.31	25.75	46.00	-20.25
647.89	Н	Peak	34.12	-4.99	29.13	46.00	-16.87

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 95 of 107

Radiated Spurious Emission Measurement Result (below 1GHz)

PCS 1900 CH High Operation Mode **Test Date** Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Temperature Pol Ver./Hor 25 °C

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Ant./CL/	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV) A	Amp. CF(dB) (dBuV/m)	(dBuV/m)	(dB)
101.78	V	Peak	43.95	-16.87	27.08	43.50	-16.42
153.19	V	Peak	33.78	-13.00	20.78	43.50	-22.72
361.74	V	Peak	31.53	-11.33	20.20	46.00	-25.80
455.83	V	Peak	32.31	-8.61	23.70	46.00	-22.30
643.04	V	Peak	32.97	-5.14	27.83	46.00	-18.17
872.93	V	Peak	32.87	-1.56	31.31	46.00	-14.69
75.59	Н	Peak	45.73	-17.13	28.60	40.00	-11.40
94.99	H	Peak	40.93	-17.26	23.67	43.50	-19.83
211.39	H	Peak	35.96	-15.22	20.74	43.50	-22.76
390.84	H	Peak	35.39	-10.31	25.08	46.00	-20.92
453.89	H	Peak	33.62	-8.60	25.02	46.00	-20.98
649.83	H	Peak	34.06	-4.95	29.11	46.00	-16.89

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only.

脉非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification is the content of the law. cation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 96 of 107

Radiated Spurious Emission Measurement Result (above 1GHz)

PCS 1900 CH Low Operation Mode Test Date Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Temperature Pol Ver 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	i
3700.4	35.30		6.80	42.10		74.00	54.00	-11.90	Peak
5550.6									
7400.8									
9251.0									
11101.2									
12951.4									
14801.6									
16651.8									
18502.0									

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 97 of 107

Radiated Spurious Emission Measurement Result (above 1GHz)

PCS 1900 CH Low Operation Mode Test Date Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Temperature Pol Hor 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
3700.4	34.98		2.66	37.64		74.00	54.00	-16.36	Peak
5550.6									
7400.8									
9251.0									
11101.2									
12951.4									
14801.6									
16651.8									
18502.0									

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental fre-
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only.

脉非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification is the content of the law. cation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 98 of 107

Radiated Spurious Emission Measurement Result (above 1GHz)

PCS 1900 CH Mid Operation Mode Test Date Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Pol Temperature Ver 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	i
3760.0	35.14		2.88	38.02		74.00	54.00	-15.98	Peak
5640.0									
7520.0									
9400.0									
11280.0									
13160.0									
15040.0									
16920.0									
18800.0									

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW=1MHz, VBW=1MHz, Sweep time=200
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within and pulsations assess defined interest. All youter or into accoment a autoration contained interest in electric property is mining, at the limits of Client's instructions, if any. The Company's society is the limits of Client's instructions, if any. The Company's society is and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 99 of 107

Radiated Spurious Emission Measurement Result (above 1GHz)

PCS 1900 CH Mid Operation Mode Test Date Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Temperature Pol Hor 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
3760.0	34.17		2.88	37.05		74.00	54.00	-16.95	Peak
5640.0									
7520.0									
9400.0									
11280.0									
13160.0									
15040.0									
16920.0									
18800.0									

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within and plasticular issues defined interest. Any folder of mis document is advised und information contained network networks as the company's sold in the limits of Client's instructions, if any. The Company's sold responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 100 of 107

Radiated Spurious Emission Measurement Result (above 1GHz)

PCS 1900 CH High Operation Mode Test Date Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Pol Temperature Ver 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	ıal FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	-
3819.6	34.51		3.09	37.60		74.00	54.00	-16.40	Peak
5729.4									
7639.2									
9549.0									
11458.8									
13368.6									
15278.4									
17188.2									
19098.0									

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within and pulsations assess defined interest. All youter or into accoment a autoration contained interest in electric property is mining, at the limits of Client's instructions, if any. The Company's society is the limits of Client's instructions, if any. The Company's society is and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 101 of 107

Radiated Spurious Emission Measurement Result (above 1GHz)

PCS 1900 CH High Operation Mode Test Date Nov. 28, 2009

Fundamental Frequency N/A Test By Jazz Temperature Pol Hor 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}	
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
3819.6	33.70		3.09	36.79		74.00	54.00	-17.21
5729.4								
7639.2								
9549.0								
11458.8								
13368.6								
15278.4								
17188.2								
19098.0								

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental fre-
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-13GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200
- (5) Spectrum AV Setting: 1GHz-13GHz, RBW=1MHz, VBW=10Hz, Sweep time=200

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only.

脉非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification is the content of the law. cation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 102 of 107

Radiated Spurious Emission Measurement Result (below 1GHz) GPS

GPS Operation Mode Test Date Dec. 01, 2009

Fundamental Frequency N/A Test By Jazz Temperature Pol Ver./Hor 25 °C

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Ant./CL/	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV) A	Amp. CF(dB) (dBuV/m)	(dBuV/m)	(dB)
71.23	V	Peak	48.13	-16.87	31.26	40.00	-8.74
102.75	V	Peak	44.12	-13.00	31.12	43.50	-12.38
197.33	V	Peak	44.80	-11.33	33.47	43.50	-10.03
325.85	V	Peak	40.23	-8.61	31.62	46.00	-14.38
495.60	V	Peak	36.89	-5.14	31.75	46.00	-14.25
650.80	V	Peak	33.49	-1.56	31.93	46.00	-14.07
274.93	Н	Peak	40.06	-11.95	28.11	46.00	-17.89
325.85	H	Peak	41.38	-10.65	30.73	46.00	-15.27
352.53	H	Peak	40.61	-10.06	30.55	46.00	-15.45
403.45	H	Peak	38.73	-8.43	30.30	46.00	-15.70
456.80	H	Peak	36.97	-7.04	29.93	46.00	-16.07
495.60	Н	Peak	37.10	-6.93	30.17	46.00	-15.83

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this less report reier only to the sample(s) lessed and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 f (886-2) 2298-0488



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 103 of 107

Radiated Spurious Emission Measurement Result (above 1GHz) GPS

GPS Operation Mode Test Date Dec. 01, 2009

Fundamental Frequency N/A Test By Jazz Temperature Pol Ver / Hor 25 °C

Humidity 65 %

		Peak	\mathbf{AV}		Actu	ıal FS	Peak	\mathbf{AV}		
Freq	. Ant.Pol.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz	z) H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)(d Bu V/m)	(dBuV/m)(dBuV/m)	(dB)	
1350.0	0 V	44.90		-14.83	30.07		74.00	54.00	-23.93	Peak
3236.0	0 V	45.68		-10.40	35.28		74.00	54.00	-18.72	Peak
2150.:	5 Н	44.42		-11.92	32.50		74.00	54.00	-21.50	Peak
2995.:	5 H	45.45		-10.33	35.12		74.00	54.00	-18.88	Peak

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-16GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200
- (5) Spectrum AV Setting: 1GHz- 16GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within and phisolated instructions, if any. The Company's sociented in a construction of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any. The Company's sociented in the limits of Client's instructions, if any the limits of Client's instruction cation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 104 of 107

14. Maximum Permissible Exposure (MPE)

14.1 **Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended to comply with Section Part 22, subpart H and Part 24, subpart E of the FCC CFR 47 Rules. For 47 CFR 1.1310 Radio frequency Radiation Exposure requirement.

14.2 Special Accessories

Not available for this EUT intended for grant.

14.3 Equipment Modifications

Not available for this EUT intended for grant.

14.4 Limitation

Frequency Range	Electric Field	Magnetic Field	Power Density	Averaging Time					
(MHz)	Strength (V/m)	Strength (A/m)	(mW/cm^2)	(minute)					
Limits for General Population/Uncontrolled Exposure									
0.3-1.34	614	1.63	*(100)	30					
1.34-30	824/f	2.19/f	$*(180/f^2)$	30					
30-300	27.5	0.073	0.2	30					
300-1500	/	/	F/1500	30					
1500-15000	/	/	1.0	30					

F = frequency in MHz

* = Plane-wave equipment power density

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the results shown in this less report relief only to the sample(s) tested and south sample(s) are retained for 90 days only. When the state of 90 days only. obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 105 of 107

14.5 Maximum Permissible Exposure (MPE) Evaluation

In this application we seek approval to the iPA280. Based on the FCC OET Bulletin 65 Supplement C and 47 CFR §2.1091, we have concluded that the Quki Q2687 module will comply with the FCC rules on RF exposure for mobile devices in cellular band and PCS band. The following analysis will demonstrate such compliance. The analysis will be done in two US bands.

Operation in cellular band (824 – 849 MHz)

The ERP of TD-3261G in cellular band is 32.94dBm max at GSM/GPRS mode. The resulted power density at a distance of 20 cm can be deducted as follows:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
GSM 850	824.20	128	Н	V	123.15	36.76	-7.87	3.62	25.26	38.45
				Н	129.53	43.26	-7.87	3.62	31.76	38.45
			E1	V	126.96	40.57	-7.87	3.62	29.07	38.45
				Н	122.52	36.25	-7.87	3.62	24.75	38.45
			E2	V 119.73 33.34	-7.87	3.62	21.84	38.45		
			E2	Н	130.71	44.44	-7.87	3.62	32.94	38.45
	836.60	190		V	122.35	36.10	-7.88	3.65	24.57	38.45
			Н	Н	129.03	42.80	-7.88	3.65	24.57 31.27 28.66	38.45
			E1 -	V	126.44	40.19	-7.88	3.65	28.66	38.45
				Н	122.65	36.42	-7.88	3.65	24.89	38.45
			E2	V	119.68	33.43	-7.88	3.65	21.90	38.45
				Н	130.33	44.10	-7.88	3.65	32.57	38.45
	848.80	251	Н	V	120.67	34.55	-7.88	3.68	22.99	38.45
			п	Н	127.18	40.99	-7.88	3.68	29.43	38.45
			E1	V	125.39	39.27	-7.88	3.68	27.71	38.45
				Н	121.88	35.69	-7.88	3.68	24.13	38.45
			E2	V	129.47	43.35	-7.88	3.68	31.79	38.45
			E2	Н	119.01	32.82	-7.88	3.68	21.26	38.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this less report reier only to the sample(s) lessed and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 www.tw.sgs.com



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 106 of 107

ERP = 32.94 dBm = 1967.88629 mWPower Density = ERP*Duty Cycle/ $(4 \pi R^2)$ $=1967.89*0.25/(4*\pi*20^2)=0.098 \text{ mW/cm}^2$

where Duty Cycle is 0.25 for GPRS operation (class 10) and R is 20 cm.

The MPE limit for General Population/Uncontrolled Exposure is shown in the FCC OET

Bulletin 65 Supplement C and can be calculated as follows:

MPE limit = $824/1500 = 0.55 \text{ mW/cm}^2$

As we can see the resulted power density is below the MPE limit, therefore iPA280. in cellular band is compliant with the FCC rules on RF exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this user report refer only to the sample(s) lested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 www.tw.sgs.com

台灣檢驗科技股份有限公司



Report No.: EH/2010/50053 **Issue Date: Nov. 23, 2010**

Page: 107 of 107

Operation in PCS band (1850 – 1910 MHz)

The EIRP of TD-3261G in PCS band is 29.30 dBm. max. The resulted EIRP can be expressed as follows:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
PCS 1900	1850.20	512	Н	V	120.88	16.49	9.90	5.56	20.83	33.00
				Н	125.34	21.16	9.90	5.56	25.50	33.00
			E1	V	125.91	21.52	9.90	5.56	25.86	33.00
				Н	127.01	22.83	9.90	5.56	27.17	33.00
			E2	V	126.45	22.06	9.90	5.56	26.40	33.00
				Н	126.25	22.07	9.90	5.84	26.13	33.00
	1880.00	661	Н	V	119.71	15.35	9.99	5.61	19.73	33.00
			п	Н	124.99	20.85	9.99	5.61	25.22	33.00
			E1	V	125.66	21.30	9.99	5.61	25.68	33.00
			EI	Н	129.07	24.93	9.99	5.61	29.30	33.00
			E2	V	125.34	20.98	9.99	5.61	25.36	33.00
				Н	126.02	21.88	9.99	5.61	26.25	33.00
	1909.80	810	Н	V	117.04	12.71	10.08	5.66	17.13	33.00
				Н	123.29	19.18	10.08	5.66	23.60	33.00
			E1	V	125.01	20.68	10.08	5.66	25.10	33.00
				Н	126.58	22.47	10.08	5.66	26.89	33.00
			E2	V	126.87	22.54	10.08	5.66	26.96	33.00
				Н	126.73	22.62	10.08	5.66	27.04	33.00

EIRP = 29.30 dBm = 851.138038 mWPower Density = EIRP*Duty Cycle/ $(4 \pi R^2)$

 $=851.138*0.25/(4*\pi*20^2) = 0.0113 \text{ mW/cm}^2$

where Duty Cycle is 0.25 for GPRS operation (class 10) and R is 20 cm.

The MPE limit for General Population/Uncontrolled Exposure is shown in the FCC OET Bulletin 65 Supplement C and can be calculated as follows:

MPE limit = 1.0 mW/cm^2

As we can see the resulted power density is below the MPE limit, therefore iPA280. in PCS band is compliant with the FCC rules on RF exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wise stated the results shown in this less report relief only to the sample(s) tested and south sample(s) are retained for 90 days only. When the state of 90 days only. obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 www.tw.sgs.com

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488