APPLICATION FOR CERTIFICATION On Behalf of

Activision Publishing, Inc.

Wireless Guitar Controller for PlayStation 3

Model Number: 96142805

FCC ID: XLU96142805

Prepared for: Activision Publishing, Inc.

3100 Ocean Park Blvd., Santa Monica, CA 90405, U.S.A.

Prepared By: Audix Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Rd., 52 Block, Shenzhen Science & Industrial Park, Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F10200

Date of Test : Aug.02~04, 2010

Date of Report : Aug.05, 2010

TABLE OF CONTENTS

<u>De</u>	<u>scripti</u>	on	Page
1.	SUM	MARY OF STANDARDS AND RESULTS	1-1
	1.1.	Description of Standards and Results	
2.	GEN	NERAL INFORMATION	
	2.1.	Description of Device (EUT)	
	2.2.	Test Facility	
	2.3.	Test Uncertainty (95% confidence levels, k=2)	
3.	POV	VER LINE CONDUCTED EMISSION TEST	3-1
4.	RAI	4-1	
	4.1.	Test Equipment	
	4.2.	Block Diagram of Test Setup	
	4.3.	Radiated Emission Limit Standard: FCC 15.209 and 15.249	
	4.4.	EUT Configuration on Test	4-3
	4.5.	Operating Condition of EUT	4-3
	4.6.	Test Procedure	
	4.7.	Radiated Emission Test Results	4-3
5.	BAN	ND EDGE COMPLIANCE TEST	5-1
	5.1.	Test Equipment	5-1
5.	5.2.	Limit	5-1
	5.3.	Test Produce	5-1
	5.4.	Test Results	5-1
6.	BAN	NDWIDTH TEST	6-1
	6.1.	Test Equipment	6-1
	6.2.	Limit	6-1
	6.3.	Test Results	6-1
7.	DEV	VIATION TO TEST SPECIFICATIONS	7-1
8.	PHO	OTOGRAPH OF TEST	8-1
-	8.1.	Photos of Radiated Emission Test (In Anechoic Chamber)	
9.	PHO	OTOGRAPH OF EUT	9-1

TEST REPORT CERTIFICATION

Applicant : Activision Publishing, Inc.

Manufacturer : Berway Technology Ltd.

EUT Description : Wireless Guitar Controller for PlayStation 3

MODEL NO. : 96142805

FCC ID : XLU96142805

POWER SUPPLY : DC 3V TEST VOLTAGE : DC 3V

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart C 2008

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits for radiated and conducted emissions.

The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of tests. Also, this report shows that EUT is technically compliant with FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

Prepared by:

Annie Wu / Supervisor

Reviewer:

Approved & Authorized Signer:

Aug.02~04, 2010

Annie Wu / Supervisor

Annie Wu / Supervisor

Annie Wu / Supervisor

Andix Technology (Shenzhen) Co., Ltd.

EMC 本門報告專用章

Stamp only for EMC Dept. Report

Signature:

Ken Lu / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION								
Description of Test Item	Standard	Results						
Power Line Conducted Emission Test	FCC Part 15C: 15.207 ANSI C63.10-2009	N/A						
Radiated Emission Test	FCC Part 15C: 15.209 FCC Part 15C: 15.249 ANSI C63.10-2009	PASS						
Band Edge Compliance Test	FCC Part 15: 15.249 ANSI C63.10-2009	PASS						
20dB Bandwidth Test	FCC Part 15: 15.215 ANSI C63.10-2009	PASS						
N/A is an abbreviation for Not Applicable.								

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product name : Wireless Guitar Controller for PlayStation 3

Model Number : 96142805

FCC ID : XLU96142805

Operation frequency: 2403MHz~2475MHz

Modulation : GFSK

Power Supply : DC 3V

(Note: Batteries were full charged for all the test.)

Applicant : Activision Publishing, Inc.

3100 Ocean Park Blvd., Santa Monica, CA 90405, U.S.A.

Manufacturer : Berway Technology Ltd.

Unit 1301-03, No.88, Kwai Cheong Road, Kwai Chung,

N.T. Hong Kong

Date of Test : Aug.02~04, 2010

Date of Receipt : Jul.01, 2010

Sample Type : Prototype production

2.2. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Rd., 52 Block, Shenzhen

Science & Industrial Park, Nantou, Shenzhen, Guangdong, China

3m Anechoic Chamber : Mar.31, 2009 File on Federal

Communication Commission Registration Number: 90454

3m & 10m Anechoic Chamber : Dec. 30, 2009 File on Federal

Communication Commission Registration Number: 794232

EMC Lab. : Accredited by DATech, German

Registration Number: DAT-P-091/99-01

Feb. 02, 2009

Accredited by NVLAP, USA NVLAP Code: 200372-0

Apr. 01, 2010

2.3. Test Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty				
Uncertainty for Radiation Emission test	3.82 dB (Polarize: V)				
in 3m chamber	4.32 dB (Polarize: H)				
	2.70 dB				
Uncertainty for Radiated Spurious	(Bilog antenna 30M~1000MHz)				
Emission test in RF chamber	2.27 dB				
	(Horn antenna 1000M~25000MHz)				
Uncertainty for Temperature and humidity	2%				
test	1°C				
Uncertainty for Bandwidth test	$1x10^{-9}$				
Uncertainty for DC power test	0.038 %				
Uncertainty for test site temperature and	0.6°C				
humidity	3%				

3. POWER LINE CONDUCTED EMISSION TEST

According to Paragraph (c) of FCC Part 15 section 15.207, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

4. RADIATED EMISSION TEST

4.1. Test Equipment

Frequency rang: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	3#Chamber	AUDIX	N/A	N/A	Dec.05,09	1 Year
2	EMI Spectrum	Agilent	E4407B	MY41440292	May.08, 10	1 Year
3	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	May.08, 10	1 Year
4	Amplifier	HP	8447D	2648A04738	May.08, 10	1 Year
5	Bilog Antenna	Schaffner	CBL6111C	2598	Dec.14, 09	1 Year
6	RF Cable	MIYAZAKI	8D-FB	3# Chamber No.1	May.08, 10	1 Year
7	Coaxial Switch	Anritsu	MP59B	M73989	May.08, 10	1 Year

Frequency rang: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 10	1 Year
2	Horn Antenna	EMCO	3115	9607-4877	Nov.25, 09	1.5 Year
3	Horn Antenna	EMCO	3116	00060089	Nov.25, 09	1.5 Year
4	Amplifier	Agilent	8449B	3008A00863	May.08, 10	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX102	28620/2	May.08, 10	1 Year
6	RF Cable	Hubersuhner	SUCOFLEX102	29091/2	May.08, 10	1 Year

4.2. Block Diagram of Test Setup


4.2.1. Block Diagram of connection between EUT and simulators

EUT

(EUT: Wireless Guitar Controller for PlayStation 3)

4.2.2. Anechoic Chamber Setup Diagram

ANTENNA TOWER

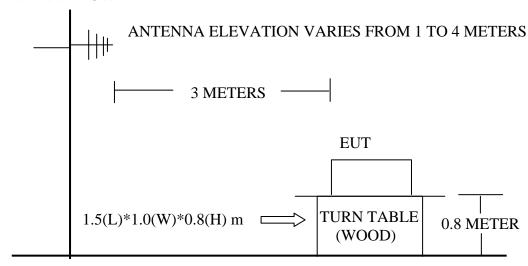

GROUND PLANE

4.3. Radiated Emission Limit Standard: FCC 15.209 and 15.249

FREQUENCY	DISTANCE	FIELD STREN	NGTHS LIMIT	
MHz	Meters	$\mu V/m$	$dB(\mu V)/m$	
30 ~ 88	3	100	40.0	
88 ~ 216	3	150	43.5	
216 ~ 960	3	200	46.0	
960 ~ 1000	3	500	54.0	
Above 1000MHz	3	74.0 dB(μV	/)/m (Peak)	
		54.0 dB(μV	/)/m (Average)	
Field Strength of	3	94.0 dB(μV)/m (Average)		
Fundamental emission for		114.0 dB(μ	V)/m(Peak)	
2.4GHz-2.4835GHz				
Field Strength of	3	74.0 dB(μV	/)/m (Peak)	
Harmonics		54.0 dB(μV	/)/m (Average)	

Remark: (1) Emission level $dB\mu V = 20 \log Emission$ level $\mu V/m$

- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
- (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT as shown in Section 4.2..
- 4.5.2. Turned on the power of all equipment.
- 4.5.3. Let the EUT worked in test mode (Tx Mode) and tested it.

4.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2009 on radiated emission Test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as the test photo indicated.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz

This device is pulse modulated, a duty cycle factor was used to calculate average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.


4.7. Radiated Emission Test Results


PASS

All the emissions from 30MHz to 25GHz were comply with the 15.209 and 15.249 Limit.

Note: The duty cycle factor for calculate average level is 30.13dB, and average limit is 20dB below peak limit, so if peak measured level comply with peak limit, the average level was deemed to comply with average limit.

Duty cycle: 0.2833us *11/100ms*100% = 3.12% Duty cycle factor = 20log (1/duty cycle) = 30.13dB

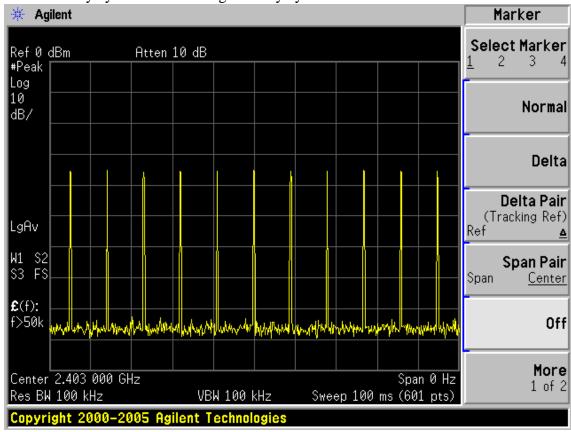

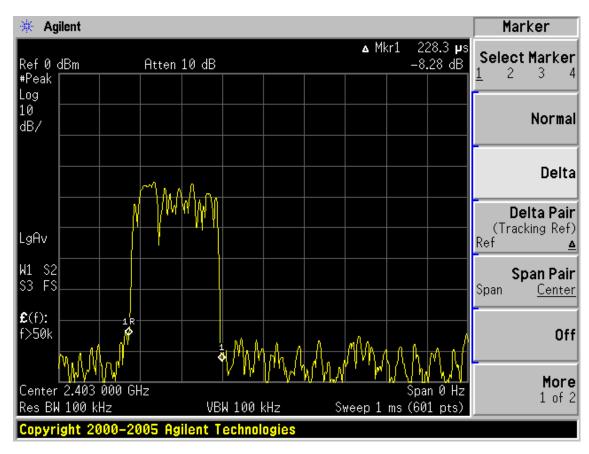


Radiated spurious emissions from 30MHz to 1GHz test result



No.6 Ke Feng Road, Block 52, ShenZhen Science & Industry Park Noutou, ShenZhen, GuangDong, China Tel:+86-755-26639495-7

Fax:+86-755-26632877 Postcode:518057

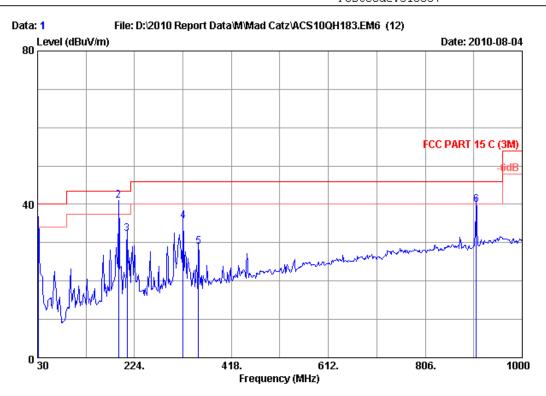

Site no. : 3m Chamber Data no. : 1

Dis. / Ant. : 3m 2010 CBL6111C Ant. pol. : HORIZONTAL

Limit : FCC PART 15 C (3M)

Env. / Ins. : 24*C/56% Engineer : Leo-Li
EUT : Wireless Guitar Controller for PlayStation 3

Power : DC 3V Test mode : Tx M/N : 96142805


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark	
1	31.940	18.88	0.63	14.68	34.19	40.00	5.81	QP	
2	192.000	9.52	1.63	28.80	39.95	43.50	3.55	QP	
3	209.450	10.10	1.81	20.44	32.35	43.50	11.15	QP	
4	321.000	14.22	2.57	18.91	35.70	46.00	10.30	QP	
5	352.040	15.20	2.71	11.10	29.01	46.00	16.99	QP	
6	907.850	23.04	5.23	11.60	39.87	46.00	6.13	QP	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.

The emission levels that are 20dB below the official limit are not reported.



Fax:+86-755-26632877 Postcode:518057

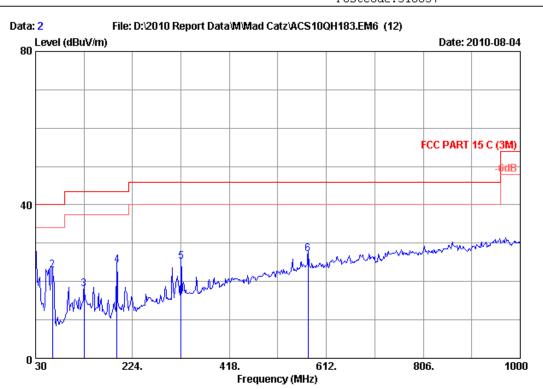

Site no. : 3m Chamber Data no. : 2

Dis. / Ant. : 3m 2010 CBL6111C Ant. pol. : VERTICAL

Limit : FCC PART 15 C (3M)

Env. / Ins. : 24*C/56% Engineer : Leo-Li EUT : Wireless Guitar Controller for PlayStation 3

Power : DC 3V Test mode : Tx M/N : 96142805

No	o. Freq.	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark	
1	30.000	20.00	0.61	7.59	28.20	40.00	11.80	QP	
2	63.950	6.00	0.88	16.02	22.90	40.00	17.10	QP	
3	127.000	12.14	1.13	4.79	18.06	43.50	25.44	QP	
4	192.960	9.58	1.64	13.04	24.26	43.50	19.24	QP	
5	321.000	14.22	2.57	8.49	25.28	46.00	20.72	QP	
6	575.140	19.65	3.98	3.55	27.18	46.00	18.82	QP	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.


2. The emission levels that are 20dB below the official limit are not reported.

Radiated emissions from 1GHz to 18GHz (include fundamental) test result



No.6 Ke Feng Road, Block 52, ShenZhen Science & Industry Park Noutou, ShenZhen, GuangDong, China Tel:+86-755-26639495-7

Fax:+86-755-26632877 Postcode:518057

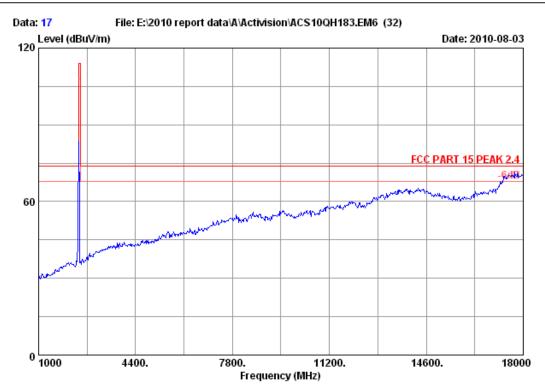


Site no. : RF Chamber Data no. : 17
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL


Limit : FCC PART 15 PEAK 2.4

Env. / Ins. : 23*C/54% Engineer : Paul Tian EUT : Wireless Guitar Controller for PlayStation 3

Power : DC 3V Test mode : Tx 2403MHz M/N : 96142805





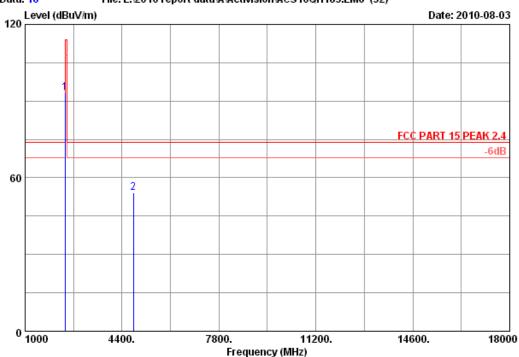

Site no. : RF Chamber Data no. : 18
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL

Limit : FCC PART 15 PEAK 2.4

Env. / Ins. : 23*C/54% Engineer : Paul Tian EUT : Wireless Guitar Controller for PlayStation 3

Power : DC 3V Test mode : Tx 2403MHz M/N : 96142805

	-	Factor	Factor	Reading (dBuV)		Limits	_	Remark	
_	2403.000 4806.000		 	92.94 44.22	93.20 54.04		20.80 19.96	Peak Peak	

- 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- 2. The emission levels that are 20dB below the official limit are not reported.


18000

14600.



0 1000

No.6 Ke Feng Road, Block 52, ShenZhen Science & Industry Park Noutou, ShenZhen, GuangDong, China Tel:+86-755-26639495-7 Fax:+86-755-26632877 Postcode:518057

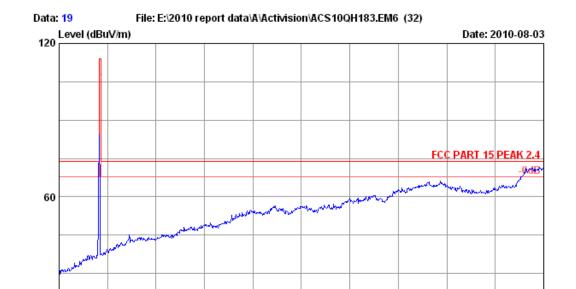

Site no. : RF Chamber Data no. : 19

7800.

Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL

Frequency (MHz)

11200.


Limit : FCC PART 15 PEAK 2.4

Env. / Ins. : 23*C/54% Engineer : Paul Tian
EUT : Wireless Guitar Controller for PlayStation 3

Power : DC 3V
Test mode : Tx 2403MHz
M/N : 96142805

4400.



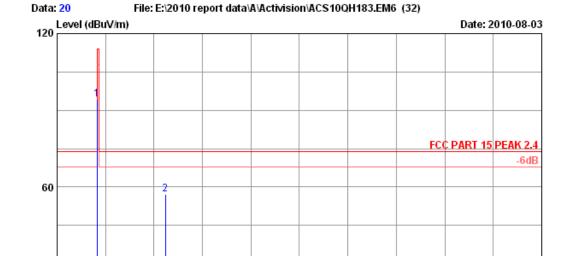

Site no. : RF Chamber Data no. : 20

7800.

Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL

Frequency (MHz)

11200.

14600.

18000

Limit : FCC PART 15 PEAK 2.4

Env. / Ins. : 23*C/54% Engineer : Paul Tian
EUT : Wireless Guitar Controller for PlayStation 3

Power : DC 3V
Test mode : Tx 2403MHz
M/N : 96142805

4400.

		Cable	Amp.		Emissio:	n			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2403.000	29.45	7.43	36.62	94.14	94.40	114.00	19.60	Peak
2	4806.000	34.30	10.62	35.10	47.28	57.10	74.00	16.90	Peak

Remarks:


0 1000


- 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road, Block 52, ShenZhen Science & Industry Park Noutou, ShenZhen, GuangDong, China

Tel:+86-755-26639495-7 Fax:+86-755-26632877 Postcode:518057



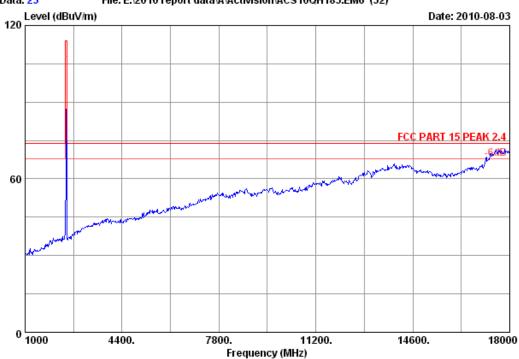


Site no. : RF Chamber Data no. : 23
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL


Limit : FCC PART 15 PEAK 2.4

Env. / Ins. : 23*C/54% Engineer : Paul Tian EUT : Wireless Guitar Controller for PlayStation 3

Power : DC 3V Test mode : Tx 2440MHz M/N : 96142805





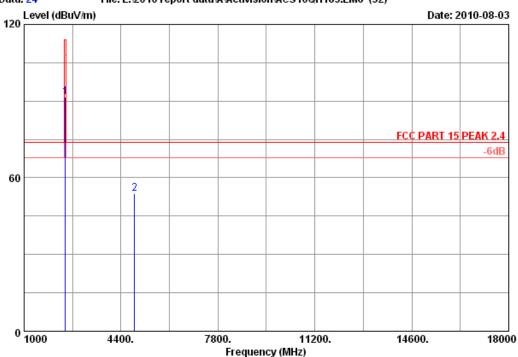

Site no. : RF Chamber Data no. : 24
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL

Limit : FCC PART 15 PEAK 2.4


Env. / Ins. : 23*C/54% Engineer : Paul Tian
EUT : Wireless Guitar Controller for PlayStation 3


Power : DC 3V Test mode : Tx 2440MHz M/N : 96142805

	-	Factor	Factor	Reading (dBuV)		Limits	_	Remark	
_	2440.000 4880.000		 	91.38 43.85	91.74 53.94		22.26 20.06	Peak Peak	

- 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- 2. The emission levels that are 20dB below the official limit are not reported.





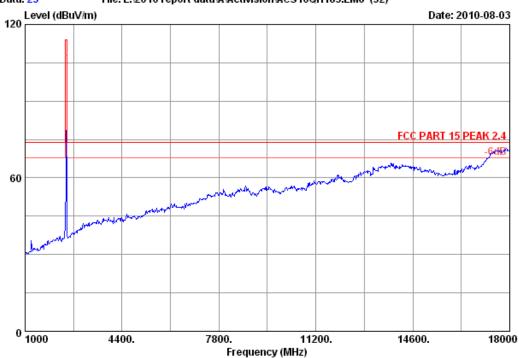

Site no. : RF Chamber Data no. : 25


Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL


Limit : FCC PART 15 PEAK 2.4

Env. / Ins. : 23*C/54% Engineer : Paul Tian : Wireless Guitar Controller for PlayStation 3

Power : DC 3V : Tx 2440MHz Test mode M/N : 96142805





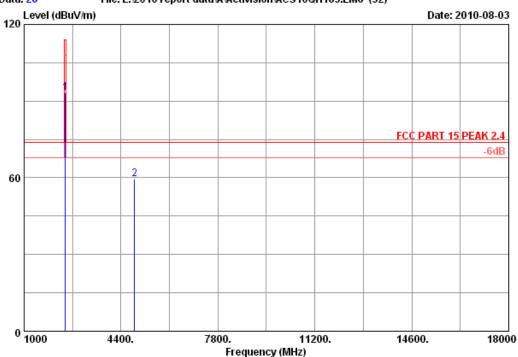

Site no. : RF Chamber Data no. : 26

Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL

Limit : FCC PART 15 PEAK 2.4


Env. / Ins. : 23*C/54% Engineer : Paul Tian
EUT : Wireless Guitar Controller for PlayStation 3

Power : DC 3V Test mode : Tx 2440MHz M/N : 96142805

•	Factor	loss	Reading (dBuV)		Limits	_	Remark	
2440.000 4880.000			 92.86 49.33	93.22 59.42		20.78 14.58	Peak Peak	

- 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- 2. The emission levels that are 20dB below the official limit are not reported.



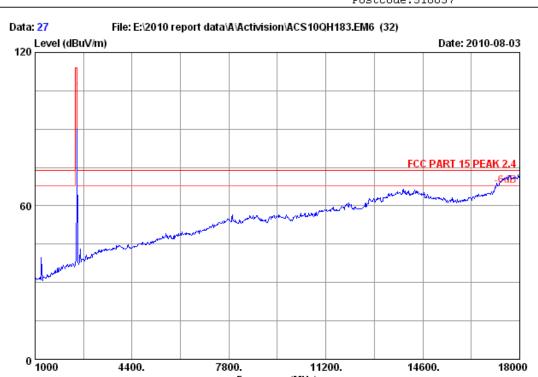

Site no. : RF Chamber Data no. : 27

Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL


Frequency (MHz)


Limit : FCC PART 15 PEAK 2.4

Env. / Ins. : 23*C/54% Engineer : Paul Tian
EUT : Wireless Guitar Controller for PlayStation 3

Power : DC 3V
Test mode : Tx 2475MHz
M/N : 96142805





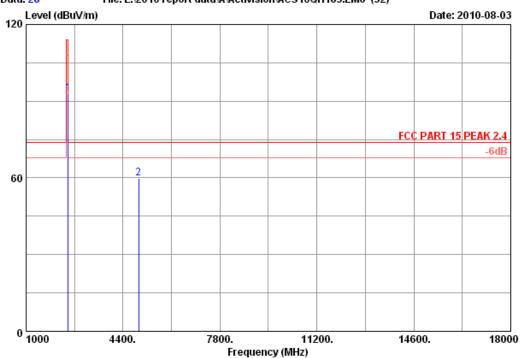

Site no. : RF Chamber Data no. : 28

Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL

Limit : FCC PART 15 PEAK 2.4


Env. / Ins. : 23*C/54% Engineer : Paul Tian
EUT : Wireless Guitar Controller for PlayStation 3

Power : DC 3V Test mode : Tx 2475MHz M/N : 96142805

	•	Factor	Factor	Reading (dBuV)		Limits	_	Remark
_	2475.000 4950.000		 	92.42 49.37	92.85 59.72	114.00 74.00	21.15 14.28	Peak Peak

- 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- 2. The emission levels that are 20dB below the official limit are not reported.



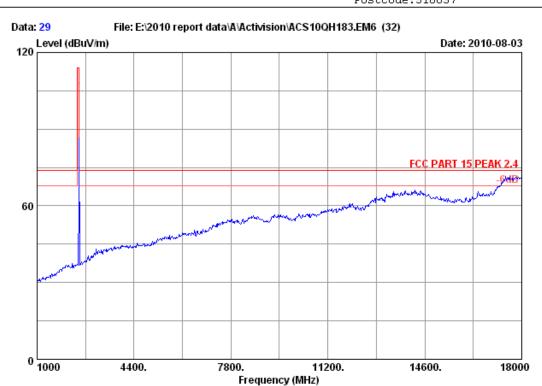


Site no. : RF Chamber Data no. : 29
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL

Limit : FCC PART 15 PEAK 2.4

Power : DC 3V
Test mode : Tx 2475MHz
M/N : 96142805



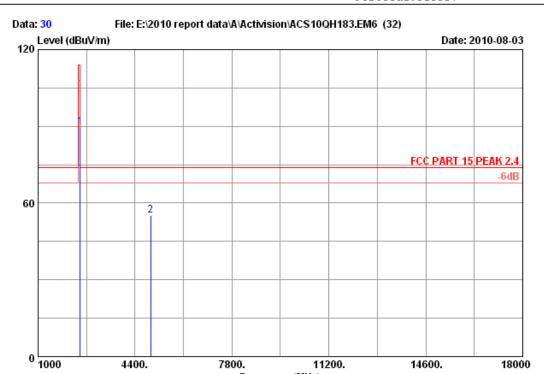

Site no. : RF Chamber Data no. : 30
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL

Frequency (MHz)

Limit : FCC PART 15 PEAK 2.4

Env. / Ins. : 23*C/54% Engineer : Paul Tian EUT : Wireless Guitar Controller for PlayStation 3

Power : DC 3V Test mode : Tx 2475MHz M/N : 96142805

		Ant.	Cable	Amp.		Emissio	n		
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2475.000	29.49	7.54	36.60	89.14	89.57	114.00	24.43	Peak
2	4950.000	34.52	10.78	34.95	44.76	55.11	74.00	18.89	Peak

- 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- 2. The emission levels that are 20dB below the official limit are not reported.

5. BAND EDGE COMPLIANCE TEST

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,10	1 Year
2.	Horn Antenna	EMCO	3115	9607-4877	Nov.25, 09	1.5 Year
3.	Amplifier	Agilent	8449B	3008A02495	May.08, 10	1 Year
4.	RF Cable	Hubersuhner	SUCOFLEX102	28620/2	May.08,10	1 Year
5.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08,10	1 Year
6.	RF Cable	Hubersuhner	SUCOFLEX102	28610/2	May.08,10	1 Year

5.2. Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in section 15.209, which is the lesser attenuation.

5.3. Test Produce

- 1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
- 2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz, PK detector, Sweep=AUTO
 - (b)This device is pulse modulated, a duty cycle factor was used to calculate average level based measured peak level.


5.4. Test Results


Pass (The testing data was attached in the next pages.)

Note: The duty cycle factor for calculate average level is 30.13dB, and average limit is 20dB below peak limit, so if peak measured level comply with peak limit, the average level was deemed to comply with average limit.



Postcode:518057



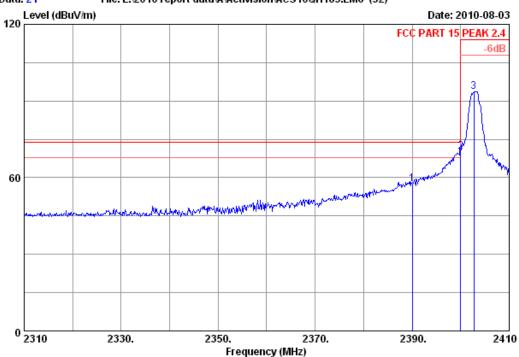

Site no. : RF Chamber Data no. : 21

Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL

Limit : FCC PART 15 PEAK 2.4

Env. / Ins. : 23*C/54% Engineer : Paul Tian EUT : Wireless Guitar Controller for PlayStation 3


Power : DC 3V Test mode : Tx 2403MHz M/N : 96142805


		Ant.	Cable	Amp.		Emissio	n			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2390.000	29.44	7.39	36.62	57.15	57.36	74.00	16.64	Peak	
2	2400.000	29.44	7.43	36.62	70.02	70.27	74.00	3.73	Peak	
3	2402.700	29.45	7.43	36.62	93.44	93.70	114.00	20.30	Peak	

- 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- 2. The emission levels that are 20dB below the official limit are not reported.



Postcode:518057



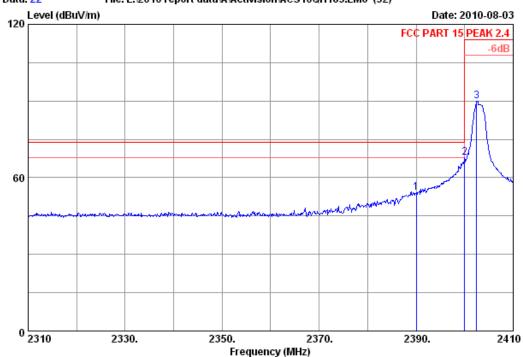

Site no. : RF Chamber Data no. : 22
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL

Limit : FCC PART 15 PEAK 2.4

Env. / Ins. : 23*C/54% Engineer : Paul Tian EUT : Wireless Guitar Controller for PlayStation 3


Power : DC 3V Test mode : Tx 2403MHz M/N : 96142805


		Ant.	Cable	Amp.		Emissio	n			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
										-
1	2390.000	29.44	7.39	36.62	53.80	54.01	74.00	19.99	Peak	
2	2400.000	29.44	7.43	36.62	67.47	67.72	74.00	6.28	Peak	
3	2402.500	29.44	7.43	36.62	89.72	89.97	114.00	24.03	Peak	

- 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- 2. The emission levels that are 20dB below the official limit are not reported.



Postcode:518057



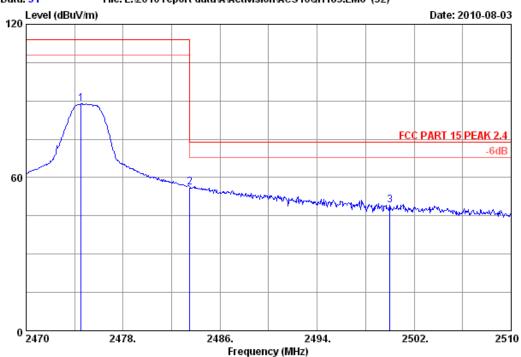

Site no. : RF Chamber Data no. : 31
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL

Limit : FCC PART 15 PEAK 2.4

Env. / Ins. : 23*C/54% Engineer : Paul Tian
EUT : Wireless Guitar Controller for PlayStation 3

Power : DC 3V Test mode : Tx 2475MHz M/N : 96142805


	Ant.	Cable	Amp.		Emissio	n		
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
2474.520	29.49	7.54	36.60	88.36	88.79	114.00	25.21	Peak
2483.500	29.49	7.58	36.60	55.65	56.12	74.00	17.88	Peak
2500.000	29.50	7.62	36.60	48.52	49.04	74.00	24.96	Peak
	(MHz) 2474.520 2483.500	Freq. Factor (MHz) (dB/m) 	Freq. Factor loss (MHz) (dB/m) (dB) 	•	Freq. Factor loss Factor Reading (MHz) (dB/m) (dB) (dB) (dBuV)	Freq. Factor loss Factor Reading Level (MHz) (dB/m) (dB) (dB) (dBuV) (dBuV/m) 	Freq. Factor loss Factor Reading Level Limits (MHz) (dB/m) (dB) (dB) (dBuV) (dBuV/m) (dBuV/m) 2474.520 29.49 7.54 36.60 88.36 88.79 114.00 2483.500 29.49 7.58 36.60 55.65 56.12 74.00	Freq. Factor loss Factor Reading Level Limits Margin (MHz) (dB/m) (dB) (dB) (dBuV) (dBuV/m) (dBuV/m) (dB) 2474.520 29.49 7.54 36.60 88.36 88.79 114.00 25.21 2483.500 29.49 7.58 36.60 55.65 56.12 74.00 17.88

- 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- 2. The emission levels that are 20dB below the official limit are not reported.



Postcode:518057

Data: 32 File: E:\2010 report data\A\activision\ACS10QH183.EM6 (32)

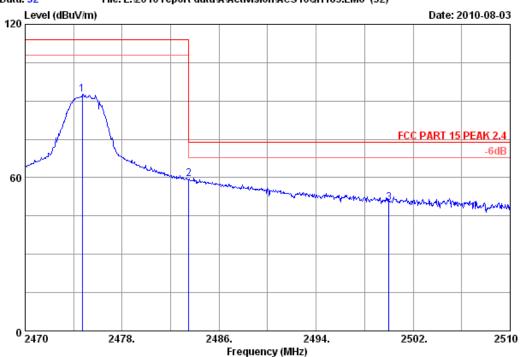

Site no. : RF Chamber Data no. : 32

Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL

Limit : FCC PART 15 PEAK 2.4

Env. / Ins. : 23*C/54% Engineer : Paul Tian EUT : Wireless Guitar Controller for PlayStation 3

Power : DC 3V Test mode : Tx 2475MHz M/N : 96142805

		Ant.	Cable	Amp.		Emissio	n			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2474.720	29.49	7.54	36.60	92.18	92.61	114.00	21.39	Peak	
2	2483.500	29.49	7.58	36.60	58.93	59.40	74.00	14.60	Peak	
3	2500.000	29.50	7.62	36.60	49.68	50.20	74.00	23.80	Peak	

- 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- 2. The emission levels that are 20dB below the official limit are not reported.

6. BANDWIDTH TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,10	1 Year

6.2. Limit


Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


6.3. Test Results

EUT: Wireless Guitar Controller for PlayStation 3					
M/N: 96142805					
Test date:2010-08-02	Pressure:101.2 kpa	Humidity:53 %			
Tested by: Leo-Li	Test site: RF site	Temperature : 24 °C			


Frequency	-20dB bandwidth (KHz)	Limit (KHz)
2403	1890	N/A
2440	1698	N/A
2475	1668	N/A
Conclusion: PASS		


Test Frequency: 2403MHz

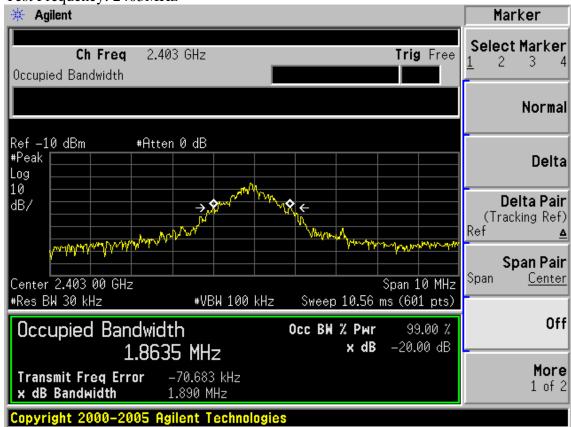







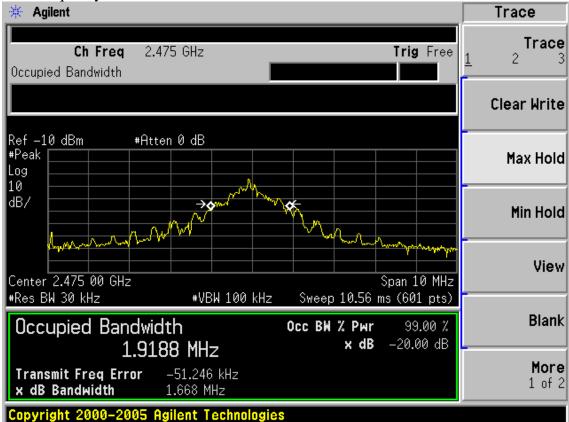

7. DEVIATION TO TEST SPECIFICATIONS

[NONE]