

Report number:	209925-7TRFWL
Apparatus:	TDFE-19
Applicant:	TEKO Telecom S.p.A. Via Meucci, 24/a I-40024 Castel S. Pietro Terme (BO)
FCC ID:	XM2-DFE
Test specification:	
Title 47 – Telecommunication Chapter I – Federal Communication Subchapter A – General Part 24 – Personal Communication Subpart E – Broadband PCS	

Reviewed by:

Signature
P. Barbieri, Wireless/EMC Specialist

2012/06/20

Date

Reviewed by: Granture 2012/06/20

Signature Date

G. Curioni, Wireless/EMC Specialist

Nemko S.p.A. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko S.p.A. accepts no responsibility for damages, if any suffered by any third party as a result of decisions made or actions based on this report.

This report shall not be reproduced except in full without the written approval of the testing laboratory.

Specification: FCC 24 Subpart E

# Table of contents

Section 1. Penart cummary	2
Section 1: Report summary Section 2: Equipment under test	
2.1 Identification of equipment under test (EUT)	
2.2 Accessories and support equipment	
2.3 EUT description	5
2.4 Technical specifications of the EUT	
2.5 EUT setup diagram	6
2.6 Operation of the EUT during testing	6
2.7 Modifications incorporated in the EUT	6
Section 3: Test conditions	
3.1 Deviations from laboratory tests procedures	7
3.2 Test conditions, power source and ambient temperatures	
3.3 Measurement uncertainty	
3.4 Test equipment	
Section 4: Result summary	
4.1 Test results	
Appendix A: Test results	
Clause 24.232 RF Power output	
Clause 2.1047 Modulation characteristics	
Clause 2.1049 Occupied bandwidth	
Clause 24.238(a) Spurious emissions at antenna terminal	
Clause 24.238(a) Field strength of spurious radiation	86
Clause 24.235 Frequency stability	87
Appendix B: Block diagrams of test set-ups	91
···	



Section 1: Report summary

Report number 209925-7TRFWL

Specification: FCC 24 Subpart E

# Section 1: Report summary

This report contains an assessment of apparatus against specifications based upon tests carried out on samples submitted at Nemko Italy SpA.

## Test specification:

FCC Part 24 Subpart E, Broadband PCS

· • • · • · · · · · · · · · · · · · · ·			
Compliance status:	Complies		
Exclusions:	None		
Non-compliances:	None		
Report release history:	Original release		
Test location:	Nemko Italy S.p.A. Via del Carroccio 4, 20046, Biassono, Italy		
Registration number:	481407 (10 m Semi anechoic chamber)		

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.



Section 2: Equipment under test

Report number: 209925-7TRFWL

Specification: FCC 24 Subpart E

# Section 2: Equipment under test

2.1 Identification of equipment under test (EUT)  The following information identifies the EUT under test:			
Type of equipment:	Digital Donor Front End		
Product marketing name:	Teko Telecom S.p.A.		
Model number:	TDFE-19		
Serial number:	120770001		
Nemko sample number:			
FCC ID:	XM2-DFE		
Date of receipt:	2012-06-11		

# 2.2 Accessories and support equipment

The following information identifies accessories used to exercise the EUT during testing:

Only setup See 3.4 test equipment and photo




Via del Carroccio 4, 20046, Biassono, Italy.

Section 2: Equipment under test Report number: 209925-7TRFWL

Specification: FCC 24 Subpart E

### Section 2: Equipment under test, continued

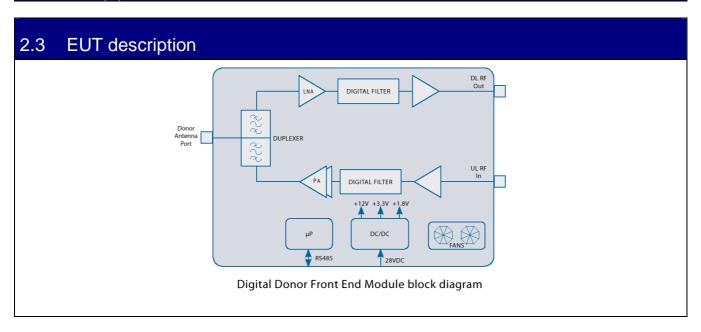

# Technical specifications of the EUT

Operating band:	Down Link 1930-1995 MHz; Up Link 1850-1915 MHz
Operating frequencies:	Wideband
Modulation type:	GSM, EDGE, TDMA, CDMA, WCDMA, LTE (QAM and QPSK)
Occupied bandwidth:	GSM and EDGE: 200 kHz;
	TDMA: 30 kHz
	CDMA: 1,25 MHz,
	WCDMA: 5 MHz
	LTE: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz
Channel spacing:	Standard
Emission designator:	GSM and EDGE: GXW;
_	TDMA: DXW
	CDMA, WCDMA: F9W,
	LTE: D7W
RF Output	Down Link: 10dBm (0,010W)
	Up Link: 26dBm (0,400W)
Gain	Down Link: 63dB
	Up Link: 64dB
Antenna data:	No antenna provided
Antenna type:	No antenna provided
	External Antenna
	(Equipment that has an external 50 Ω RF connector)
Power source	28-30 Vdc stand alone
	100-240 Vac in subrack with external Ac/Dc power supply

Page 5 of 30




Section 2: Equipment under test

Report number: 209925-7TRFWL

Specification: FCC 24 Subpart E

## Section 2: Equipment under test, continued

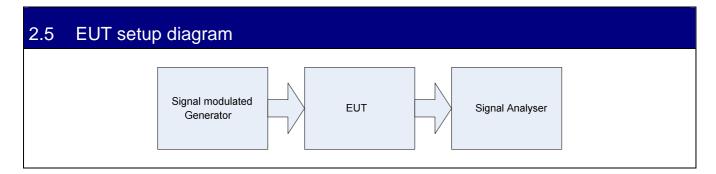

# 2.6 Operation of the EUT during testing

Normal working at max gain with max RF power output (down-link and up-link)

# 2.7 Modifications incorporated in the EUT

None/Comments (Performed by: Client or Nemko)

There were no modifications performed to the EUT during this assessment.



Section 4: Result summary

Report number: 209925-7TRFWL

Specification: FCC 24 Subpart E

# Section 3: Test conditions

# 3.1 Deviations from laboratory tests procedures

No deviations were made from laboratory test procedures.

designed.

3.2 Test conditions, power source and ambient temperatures			
Normal temperature, humidity and air pressure test conditions	Temperature: 15–30 ℃ Relative humidity: 20–75 % Air pressure: 860–1060 hPa		
	When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.		
Power supply range:	The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages ±5 %, for which the equipment was		



Section 4: Result summary

Report number: 209925-7TRFWL

Specification: FCC 24 Subpart E

## Section 3: Test conditions, continued

## 3.3 Measurement uncertainty

Nemko S.p.A. measurement uncertainty has been calculated using the standard CISPR 16-4-2 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainties, statistics and limit modeling – Uncertainty in EMC measurements". All calculations have been performed to provide a confidence level of 95 % and can be found in Nemko S.p.A. document WML1002.

# 3.4 Test equipment

ldentification number	Description	Manufacturer model	s/n	Cal. Due
1a	Vector Signal Generator	Agilent N5182A MXG	MY48180714	May 2013
1b	Vector Signal Generator	Agilent E4438C ESG	MY45094485	Ago 2013
2a	Spectrum Analyzer	Agilent E4440A	US40420470	Jul 2012
2b	Spectrum Analyzer	Agilent E9020A MXA	MY48011812	Jul 2012
3	Network Analyzer	Agilent E5071B	MY42301133	Jan 2013
4	Climatic chamber	Angelantoni Hygros 600	7237 Nov 2014	

Client's property

Identification number	Equipment	Manufacturer	Model	Serial N°	Cal. due
1	Trilog Broadband Antenna	Schwarzbeck	VULB 9163	VULB 9163-286	04/2013
2	Bilog antenna	Schwarzbeck	STLP 9148-123	123	09/2012
3	Double ridge waveguide horn	Spin	DRH40	061106A40	09/2013
4	Broadband preamplifier	Schwarzbeck	BBV 9718	9718-137	05/2013
5	Broadband preamplifier	Miteq	JS44	1648665	05/2013
6	Spectrum Analyzer 9kHz-40GHz	R&S	FSEK	848255/005	09/2012
7	Controller	EMCO	2090	9511-1099	NSC
8	Antenna Tower	EMCO	2071-2	9601-1940	NSC
9	Turning table Controller	EMCO	1061-1.521	9012-1508	NSC
10	Semi-anechoic chamber	Nemko	3m semi-anechoic chamber	70	04/2013
11	Control room	Siemens	3m control room	3	NSC

Property of Nemko Italy



Section 4: Result summary

Report number: 209925-7TRFWL

Specification: FCC 24 Subpart E

# Section 4: Result summary

## 4.1 Test results

The apparatus was assessed against the following specifications:

FCC Part 2 Subpart J, Equipment Authorization Procedures

FCC Part 24 Subpart E, Broadband PCS

The column headed 'Required' indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

N	No : not applicable / not relevant.
Υ	Yes: Mandatory i.e. the apparatus shall conform to these tests.
N/T	Not Tested, mandatory but not assessed. (See report summary)

Part	Test method	Test description	Required	Result
§24.232	2.1046	EIRP limits	Υ	Pass
_	2.1047	Modulation characteristics	Y	Pass
§24.238(b)	2.1049	Occupied bandwidth	Y	Pass
§24.238(a)	2.1051	Spurious emissions at the antenna terminal	Y	Pass
§24.238(a)	2.1053	Field strength of spurious radiation	Y	Pass
§24.235	2.1055	Frequency stability	Y	Pass
§2-11- 04/EAB/RF		Filter Frequency Response	Υ	Pass
04/LAD/IN				

Notes:



Appendix B: Block diagrams

Report Number: 209925-7TRFWL

Specification: FCC 24 Subpart E

# Appendix A: Test results

## Clause 24.232 RF Power output

Base stations are limited to 1640 watts peak E.I.R.P. with an antenna height up to 300 meters HAAT. In no case may the peak output power of a base station transmitter exceed 100 watts.

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.

Test date: 2012-06-11

Test results: Pass

Only conducted measurement at antenna connector was possible, no antenna provided by manufacturer



Appendix B: Block diagrams Report Number: 209925-7TRFWL Specification: FCC 24 Subpart E

## Test data

### **Conducted measurement**

Test data					
Direction	Modulation	Frequency (MHz)	RF output channel Power (dBm)	RF output channel Power (W)	PAR (dB)
Down-link	GSM (200 kHz)	1962.5	10.08	0.010	0.61
Down-link	EDGE (200 kHz)	1962.5	10.10	0.010	4.04
Down-link	TDMA (30 kHz)	1962.5	10.05	0.010	3.30
Down-link	CDMA (1,25MHz)	1962.5	10.15	0.010	8.93
Down-link	WCDMA (5MHz)	1962.5	10.16	0.010	10.50
Down-link	LTE (QAM, 1,4MHz)	1962.5	10.14	0.010	9.76
Down-link	LTE (QPSK, 1,4MHz)	1962.5	10.18	0.010	9.70
Down-link	LTE (QAM, 3MHz)	1962.5	10.36	0.011	10.66
Down-link	LTE (QPSK, 3MHz)	1962.5	10.34	0.011	10.82
Down-link	LTE (QAM, 5MHz)	1962.5	10.13	0.010	10.30
Down-link	LTE (QPSK, 5MHz)	1962.5	10.07	0.010	10.35
Down-link	LTE (QAM, 10MHz)	1962.5	10.14	0.010	11.09
Down-link	LTE (QPSK, 10MHz)	1962.5	10.16	0.010	10.42
Down-link	LTE (QAM, 15MHz)	1962.5	10.14	0.010	10.89
Down-link	LTE (QPSK, 15MHz)	1962.5	10.08	0.010	11.63
Down-link	LTE (QAM, 20MHz)	1962.5	10.05	0.010	10.56
Down-link	LTE (QPSK, 20MHz)	1962.5	10.12	0.010	10.91
Up-link	GSM (200 kHz)	1882.5	26.12	0.407	0.61
Up-link	EDGE (200 kHz)	1882.5	26.12	0.407	3.83
Up-link	TDMA (30 kHz)	1882.5	26.07	0.404	3.34
Up-link	CDMA (1,25MHz)	1882.5	26.04	0.402	8.67
Up-link	WCDMA (5MHz)	1882.5	26.10	0.407	10.36
Up-link	LTE (QAM, 1,4MHz)	1882.5	26.02	0.400	9.54
Up-link	LTE (QPSK, 1,4MHz)	1882.5	26.05	0.403	9.36
Up-link	LTE (QAM, 3MHz)	1882.5	26.11	0.407	10.21
Up-link	LTE (QPSK, 3MHz)	1882.5	26.08	0.406	10.05
Up-link	LTE (QAM, 5MHz)	1882.5	26.05	0.403	10.36
Up-link	LTE (QPSK, 5MHz)	1882.5	26.02	0.400	10.00
Up-link	LTE (QAM, 10MHz)	1882.5	26.05	0.403	10.65
Up-link	LTE (QPSK, 10MHz)	1882.5	26.09	0.406	11.26
Up-link	LTE (QAM, 15MHz)	1882.5	26.02	0.400	10.14
Up-link	LTE (QPSK, 15MHz)	1882.5	26.01	0.400	10.58
Up-link	LTE (QAM, 20MHz)	1882.5	26.04	0.402	11.26
Up-link	LTE (QPSK, 20MHz)	1882.5	26.03	0.402	10.83




Via del Carroccio 4, 20046, Biassono, Italy.

Appendix B: Block diagrams Report Number: 209925-7TRFWL


Specification: FCC 24 Subpart E

#### Test data

#### Mod. GSM

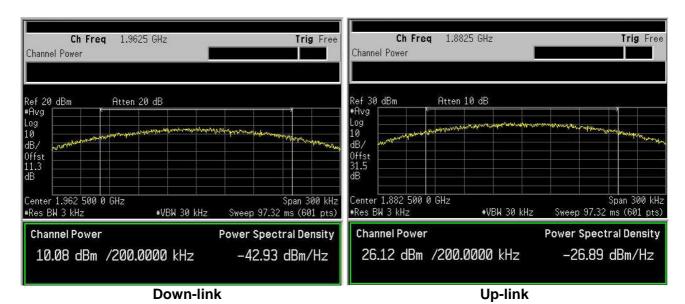

#### Mod. EDGE

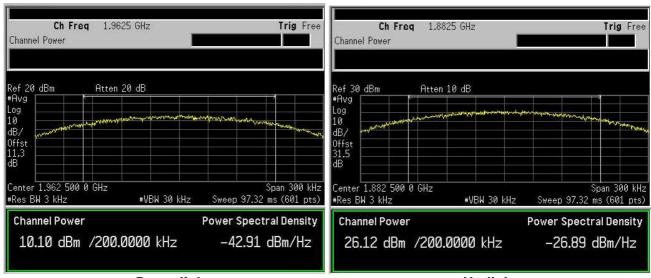


**Up-link** Down-link




Specification: FCC 24 Subpart E

#### Mod. TDMA

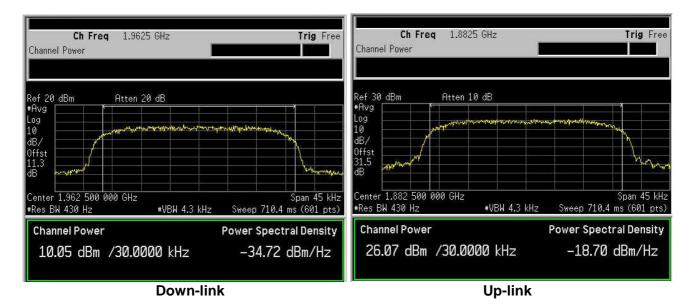


#### Mod. CDMA

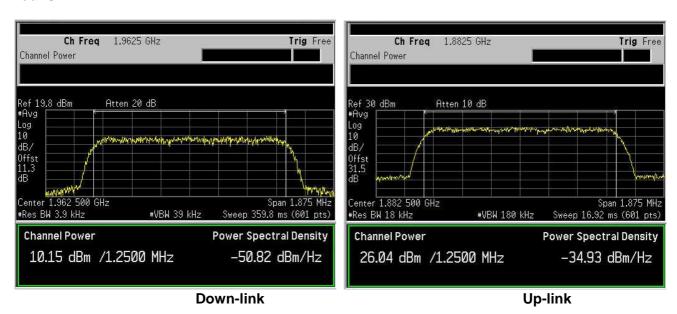



Specification: FCC 24 Subpart E

#### Mod. WCDMA

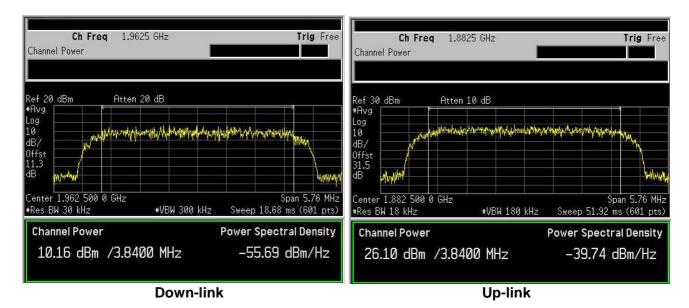


#### Mod. LTE 1,4MHz (QAM)






Specification: FCC 24 Subpart E

#### Mod. LTE 1,4MHz (QPSK)

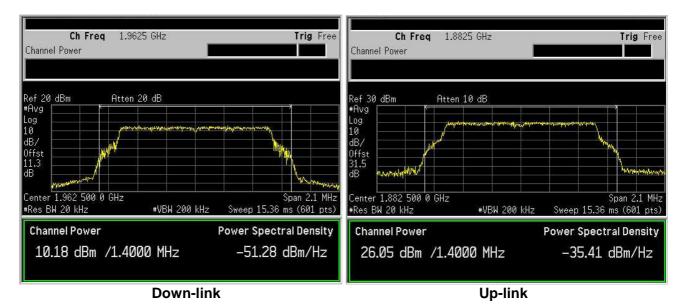


#### Mod. LTE 3MHz (QAM)

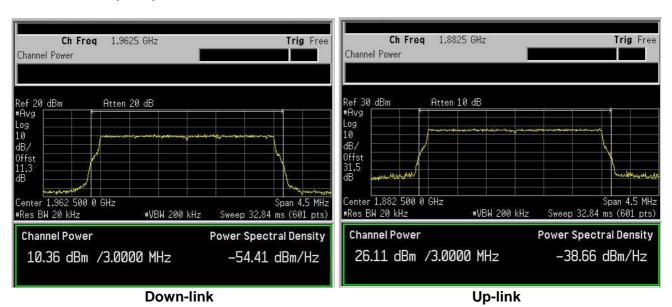




Specification: FCC 24 Subpart E


#### Mod. LTE 3MHz (QPSK)

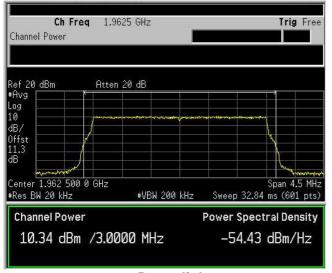

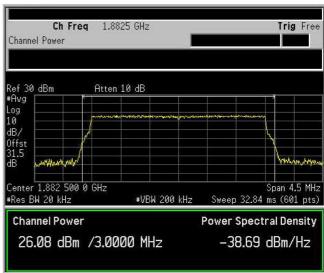

Down-link Up-link


#### Mod. LTE 5MHz (QAM)

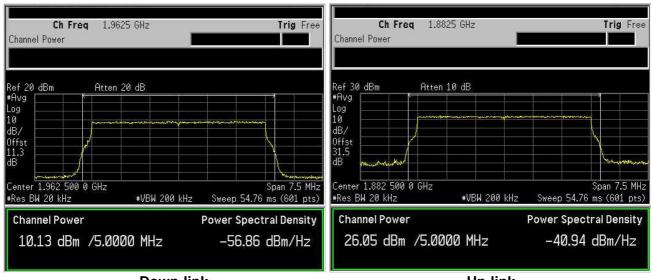




Specification: FCC 24 Subpart E

#### Mod. LTE 5MHz (QPSK)

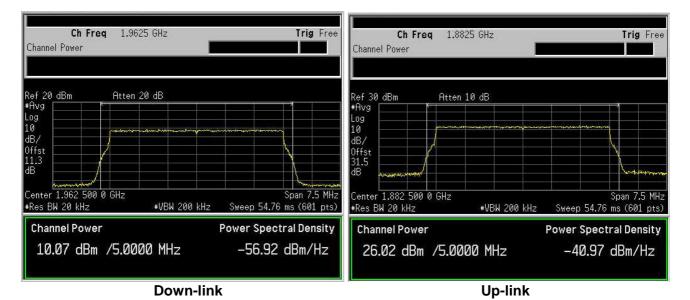

### Mod. LTE 10MHz (QAM)

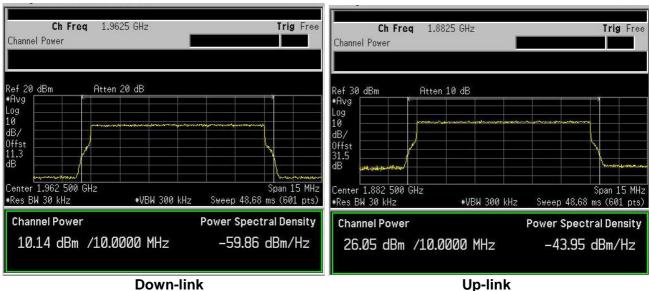



OWII-IIIIK Op-IIIIK



Specification: FCC 24 Subpart E


### Mod. LTE 10MHz (QPSK)

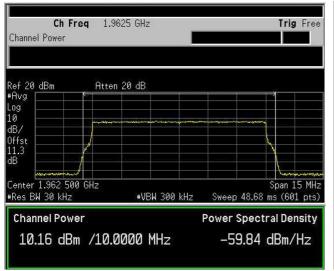

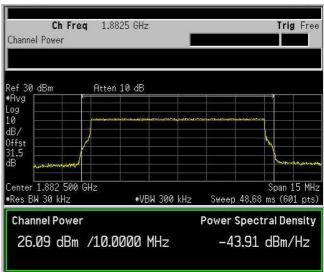

**Up-link Down-link** 


#### Mod. LTE 15MHz (QAM)

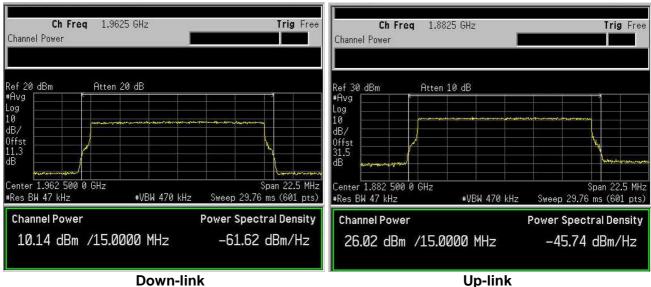




Specification: FCC 24 Subpart E

#### Mod. LTE 15MHz (QPSK)

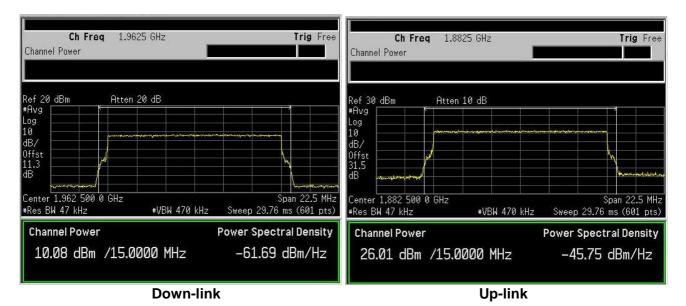


#### Mod. LTE 20MHz (QAM)

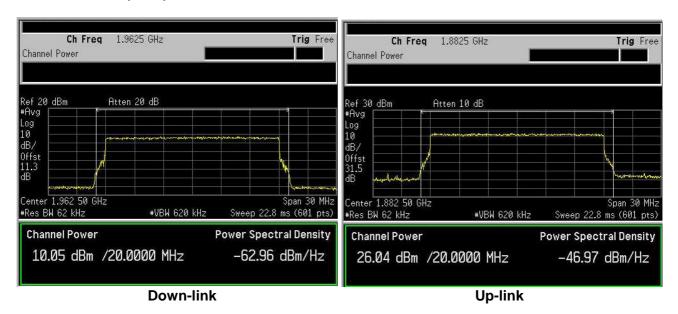



Specification: FCC 24 Subpart E

### Mod. LTE 20MHz (QPSK)

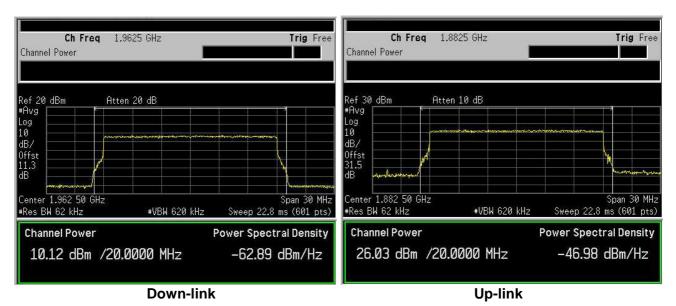



Appendix B: Block diagrams

Report Number: 209925-7TRFWL

Specification: FCC 24 Subpart E

### Clause 2.1047 Modulation characteristics

Unless specified elsewhere in this part, stations will be authorized emissions as provided for in paragraphs (b) through (n) of this section.

#### § 2.1047 Measurements required: Modulation characteristics.

- (a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.
- (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.
- (c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.
- (d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

Test date: 2012-06-11
Test results: Pass

#### Test data

None




Appendix B: Block diagrams


Report Number: 209925-7TRFWL

Specification: FCC 24 Subpart E

#### Mod. GSM

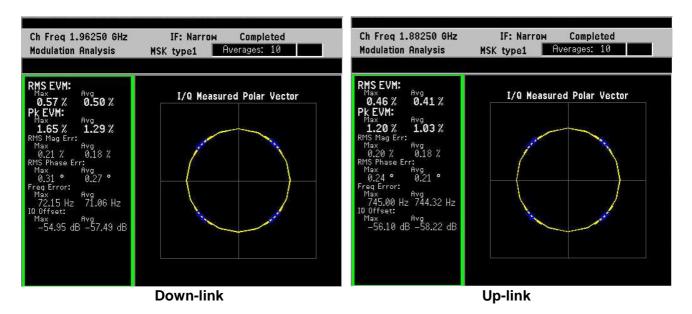


#### Mod. EDGE

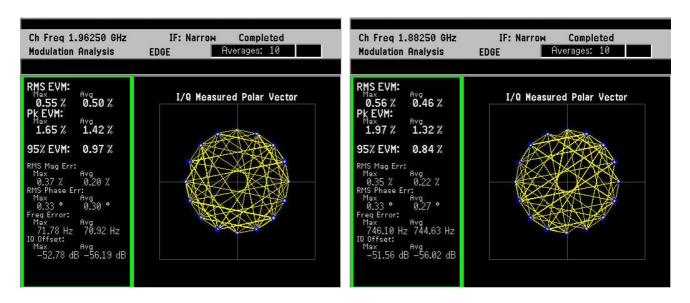




Appendix B: Block diagrams Report Number: 209925-7TRFWL Specification: FCC 24 Subpart E

#### Mod. TDMA

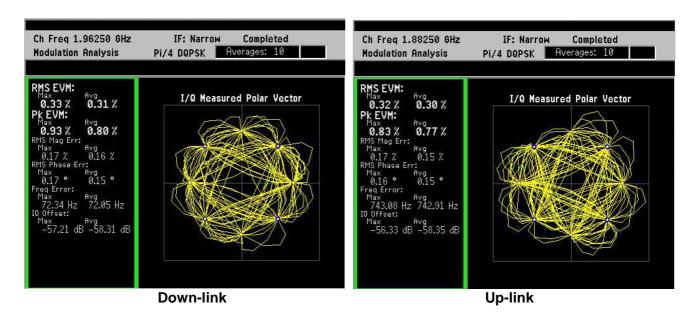


#### Mod. CDMA

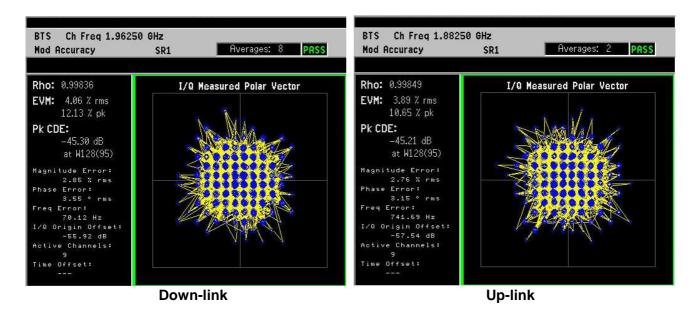




Specification: FCC 24 Subpart E

#### Mod. WCDMA

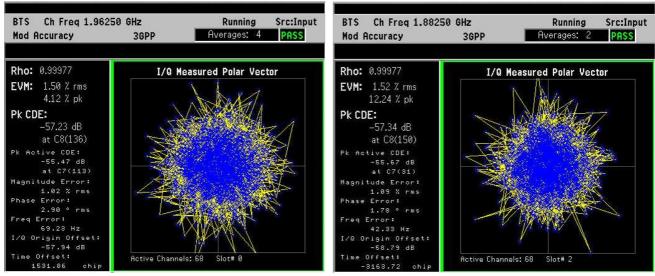

**Up-link Down-link** 

#### Mod. LTE 1.4MHz (QAM)

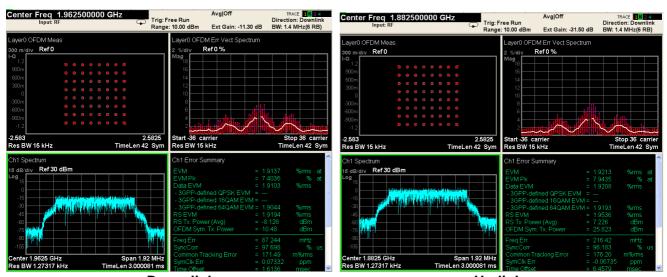




Appendix B: Block diagrams


Report Number: 209925-7TRFWL

Specification: FCC 24 Subpart E

## Mod. LTE 1.4MHz (QPSK)

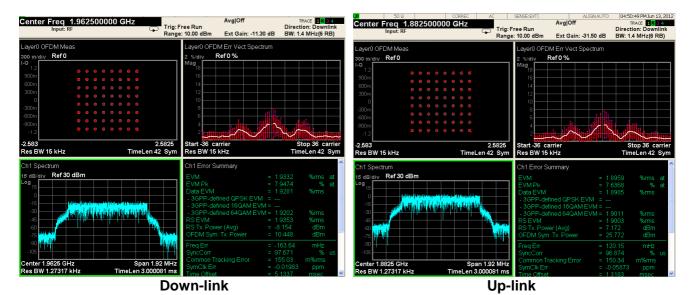


# Mod. LTE 3MHz (QAM)

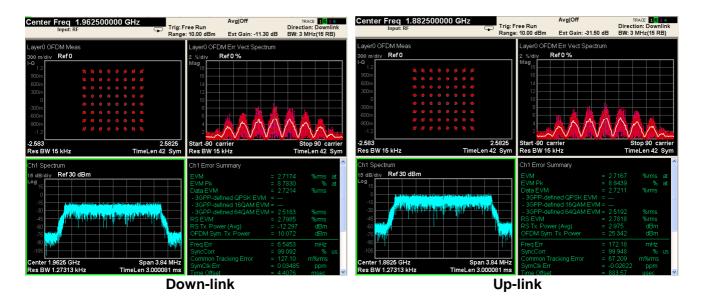




Specification: FCC 24 Subpart E

### Mod. LTE 3MHz (QPSK)

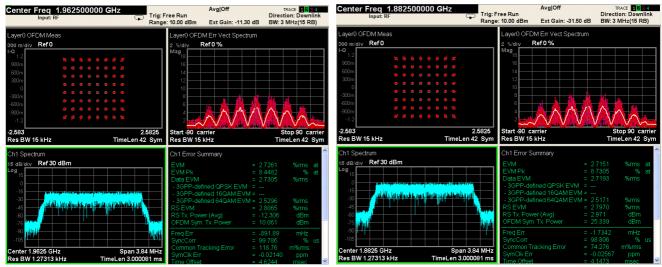

Down-link Up-link


#### Mod. LTE 5MHz (QAM)

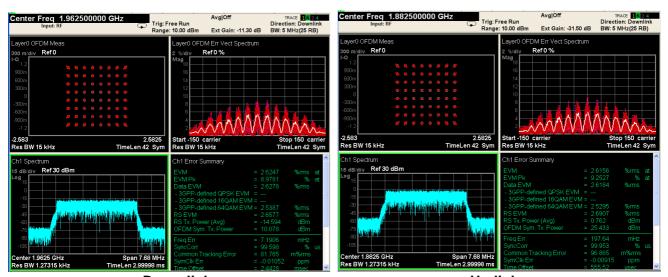




Specification: FCC 24 Subpart E

## Mod. LTE 5MHz (QPSK)

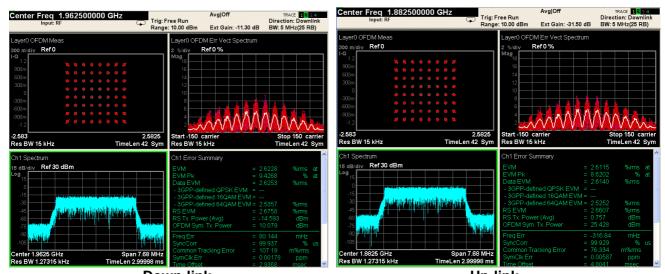

Down-link Up-link


### Mod. LTE 10MHz (QAM)

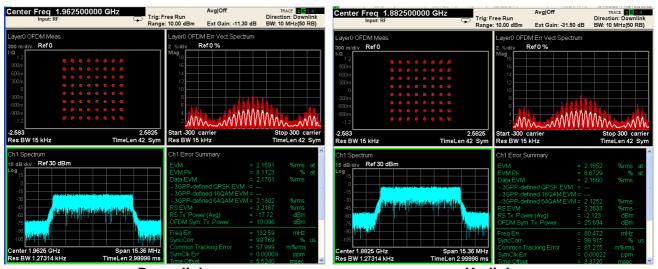




Specification: FCC 24 Subpart E

## Mod. LTE 10MHz (QPSK)

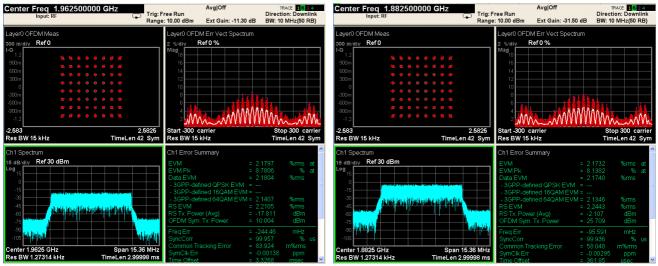

Down-link Up-link


### Mod. LTE 15MHz (QAM)

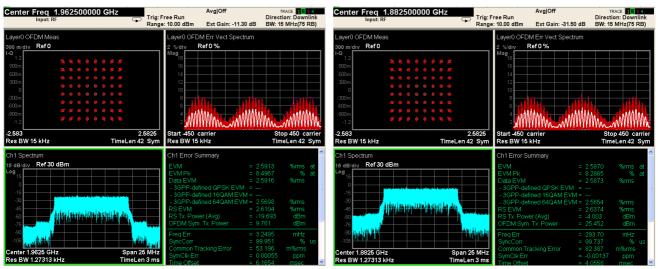




Specification: FCC 24 Subpart E

### Mod. LTE 15MHz (QPSK)

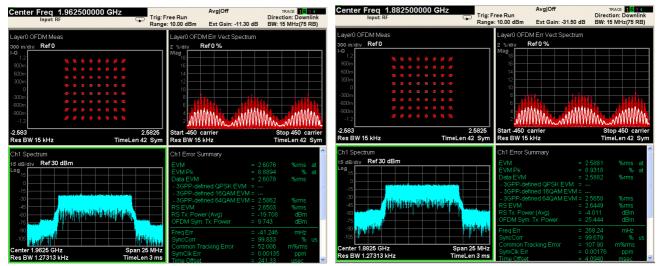

Down-link Up-link

### Mod. LTE 20MHz (QAM)

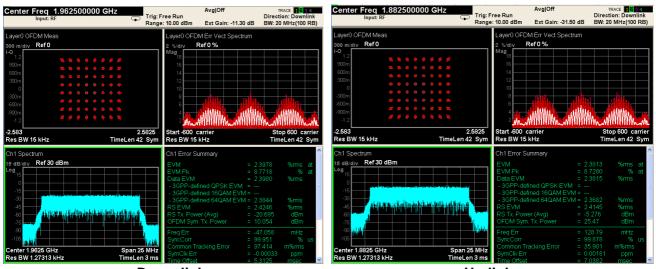




Appendix B: Block diagrams

Report Number: 209925-7TRFWL

Specification: FCC 24 Subpart E

### Mod. LTE 20MHz (QPSK)

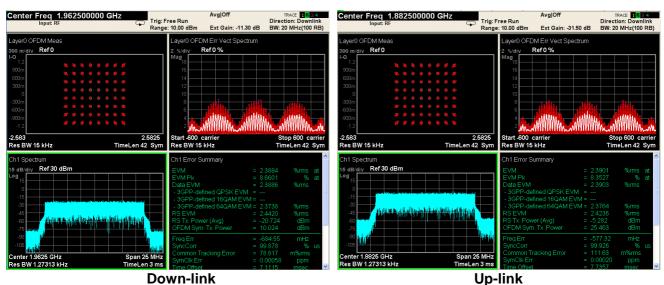

**Up-link** 

To be continued