

209925-3TRFWL

TDFE-8A

Applicant:		TEKO Telecom S.p.A. Via Meucci, 24/a I-40024 Castel S. Pietro Terr	me (BO))
FCC ID:		XM2- DFE		
Test specif	ication:			
Title 47-Telecommunication Chapter I – Federal Communications Commission Subchapter A – General Part 22 – Public Mobile Services Subpart H – Cellular Radiotelephone Service				
Reviewed by:	Signature P. Barbieri, Wireless/EM	MC Specialist	Date	2012/06/20
Reviewed by:	Signature G. Curioni, Wireless/EM	 IC Specialist		2012/06/20

Report number:

Apparatus:

Nemko S.p.A. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko S.p.A. accepts no responsibility for damages, if any suffered by any third party as a result of decisions made or actions based on this report.

This report shall not be reproduced except in full without the written approval of the testing laboratory.

Table of contents

T :	47 T I		
		nunication	
		mmary	
		nt under test	
2.1		tion of equipment under test (EUT)	
2.2		ies and support equipment	
2.3	EUT desc	cription	5
2.4	Technical	specifications of the EUT	5
2.5	EUT setu	p diagram	6
2.6	Operation	of the EUT during testing	6
2.7	Modificati	ons incorporated in the EUT	6
Section:	3: Test cond	litions	7
3.1	Deviations	s from laboratory tests procedures	7
3.2		litions, power source and ambient temperatures	
3.3		nent uncertainty	
3.4	Test equip	pment	8
Section 4		mmary	
4.1		lts	
Appendi	x A: Test res	sults	10
Claus	se 22.913(a)	Effective radiated power limits	10
	se 2.1047 (Modulation characteristics	
Claus	se 2.1049	Occupied bandwidth	
Claus	se 22.917	Out of band emissions at antenna terminal	
	se 22.917	Field strength of emissions	
	se 22.355	Frequency tolerance	
		liagrams of test set-ups	
la la a			



Section 1: Report summary

Report number: 209925-3TRFWL

Specification: FCC 22 Subpart H

Section 1: Report summary

This report contains an assessment of apparatus against specifications based upon tests carried out on samples submitted at Nemko Italy SpA.

Test specification:

FCC Part 22 Subpart H, Cellular Radiotelephone Service

Compliance status:	Complies
Exclusions:	None
Non-compliances:	None
Report release history:	Original release
Test location:	Nemko Italy S.p.A. Via del Carroccio 4, 20046, Biassono, Italy.
Registration number:	481407 (10 m Semi anechoic chamber)

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Italy's ISO/IEC 17025 accreditation.

Nemko Italy SpA. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Italy SpA. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

Page 3 of 40



Section 2: Equipment under test

Report number: 209925-3TRFWL

Specification: FCC 22 Subpart H

Section 2: Equipment under test

2.1 Identification of equipment under test (EUT) The following information identifies the EUT under test:				
Type of equipment:	Digital Donor Front-End			
Product marketing name:	Teko Telecom S.p.A.			
Model number:	TDFE-8A			
Serial number:	120834001			
Nemko sample number:				
FCC ID:	XM2-DFE			
Date of receipt:	2012-06-11			

2.2 Accessories and support equipment

The following information identifies accessories used to exercise the EUT during testing:

Only setup See 3.4 test equipment and photo

• Page 4 of 40




Section 2: Equipment under test

Report number: 209925-3TRFWL

Specification: FCC 22 Subpart H

Section 2: Equipment under test, continued

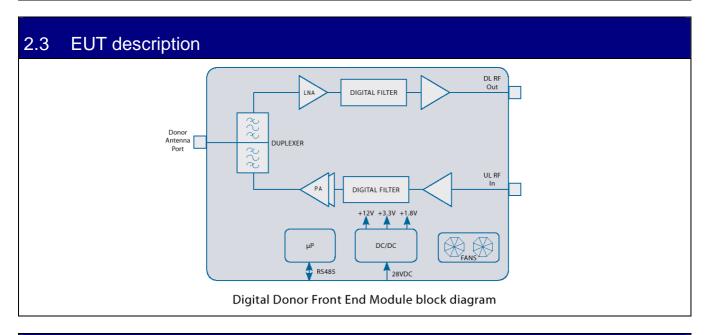

2.4 Technical specifications of the EUT

Operating band:	Down Link 869-894 MHz; Up Link 824-849 MHz
Operating frequencies:	Wideband
Modulation type:	GSM, EDGE, TDMA, CDMA, WCDMA, LTE (QAM and QPSK)
Occupied bandwidth:	GSM and EDGE: 200 kHz;
	TDMA: 30 kHz
	CDMA: 1,25 MHz,
	WCDMA: 5 MHz
	LTE: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz
Channel spacing:	Standard
Emission designator:	GSM and EDGE: GXW;
	TDMA: DXW
	CDMA, WCDMA: F9W,
	LTE: D7W
RF Output	Down Link: 10dBm (0,010W)
	Up Link: 26dBm (0,400W)
Gain	Down Link: 63dB
	Up Link: 64dB
Antenna data:	No antenna provided
Antenna type:	No antenna provided
	External Antenna
	(Equipment that has an external 50 Ω RF connector)
Power source	28-30 Vdc stand alone
	100-240 Vac in subrack with external Ac/Dc power supply

Page 5 of 40




Section 2: Equipment under test

Report number: 209925-3TRFWL

Specification: FCC 22 Subpart H

Section 2: Equipment under test, continued

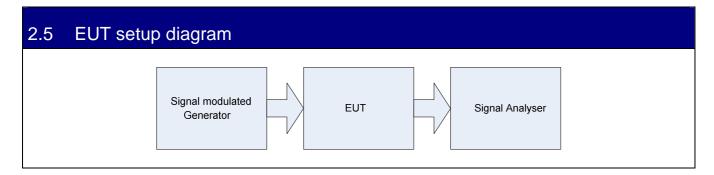

2.6 Operation of the EUT during testing

Normal working at max gain with max RF power output (down-link and up-link)

2.7 Modifications incorporated in the EUT

None/Comments (Performed by: Client or Nemko)

There were no modifications performed to the EUT during this assessment.



Section 4: Result summary

Report number: 209925-3TRFWL

Specification: FCC 22 Subpart H

Section 3: Test conditions

3.1 Deviations from laboratory tests procedures

No deviations were made from laboratory test procedures.

3.2 Test conditions, power source and ambient temperatures						
Normal temperature,						
humidity and air	Relative humidity: 20–75 %					
pressure test Air pressure: 860–1060 hPa conditions						
When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.						
Power supply range:	The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages ±5 %, for which the equipment was designed.					

Page 7 of 40



Section 4: Result summary

Report number: 209925-3TRFWL

Specification: FCC 22 Subpart H

Section 3: Test conditions, continued

3.3 Measurement uncertainty

Nemko S.p.A. measurement uncertainty has been calculated using the standard CISPR 16-4-2 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainties, statistics and limit modeling – Uncertainty in EMC measurements". All calculations have been performed to provide a confidence level of 95 % and can be found in Nemko S.p.A. document WML1002.

3.4 Test equipment

Identification number	Description	Manufacturer model	s/n	Cal. Due
1a	Vector Signal Generator	Agilent N5182A MXG	MY48180714	May 2013
1b	Vector Signal Generator	Agilent E4438C ESG	MY45094485	Ago 2013
2a	Spectrum Analyzer	Agilent E4440A	US40420470	Jul 2012
2b	Spectrum Analyzer	Agilent E9020A MXA	MY48011812	Jul 2012
3	Network Analyzer	Agilent E5071B	MY42301133	Jan 2013
4	Climatic chamber	Angelantoni Hygros 600	7237	Nov 2014

Client's property

Identification number	Equipment	Manufacturer	Model	Serial N°	Cal. due
1	Trilog Broadband Antenna	Schwarzbeck	VULB 9163	VULB 9163-286	04/2013
2	Bilog antenna	Schwarzbeck	STLP 9148-123	123	09/2012
3	Double ridge waveguide horn	Spin	DRH40	061106A40	09/2013
4	Broadband preamplifier	Schwarzbeck	BBV 9718	9718-137	05/2013
5	Broadband preamplifier	Miteq	JS44	1648665	05/2013
6	Spectrum Analyzer 9kHz-40GHz	R&S	FSEK	848255/005	09/2012
7	Controller	EMCO	2090	9511-1099	NSC
8	Antenna Tower	EMCO	2071-2	9601-1940	NSC
9	Turning table Controller	EMCO	1061-1.521	9012-1508	NSC
10	Semi-anechoic chamber	Nemko	3m semi-anechoic chamber	70	04/2013
11	Control room	Siemens	3m control room	3	NSC

Property of Nemko Italy



Section 4: Result summary

Report number: 209925-3TRFWL

Specification: FCC 22 Subpart H

Section 4: Result summary

4.1 Test results

The apparatus was assessed against the following specifications:

FCC Part 2 Subpart J, Equipment Authorization Procedures

FCC Part 22 Subpart H Cellular Radiotelephone Service

The column headed 'Required' indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

N	No : not applicable / not relevant.
Υ	Yes: Mandatory i.e. the apparatus shall conform to these tests.
N/T	Not Tested, mandatory but not assessed. (See report summary)

Part	Test description	Required	Result
§22.913(a)	Effective radiated power limits (500 W erp)	Y	Pass
§2.1047	Modulation characteristics	Y	Pass
§2.1049	Occupied bandwidth (Input/Output)	Y	Pass
§22.917	Out of band emissions (antenna terminals)	Y	Pass
§22.917	Field Strength of Spurious Emissions	Y	Pass
§22.355	Frequency tolerance	Y	Pass
	Filter Frequency Response	Y	Pass
Matan			

Notes:



Report Number: 209925-3TRFWL

Specification: FCC 22 Subpart H

Appendix A: Test results

Clause 22.913(a) Effective radiated power limits

The effective radiated power (ERP) of transmitters in the Cellular Radiotelephone Service must not exceed the limits in this section.

- (a) Maximum ERP. In general, the effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts (57 dBm). However, for those systems operating in areas more than 72 km (45 miles) from international borders that:
 - Are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census; or,
 - (2) Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in §22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts (60 dBm). The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts (38.45 dBm).

Test date: 2012-06-11

Test results: Pass

Special notes

Conducted measurement were performed:

- The power was measured using spectrum analyzer with RMS detector / average power meter.

Only conducted measurement at antenna connector was possible, no antenna provided by manufacturer

Page 10 of 40



Via del Carroccio 4, 20046, Biassono, Italy.

Appendix B: Block diagrams Report Number: 209925-3TRFWL

Specification: FCC 22 Subpart H

Clause 22.913(a) RF power output, continued

Test data

Conducted measurement

Test data				
Direction	Modulation	Frequency (MHz)	RF output channel Power (dBm)	RF output channel Power (W)
Down-link	GSM (200 kHz)	881.5	10.06	0.010
Down-link	EDGE (200 kHz)	881.5	10.16	0.010
Down-link	TDMA (30 kHz)	881.5	10.02	0.010
Down-link	CDMA (1,25MHz)	881.5	10.14	0.010
Down-link	WCDMA (5MHz)	881.5	10.10	0.010
Down-link	LTE (QAM, 1,4MHz)	881.5	10.16	0.010
Down-link	LTE (QPSK, 1,4MHz)	881.5	10.10	0.010
Down-link	LTE (QAM, 3MHz)	881.5	10.13	0.010
Down-link	LTE (QPSK, 3MHz)	881.5	10.16	0.010
Down-link	LTE (QAM, 5MHz)	881.5	10.13	0.010
Down-link	LTE (QPSK, 5MHz)	881.5	10.10	0.010
Down-link	LTE (QAM, 10MHz)	881.5	10.06	0.010
Down-link	LTE (QPSK, 10MHz)	881.5	10.12	0.010
Up-link	GSM (200 kHz)	836.5	26.18	0.415
Up-link	EDGE (200 kHz)	836.5	26.08	0.406
Up-link	TDMA (30 kHz)	836.5	26.15	0.412
Up-link	CDMA (1,25MHz)	836.5	26.15	0.412
Up-link	WCDMA (5MHz)	836.5	26.08	0.406
Up-link	LTE (QAM, 1,4MHz)	836.5	26.04	0.402
Up-link	LTE (QPSK, 1,4MHz)	836.5	26.01	0.400
Up-link	LTE (QAM, 3MHz)	836.5	26.08	0.406
Up-link	LTE (QPSK, 3MHz)	836.5	26.05	0.403
Up-link	LTE (QAM, 5MHz)	836.5	26.11	0.407
Up-link	LTE (QPSK, 5MHz)	836.5	26.05	0.403
Up-link	LTE (QAM, 10MHz)	836.5	26.16	0.413
Up-link	LTE (QPSK, 10MHz)	836.5	26.13	0.410

Page 11 of 40



Trig Free

Span 300 kHz

Sweep 97.32 ms (601 pts)


-26.83 dBm/Hz

Report Number: 209925-3TRFWL

Specification: FCC 22 Subpart H


Test data

Mod. GSM

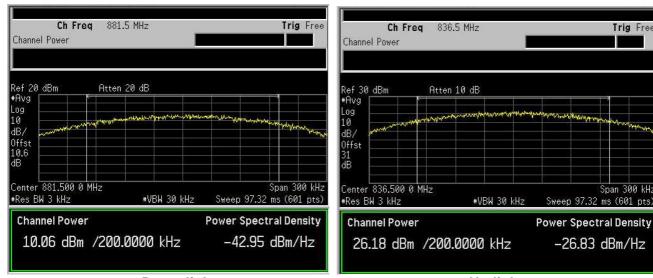

Down-link **Up-link**

Mod. EDGE

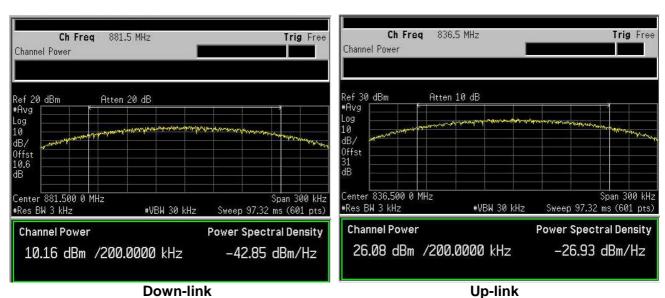


Page 12 of 40



Report Number: 209925-3TRFWL

Specification: FCC 22 Subpart H


Mod. TDMA






Up-link Down-link

Mod. CDMA






Up-link

Page 13 of 40




Report Number: **209925-3TRFWL**Specification: FCC 22 Subpart H

Mod. WCDMA

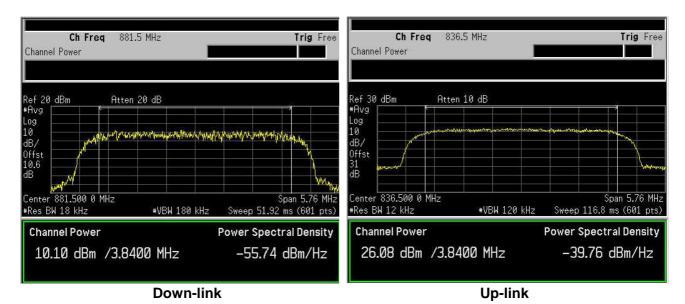


Mod. LTE 1,4MHz (Down-link)

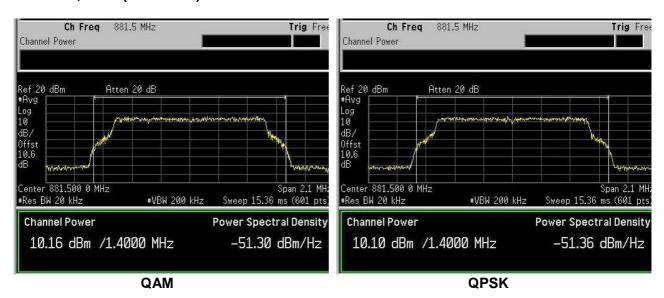




Specification: FCC 22 Subpart H


Mod. LTE 3MHz (Down-link)






QAM QPSK

Mod. LTE 5MHz (Down-link)





QAM QPSK


Page 15 of 40




Report Number: 209925-3TRFWL

Specification: FCC 22 Subpart H

Mod. LTE 10MHz (Down-link)

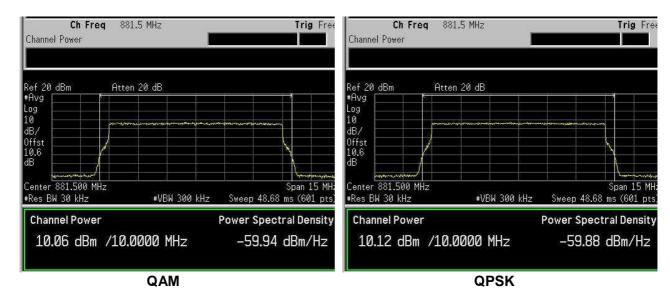

Mod. LTE 1.4MHz (Up-link)

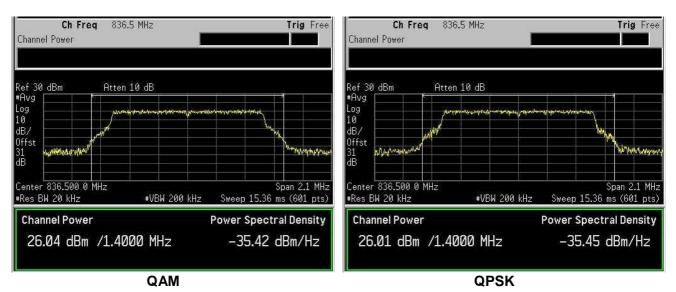



Page 16 of 40



Specification: FCC 22 Subpart H


Mod. LTE 3MHz (Up-link)





QAM QPSK

Mod. LTE 5MHz (Up-link)

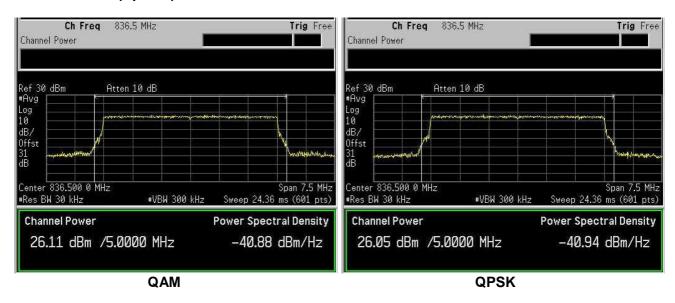



Page 17 of 40



Specification: FCC 22 Subpart H

Mod. LTE 10MHz (Up-link)





QAM QPSK

Page 18 of 40



Report Number: 209925-3TRFWL

Specification: FCC 22 Subpart H

Clause 2.1047 Modulation characteristics

Unless specified elsewhere in this part, stations will be authorized emissions as provided for in paragraphs (b) through (n) of this section.

§ 2.1047 Measurements required: Modulation characteristics.

- (a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.
- (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.
- (c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.
- (d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

Test date: 2012-06-11
Test results: Pass


Test data

None




Specification: FCC 22 Subpart H

Mod. GSM

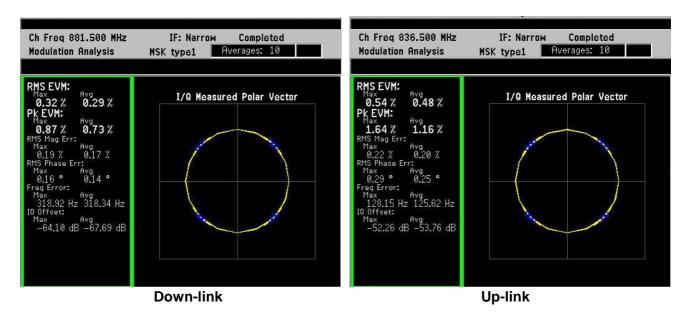

Mod. EDGE

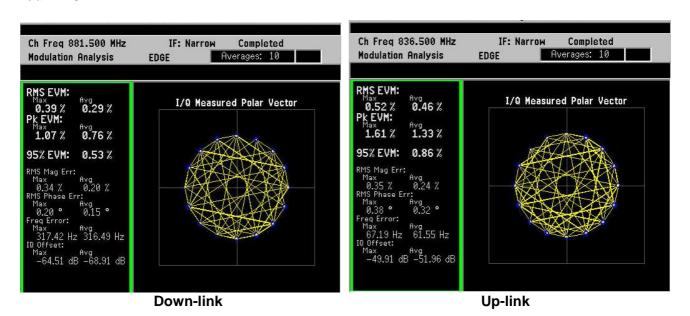


Page 20 of 40




Specification: FCC 22 Subpart H

Mod. TDMA

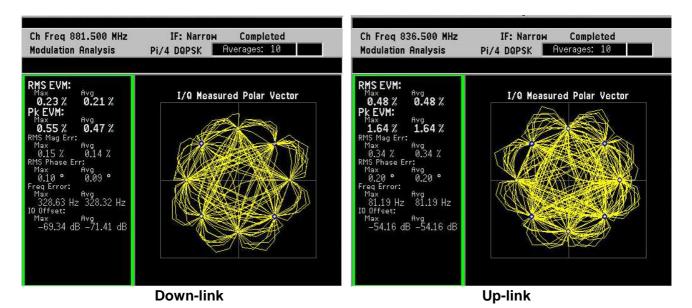

Mod. CDMA

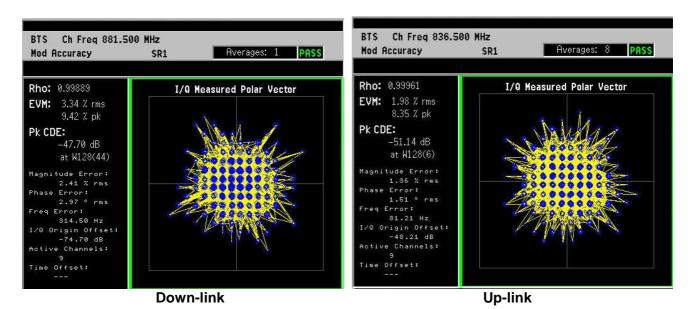


Page 21 of 40



Report Number: 209925-3TRFWL


Specification: FCC 22 Subpart H

Mod. WCDMA

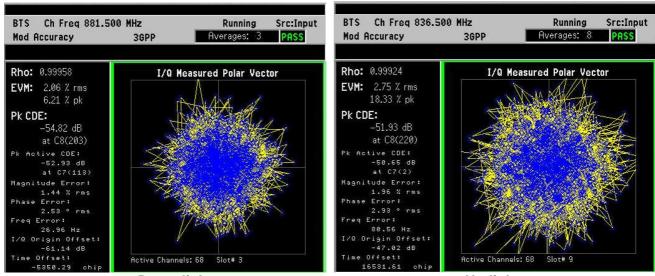

Down-link Up-link

Mod. LTE 1.4MHz (QAM)

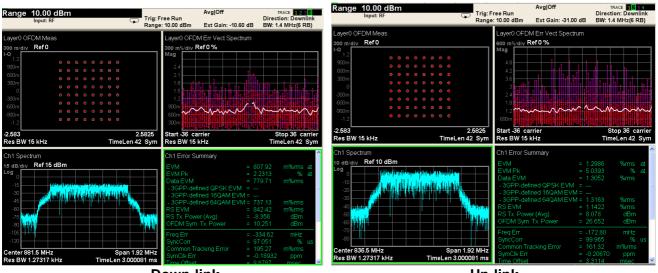


Down-link Up-link

Page 22 of 40




Specification: FCC 22 Subpart H

Mod. LTE 1.4MHz (QPSK)

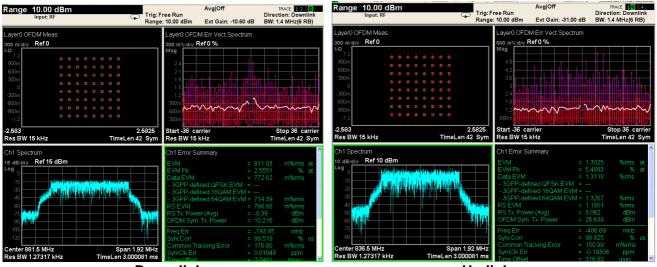

Down-link Up-link

Mod. LTE 3MHz (QAM)

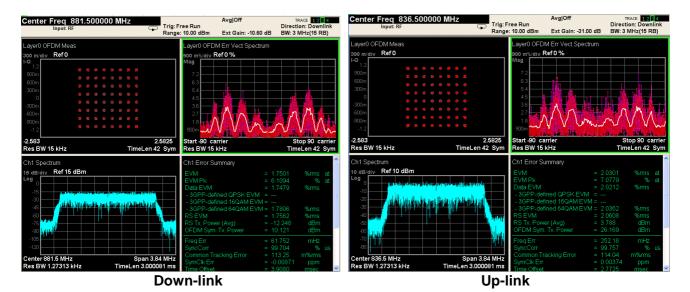


Page 23 of 40





Report Number: **209925-3TRFWL**Specification: FCC 22 Subpart H

Mod. LTE 3MHz (QPSK)

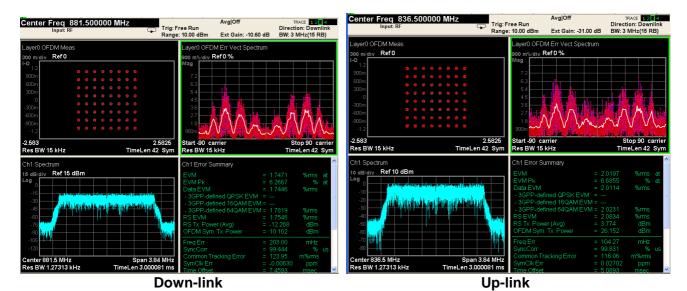

Mod. LTE 5MHz (QAM)






Down-link Up-link

Page 24 of 40




Specification: FCC 22 Subpart H

Mod. LTE 5MHz (QPSK)

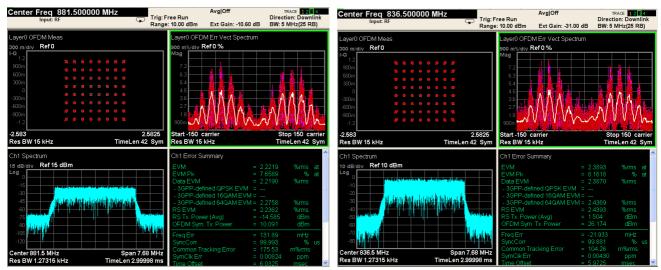

Down-link **Up-link**

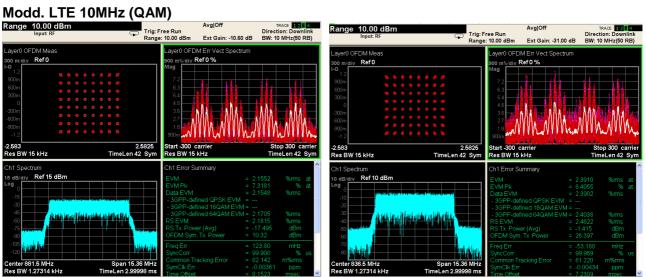


Down-link **Up-link**

Page 25 of 40



Specification: FCC 22 Subpart H

Mod. LTE 10MHz (QPSK)

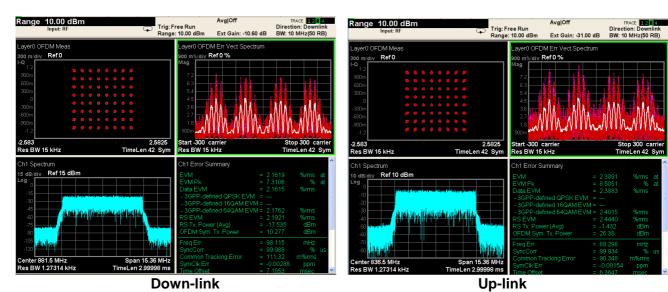



Report Number: 209925-3TRFWL

Specification: FCC 22 Subpart H

Clause 2.1049 Occupied bandwidth (input/output)

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Test date: 2012-06-11
Test results: Pass

Special notes

Resolution bandwidth was set wider or equal than occupied bandwidth. Reference peak power was measured.

Page 27 of 40





Report Number: 209925-3TRFWL

Specification: FCC 22 Subpart H

Clause Occupied bandwidth (input/output), continued


Mod. GSM (Down-link)






Input

Mod. GSM (Up-link)






itput Input


Page 28 of 40



Appendix B: Block diagrams Report Number: 209925-3TRFWL Specification: FCC 22 Subpart H


Mod. EDGE (Down-link)






Input

Mod. EDGE (Up-link)






Page 29 of 40




Specification: FCC 22 Subpart H

Mod. TDMA (Down-link)

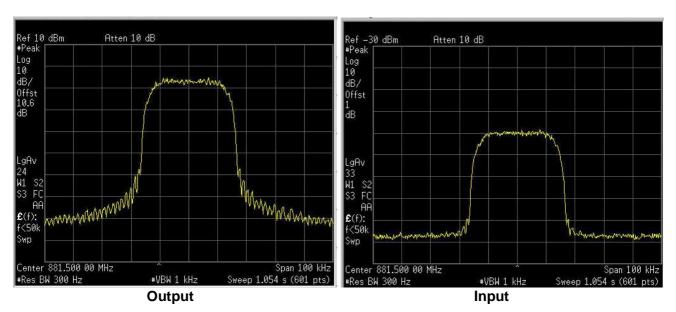


Mod. TDMA (Up-link)

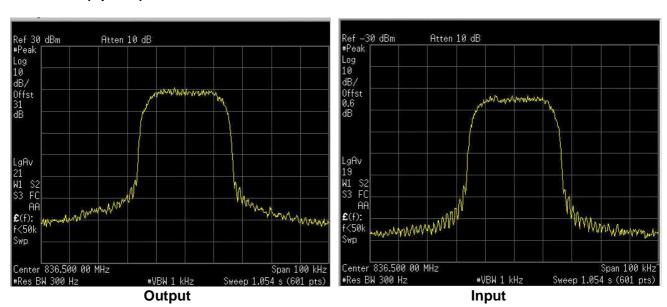




Specification: FCC 22 Subpart H


Mod. CDMA (Down-link)






Input

Mod. CDMA (Up-link)





Input


Page 31 of 40




Report Number: 209925-3TRFWL

Specification: FCC 22 Subpart H


Mod. WCDMA (Down-link)






Input

Mod. WCDMA (Up-link)





Output Input


Page 32 of 40




Report Number: 209925-3TRFWL

Specification: FCC 22 Subpart H


Mod. LTE 1.4MHz (QAM) (Down-link)






ut Input

Mod. LTE 1.4MHz (QAM) (Up-link)





Output Input


Page 33 of 40




Report Number: 209925-3TRFWL

Specification: FCC 22 Subpart H


Mod. LTE 1.4MHz (QPSK) (Down-link)






Input

Mod. LTE 1.4MHz (QPSK) (Up-link)






Output Input




Report Number: 209925-3TRFWL

Specification: FCC 22 Subpart H

Mod. LTE 3MHz (QAM) (Down-link)

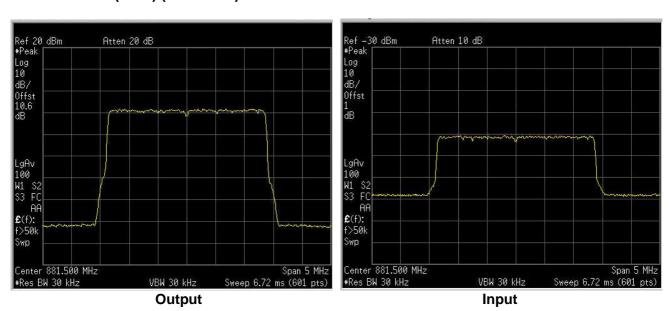


Mod. LTE 3MHz (QAM) (Up-link)

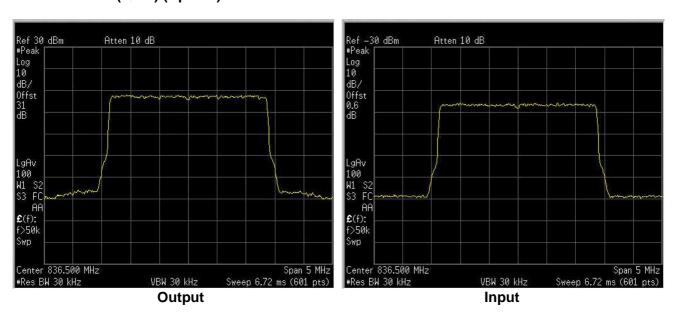




Specification: FCC 22 Subpart H


Mod. LTE 3MHz (QPSK) (Down-link)






Output Input

Mod. LTE 3MHz (QPSK) (Up-link)





Output Input


Page 36 of 40




Report Number: 209925-3TRFWL

Specification: FCC 22 Subpart H


Mod. LTE 5MHz (QAM) (Down-link)






Output Input

Mod. LTE 5MHz (QAM) (Up-link)





Output Input


Page 37 of 40




Report Number: 209925-3TRFWL

Specification: FCC 22 Subpart H


Mod. LTE 5MHz (QPSK) (Down-link)






Input

Mod. LTE 5MHz (QPSK) (Up-link)





utput Input


Page 38 of 40




Report Number: 209925-3TRFWL

Specification: FCC 22 Subpart H

Mod. LTE 10MHz (QAM) (Down-link)

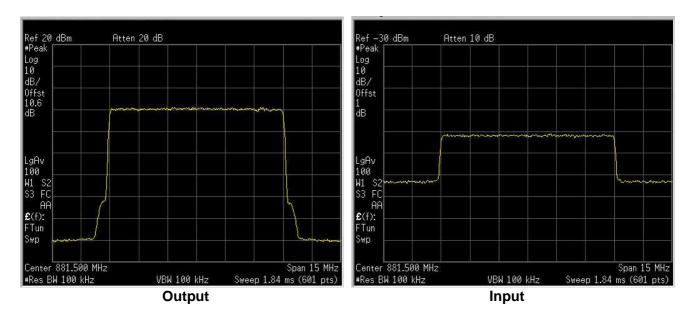

Mod. LTE 10MHz (QAM) (Up-link)

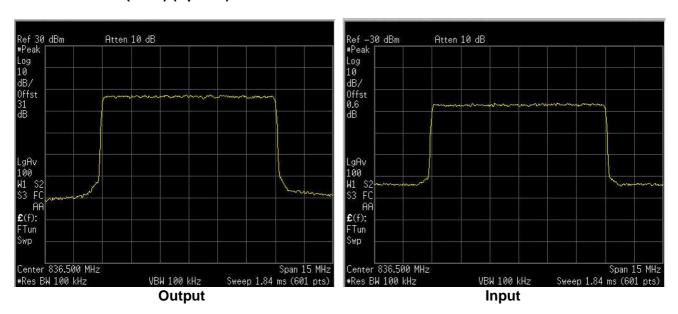





Report Number: 209925-3TRFWL

Specification: FCC 22 Subpart H

Mod. LTE 10MHz (QPSK) (Down-link)

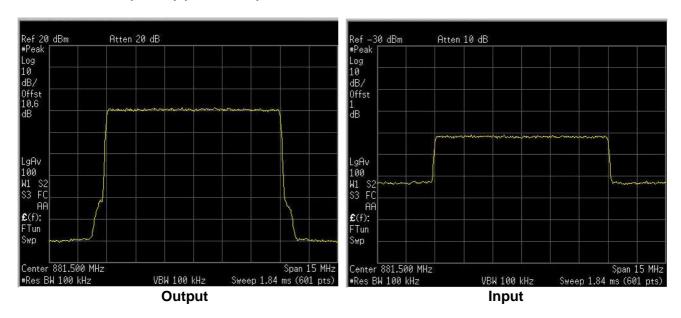

Mod. LTE 10MHz (QPSK) (Up-link)

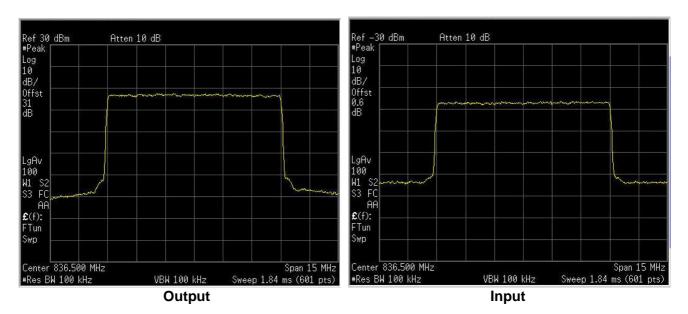

To be continued

Page 40 of 40