
WIP1200 Cycle Safely with wireless Auxiliary Indicator

This extremely versatile bicycle indicator set features wireless bicycle turn signal that can operated with touch sensor panel.

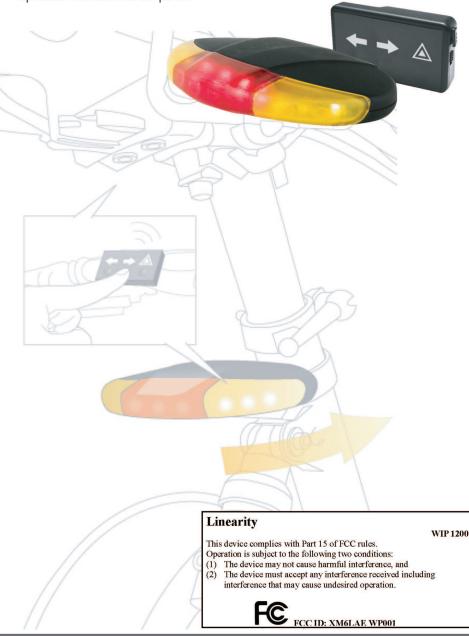

FAQ:


Problem Description	Solution
W1200-R has no response.	 Please check whether the switch is on. Please check whether the WIP-1200 has power.
W1200-T has no response.	 Please check whether the finger is clean. Please check the panel is clean.
Battery status LED indicator doesn't work	 Please check the connection and reconnect. Please check whether cable is damaged.
Emergency Charging Function	This product can support most (90%) 5V/500mAhr mobile devices. If the mobile devices can not be charged, maybe the mobile device can't work with W1200-R. Please email to sales@linearity.com.tw

Warranty Card	(WIP1200)			
Name:				
Email:				
Telephone:				
Address:				
Purchase Date:	/	1	(Y/M/D)	
Barcode				Authorized Dealer
	Po	mer	bank	service
	are 1V			(stamp)

- In order to secure your right, please make sure that the authorized dealer fills in all the information and the warranty is one year from the date of purchasing.
- Without the stamp of authorized dealer or incomplete information, the warranty is from the shipping date of the product.
- Strings, accessories and free gifts are not warranted.

www.linearity.com.tw

What is included:

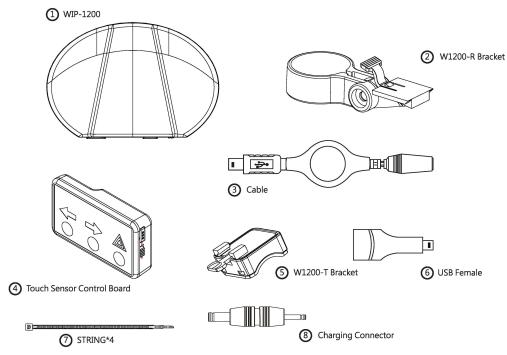


Product Diagram:

W1200-R

W1200-T

Back



- - Power Bank
 LED Indicator
 - (3) (DCCharging Port)
 - (4) (On/off PB Switch)

Front

0

- 1 Touch Panel
 2 On/off Switch
- 3 (DCCharging Port)
- 4) (LED Indicator

Warning:



Please read the instruction carefully before installing WIP-1200. Do not charge the product in the rain or humid environment. If there are any technical problems, please contact your dealers.

Suggested installation for WIP-1200:



The Function of W1200-T

	Touch Sensor	Action
1	Touch Left Button Once	The left turning signal will flash for 15 seconds.
2	The second time to touch Left Button	The left turning signal will be cancelled.
3	Touch Right Button Once	The right turning signal will flash for 15 seconds.
4	The second time to touch Right Button	The right turning signal will be cancelled.
5	Touch warning signal Once	The whole set of LED light will keep flashing.
6	The second time to touch Warning Signal	The whole set of LED light will be cancelled.
7	Low Battery Power Status (Yellow Indicator)	Yellow LED light will be active when the power is below 3.5V.

The Function of W1200-R

1	On/Off/PB Switch	/ Oil.idill oil W1200-K		
2	Right Indicator	Right LED light will be active after 0.5 second and it will flash continuously in proper order from left to right.		
3	Left Indicator Left LED light will be active after 0.5 second and it will flat continuously in proper order from right to left.			
4	Warning Signal	Red LED light will be active with continuous mode, at the same time orange LED light will flash every 0.5 second.		
5	Stand by	Red LED light will active with flashing mode.		
6	Braking	Red LED light and Orange LED Light will be active with continuous mode.		
7	Low Battery Power Status (Yellow Indicator)	Yellow LED light will be active when the Battery Voltage is below 3.5V		