





RF TEST REPORT

Applicant Quectel Wireless Solutions Co., Ltd

FCC ID XMR201808EC25AFX

Product LTE Module

Brand Quectel

Model EC25-AFX; EC25-AFX MINIPCIE

Report No. R1907A0408-R3

Issue Date September 25, 2019

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in FCC CFR47 Part 2 (2017)/ FCC CFR47 Part 27C (2017). The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



Table of Contents

1	Test	t Laboratoryt	4
	1.1	Notes of the Test Report	4
	1.2	Test facility	4
	1.3	Testing Location	5
2	Ger	neral Description of Equipment under Test	6
3	App	lied Standards	8
4	Test	t Configuration	9
5	Test	t Case Results	11
	5.1	RF Power Output	11
	5.2	Effective Isotropic Radiated Power	22
	5.3	Occupied Bandwidth	29
	5.4	Band Edge Compliance	60
	5.5	Peak-to-Average Power Ratio (PAPR)	98
	5.6	Frequency Stability	103
	5.7	Spurious Emissions at Antenna Terminals	111
	5.8	Radiates Spurious Emission	144
6	Mai	n Test Instruments	150
Α	NNEX	A: EUT Appearance and Test Setup	151
	A.1	EUT Appearance	151
	A.2	Test Setup	153



Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Isotropic Radiated power	27.50(d)(4) /27.50(b)(10) /27.50(c)(10) /27.50(h)(2)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	27.53(h) /27.53(g) /27.53(f) /27.53(c) /27.53(m)	PASS
5	Peak-to-Average Power Ratio	27.50(d)/KDB971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 27.54	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 /27.53(h) /27.53(g) /27.53(f)	PASS
8	Radiates Spurious Emission	2.1053 /27.53(h) /27.53(g) /27.53(f)	PASS

Date of Testing: June 29, 2018~ July 16, 2018 and July 30, 2018~ July 31, 2018 and August 3, 2019~ August 13, 2019

Note: PASS: The EUT complies with the essential requirements in the standard.

FAIL: The EUT does not comply with the essential requirements in the standard.



1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology** (shanghai) co., Ltd. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.

Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

City: Shanghai

Post code: 201201

Country: P. R. China

Contact: Xu Kai

Telephone: +86-021-50791141/2/3

Fax: +86-021-50791141/2/3-8000

Website: http://www.ta-shanghai.com

E-mail: xukai@ta-shanghai.com



2 General Description of Equipment under Test

Client Information

Applicant	Quectel Wireless Solutions Co., Ltd				
Applicant address	Building 5, Shanghai Business Park Phase III (Area B), No.1016				
, pp. cam aaa coo	Tianlin Road, Minhang District, Shanghai, China 200233				
Manufacturer	Quectel Wireless Solutions Co., Ltd				
Manufacturar address	Building 5, Shanghai Business Park Phase III (Area B), No.1016				
Manufacturer address	Tianlin Road, Minhang District, Shanghai, China 200233				

General information

	EUT Description	1						
Model	EC25-AFX; EC25-AFX MI	NIPCIE						
IMEI	EC25-AFX :866834040000767							
IWIEI	EC25-AFX MINIPCIE: 866834040002375							
Hardware Version	R1.0							
Software Version	EC25AFXGAR07A01M1G							
Power Supply	External Power Supply							
Antenna Type	The EUT don't have stand	ard Antenna, The An	tenna used for testi					
Antenna Type	ng in this report is the afte	r-market accessory (Dipole Antenna)					
Antenna Gain	4dBi							
Test Mode(s)	WCDMA Band IV;							
. ,	LTE Band 4/12/13/ 66/ 71;							
Test Modulation	(WCDMA)QPSK; (LTE)QF	PSK 16QAM;						
HSDPA UE Category	24							
HSUPA UE Category	6							
LTE Category	4							
	WCDMA Band IV:	25.62dBm						
	LTE Band 4:	26.08dBm						
Maximum E.I.R.P./ E.R.P.	LTE Band 12:	20.48dBm						
Maximum E.I.K.P./ E.K.P.	LTE Band 13:	23.63dBm						
	LTE Band 66:	27.51dBm						
	LTE Band 71:	22.72dBm						
Rated Power Supply	3.8V							
Voltage:	0.0 v							
Extreme Voltage	Minimum: 3.3V Maximu	m: 4.3V						
Extreme Temperature	Lowest: -40°C Highest: +85°C							
Operating Frequency	Mode	Tx (MHz)	Rx (MHz)					
Range(s)	WCDMA Band IV	1710 ~ 1755 2110 ~ 215						
Trange(s)	LTE Band 4	1710 ~ 1755	2110 ~ 2155					

TA Technology (Shanghai) Co., Ltd.

TA-MB-05-003R

Page 6 of 153



LTE Band 12	699 ~ 716	729 ~ 746
LTE Band 13	777 ~ 787	746 ~ 756
LTE Band 66	1710 ~ 1780	2110 ~ 2200
LTE Band 71	663 ~ 698	617 ~ 652

Note: 1. The information of the EUT is declared by the manufacturer.

Accessory equipment							
Evaluation Board	RF Cable						
RS232-to-USB Cable	Antenna: Dipole Antenna						
Headset	DC 5V Adaptor						

EC25-AFX and EC25-AFX MINIPCIE are all LTE modules. They support the same frequency bands, use the same chipset and share the same software & hardware design. The main difference is on the carrier board.

EC25-AFX MINIPCIE makes up of EC25-AFX module and PCIe transferred board.

The transferred board switches EC25-AFX module to follow PCI Express Mini Card 1.2 standard connector protocol. No any other internal changes in EC25-AFX module.

Two models are identical in interior structure and components, and just connector interface is different for the marketing requirement.



3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC CFR47 Part 2 (2017)

FCC CFR47 Part 27C (2017)

ANSI/TIA-603-E (2016)

KDB 971168 D01 Power Meas License Digital Systems v03r01



4 Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Xaxis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated. Subsequently, only the worst case emissions are reported.

The following testing in WCDMA/LTE is set based on the maximum RF Output Power.

The following testing in different Bandwidth is set to detailin the following table:

Test modes are chosen to be reported as the worst case configuration below for WCDMA Band IV:

Test items	Modes/Modulation
rest items	WCDMA Band IV
	RMC
RF power output	HSDPA/HSUPA
	DC-HSDPA
Effective Isotropic Radiated power	RMC
Occupied Bandwidth	RMC
Band Edge Compliance	RMC
Peak-to-Average Power Ratio	RMC
Frequency Stability	RMC
Spurious Emissions at Antenna Terminals	RMC
Radiates Spurious Emission	RMC

Test modes are chosen to be reported as the worst case configuration below for LTE Band 4/12/13/66/71:

Test items	Modes Bandwidth (MHz)			Modulation		RB			Test Channel						
		1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	Н
	LTE 4	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	LTE 12	0	0	0	0	-	-	0	0	0	0	0	0	0	0
RF power output	LTE 13	-	-	0	0	-	-	0	0	0	0	0	0	0	0
	LTE 66	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	LTE 71	-	1	0	0	0	0	0	0	0	0	0	0	0	0
Effective	LTE 4	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Isotropic	LTE 12	0	0	0	0	-	-	0	0	0	0	0	0	0	0

FCC RF Test	Report									Rep	ort No: R	1907A040)8-R3		
Radiated power	LTE 13	-	-	0	0	-		0	0	0	0	0	0	0	0
	LTE 66	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	LTE 71	-	-	0	0	0	0	0	0	0	0	0	0	0	0
	LTE 4	0	0	0	0	0	0	0	0	-	-	0	0	0	0
Occupied	LTE 12	0	0	0	0	-	•	0	0	-	-	0	0	0	0
Bandwidth	LTE 13	-	-	0	0	-	-	0	0			0	0	0	0
Danawatii	LTE 66	0	0	0	0	0	0	0	0	-	-	0	0	0	0
	LTE 71			0	0	0	0	0	0			0	0	0	0
	LTE 4	0	0	0	0	0	0	0	0	0	-	0	0	-	0
Band Edge	LTE 12	0	0	0	0	-	-	0	0	0	-	0	0	-	0
Compliance	LTE 13	-	-	0	0	-	-	0	0	0	-	0	0	-	0
Compliance	LTE 66	0	0	0	0	0	0	0	0	0	-	0	0	-	0
	LTE 71	-	-	0	0	0	0	0	0	0	-	0	0	-	0
	LTE 4	0	0	0	0	0	0	0	0	-	-	0	0	0	0
Peak-to-Average	LTE 12	0	0	0	0	-	-	0	0	-	-	0	0	0	0
Power Ratio	LTE 13	-	-	0	0	-	-	0	0	-	-	0	0	0	0
1 owel Italio	LTE 66	0	0	0	0	0	0	0	0	-	-	0	0	0	0
	LTE 71	-	-	0	0	0	0	0	0	-	-	0	0	0	0
	LTE 4	0	0	0	0	0	0	0	0	-	-	0	0	-	0
Frequency	LTE 12	0	0	0	0	-	-	0	0	-	-	0	0	-	0
Stability	LTE 13	-	-	0	0	-	-	0	0	-	-	0	0	-	0
Gtability	LTE 66	0	0	0	0	0	0	0	0	-	-	0	0	-	0
	LTE 71	-	-	0	0	0	0	0	0	-	-	0	0	-	0
	LTE 4	0	0	0	0	0	0	0	-	0	0	0	0	0	0
Spurious Emissions at	LTE 12	0	0	0	0	-	-	0	-	0	0	0	0	0	0
Antenna	LTE 13	-	-	0	0	-	-	0	-	0	0	0	0	0	0
Terminals	LTE 66	0	0	0	0	0	0	0	-	0	0	0	0	0	0
	LTE 71	-	-	0	0	0	0	0	-	0	0	0	0	0	0
	LTE 4	-	-	0	-	-	-	0	-	0	-	-	0	0	0
Radiates	LTE 12	-	-	0	-	-	-	0	-	0	-	-	0	0	0
Spurious	LTE 13	-	-	0	-	-	-	0	-	0	-	-	0	0	0
Emission	LTE 66	-	-	0	-	-	-	0	-	0	-	-	0	0	0
	LTE 71	-	-	0	-	-	1	0	-	0	-	-	0	0	0
Note 1. The mark "O" means that this configuration is chosen for testing.															
2. The mark "-" means that this configuration is not testing.															



5 Test Case Results

5.1 RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

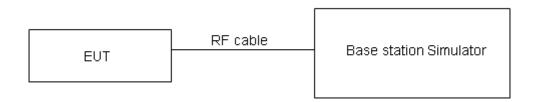

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 2, U=0.4 dB.



Test Results

Report No: R1907A0408-R3

		AV Co	nducted Power(dB	sm)	
WCDMA	Band IV	Channel 1312	Channel 1413	Channel 1513	
		1712.4 (MHz)	1732.6 (MHz)	1752.6(MHz)	
RM	RMC		23.34	23.25	
	Sub - Test 1	22.36	22.16	22.19	
HEDDA	Sub - Test 2	22.44	22.14	22.26	
HSDPA	Sub - Test 3	21.83	21.64	21.78	
	Sub - Test 4	21.92	21.69	21.76	
	Sub - Test 1	22.13	22.15	22.07	
	Sub - Test 2	21.80	21.73	21.63	
HSUPA	Sub - Test 3	22.27	22.21	22.12	
	Sub - Test 4	22.37	22.13	22.16	
	Sub - Test 5	22.44	22.18	22.19	
	Sub - Test 1	22.73	22.70	22.82	
DC-HSDPA	Sub - Test 2	22.72	22.69	22.58	
DC-HODPA	Sub - Test 3	22.30	22.18	22.09	
	Sub - Test 4	22.29	22.17	22.34	



	LTE Ban	d 4	AV Conducted Power(dBm)						
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)					
Bandwidth	Modulation	KD SIZE	KD OIISEL	19957/1710.7	20175/1732.5	20393/1754.3			
		1	0	23.55	23.20	23.42			
		1	2	23.44	23.53	23.46			
		1	5	23.20	23.54	23.68			
	QPSK	3	0	23.32	23.22	23.55			
		3	2	23.28	23.33	23.40			
		3	3	23.31	23.42	23.39			
1.4MHz		6	0	22.30	22.40	22.64			
1.4101112		1	0	22.45	22.25	23.27			
		1	2	22.52	22.79	23.15			
		1	5	22.38	22.98	23.37			
	16QAM	3	0	22.23	22.32	22.43			
		3	2	22.32	22.39	22.26			
		3	3	22.39	22.47	22.47			
		6	0	21.34	21.48	21.68			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)					
Banawiatii	Modulation	110 0120	TO OHOOL	19965/1711.5	20175/1732.5	20385/1753.5			
	QPSK	1	0	23.57	23.24	23.45			
		1	7	23.47	23.58	23.50			
		1	14	23.23	23.59	23.72			
		8	0	22.42	22.34	22.68			
		8	4	22.40	22.43	22.52			
		8	7	22.41	22.53	22.49			
3MHz		15	0	22.33	22.44	22.67			
02		1	0	22.48	22.27	23.30			
		1	7	22.55	22.84	23.19			
		1	14	22.40	23.02	23.40			
	16QAM	8	0	21.34	21.45	21.55			
		8	4	21.43	21.52	21.38			
		8	7	21.49	21.59	21.60			
		15	0	21.37	21.52	21.71			
Bandwidth	Modulation	RB size	RB offset		nel/Frequency (,			
				19975/1712.5	20175/1732.5	20375/1752.5			
		1	0	23.54	23.22	23.41			
		1	13	23.45	23.54	23.47			
	0.000	1	24	23.20	23.54	23.68			
5MHz	QPSK	12	0	22.39	22.29	22.64			
		12	6	22.38	22.39	22.47			
		12	13	22.39	22.51	22.45			
		25	0	22.31	22.43	22.65			

FCC RF Test	Report				Report No: I	R1907A0408-R3
		1	0	22.45	22.23	23.27
		1	13	22.52	22.82	23.16
		1	24	22.37	23.00	23.36
	16QAM	12	0	21.32	21.41	21.52
		12	6	21.40	21.47	21.34
		12	13	21.46	21.54	21.56
		25	0	21.35	21.48	21.66
Donadoui dila	Madulation	RB size	DD offeet	Char	nel/Frequency (MHz)
Bandwidth	Modulation	KB SIZE	RB offset	20000/1715	20175/1732.5	20350/1750
		1	0	23.56	23.23	23.44
		1	25	23.48	23.59	23.51
		1	49	23.22	23.58	23.71
	QPSK	25	0	22.42	22.34	22.68
		25	13	22.41	22.44	22.51
		25	25	22.41	22.55	22.50
400411		50	0	22.39	22.45	22.69
10MHz		1	0	22.47	22.26	23.29
		1	25	22.55	22.86	23.19
		1	49	22.40	23.02	23.39
	16QAM	25	0	21.35	21.46	21.56
		25	13	21.42	21.51	21.37
		25	25	21.49	21.59	21.60
		50	0	21.38	21.53	21.70
Donadoui déla	Madulatian	DD size	DD affact	Char	nel/Frequency (MHz)
Bandwidth	Modulation	RB size	RB offset	20025/1717.5	20175/1732.5	20325/1747.5
		1	0	23.55	23.19	23.42
		1	38	23.46	23.58	23.48
		1	74	23.19	23.53	23.67
	QPSK	36	0	22.40	22.30	22.65
		36	18	22.38	22.39	22.47
		36	39	22.38	22.52	22.46
4 F B B L !-		75	0	22.37	22.41	22.64
15MHz		1	0	22.42	22.24	23.27
		1	38	22.53	22.83	23.17
		1	74	22.37	22.98	23.36
	16QAM	36	0	21.32	21.44	21.53
		36	18	21.39	21.46	21.33
		36	39	21.47	21.55	21.57
		75	0	21.35	21.48	21.66
		D.E	DD 41		nnel/Frequency (
Bandwidth	Modulation	RB size	RB offset	20050/1720	20175/1732.5	20300/1745
001111	0.70::	1	0	23.52	23.15	23.39
20MHz	QPSK	1	50	23.45	23.54	23.46
		'		20.⊣0	20.04	20.⊣0

FCC RF Test Report				Report No:	R1907A0408-R3
	1	99	23.17	23.52	23.64
	50	0	22.37	22.25	22.61
	50	25	22.36	22.35	22.44
	50	50	22.35	22.47	22.42
	100	0	22.34	22.36	22.60
	1	0	22.40	22.20	23.22
	1	50	22.49	22.81	23.13
	1	99	22.35	22.95	23.34
16QAM	50	0	21.29	21.40	21.50
	50	25	21.36	21.44	21.30
	50	50	21.44	21.50	21.53
	100	0	21.33	21.44	21.63

LT	ΓE Band 12			AV Co	nducted Power	r(dBm)
Dan duvidáh	Modulation	RB	DD offeet	Chan	nel/Frequency (MHz)
Bandwidth	Modulation	size	RB offset	23017/699.7	23095/707.5	23173/715.3
		1	0	23.63	23.64	23.61
		1	2	23.67	23.57	23.69
		1	5	23.61	23.50	23.70
	QPSK	3	0	23.50	23.54	23.63
		3	2	23.45	23.50	23.54
		3	3	23.66	23.62	23.63
1.4MHz		6	0	22.61	22.57	22.65
1.411172		1	0	22.95	22.18	22.96
		1	2	22.94	22.55	23.20
		1	5	22.76	22.36	22.86
	16QAM	3	0	22.58	22.60	22.74
		3	2	22.52	22.50	22.51
		3	3	22.52	22.58	22.46
		6	0	21.71	21.63	21.84
Bandwidth	Modulation	RB	RB offset	Channel/Frequency (MHz)		MHz)
Bandwidth	iviodulation	size	KD Ullset	23025/700.5	23095/707.5	23165/714.5
		1	0	23.65	23.68	23.64
		1	7	23.70	23.62	23.73
		1	14	23.64	23.55	23.74
	QPSK	8	0	22.60	22.66	22.76
3MHz		8	4	22.57	22.60	22.66
		8	7	22.76	22.73	22.73
		15	0	22.64	22.61	22.68
	16QAM	1	0	22.98	22.20	22.99
	IUQAW	1	7	22.97	22.60	23.24

FCC RF Test	Report				Report No: I	R1907A0408-R3
		1	14	22.78	22.40	22.89
		8	0	21.69	21.73	21.86
		8	4	21.63	21.63	21.63
		8	7	21.62	21.70	21.59
		15	0	21.74	21.67	21.87
Bandwidth	Modulation	RB	RB offset	Chan	nel/Frequency (MHz)
bandwidth	Modulation	size	KD Ollset	23035/701.5	23095/707.5	23155/713.5
		1	0	23.63	23.63	23.61
		1	13	23.69	23.62	23.71
		1	24	23.60	23.49	23.69
	QPSK	12	0	22.58	22.62	22.73
		12	6	22.55	22.56	22.61
		12	13	22.73	22.72	22.70
5MHz		25	0	22.68	22.58	22.65
SIVITZ		1	0	22.92	22.17	22.96
		1	13	22.95	22.59	23.22
		1	24	22.75	22.36	22.85
	16QAM	12	0	21.67	21.72	21.84
		12	6	21.59	21.57	21.58
		12	13	21.60	21.66	21.56
		25	0	21.72	21.63	21.82
Bandwidth	Modulation	RB	RB offset	Channel/Frequency (MHz)		
Bandwidth	Modulation	size	KD 011961	23060/704	23095/707.5	23130/711
		1	0	23.60	23.59	23.58
		1	25	23.68	23.58	23.69
		1	49	23.58	23.48	23.66
	QPSK	25	0	22.55	22.57	22.69
		25	13	22.53	22.52	22.58
		25	25	22.70	22.67	22.66
10MHz		50	0	22.65	22.53	22.61
TOWINZ		1	0	22.90	22.13	22.91
		1	25	22.91	22.57	23.18
		1	49	22.73	22.33	22.83
	16QAM	25	0	21.64	21.68	21.81
		25	13	21.56	21.55	21.55
		25	25	21.57	21.61	21.52
		50	0	21.70	21.59	21.79



	LTE Band	d 13	Conducted Power(dBm)			
Dan desidab	N/a di dati a a	DD sins	DD -#+	Chann	el/Frequency	(MHz)
Bandwidth	Modulation	RB size	RB offset	23205/779.5	23230/782	23255/784.5
		1	0	23.72	23.63	23.78
		1	13	23.79	23.68	23.77
		1	24	23.58	23.69	23.65
	QPSK	12	0	22.87	22.77	22.82
		12	6	22.85	22.80	22.86
		12	13	22.75	22.82	22.83
5MHz		25	0	22.81	22.74	22.80
SIVITIZ		1	0	23.06	22.41	22.60
		1	13	23.14	22.45	22.35
		1	24	23.03	22.16	22.43
	16QAM	12	0	21.50	21.52	21.68
		12	6	21.63	21.75	21.65
		12	13	21.76	21.60	21.57
		25	0	21.74	21.96	21.62
Bandwidth	Modulation	RB size	RB size RB offset	Channel/Frequency (MHz)		
Balluwidili	Modulation	IND SIZE	IVD Ollset	/	23230/782	/
		1	0	/	23.76	/
		1	25	/	23.85	/
		1	49	/	23.71	/
	QPSK	25	0	/	22.87	/
		25	13	/	22.79	/
		25	25	/	22.88	/
10MHz		50	0	/	22.74	/
TOWIFIZ		1	0	/	23.11	/
		1	25	/	23.41	/
		1	49	/	22.94	/
	16QAM	25	0	/	21.78	/
		25	13	/	21.83	/
		25	25	/	21.88	/
		50	0	/	21.82	/

LTE Band 66				Cond	ucted Power(dBm)
Dandwidth	Modulation	RB size	DD -:	Channel/Frequency (MHz)		
Bandwidth	Modulation	KD SIZE	RB offset	131979/1710.7	132322/1745	132665/1779.3
		1	0	23.42	23.57	23.56
4 48411-	ODGIZ	1	2	23.30	23.76	23.57
1.4MHz	QPSK 1	5	23.37	23.64	23.45	
		3	0	23.47	23.58	23.26

FCC RF Test I	Report				Report No: R	R1907A0408-R3
		3	2	23.35	23.75	23.33
		3	3	23.59	23.55	23.36
		6	0	22.51	22.73	22.34
		1	0	22.84	22.38	22.20
		1	2	22.43	22.76	22.57
		1	5	22.57	22.42	22.22
	16QAM	3	0	22.53	22.57	22.27
		3	2	22.32	22.76	22.43
		3	3	22.69	22.62	22.45
		6	0	21.65	21.84	21.45
Dondwidth.	Modulation	RB size	RB offset	Chanr	nel/Frequency ((MHz)
Bandwidth	IVIOGUIALION	KD SIZE	KD OIISEL	131987/1711.5	132322/1745	132657/1778.5
		1	0	23.44	23.61	23.59
		1	7	23.33	23.81	23.61
		1	14	23.40	23.69	23.49
	QPSK	8	0	22.57	22.70	22.39
		8	4	22.47	22.85	22.45
		8	7	22.69	22.66	22.46
3MHz		15	0	22.54	22.77	22.37
SIVITIZ		1	0	22.87	22.40	22.23
		1	7	22.46	22.81	22.61
		1	14	22.59	22.46	22.25
	16QAM	8	0	21.64	21.70	21.39
		8	4	21.43	21.89	21.55
		8	7	21.79	21.74	21.58
		15	0	21.68	21.88	21.48
Bandwidth	Modulation	RB size	RB offset	Chanr	nel/Frequency ((MHz)
Balluwiutii	Modulation	IND SIZE	ND Ollset	131997/1712.5	132322/1745	132647/1777.5
		1	0	23.41	23.59	23.55
		1	13	23.31	23.77	23.58
		1	24	23.37	23.64	23.45
	QPSK	12	0	22.54	22.65	22.35
		12	6	22.45	22.81	22.40
		12	13	22.67	22.64	22.42
5MHz		25	0	22.52	22.76	22.35
JIVITIZ		1	0	22.84	22.36	22.20
		1	13	22.43	22.79	22.58
		1	24	22.56	22.44	22.21
	16QAM	12	0	21.62	21.66	21.36
		12	6	21.40	21.84	21.51
		12	13	21.76	21.69	21.54
		25	0	21.66	21.84	21.43
Bandwidth	Modulation	RB size	RB offset	Chanr	nel/Frequency ((MHz)

FCC RF Test I	Report				Report No: R	1907A0408-R3
				132022/1715	132322/1745	132622/1775
		1	0	23.43	23.60	23.58
		1	25	23.34	23.82	23.62
		1	49	23.39	23.68	23.48
	QPSK	25	0	22.57	22.70	22.39
		25	13	22.48	22.86	22.44
		25	25	22.69	22.68	22.47
40MH=		50	0	22.60	22.78	22.39
10MHz		1	0	22.86	22.39	22.22
		1	25	22.46	22.83	22.61
		1	49	22.59	22.46	22.24
	16QAM	25	0	21.65	21.71	21.40
		25	13	21.42	21.88	21.54
		25	25	21.79	21.74	21.58
		50	0	21.69	21.89	21.47
Donadoui dale	Madulation	DD ains	DD -#	Channel	Channel	Channel
Bandwidth	Modulation	RB size	RB offset	132047/1717.5	132322/1745	132597/1772.5
		1	0	23.42	23.56	23.56
		1	38	23.32	23.81	23.59
		1	74	23.36	23.63	23.44
	QPSK	36	0	22.55	22.66	22.36
		36	18	22.45	22.81	22.40
		36	39	22.66	22.65	22.43
45MU-		75	0	22.58	22.74	22.34
15MHz		1	0	22.81	22.37	22.20
		1	38	22.44	22.80	22.59
		1	74	22.56	22.42	22.21
	16QAM	36	0	21.62	21.69	21.37
		36	18	21.39	21.83	21.50
		36	39	21.77	21.70	21.55
		75	0	21.66	21.84	21.43
Bandwidth	Modulation	RB size	RB offset	Chanr	nel/Frequency ((MHz)
Bandwidth	Modulation	ND SIZE	IVD Ollset	132072/1720	132322/1745	132572/1770
		1	0	23.39	23.52	23.53
		1	50	23.31	23.77	23.57
		1	99	23.34	23.62	23.41
	QPSK	50	0	22.52	22.61	22.32
20MHz		50	25	22.43	22.77	22.37
ZUIVITZ		50	50	22.63	22.60	22.39
		100	0	22.55	22.69	22.30
		1	0	22.79	22.33	22.15
	16QAM	1	50	22.40	22.78	22.55
		1	99	22.54	22.39	22.19

FCC RF Test Report				Report No: F	R1907A0408-R3
	50	0	21.59	21.65	21.34
	50	25	21.36	21.81	21.47
	50	50	21.74	21.65	21.51
	100	0	21.64	21.80	21.40

LTE Band 71				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	DD offeet	Char	nel/Frequency (MHz)
Bandwidth	Modulation	RB SIZE	RB offset	133147/665.5	133297/680.5	133447/695.5
		1	0	23.15	23.23	22.96
		1	13	23.44	23.23	23.08
		1	24	23.25	23.06	23.07
	QPSK	12	0	22.15	22.33	22.29
		12	6	22.20	22.19	22.21
		12	13	22.38	22.36	22.33
5MHz		25	0	22.17	22.40	22.20
SIVIFIZ		1	0	22.08	22.64	22.90
		1	13	22.20	22.85	22.91
		1	24	22.22	22.43	22.78
	16QAM	12	0	21.29	21.23	21.07
		12	6	21.25	21.28	21.26
		12	13	21.38	21.23	21.13
		25	0	21.32	21.50	21.31
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
Bandwidth	Modulation	IND SIZE	IND Ollset	133172/668	133297/680.5	133422/693
		1	0	23.17	23.24	22.99
		1	25	23.47	23.28	23.12
		1	49	23.27	23.10	23.10
	QPSK	25	0	22.18	22.38	22.33
		25	13	22.23	22.24	22.25
		25	25	22.40	22.40	22.38
10MHz		50	0	22.25	22.42	22.24
TOWNIE		1	0	22.10	22.67	22.92
		1	25	22.23	22.89	22.94
		1	49	22.25	22.45	22.81
	16QAM 25 25	25	0	21.32	21.28	21.11
		13	21.27	21.32	21.29	
		25	25	21.41	21.28	21.17
		50	0	21.35	21.55	21.35
Bandwidth	Modulation	RB size	RB offset	Char	nel/Frequency (MHz)
Danawiatii	Moderation	ND 3126	ND OHOUL	133197/670.5	133297/680.5	133397/690.5
15MHz	QPSK	1	0	23.16	23.01	22.97

FCC RF Test	Report				Report No: I	R1907A0408-R3
		1	38	23.45	23.11	23.09
		1	74	23.24	23.09	23.06
		36	0	22.16	22.25	22.30
		36	18	22.20	22.21	22.21
		36	39	22.37	22.13	22.34
		75	0	22.23	22.11	22.19
		1	0	22.05	22.07	22.90
		1	38	22.21	22.09	22.92
		1	74	22.22	22.22	22.78
	16QAM	36	0	21.29	21.25	21.08
		36	18	21.24	21.20	21.25
		36	39	21.39	21.12	21.14
		75	0	21.32	21.11	21.31
Bandwidth	Modulation	RB size	RB offset	Char	nel/Frequency (MHz)
Balluwidili	Woddiation	IVD SIZE	IND Offset	133222/673	133322/683	133372/688
		1	0	23.13	23.16	22.94
		1	0 50			
			_	23.13	23.16	22.94
	QPSK	1	50	23.13 23.44	23.16 23.23	22.94 23.07
	QPSK	1	50 99	23.13 23.44 23.22	23.16 23.23 23.04	22.94 23.07 23.03
	QPSK	1 1 50	50 99 0	23.13 23.44 23.22 22.13	23.16 23.23 23.04 22.29	22.94 23.07 23.03 22.26
20MHz	QPSK	1 1 50 50	50 99 0 25	23.13 23.44 23.22 22.13 22.18	23.16 23.23 23.04 22.29 22.15	22.94 23.07 23.03 22.26 22.18
20MHz	QPSK	1 1 50 50 50	50 99 0 25 50	23.13 23.44 23.22 22.13 22.18 22.34	23.16 23.23 23.04 22.29 22.15 22.32	22.94 23.07 23.03 22.26 22.18 22.30
20MHz	QPSK	1 1 50 50 50 100	50 99 0 25 50	23.13 23.44 23.22 22.13 22.18 22.34 22.20	23.16 23.23 23.04 22.29 22.15 22.32 22.33	22.94 23.07 23.03 22.26 22.18 22.30 22.15
20MHz	QPSK	1 1 50 50 50 100 1	50 99 0 25 50 0	23.13 23.44 23.22 22.13 22.18 22.34 22.20 22.03	23.16 23.23 23.04 22.29 22.15 22.32 22.33 22.61	22.94 23.07 23.03 22.26 22.18 22.30 22.15 22.85
20MHz	QPSK 16QAM	1 1 50 50 50 100 1	50 99 0 25 50 0	23.13 23.44 23.22 22.13 22.18 22.34 22.20 22.03 22.17	23.16 23.23 23.04 22.29 22.15 22.32 22.33 22.61 22.84	22.94 23.07 23.03 22.26 22.18 22.30 22.15 22.85 22.88
20MHz		1 1 50 50 50 100 1 1	50 99 0 25 50 0 0 50	23.13 23.44 23.22 22.13 22.18 22.34 22.20 22.03 22.17 22.20	23.16 23.23 23.04 22.29 22.15 22.32 22.33 22.61 22.84 22.38	22.94 23.07 23.03 22.26 22.18 22.30 22.15 22.85 22.85 22.88
20MHz		1 50 50 50 100 1 1 1 50	50 99 0 25 50 0 0 50 99	23.13 23.44 23.22 22.13 22.18 22.34 22.20 22.03 22.17 22.20 21.26	23.16 23.23 23.04 22.29 22.15 22.32 22.33 22.61 22.84 22.38 21.22	22.94 23.07 23.03 22.26 22.18 22.30 22.15 22.85 22.85 22.88 22.76 21.05



5.2 Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

- 1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI/TIA-603-E (2016).
- a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading.LOSS = Generator Output Power (dBm) Analyzer reading (dBm)
- e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation:ERP (dBm) = LVL (dBm) + LOSS (dB)
- f) The maximum ERP is the maximum value determined in the preceding step.
- g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:


EIRP (dBm) = Output Power (dBm) - Losses (dB) + Antenna Gain (dBi) where:dBd refers to gain relative to an ideal dipole.

EIRP (dBm) = ERP (dBm) + 2.15 (dB.)

The RB allocation refers to section 5.1, using the maximum output power configuration.




Test setup

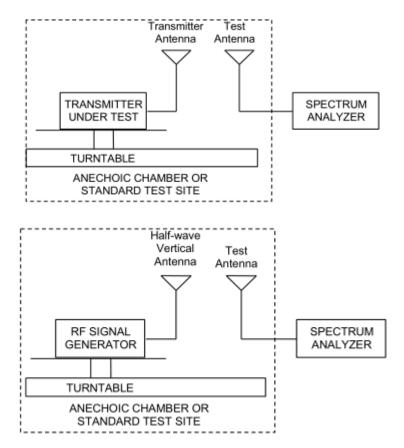

Note: Area side:2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.



Report No: R1907A0408-R3

Rule Part 27.50(b) (10) specifies that "Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP"

Rule Part 27.50(c) (10) specifies that "Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP"

Rule Part 27.50(d) (4) specifies that "Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP."

Part 27.50(b)(10)Limit	≤ 3 W (34.77 dBm)
Part 27.50(c)(10)Limit	≤ 3 W (34.77 dBm)
Part 27.50(d)(4)Limit	≤ 1 W (30 dBm)

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 2, U = 1.19 dB



Test Results

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

Mode	Channel	Frequency (MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion
WCDMA	Low	1712.4	Horizontal	25.59	30	Pass
	Mid	1732.6	Horizontal	25.62	30	Pass
Band IV	High	1752.6	Horizontal	25.26	30	Pass

LTE Band 4								
Bandwidth	Channel Polarization		EIRP (dBm)	Limit (dBm)	Conclusion			
1.4 MU=	Low	1710.7	Horizontal	26.08	30	Pass		
1.4 MHz	Mid	1732.5	Horizontal	25.73	30	Pass		
(QPSK)	High	1754.3	Horizontal	25.24	30	Pass		
2 MII-	Low	1711.5	Horizontal	25.83	30	Pass		
3 MHz	Mid	1732.5	Horizontal	25.57	30	Pass		
(QPSK)	High	1753.5	Horizontal	25.23	30	Pass		
5 NALL-	Low	1712.5	Horizontal	25.90	30	Pass		
5 MHz	Mid	1732.5	Horizontal	25.71	30	Pass		
(QPSK)	High	1752.5	Horizontal	24.99	30	Pass		
40 MH-	Low	1715	Horizontal	25.56	30	Pass		
10 MHz	Mid	1732.5	Horizontal	25.55	30	Pass		
(QPSK)	High	1750	Horizontal	25.69	30	Pass		
15 MHz	Low	1717.5	Horizontal	25.87	30	Pass		
	Mid	1732.5	Horizontal	25.66	30	Pass		
(QPSK)	High	1747.5	Horizontal	25.53	30	Pass		
20 MHz	Low	1720	Horizontal	25.51	30	Pass		
_	Mid	1732.5	Horizontal	25.40	30	Pass		
(QPSK)	High	1745	Horizontal	25.79	30	Pass		
1.4 MHz	Low	1710.7	Horizontal	25.45	30	Pass		
	Mid	1732.5	Horizontal	24.90	30	Pass		
(16QAM)	High	1754.3	Horizontal	24.69	30	Pass		
3 MHz	Low	1711.5	Horizontal	25.19	30	Pass		
	Mid	1732.5	Horizontal	24.76	30	Pass		
(16QAM)	High	1753.5	Horizontal	24.67	30	Pass		
5 MU-	Low	1712.5	Horizontal	25.52	30	Pass		
5 MHz	Mid	1732.5	Horizontal	25.54	30	Pass		
(16QAM)	High	1752.5	Horizontal	24.78	30	Pass		
40 MILI-	Low	1715	Horizontal	25.22	30	Pass		
10 MHz (16QAM)	Mid	1732.5	Horizontal	25.03	30	Pass		
(TOWAN)	High	1750	Horizontal	25.36	30	Pass		



Report No: R1907A0408-R3

15 MU=	Low	1717.5	Horizontal	25.19	30	Pass
15 MHz	Mid	1732.5	Horizontal	25.22	30	Pass
(16QAM)	High	1747.5	Horizontal	24.99	30	Pass
20 MU-	Low	1720	Horizontal	25.22	30	Pass
20 MHz	Mid	1732.5	Horizontal	24.88	30	Pass
(16QAM)	High	1745	Horizontal	25.35	30	Pass

	LTE Band 12									
Bandwidth	Channel	Frequency Polarization		ERP (dBm)	Limit (dBm)	Conclusion				
1.4 MHz	Low	699.7	Horizontal	18.96	34.77	Pass				
(QPSK)	Mid	707.5	Horizontal	20.31	34.77	Pass				
(QFSK)	High	715.3	Horizontal	20.26	34.77	Pass				
3 MHz	Low	700.5	Horizontal	19.55	34.77	Pass				
	Mid	707.5	Horizontal	19.90	34.77	Pass				
(QPSK)	High	714.5	Horizontal	20.16	34.77	Pass				
5 MHz	Low	701.5	Horizontal	19.11	34.77	Pass				
	Mid	707.5	Horizontal	20.04	34.77	Pass				
(QPSK)	High	713.5	Horizontal	20.48	34.77	Pass				
10 MHz	Low	704	Horizontal	19.21	34.77	Pass				
_	Mid	707.5	Horizontal	19.33	34.77	Pass				
(QPSK)	High	711	Horizontal	19.83	34.77	Pass				
1.4 MHz	Low	699.7	Horizontal	18.66	34.77	Pass				
(16QAM)	Mid	707.5	Horizontal	19.77	34.77	Pass				
(TOQAIVI)	High	715.3	Horizontal	19.97	34.77	Pass				
3 MHz	Low	700.5	Horizontal	19.19	34.77	Pass				
(16QAM)	Mid	707.5	Horizontal	19.56	34.77	Pass				
(TOQAIVI)	High	714.5	Horizontal	19.92	34.77	Pass				
5 MHz	Low	701.5	Horizontal	18.89	34.77	Pass				
	Mid	707.5	Horizontal	19.93	34.77	Pass				
(16QAM)	High	713.5	Horizontal	20.38	34.77	Pass				
10 MHz	Low	704	Horizontal	18.55	34.77	Pass				
(16QAM)	Mid	707.5	Horizontal	18.57	34.77	Pass				
(IOQAIVI)	High	711	Horizontal	19.30	34.77	Pass				



	LTE Band 13									
Bandwidth	Channel	Frequency (MHz)	Polarization	ERP (dBm)	Limit (dBm)	Conclusion				
5MHz	Low	779.5	Horizontal	23.26	34.77	Pass				
(QPSK)	Mid	782	Horizontal	23.25	34.77	Pass				
(QFSK)	High	784.5	Horizontal	23.36	34.77	Pass				
10MHz (QPSK)	Mid	782	Horizontal	23.63	34.77	Pass				
ENALL-	Low	779.5	Horizontal	22.65	34.77	Pass				
5MHz	Mid	782	Horizontal	22.89	34.77	Pass				
(16QAM)	High	784.5	Horizontal	22.78	34.77	Pass				
10MHz (16QAM)	Mid	782	Horizontal	23.26	34.77	Pass				

		L	TE Band 66			LTE Band 66									
Band width	Channel	Frequency (MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion									
1.4 MHz	Low	1710.70	Horizontal	27.17	30	Pass									
(QPSK)	Mid	1745.00	Horizontal	27.10	30	Pass									
(QFSK)	High	1779.30	Horizontal	26.05	30	Pass									
3 MHz	Low	1711.50	Horizontal	27.51	30	Pass									
(QPSK)	Mid	1745.00	Horizontal	27.06	30	Pass									
(QFSK)	High	1778.50	Horizontal	26.01	30	Pass									
5 MHz	Low	1712.50	Horizontal	26.92	30	Pass									
_	Mid	1745.00	Horizontal	26.78	30	Pass									
(QPSK)	High	1777.50	Horizontal	25.98	30	Pass									
10 MHz	Low	1715.00	Horizontal	27.25	30	Pass									
(QPSK)	Mid	1745.00	Horizontal	27.30	30	Pass									
(QFSK)	High	1775.00	Horizontal	26.13	30	Pass									
15 MHz	Low	1717.50	Horizontal	27.01	30	Pass									
(QPSK)	Mid	1745.00	Horizontal	27.12	30	Pass									
(QFSK)	High	1772.50	Horizontal	26.43	30	Pass									
20 MHz	Low	1720.00	Horizontal	26.98	30	Pass									
(QPSK)	Mid	1745.00	Horizontal	27.02	30	Pass									
(QF3K)	High	1770.00	Horizontal	26.31	30	Pass									
1.4 MHz	Low	1710.70	Horizontal	26.54	30	Pass									
(16QAM)	Mid	1745.00	Horizontal	26.27	30	Pass									
(TOWAIVI)	High	1779.30	Horizontal	25.50	30	Pass									
3 MHz	Low	1711.50	Horizontal	26.87	30	Pass									
(16QAM)	Mid	1745.00	Horizontal	26.25	30	Pass									
(IUQAW)	High	1778.50	Horizontal	25.45	30	Pass									



Report No: R1907A0408-R3

The rest report restriction is the restriction of t						
5 MU-	Low	1712.50	Horizontal	26.14	30	Pass
5 MHz	Mid	1745.00	Horizontal	26.21	30	Pass
(16QAM)	High	1777.50	Horizontal	25.37	30	Pass
40 MU-	Low	1715.00	Horizontal	26.61	30	Pass
10 MHz (16QAM)	Mid	1745.00	Horizontal	26.48	30	Pass
(TOWAIVI)	High	1775.00	Horizontal	25.50	30	Pass
45 MU-	Low	1717.50	Horizontal	26.63	30	Pass
15 MHz (16QAM)	Mid	1745.00	Horizontal	26.98	30	Pass
(TOWAIVI)	High	1772.50	Horizontal	26.19	30	Pass
20 MHz	Low	1720.00	Horizontal	26.79	30	Pass
(16QAM)	Mid	1745.00	Horizontal	26.60	30	Pass
(TOQAWI)	High	1770.00	Horizontal	25.97	30	Pass

	LTE Band 71									
Bandwidth	Channel	Frequency (MHz)	Polarization	ERP (dBm)	Limit (dBm)	Conclusion				
5 MHz	Low	665.5	Horizontal	21.30	34.77	Pass				
(QPSK)	Mid	680.5	Horizontal	22.72	34.77	Pass				
(QF3K)	High	695.5	Horizontal	22.54	34.77	Pass				
10 MHz	Low	668	Horizontal	21.15	34.77	Pass				
(QPSK)	Mid	680.5	Horizontal	22.42	34.77	Pass				
(QF3K)	High	693	Horizontal	22.17	34.77	Pass				
15 MHz	Low	670.5	Horizontal	21.32	34.77	Pass				
(QPSK)	Mid	680.5	Horizontal	21.74	34.77	Pass				
(QFSK)	High	690.5	Horizontal	22.44	34.77	Pass				
20 MHz	Low	673	Horizontal	21.41	34.77	Pass				
(QPSK)	Mid	683	Horizontal	22.66	34.77	Pass				
(QF3K)	High	688	Horizontal	22.52	34.77	Pass				
5 MHz	Low	665.5	Horizontal	20.62	34.77	Pass				
(16QAM)	Mid	680.5	Horizontal	22.25	34.77	Pass				
(TOQAIVI)	High	695.5	Horizontal	22.03	34.77	Pass				
10 MHz	Low	668	Horizontal	20.61	34.77	Pass				
(16QAM)	Mid	680.5	Horizontal	21.70	34.77	Pass				
(TOQAW)	High	693	Horizontal	21.64	34.77	Pass				
15 MHz	Low	670.5	Horizontal	20.64	34.77	Pass				
(16QAM)	Mid	680.5	Horizontal	21.30	34.77	Pass				
(IOQAIVI)	High	690.5	Horizontal	21.90	34.77	Pass				
20 MHz	Low	673	Horizontal	20.92	34.77	Pass				
(16QAM)	Mid	683	Horizontal	21.94	34.77	Pass				
(IOQAIVI)	High	688	Horizontal	21.88	34.77	Pass				

Note: 1. EIRP= E.R.P+2.15



5.3 Occupied Bandwidth

Ambient condition

Temperature Relative humidity		Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51 kHz, VBW is set to 160 kHz for WCDMA Band IV.

RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 4/12/66 (1.4MHz).

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 4/12/66 (3MHz).


RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 4/12/13/66/71 (5MHz).

RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 4/12/13/66/71 (10MHz).

RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 4/66/71 (15MHz/20MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

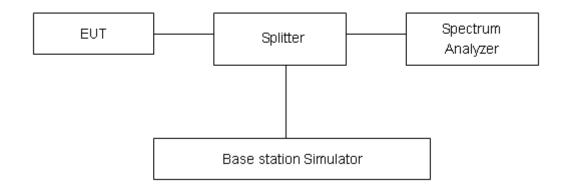


Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 2, U=624Hz.



Test Result

EC25-AFX

Mode	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
	1312	1712.4	4.1288	4.696
WCDMA Band IV (RMC)	1413	1732.6	4.1217	4.714
(RIVIC)	1513	1752.6	4.1281	4.715

			LTE	Band 4		
RB	Modulation	Bandwidth	Channel	Frequency	99% Power	-26dBc
KD	Wiodulation	(MHz)	Gilaililei	(MHz)	Bandwidth(MHz)	Bandwidth(MHz)
			19957	1710.7	1.1282	1.366
		1.4	20175	1732.5	1.1272	1.362
			20393	1754.3	1.1412	1.369
			19965	1711.5	2.7521	3.075
		3	20175	1732.5	2.7431	3.075
			20385	1753.5	2.7428	3.085
			19975	1712.5	4.5161	5.049
		5	20175	1732.5	4.5341	5.033
	QPSK		20375	1752.5	4.5121	5.057
	QPSK		20000	1715	9.0083	10.070
		10	20175	1732.5	9.0383	10.210
			20350	1750	9.0426	10.080
		15	20025	1717.5	13.4140	14.650
100%			20175	1732.5	13.4770	14.810
100%			20325	1747.5	13.4540	14.740
			20050	1720	17.8660	19.240
		20	20175	1732.5	17.8520	19.150
			20300	1745	17.8910	19.490
			19957	1710.7	1.1249	1.334
		1.4	20175	1732.5	1.1305	1.353
			20393	1754.3	1.1225	1.377
			19965	1711.5	2.7348	3.064
	160084	3	20175	1732.5	2.7630	3.089
	16QAM		20385	1753.5	2.7407	3.079
			19975	1712.5	4.5356	5.040
		5	20175	1732.5	4.5138	5.037
			20375	1752.5	4.5368	5.045
		10	20000	1715	9.0158	10.050
		oi) Co. I td		TA_MP_05_00		Page 30 of 153

Page 30 of 153