

Test Report

Report Number: 3183595MPK-002

Project Number: 3183595

November 30, 2009

Testing performed on the
Quantum 1000 Base Station
Model Number: QUANTUM 1000
FCC ID: XN3-Q1000-25-5

to

FCC Part 27 Subpart M

for

PUREWAVE NETWORKS

Test Performed by:

Intertek Testing Services NA, Inc
1365 Adams Court
Menlo Park, CA 94025

Test Authorized by:

PUREWAVE NETWORKS
2660-C Marine Way
Mountain View, CA 94043 USA

Prepared by:


Krishna Vemuri, Senior EMC Engineer

Date: November 30, 2009

Reviewed by:


Ollie Moyrong, Engineering Manager


Date: November 30, 2009

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.


Report No. 3183595MPK-002

| | |
|-------------------------------|--|
| Equipment Under Test: | Quantum 1000 Base Station |
| Trade Name: | PUREWAVE NETWORKS |
| Model No.: | QUANTUM 1000 |
| Serial No.: | EMCProto1 |
| FCC ID: | XN3-Q1000-25-5 |
| Applicant: | PUREWAVE NETWORKS |
| Contact: | Mr. Jas Dhaliwal |
| Address: | 2660-C Marine Way Mountain View, CA 94043 |
| Country | USA |
| Tel. number: | 650-528-5200 |
| Fax number: | 650-528-5222 |
| Applicable Regulation: | FCC Part 27 Subpart M |
| Test Site Location: | 1365 Adams Court Menlo Park, CA 94025 |
| Date of Test: | July 23 – November 5, 2009 |

We attest to the accuracy of this report:



Krishna Vemuri
Senior EMC Engineer



Ollie Moyrong
Engineering Manager

TABLE OF CONTENTS

| | | |
|------------|---|-----------|
| 1.0 | Introduction | 5 |
| 1.1 | Product Description..... | 5 |
| 1.2 | Summary of Test Results | 7 |
| 1.3 | Test Configuration | 8 |
| | 1.3.1 Support Equipment | 8 |
| | 1.3.2 Block diagram of Test Setup..... | 8 |
| 1.4 | Antenna Specifications..... | 9 |
| 2.0 | RF Power Output..... | 10 |
| 2.1 | Requirement..... | 10 |
| 2.2 | Test Procedure..... | 10 |
| 2.3 | Test Equipment | 10 |
| 2.4 | Test Results | 10 |
| 3.0 | Occupied Bandwidth | 20 |
| 3.1 | Requirement..... | 20 |
| 3.2 | Test Procedure..... | 20 |
| 3.3 | Test Equipment | 20 |
| 3.4 | Test Results | 20 |
| 4.0 | Spurious Emissions at Antenna Terminals | 30 |
| 4.1 | Requirement..... | 30 |
| 4.2 | Test Procedure..... | 30 |
| 4.3 | Test Equipment | 30 |
| 4.4 | Test Results | 30 |
| 5.0 | Spurious Radiation | 67 |
| 5.1 | Requirement..... | 67 |
| 5.2 | Test Procedure..... | 67 |
| 5.3 | Test Equipment | 67 |
| 5.4 | Test Results | 68 |
| 6.0 | Frequency Stability vs Temperature and Voltage | 70 |
| 6.1 | Requirement..... | 70 |
| 6.2 | Test Procedure..... | 70 |
| 6.3 | Test Equipment | 70 |
| 6.4 | Test Results | 71 |
| 7.0 | Emission from Digital Parts and Receiver..... | 72 |
| 7.1 | Radiated emissions..... | 72 |
| | 7.1.1 Test Limit..... | 72 |
| | 7.1.2 Test Procedure | 72 |
| | 7.1.3 Test Results..... | 74 |



| | | |
|------------|-------------------------------------|-----------|
| 8.0 | List of Test Equipment | 76 |
| 9.0 | Document History | 77 |

1.0 Introduction

1.1 Product Description

The Quantum 1000 employs an extremely flexible and versatile hardware architecture. The heart of the base station is a sophisticated and highly integrated ASIC that combines 6 DSP and general purpose processor cores along with specialized DSP hardware. A Linux based subsystem supports applications, SNMP and other management functions. Finally, the Quantum 1000 includes 2 RF transmitters and associated PAs, and 4 RF receivers.

Important characteristics of the Quantum 1000 Base Station Sector are:

- Board-to-board communications for scaling up to 6 antennas.
- 10 MHz profile
- WiMAX OFDMA compliance
- All layers implemented in software.
- 2.3 – 2.7 GHz and 3.3 – 3.8 GHz operations.

PureWave has implemented a scalable architecture that lets service providers upgrade their Base Stations by:

- Adding more Base Station Sector to a location
- Adding antennas (and corresponding RF module sets) within a sector
- Adding processing capability in order to process traffic within additional spectrum
- Upgrading software to allow for changes in features and standards.

| Specification of the EUT | |
|----------------------------------|---|
| Maximum Measured RF Output Power | 36.1 dBm; 4.07 W |
| Frequency Ranges, MHz | 2501 - 2685 |
| Type of modulation | QPSK, 16QAM, 64QAM |
| Channel Bandwidth | 10 MHz |
| Antenna Gain | Varies, refer to Report Section 1.4 for antenna details |
| Emission Designator | 9M39W7D |
| Operating Temperature | From -30°C to $+50^{\circ}\text{C}$ |

EUT receive date: July 23, 2009

EUT receive condition: The prototype version of the EUT was received in good condition with no apparent damage. As declared by the Applicant it is identical to the production units.

Test start date: July 23, 2009

Test completion date: November 5, 2009



1.2 Summary of Test Results


| FCC Rule | Description of Test | Result |
|----------------|---|----------|
| 2.1046, 27.50 | RF Power Output | Complies |
| 2.1049 | Occupied Bandwidth | Complies |
| 2.1051, 27.53 | Out of Band Emissions at Antenna Terminals | Complies |
| 2.1053, 27.53 | Spurious Radiation | Complies |
| 2.1055, 27.54 | Frequency Stability vs. Temperature and Voltage | Complies |
| 15.109, 15.111 | Emission from Digital Part and Receiver | Complies |

1.3 Test Configuration

1.3.1 Support Equipment

| Item # | Description | Model No. | S/N |
|--------|-------------------------|--------------|--------------|
| 1 | Dell Personal Computer | Optiplex 320 | 9B32KC1 |
| 2 | Agilent DC Power Supply | 6644A | MY40001367 |
| 3 | Dell Personal Computer | Optiplex 320 | 3RND5J1 |
| 4 | Phihong DC Power Supply | PSUI6U-480 | P72809868A1 |
| 5 | Gemtek CPE | WIXS-177 | 002682124972 |

1.3.2 Block diagram of Test Setup

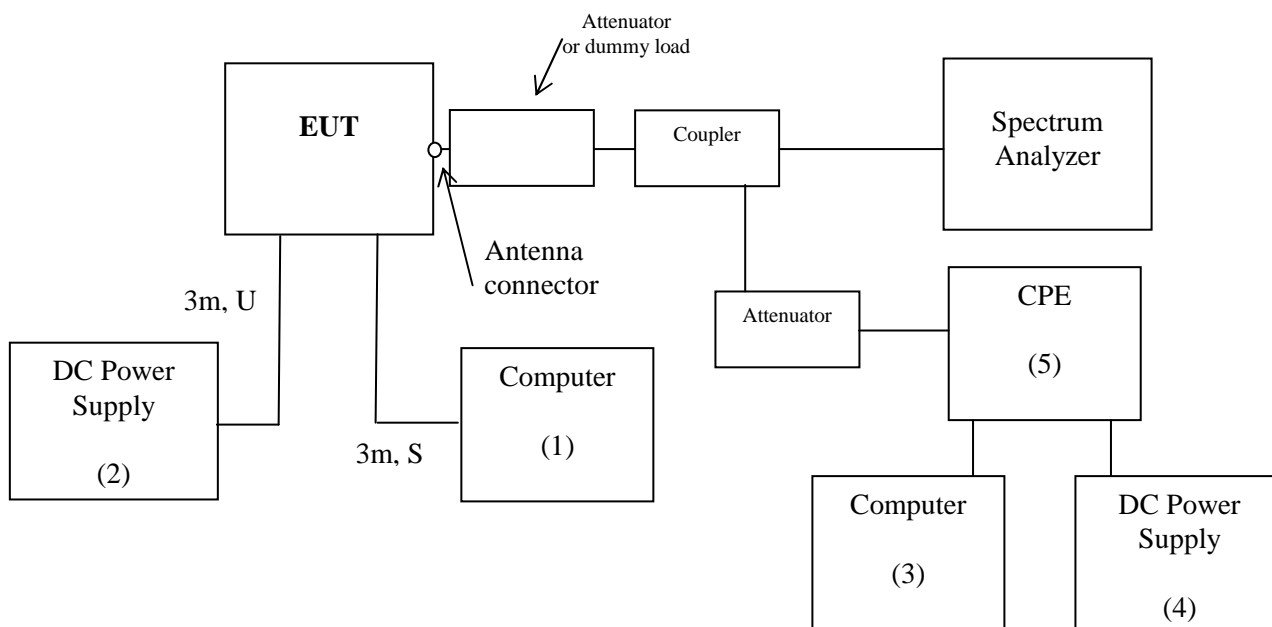

S = Shielded
U = Unshielded

F = With Ferrite
m = Length in Meters

1.4 Antenna Specifications

The Quantum 1000 2.5 GHz product line can be used with antennas supplied by PureWave Networks or any commercially available antenna. The table below lists antenna products that provide a representative sample of the range of antennas that may be used.

| Description | Gain dBi | Az BW degrees | Manufacturer | Manufacturer P/N |
|--|---------------------|--------------------------|---------------------|-------------------------|
| 4 element, vertical linear polarized array | 14.5 | 120 | Mars Antenna | MA-WE36-15PW4 |
| 4 element, vertical linear polarized array | 15.5 | 90 | Mars Antenna | MA-WD36-16PW4 |
| 2 element, dual polarized, +/- 45 degree slant | 15 | 90 | Mars Antenna | MA-WD35-DS15 |
| 2 element, dual polarized, +/- 45 degree slant | 16.5 | 65 | Mars Antenna | MA-WC35-DS17 |
| Omni, vertical polarized | 11 | 360 | L-com | HG3511U-PRO |
| Omni, vertical polarized | 8 | 360 | Air802 LLC | ANOM3508 |
| Omni, vertical polarized | 12 | 360 | Air802 LLC | ANOM3512 |

2.0 RF Power Output

FCC 2.1046, 27.50

2.1 Requirement

Main, booster and base stations. The maximum EIRP of a main, booster or base station shall not exceed $33 \text{ dBW} + 10\log(X/Y) \text{ dBW}$, where X is the actual channel width in MHz and Y is either 6 MHz if prior to transition or the station is in the MBS following transition or 5.5 MHz if the station is in the LBS and UBS following transition.

2.2 Test Procedure

The EUT RF output was connected as shown on the diagram in report section 1.3.2. The EUT was setup to transmit continuously the maximum power.

The spectrum analyzer was setup to measure a peak power using the Channel Power Function. The attenuation and cable loss were added to the spectrum analyzer reading by using OFFSET function.

The EUT was set to transmit at maximum power. Measurements were performed at three frequencies (low, middle, and high channels).

2.3 Test Equipment

Rohde & Schwarz FSU26 Spectrum Analyzer

2.4 Test Results

| Frequency (MHz) | Measured Power (dBm) | Graph |
|--------------------|----------------------|-------|
| Modulation: QPSK | | |
| 2501 | 35.94 | 2.1 |
| 2593 | 34.96 | 2.2 |
| 2685 | 36.10 | 2.3 |
| Modulation: 16 QAM | | |
| 2501 | 35.74 | 2.4 |
| 2593 | 35.02 | 2.5 |
| 2685 | 36.03 | 2.6 |
| Modulation: 64 QAM | | |
| 2501 | 35.66 | 2.7 |
| 2593 | 35.03 | 2.8 |
| 2685 | 36.07 | 2.9 |


Output Power Graph 2.1



QPSK, LOW CHANNEL

Date: 23.JUN.2009 03:01:01


Graph 2.2

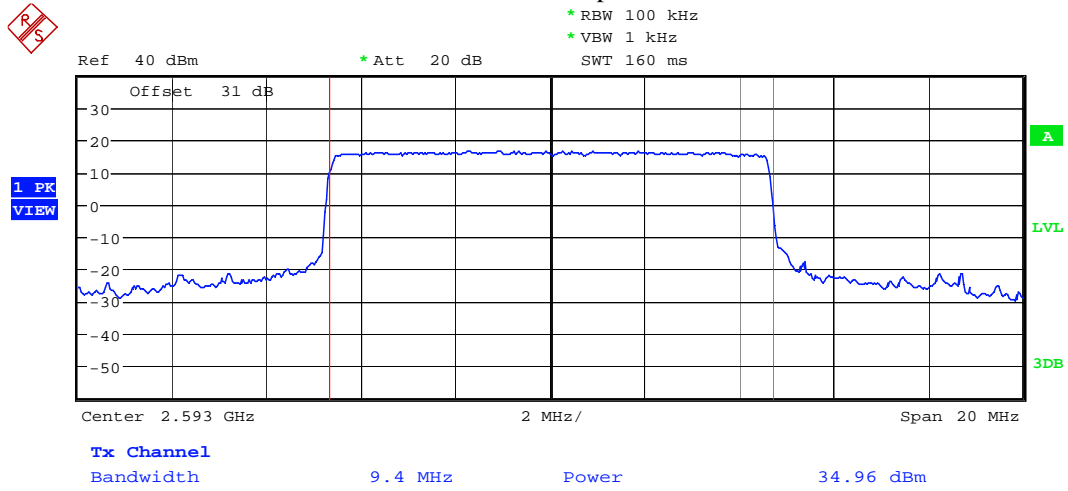

QPSK, MID CHANNEL

Date: 23.JUN.2009 03:20:33


Graph 2.3

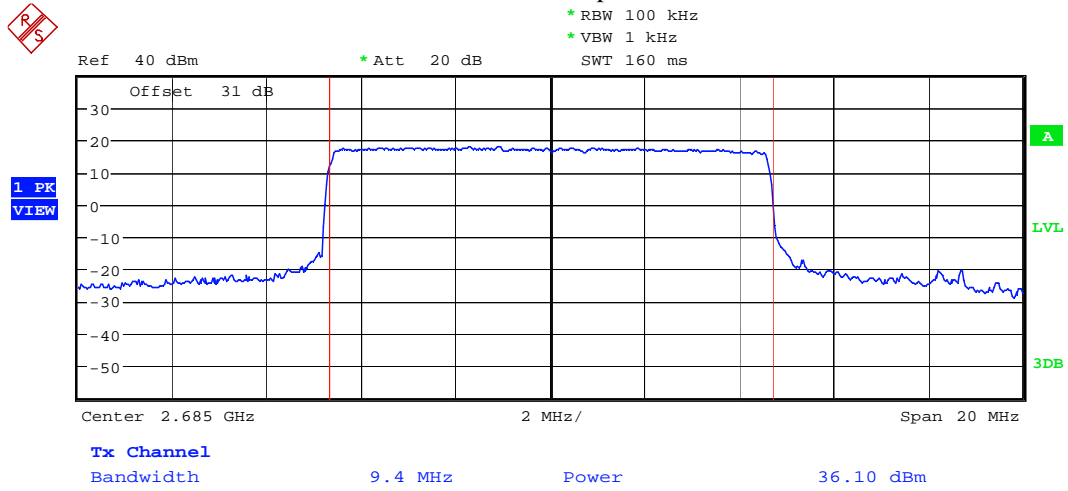

QPSK, HIGH CHANNEL

Date: 23.JUN.2009 03:44:39

Graph 2.4

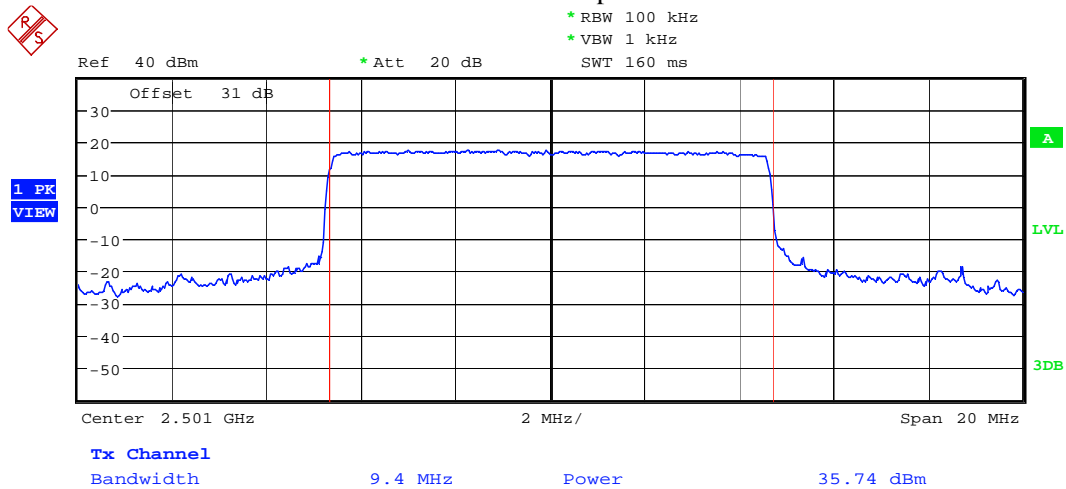


16QAM, LOW CHANNEL

Date: 23.JUN.2009 03:03:33



Graph 2.5


* RBW 100 kHz
* VBW 1 kHz
SWT 160 ms

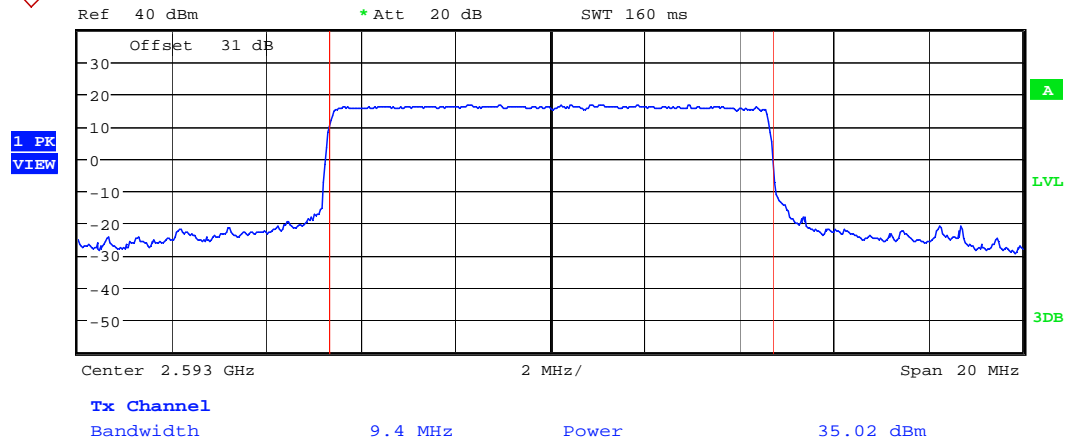

16QAM, MID CHANNEL

Date: 23.JUN.2009 03:19:28


Graph 2.6

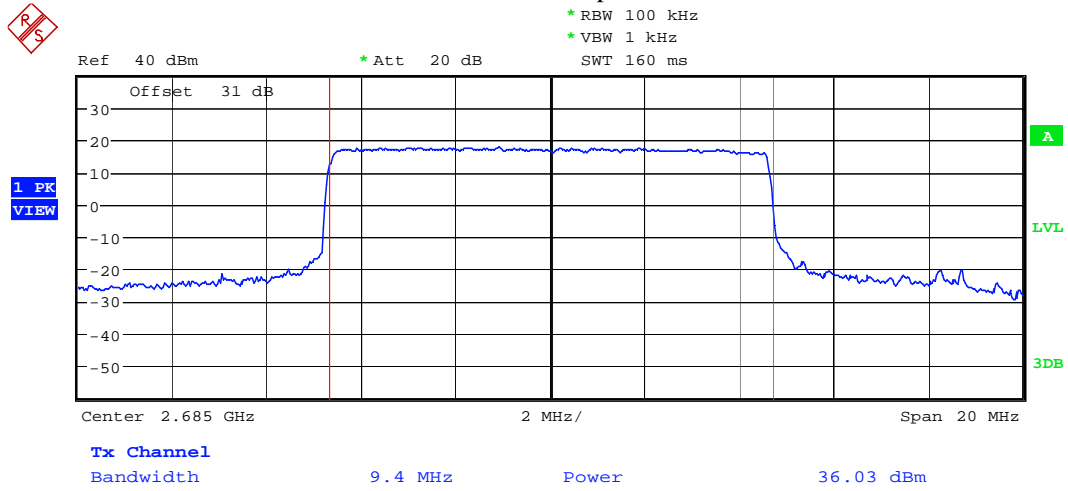

16QAM, HIGH CHANNEL

Date: 23.JUN.2009 03:41:39


Graph 2.7

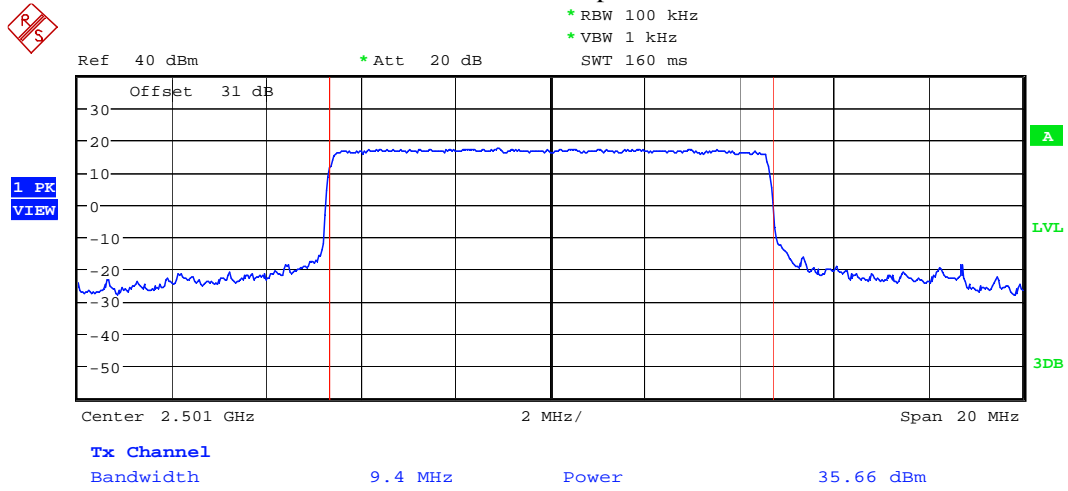

64QAM, LOW CHANNEL

Date: 23.JUN.2009 03:04:29


Graph 2.8

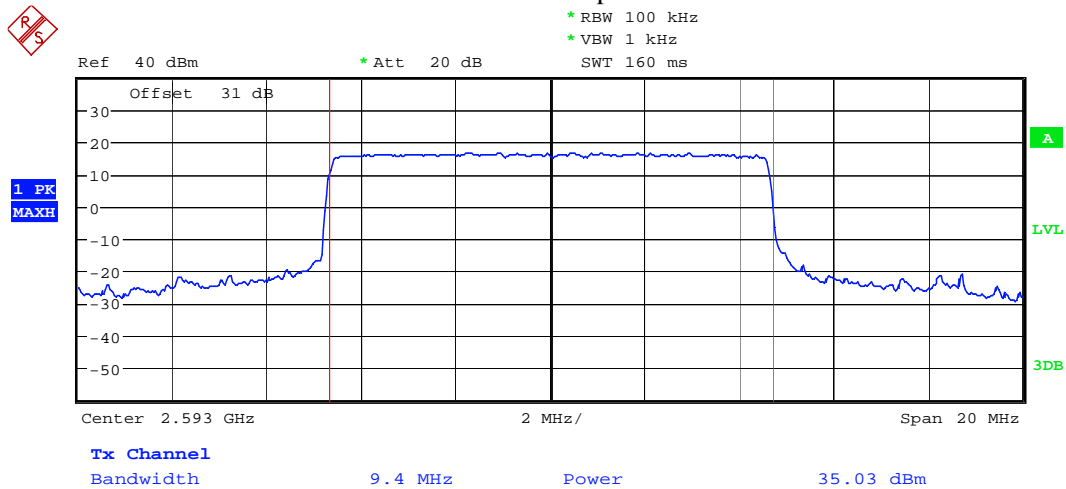

64QAM, MID CHANNEL

Date: 23.JUN.2009 03:07:43

Graph 2.9

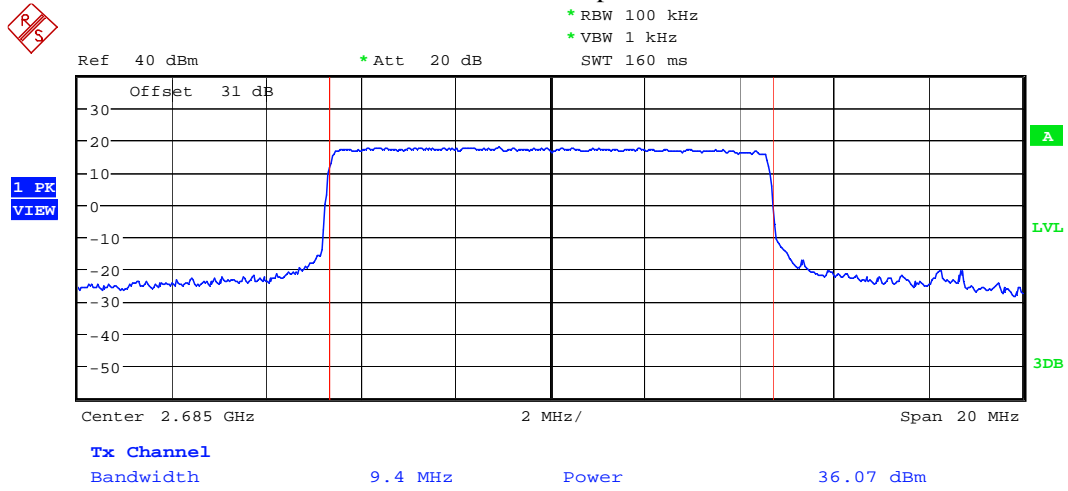

64QAM, HIGH CHANNEL

Date: 23.JUN.2009 03:43:03

3.0 Occupied Bandwidth

FCC 2.1049

3.1 Requirement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to 0.5% of the emitted power.

3.2 Test Procedure

The EUT RF output was connected as shown on the diagram in report section 1.3.2. The EUT was setup to transmit the maximum power.

The spectrum analyzed was setup to measure the Occupied Bandwidth (defined as the 99% Power Bandwidth). The Occupied Bandwidth was measured at the low, middle and high channels for all types of modulation and authorized bandwidths.

3.3 Test Equipment


Rohde & Schwarz FSU26 Spectrum Analyzer.

3.4 Test Results

| Frequency (MHz) | Modulation | Channel Bandwidth (MHz) | Measured Occupied Bandwidth (MHz) | Graph |
|-----------------|------------|-------------------------|-----------------------------------|-------|
| 2501 | QPSK | 10 | 9.359 | 3.1 |
| | 16 QAM | | 9.391 | 3.2 |
| | 64 QAM | | 9.359 | 3.3 |
| 2593 | QPSK | 10 | 9.391 | 3.4 |
| | 16 QAM | | 9.359 | 3.5 |
| | 64 QAM | | 9.359 | 3.6 |
| 2685 | QPSK | 10 | 9.359 | 3.7 |
| | 16 QAM | | 9.359 | 3.8 |
| | 64 QAM | | 9.391 | 3.9 |




Graph 3.1

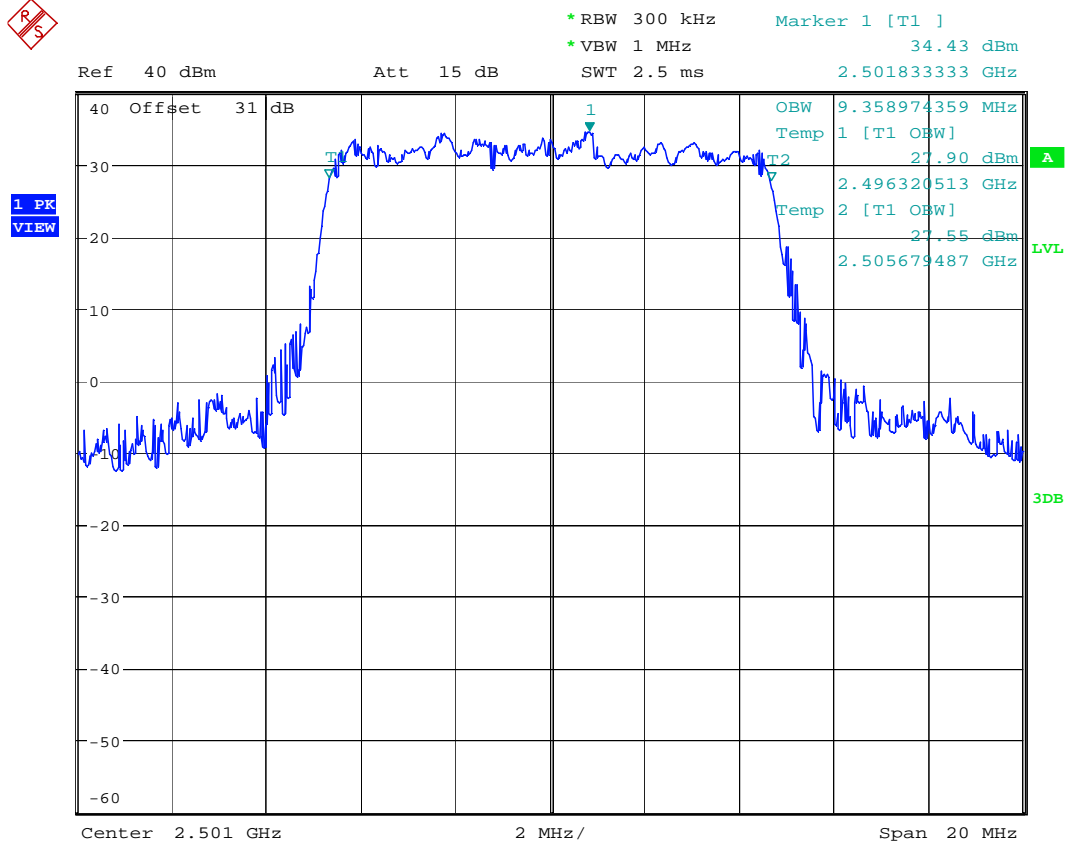

QPSK, LOW CHANNEL

Date: 23.JUN.2009 00:57:02


Graph 3.2

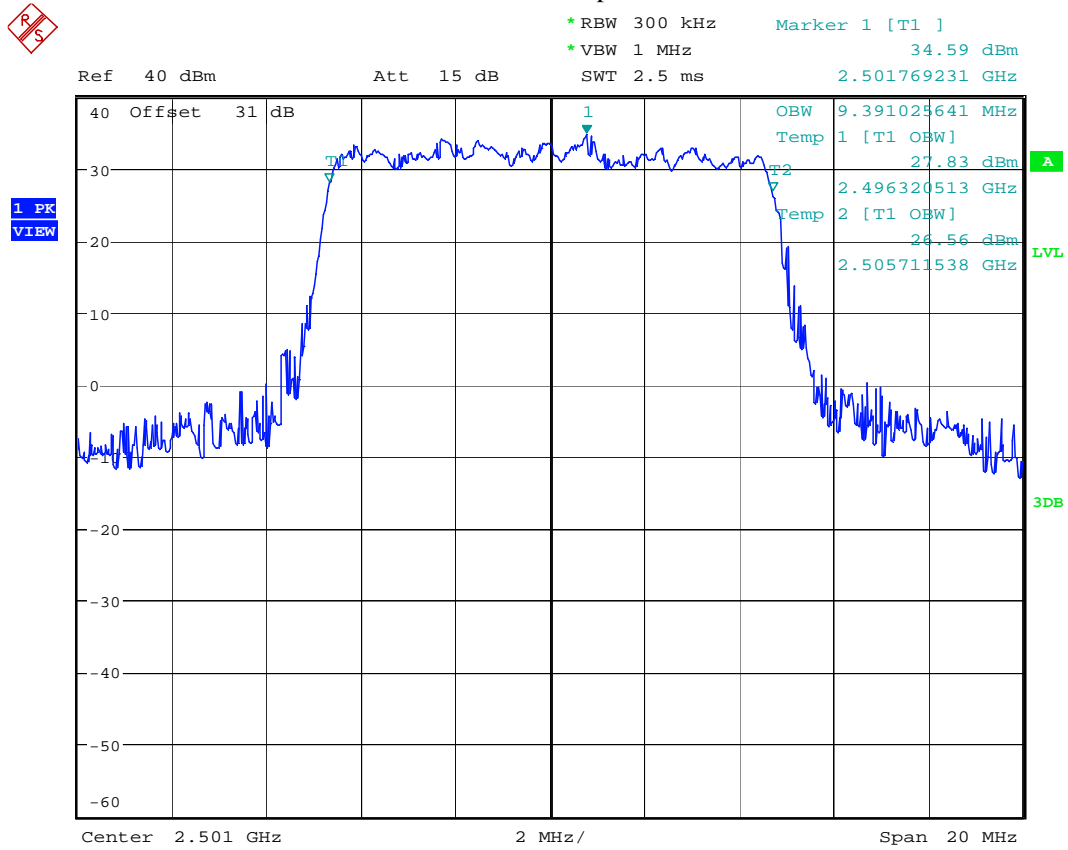

16QAM, LOW CHANNEL

Date: 23.JUN.2009 01:01:44


Graph 3.3

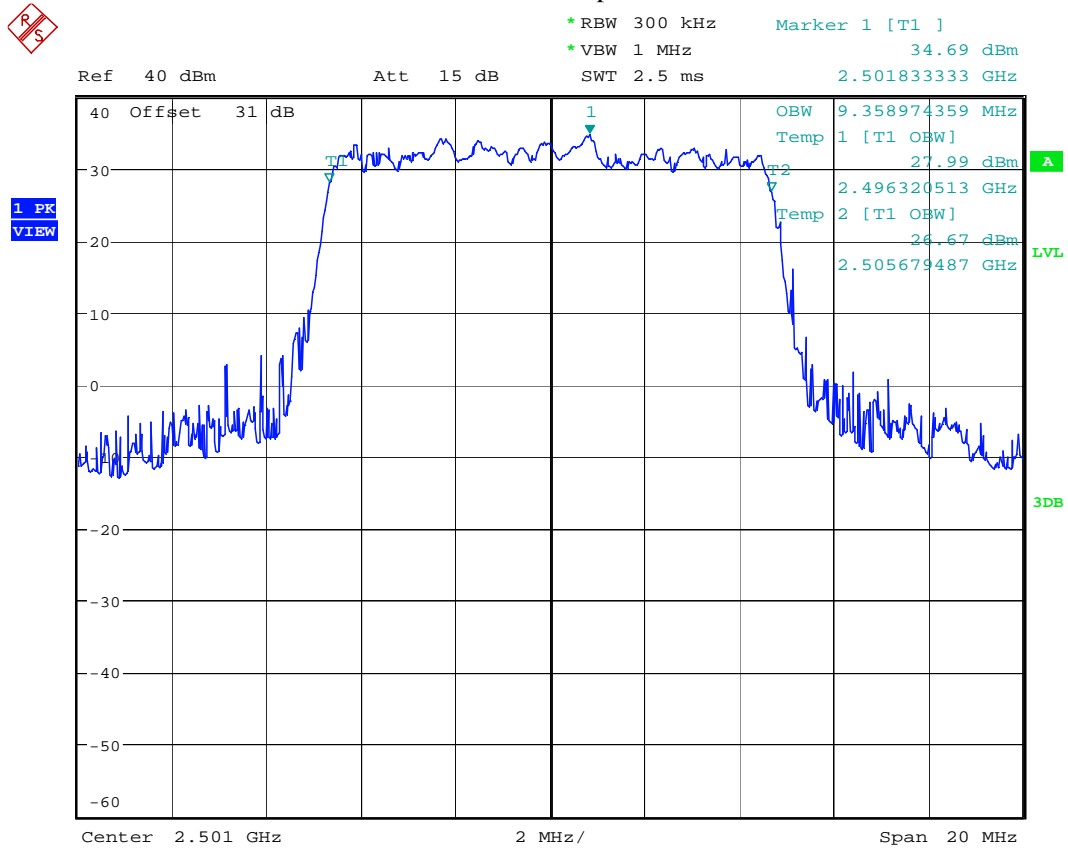

64QAM, LOW CHANNEL

Date: 23.JUN.2009 01:02:49


Graph 3.4

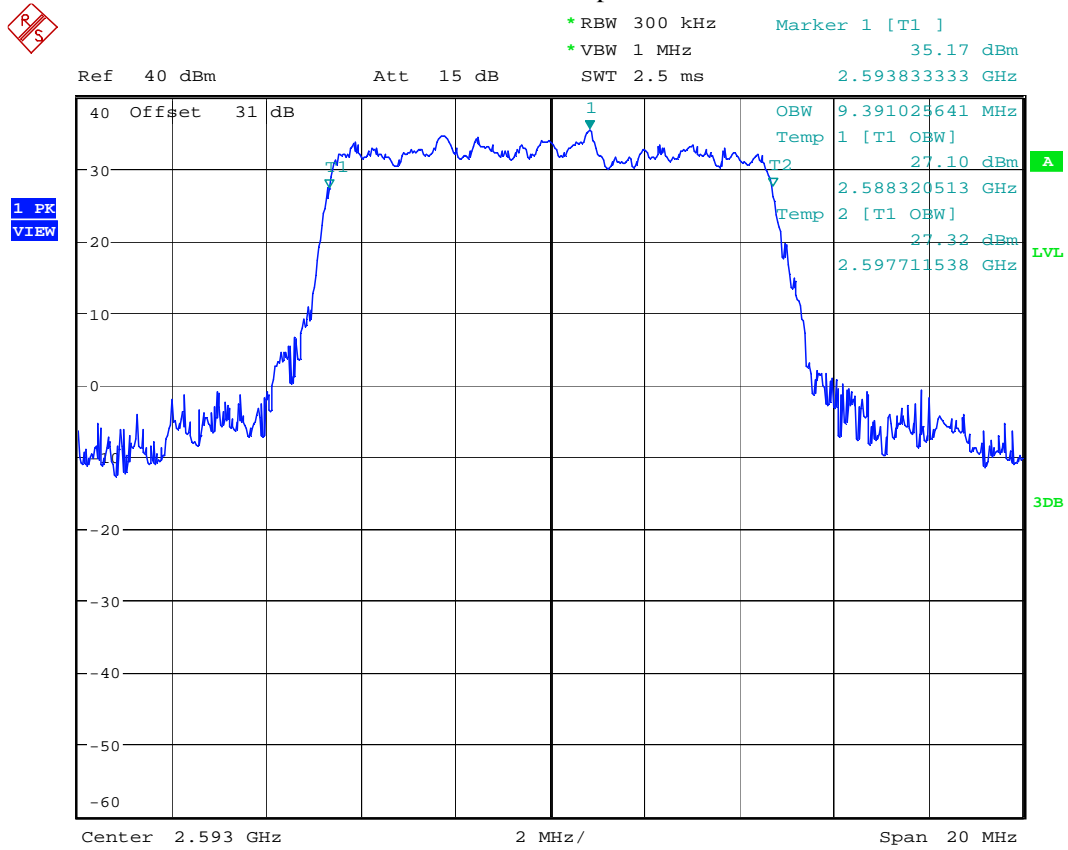

QPSK, MID CHANNEL

Date: 23.JUN.2009 01:12:35


Graph 3.5

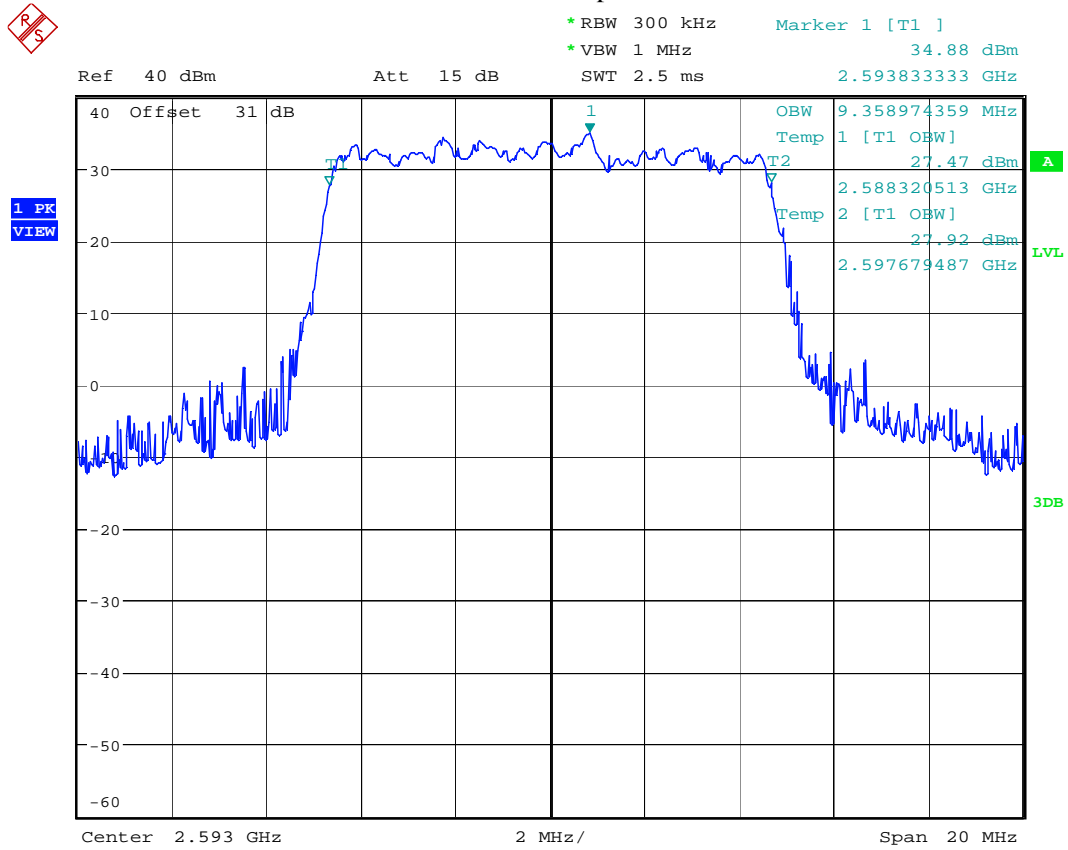

16QAM, MID CHANNEL

Date: 23.JUN.2009 01:14:23


Graph 3.6

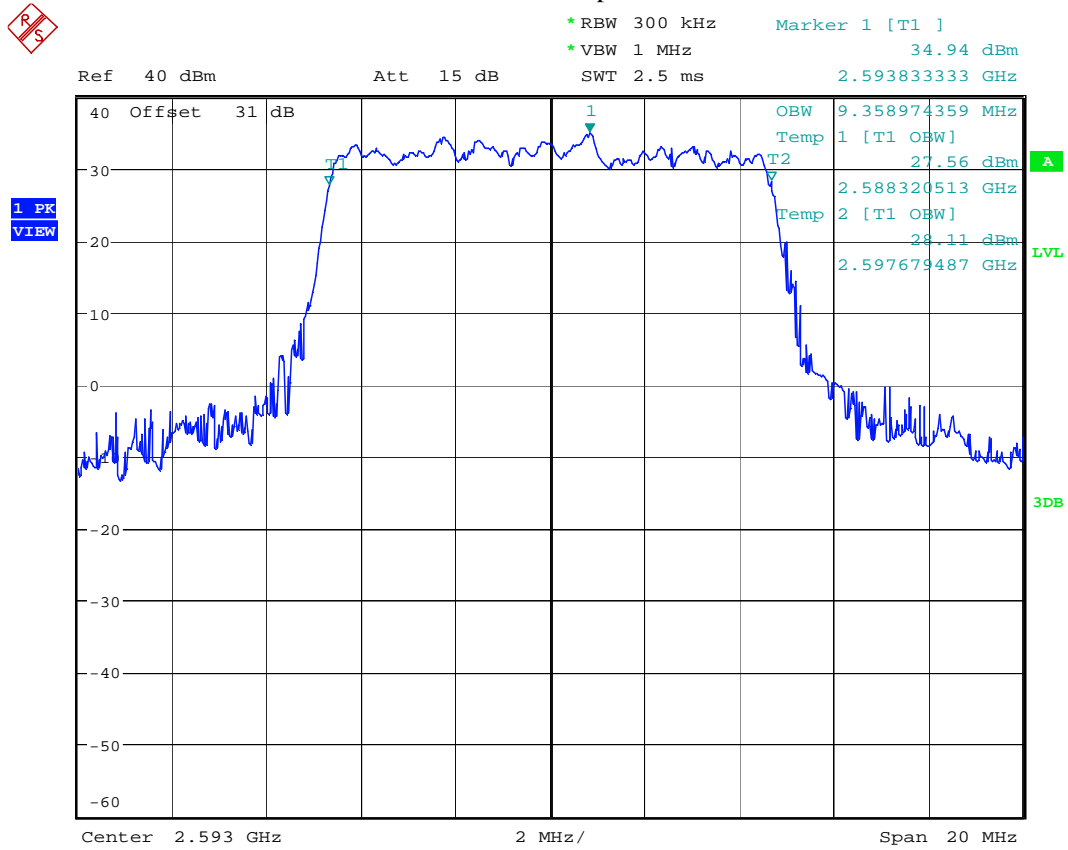

64QAM, MID CHANNEL

Date: 23.JUN.2009 01:15:25


Graph 3.7

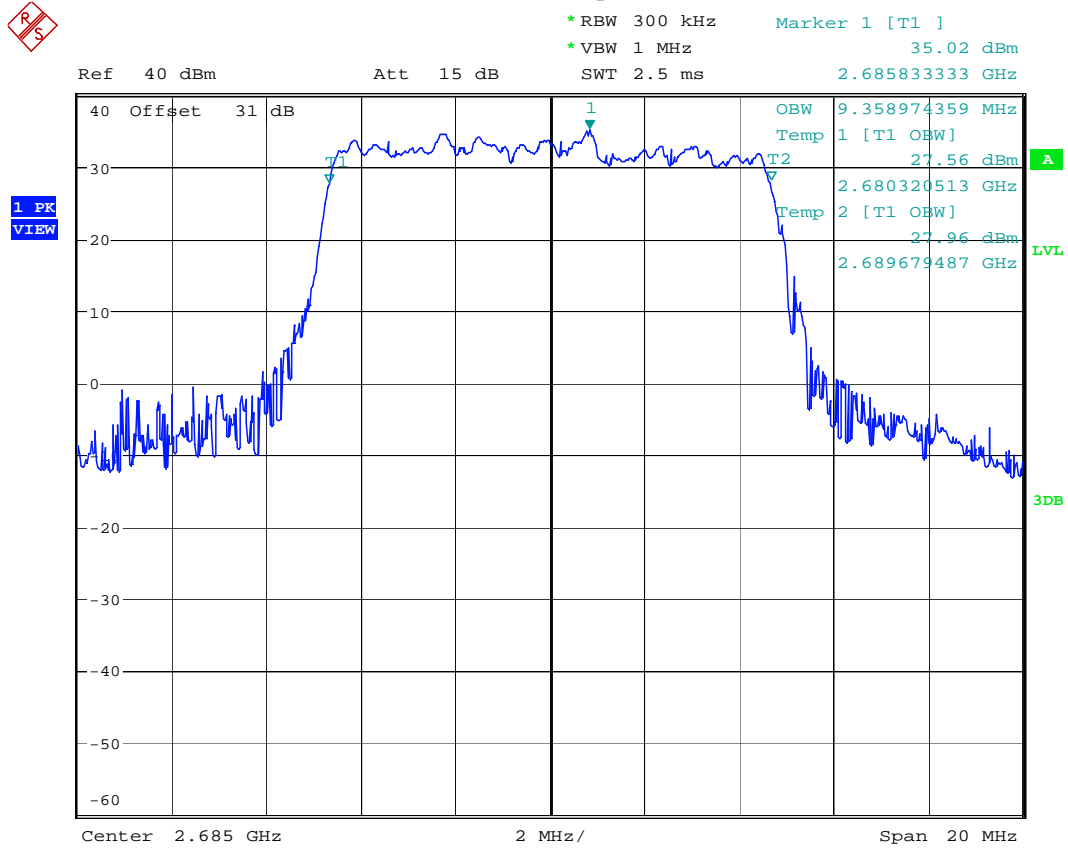

QPSK, HIGH CHANNEL

Date: 23.JUN.2009 01:10:17


Graph 3.8

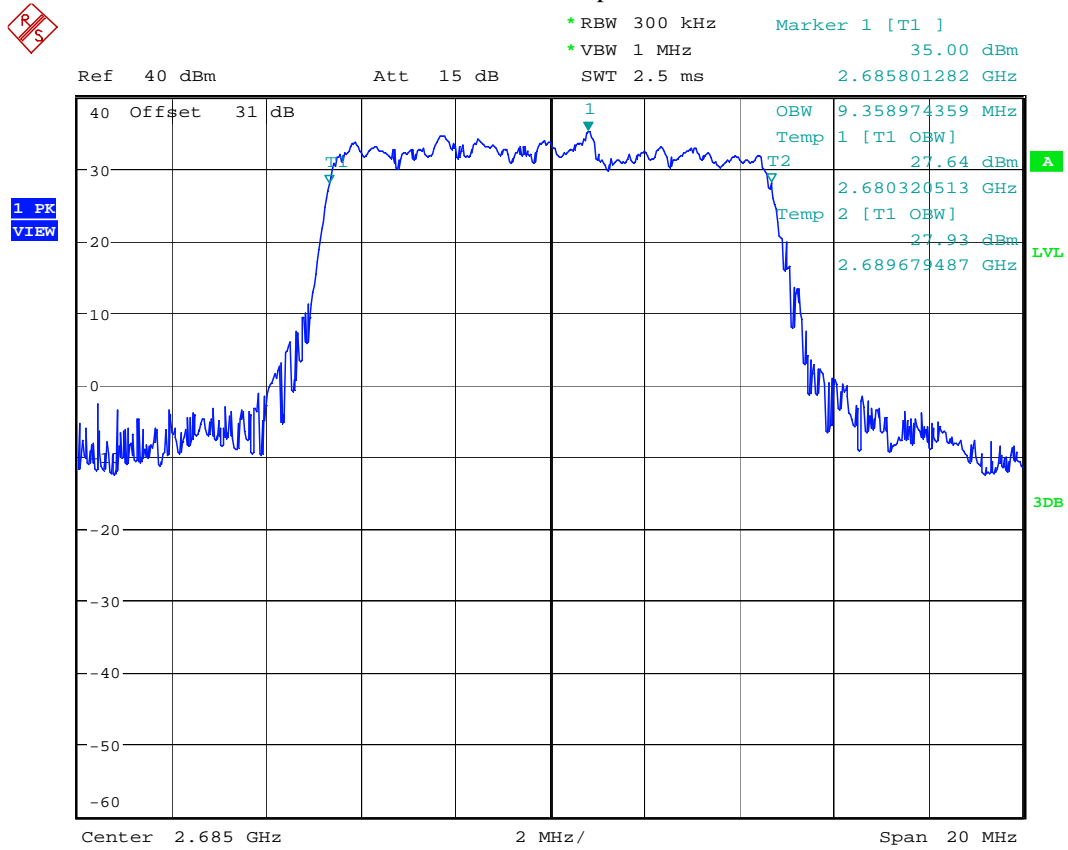

16QAM, HIGH CHANNEL

Date: 23.JUN.2009 01:08:59

Graph 3.9

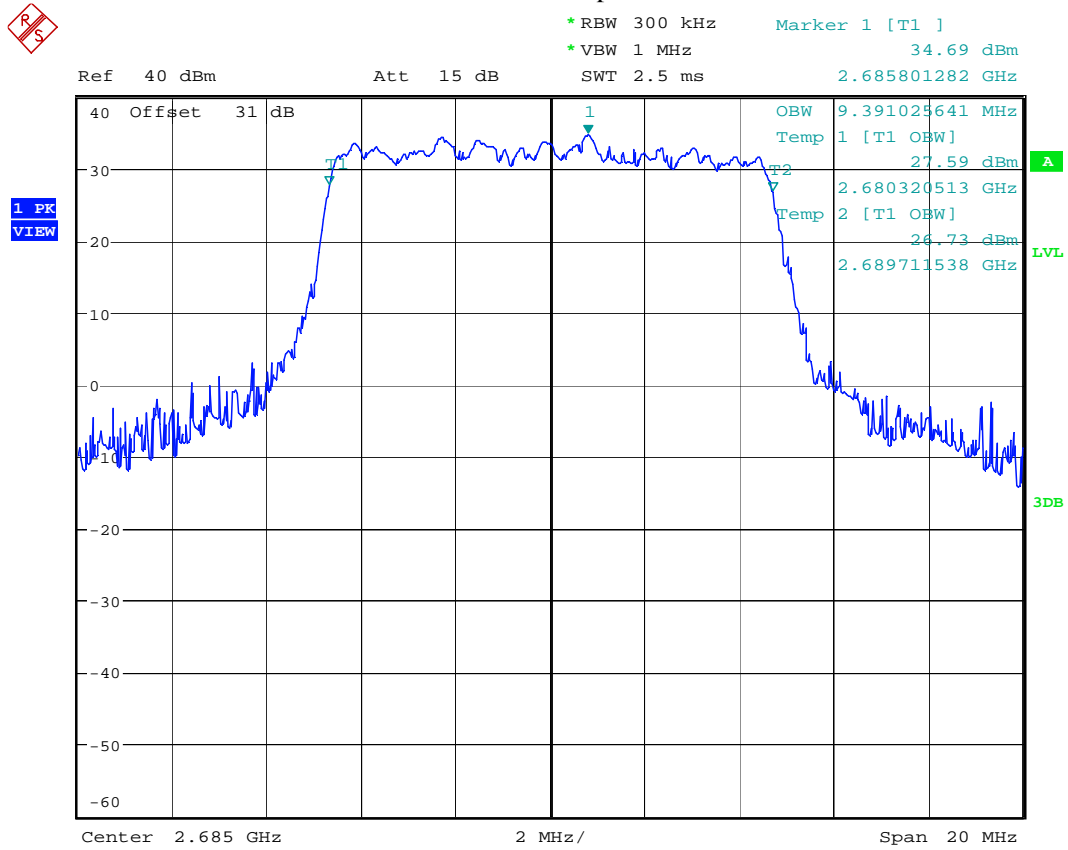

64QAM, HIGH CHANNEL

Date: 23.JUN.2009 01:06:28

4.0 Spurious Emissions at Antenna Terminals

FCC 2.1051, 27.53

4.1 Requirement

For digital base stations, the attenuation shall be not less than $43 + 10 \log (P)$ dB

Note: That corresponds to the level of -13 dBm for any out-of-band and spurious emissions.

4.2 Test Procedure

The EUT RF output was connected as shown on the diagram in report section 1.3.2. The EUT was setup to transmit the maximum power.

For measurements at frequencies below 1 GHz, the spectrum analyzed resolution bandwidth was set to 100 kHz. For measurements at frequencies above 1 GHz, the spectrum analyzed resolution bandwidth was set to 1 MHz.

Sufficient scans were taken to show the spurious emissions up to 10th harmonic.


4.3 Test Equipment

Rohde & Schwarz FSU26 Spectrum Analyzer

4.4 Test Results


| | |
|-----------------|-------------------------------|
| Complies | Refer to the following Graphs |
|-----------------|-------------------------------|

Measurements were made on the low, middle and high channels for all modulations.

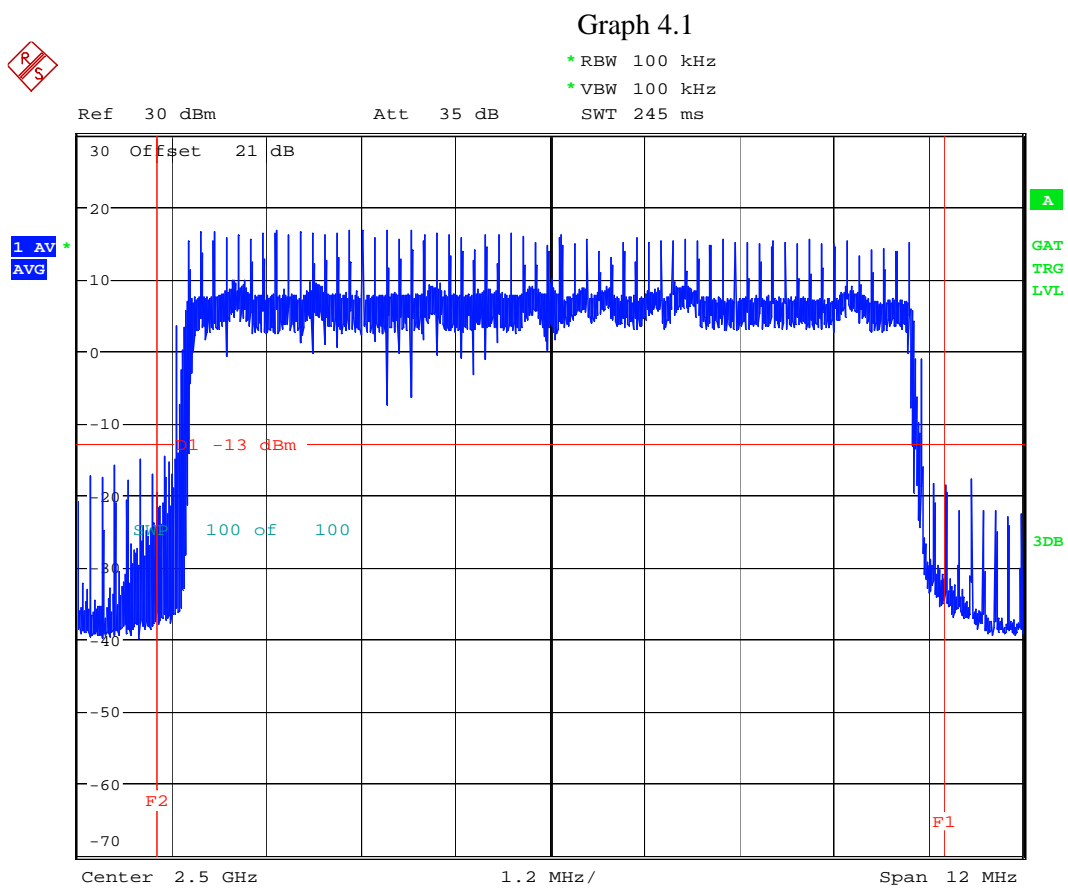


QPSK, Low Channel

Graph 4.2

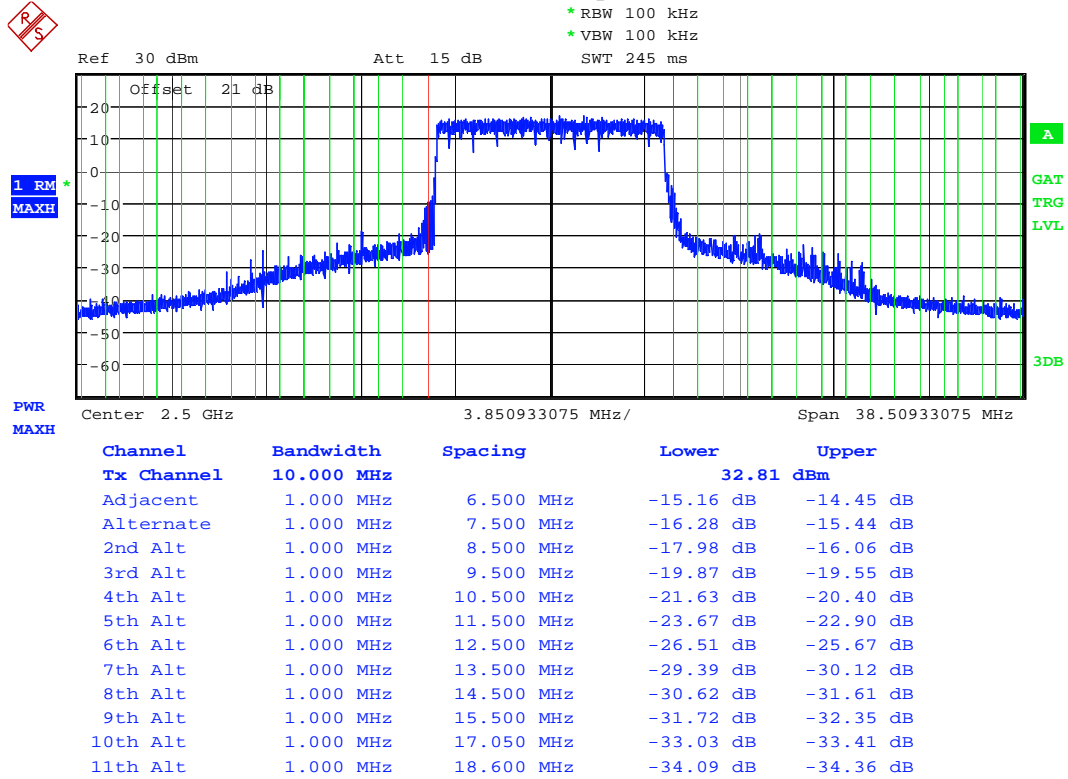

QPSK, Low Channel


Graph 4.3

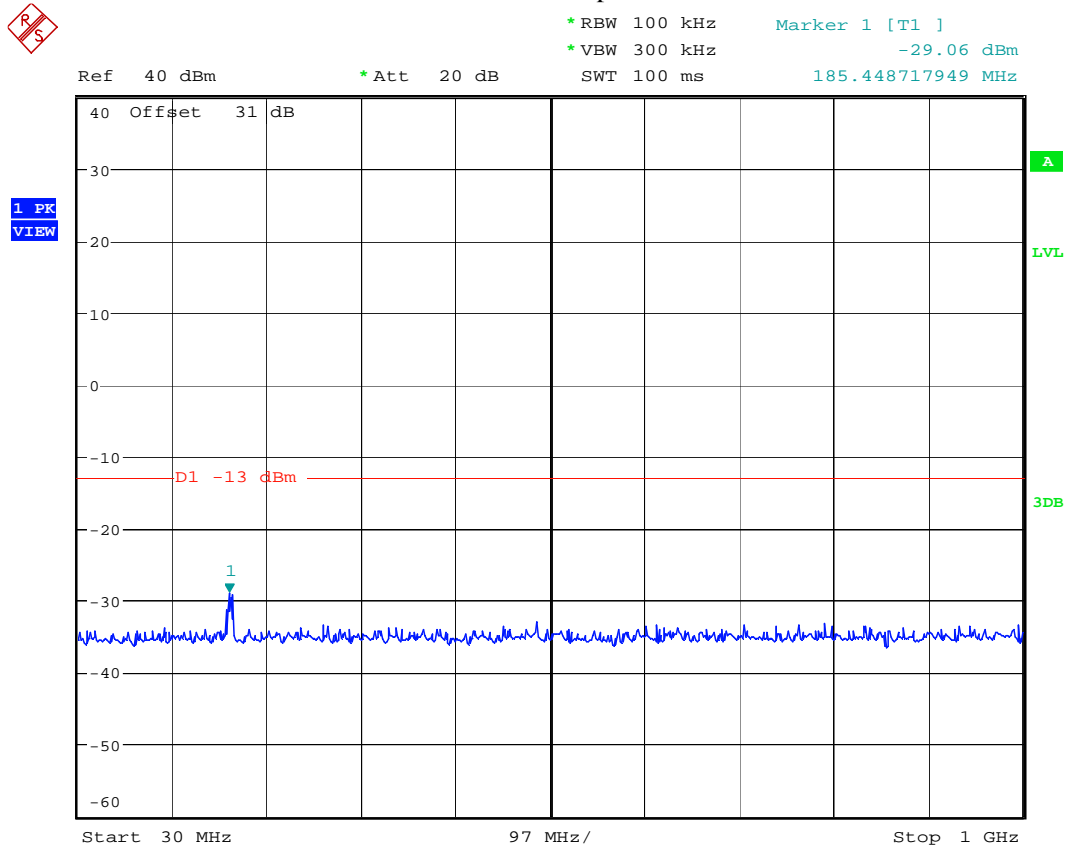

QPSK, LOW CHANNEL

Date: 23.JUN.2009 02:46:52


Graph 4.4

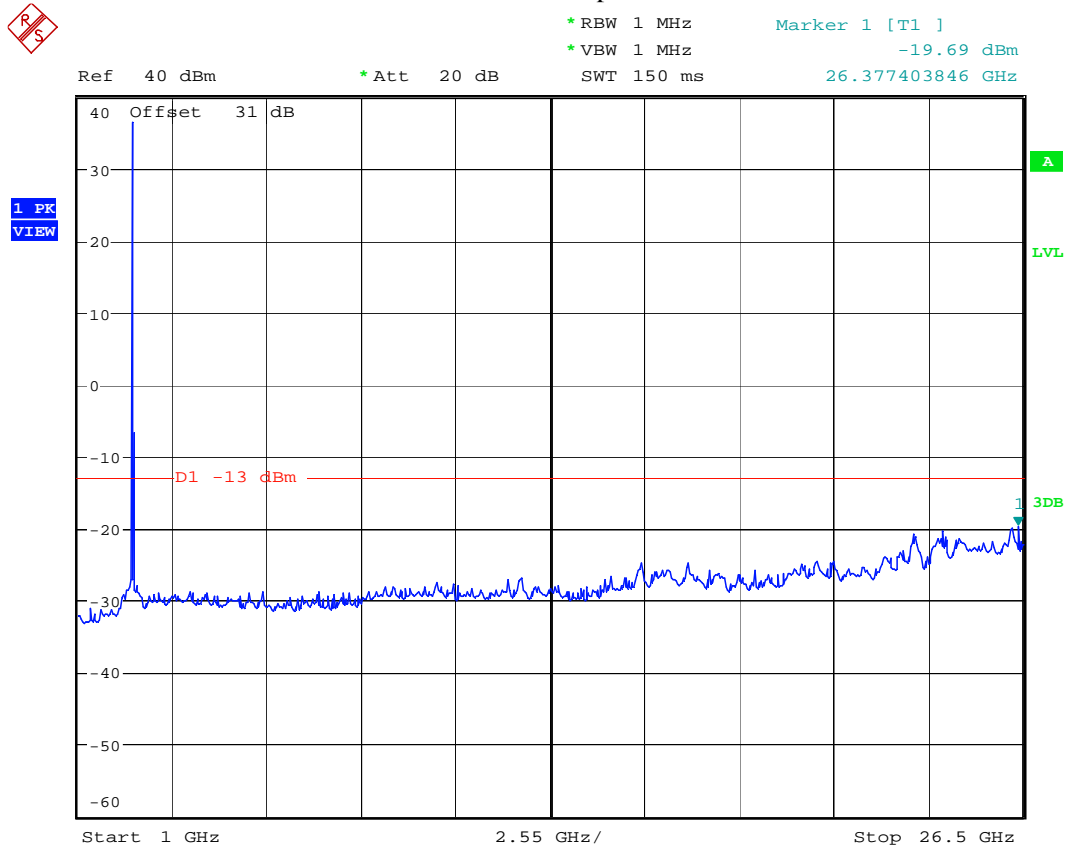

QPSK, LOW CHANNEL


Date: 23.JUN.2009 02:19:58

Graph 4.5

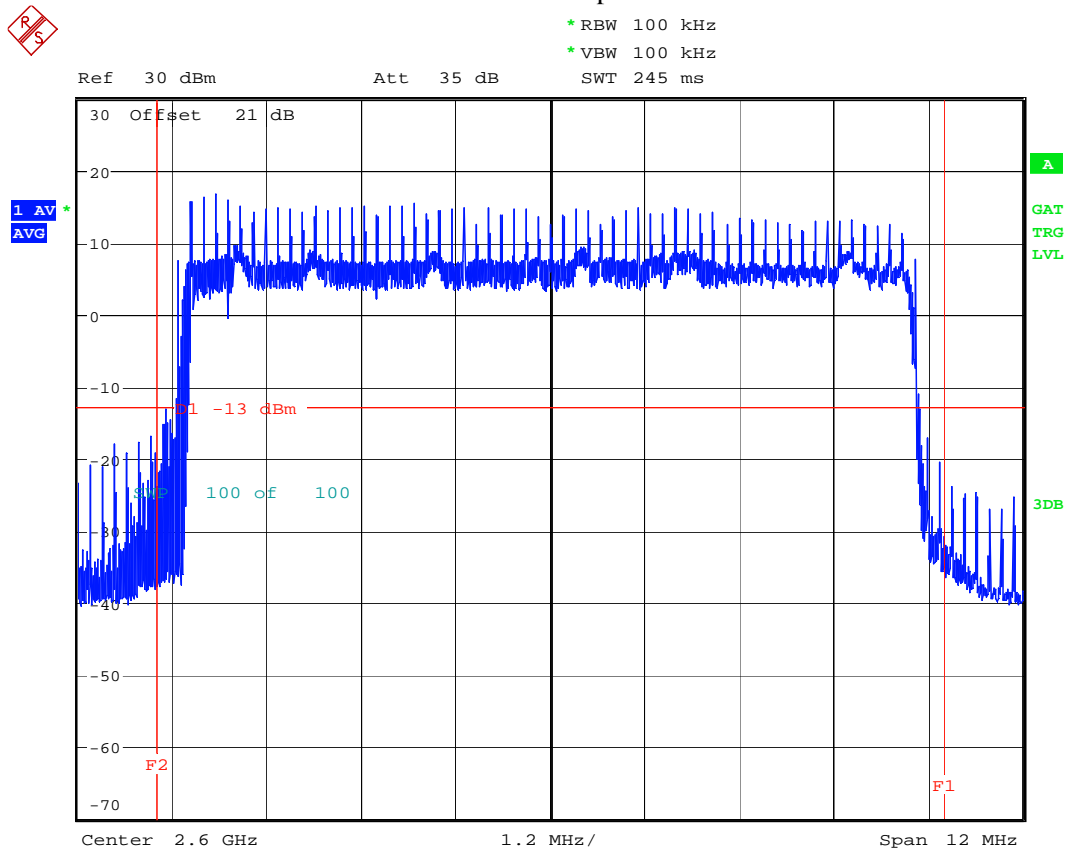


QPSK, Mid Channel

Graph 4.6

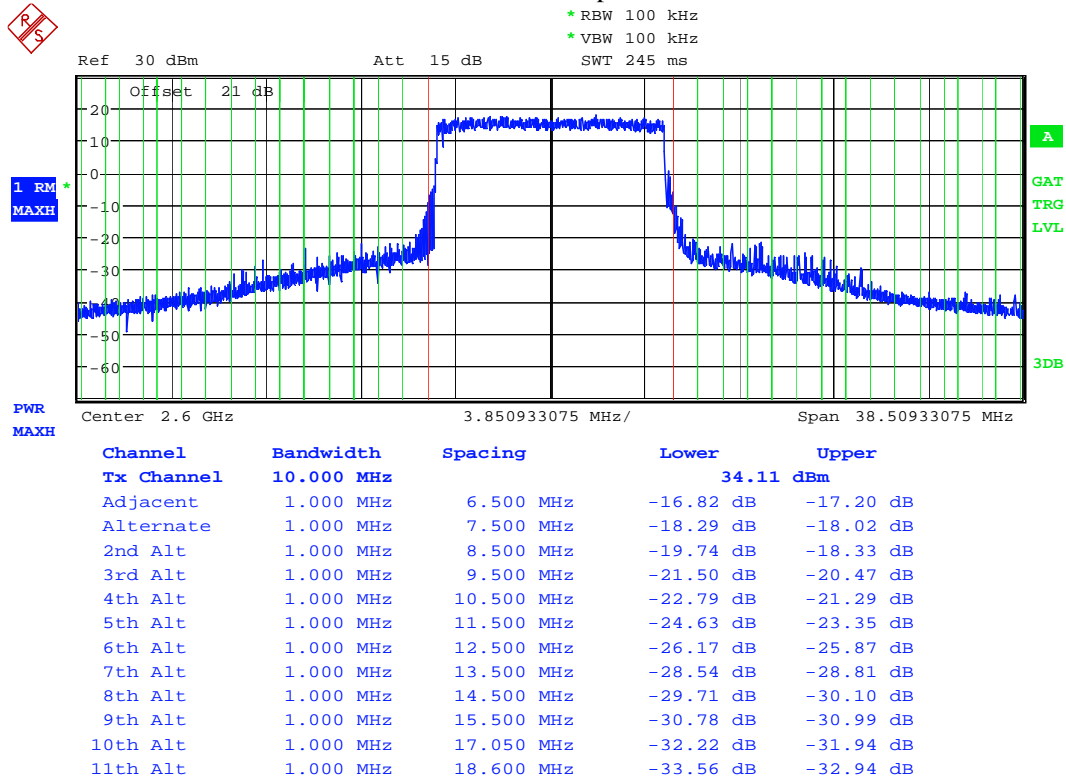

QPSK, Mid Channel


Graph 4.7

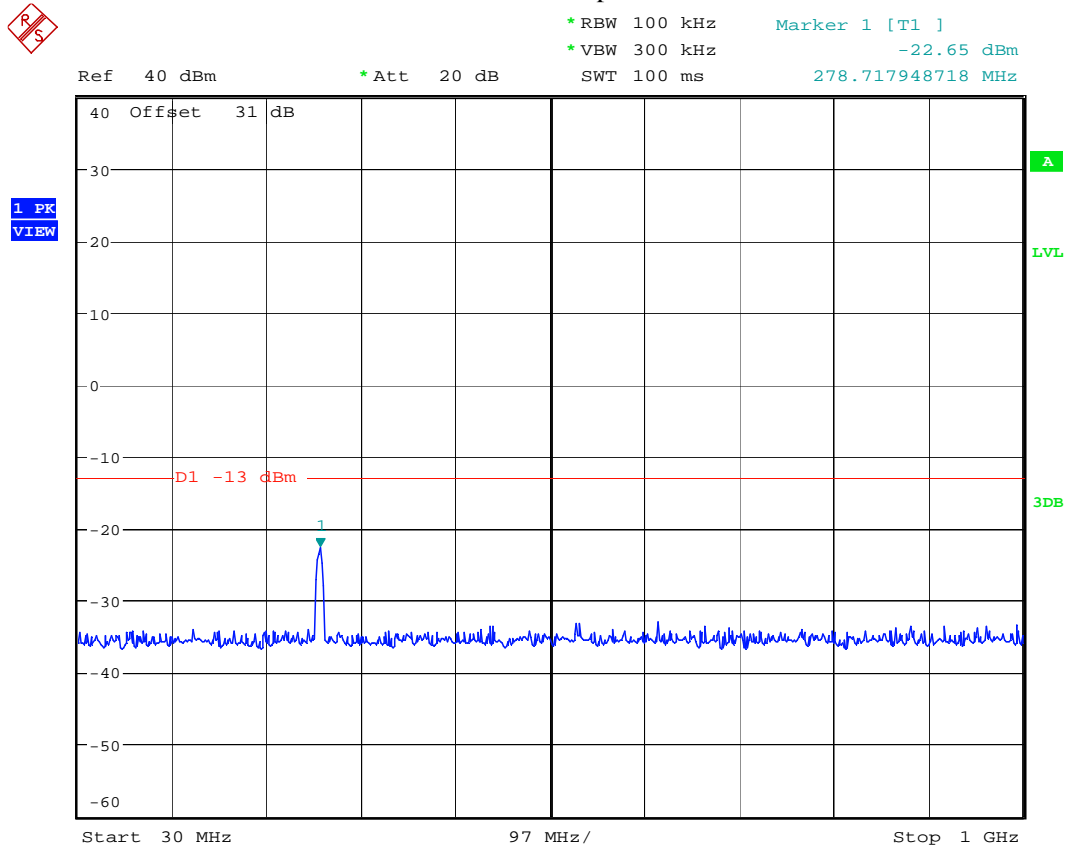

QPSK, MID CHANNEL


Date: 23.JUN.2009 02:34:35

Graph 4.8

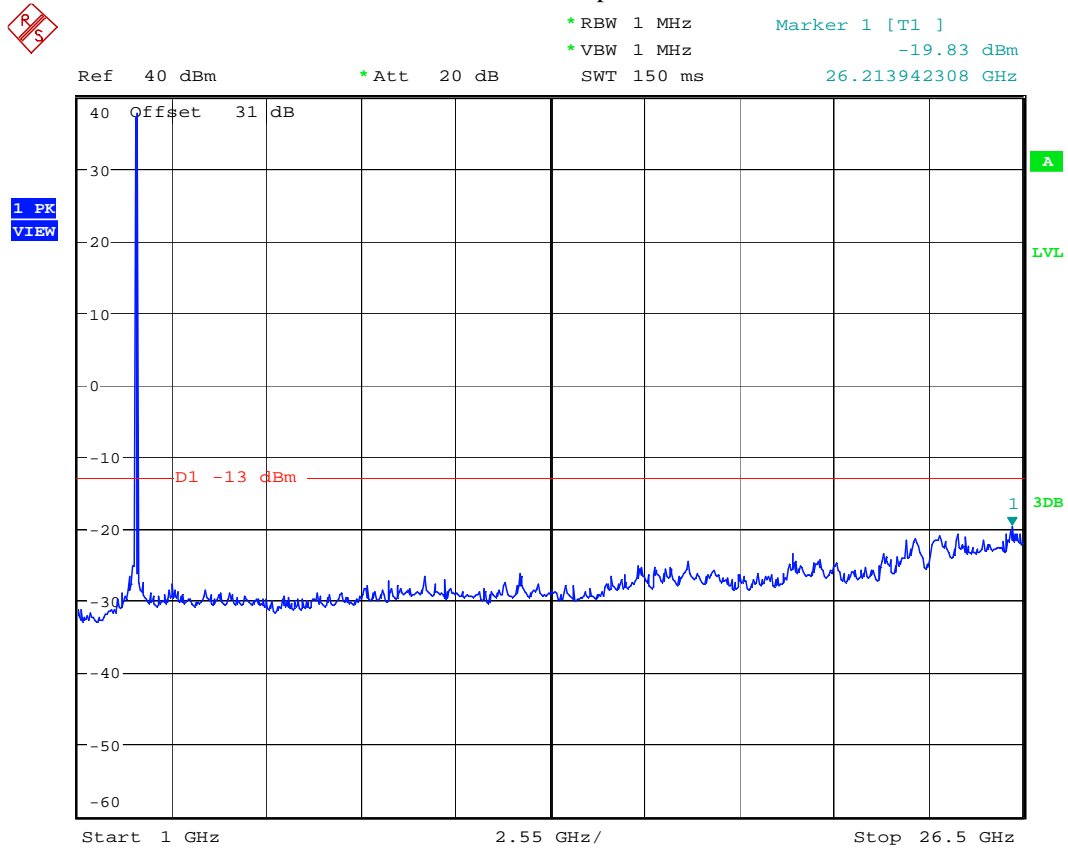


QPSK, MID CHANNEL

Date: 23.JUN.2009 01:37:24

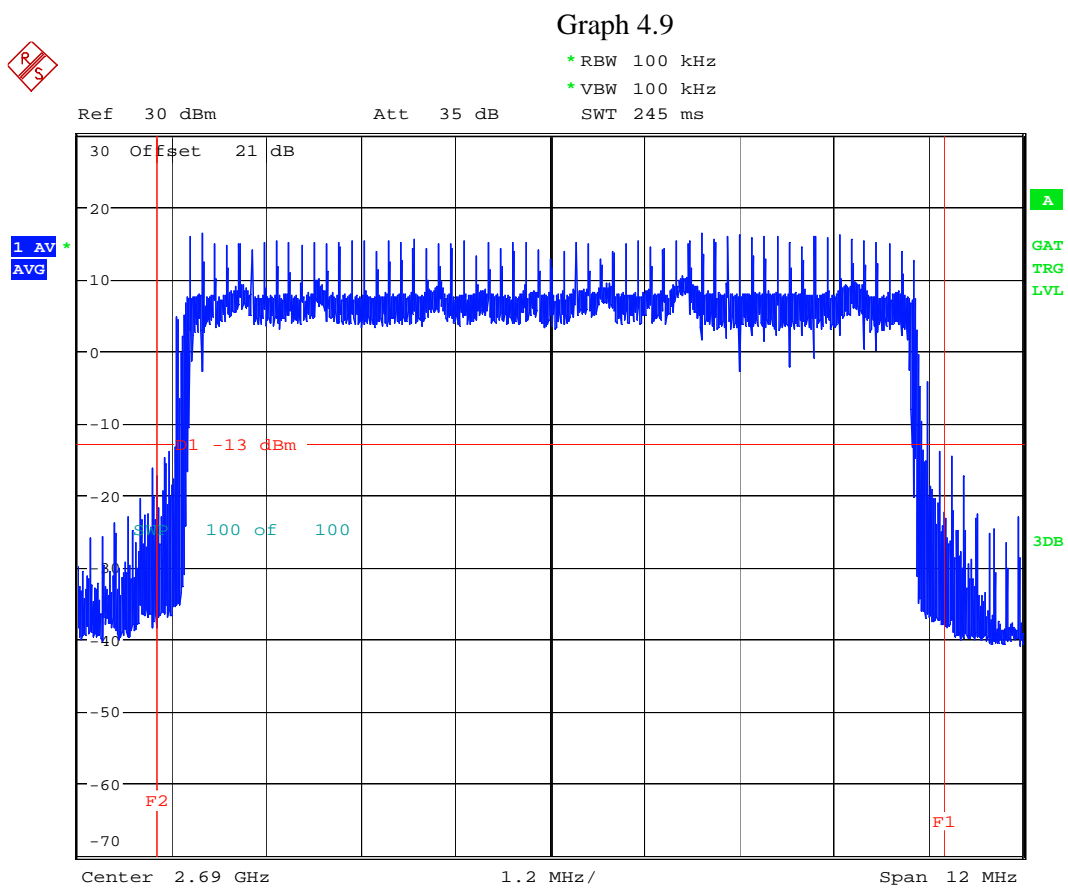


QPSK, High Channel

Graph 4.10

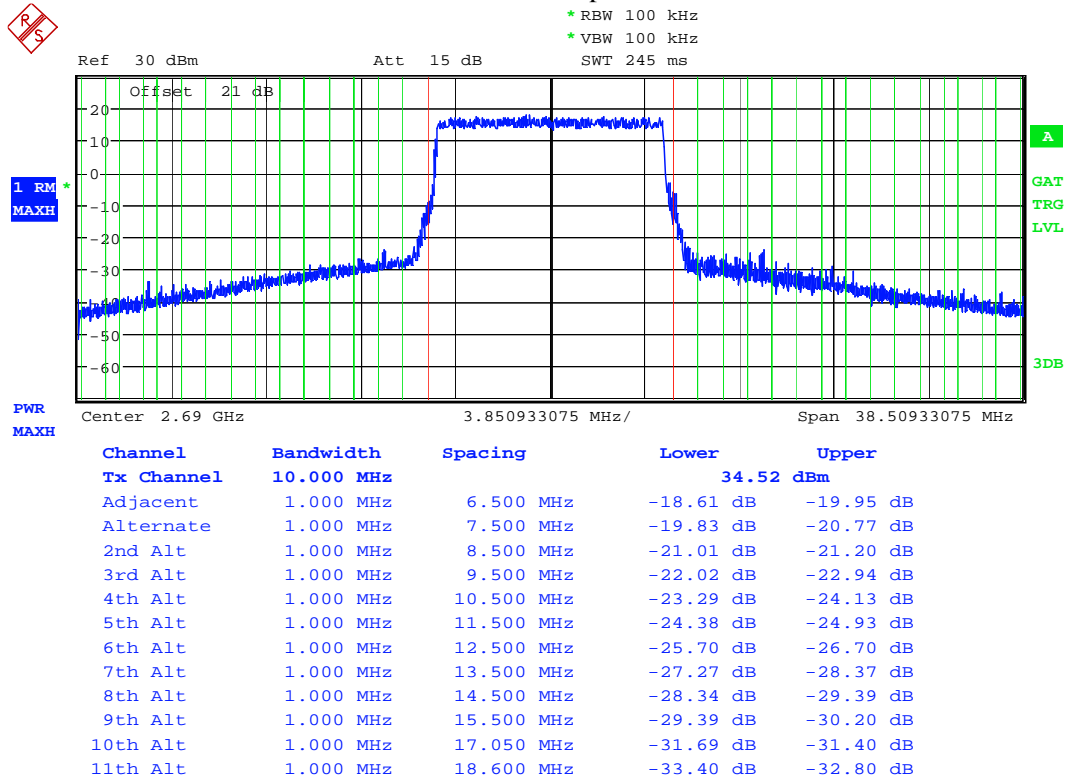

QPSK, High Channel


Graph 4.11

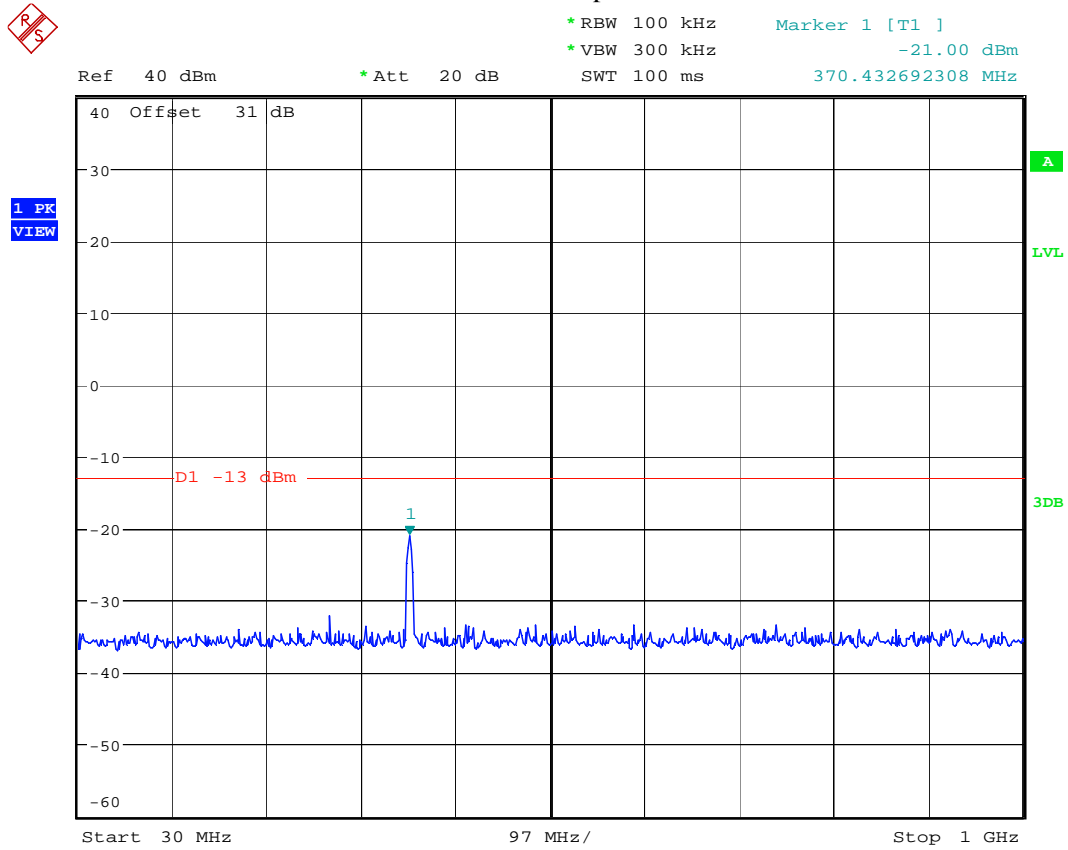

QPSK, HIGH CHANNEL

Date: 23.JUN.2009 02:32:19


Graph 4.12

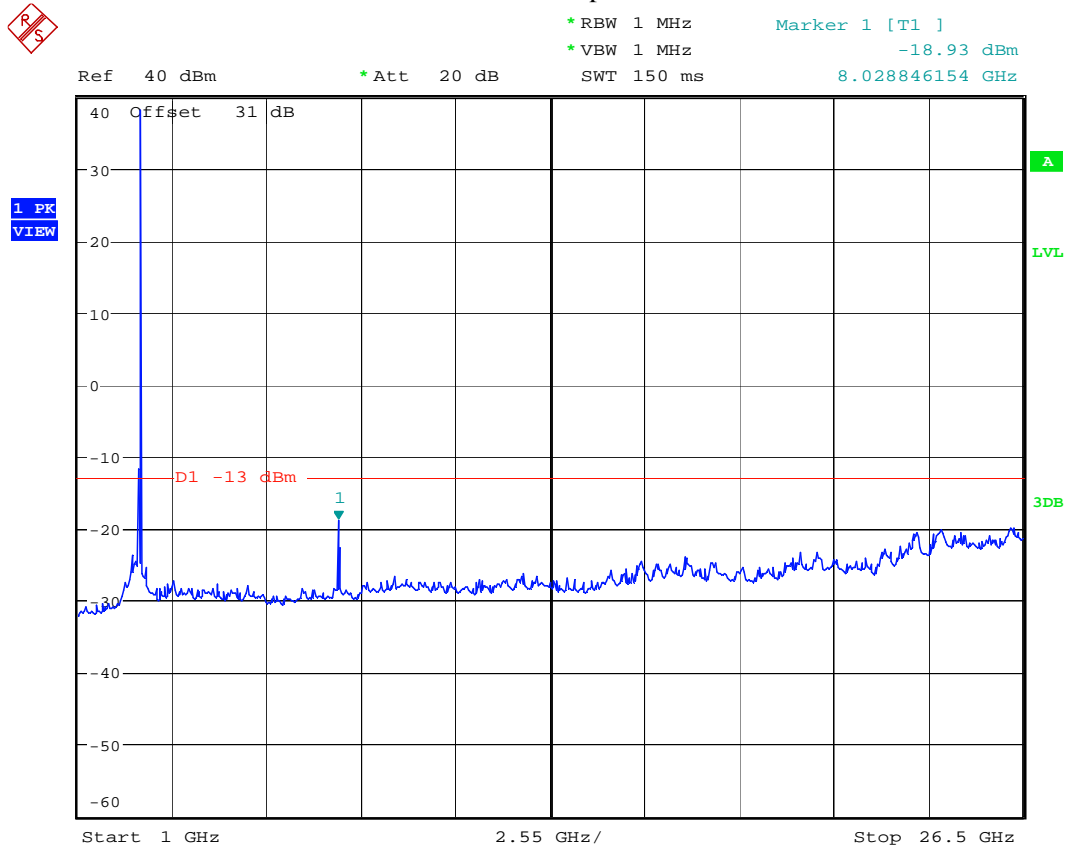

QPSK, HIGH CHANNEL


Date: 23.JUN.2009 02:21:44

Graph 4.13

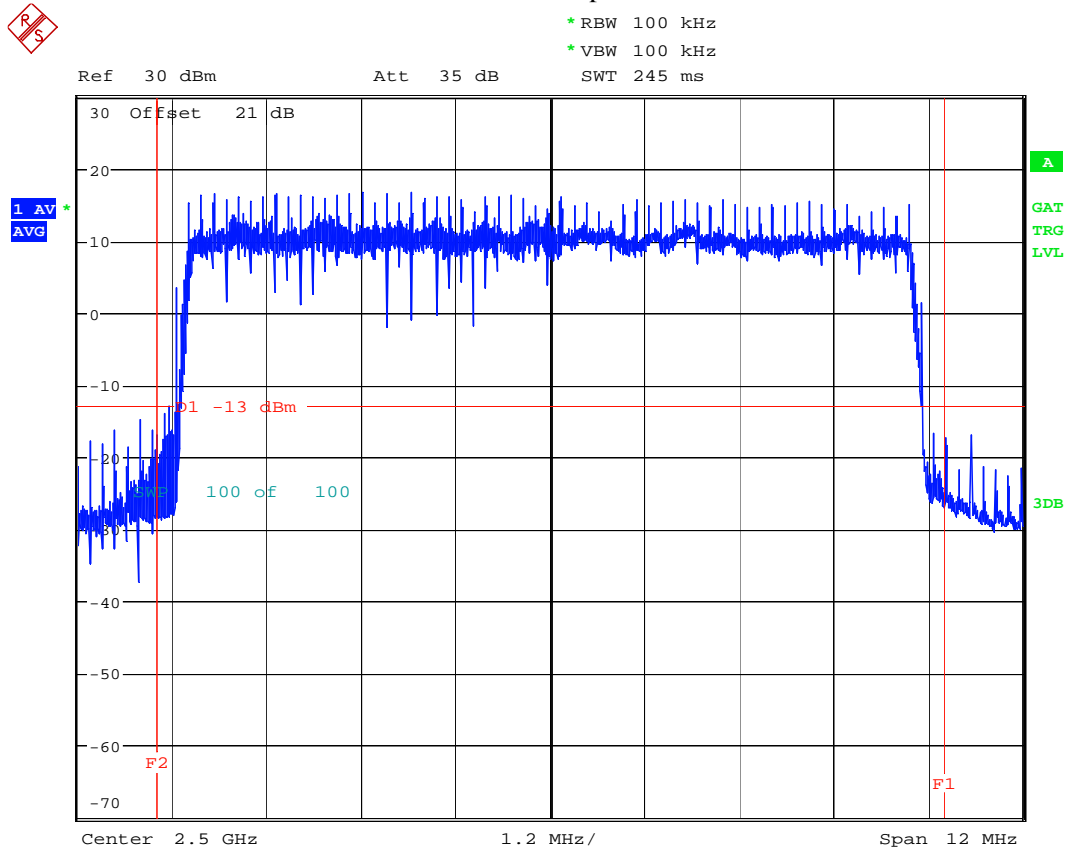


16QAM, Low Channel

Graph 4.14

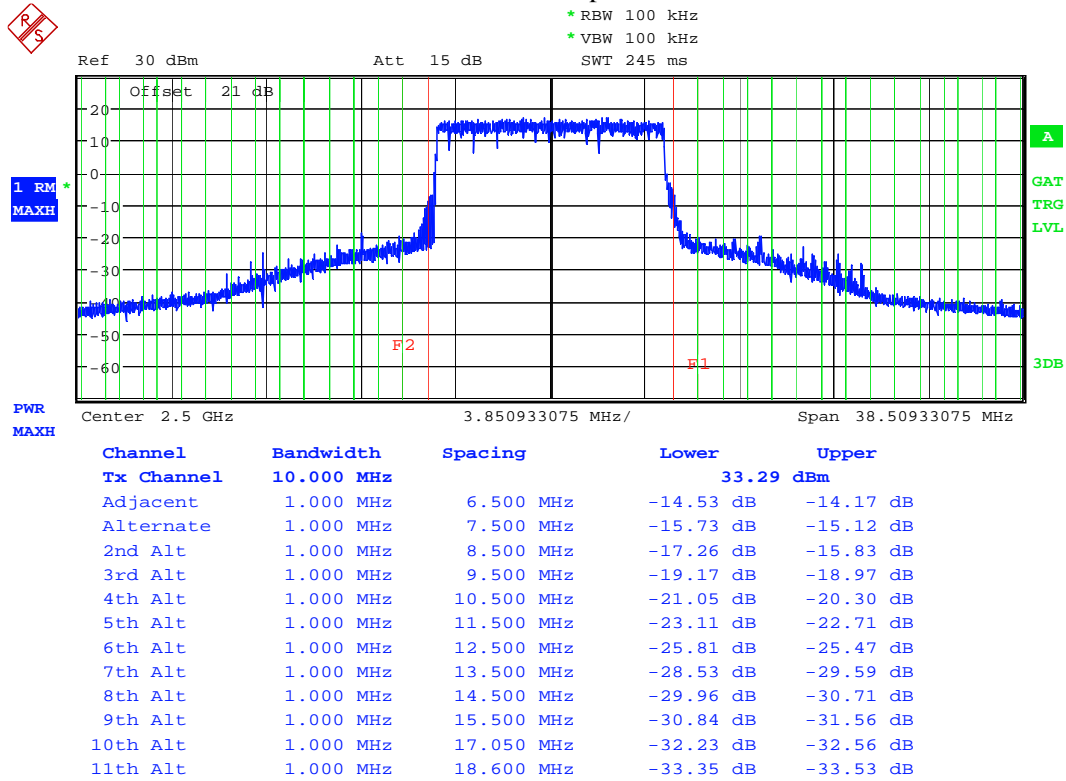

16QAM, Low Channel


Graph 4.15

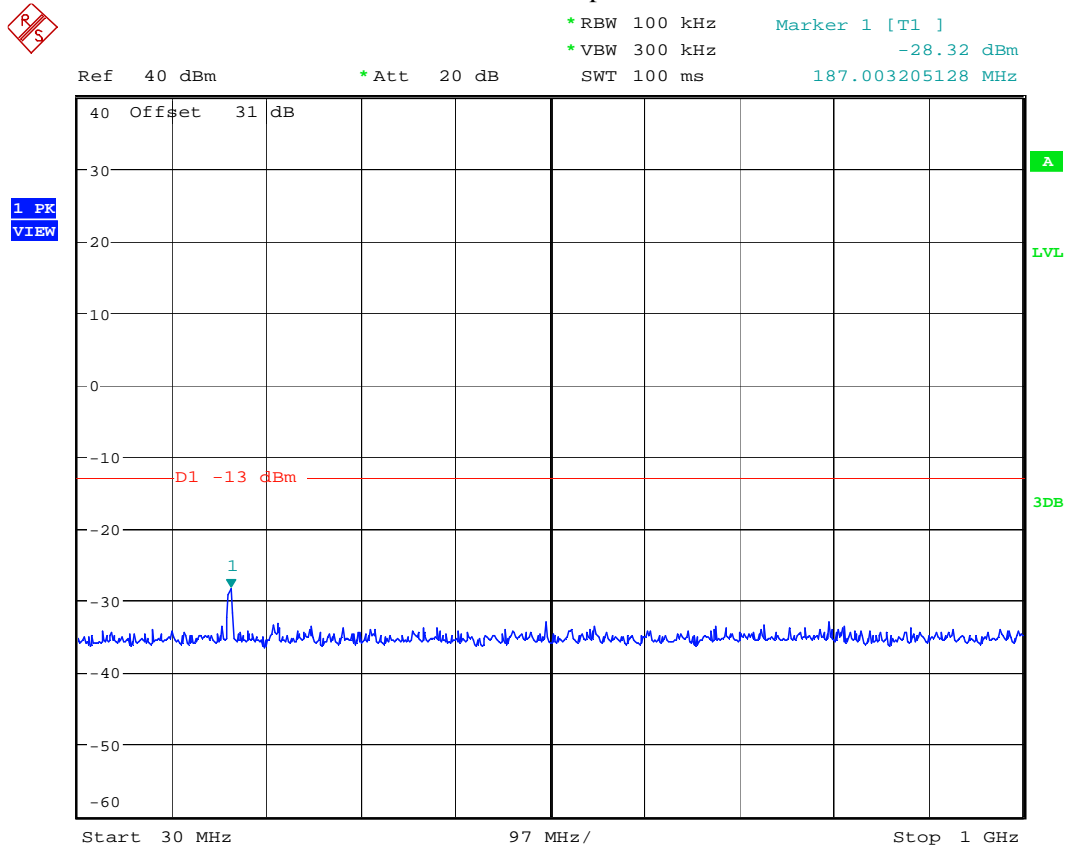

16QAM, LOW CHANNEL

Date: 23.JUN.2009 02:45:48


Graph 4.16

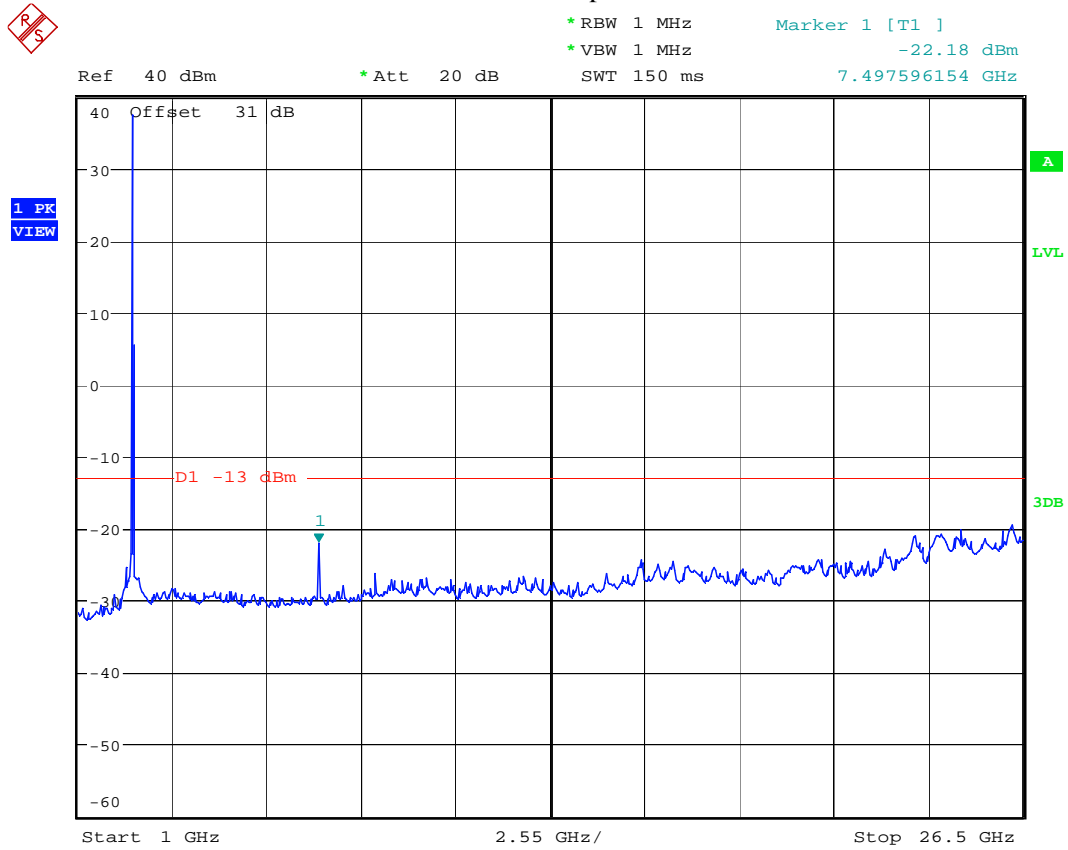

16QAM, LOW CHANNEL


Date: 23.JUN.2009 01:45:18

Graph 4.17

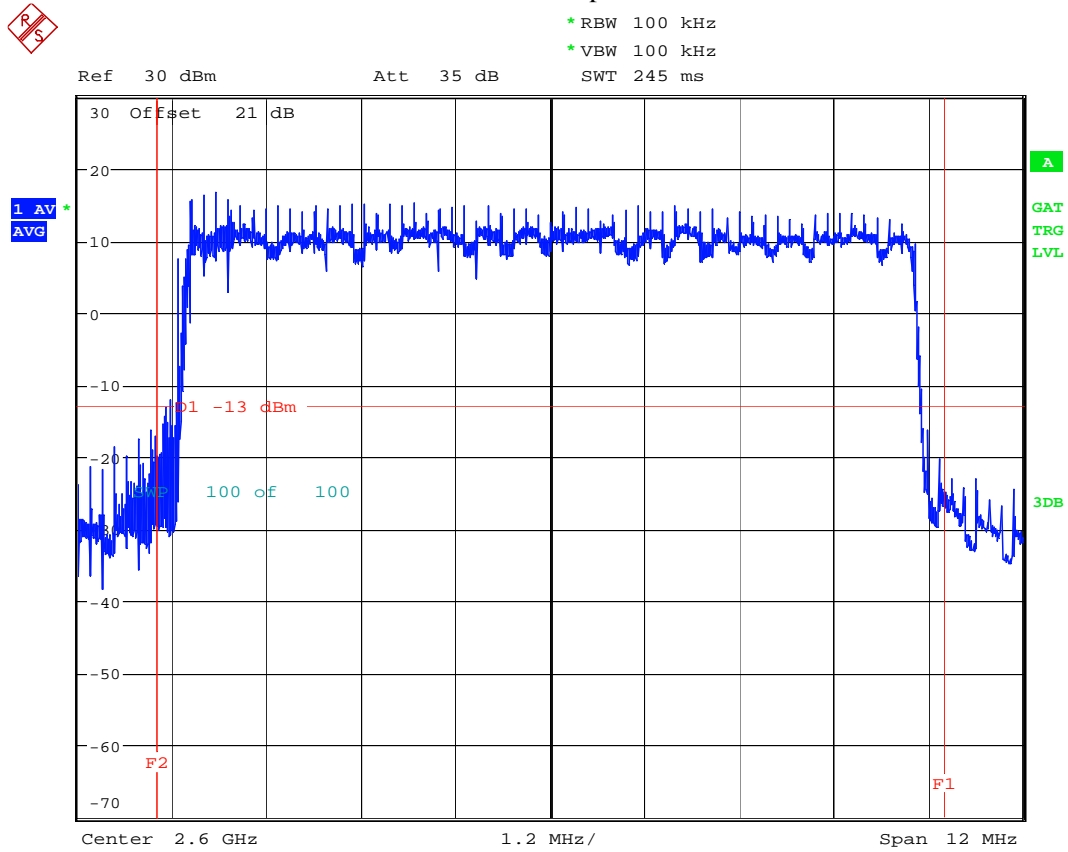


16QAM, Mid Channel

Graph 4.18

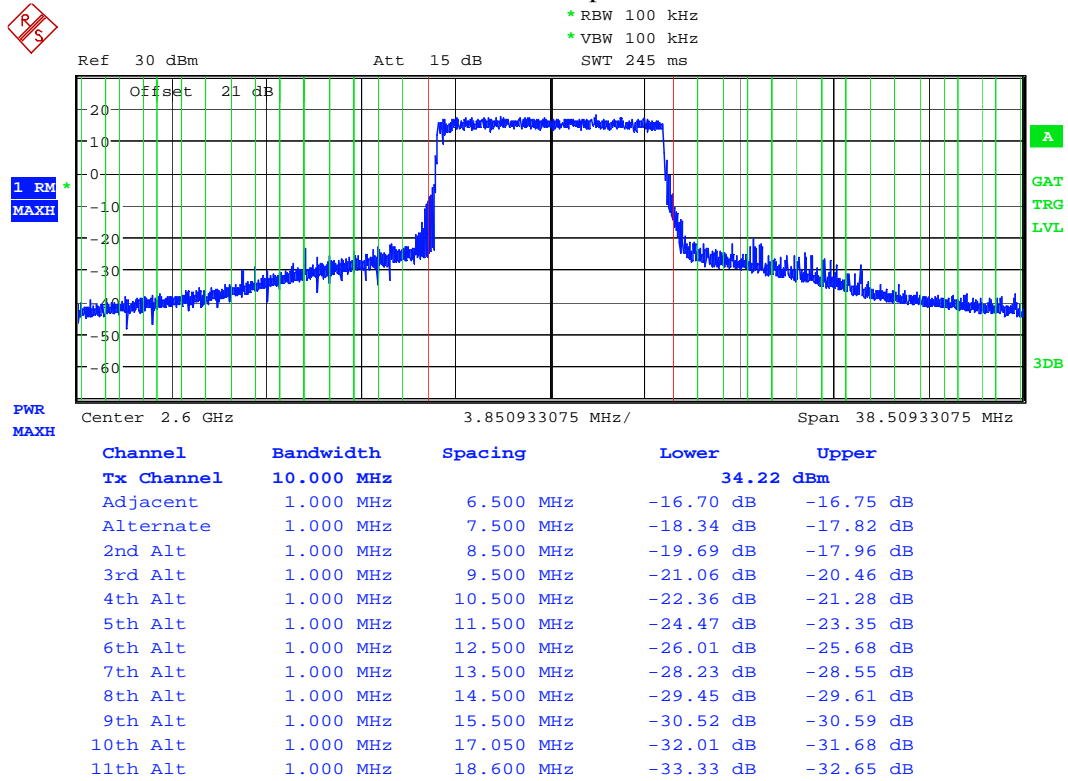

16QAM, Mid Channel


Graph 4.19

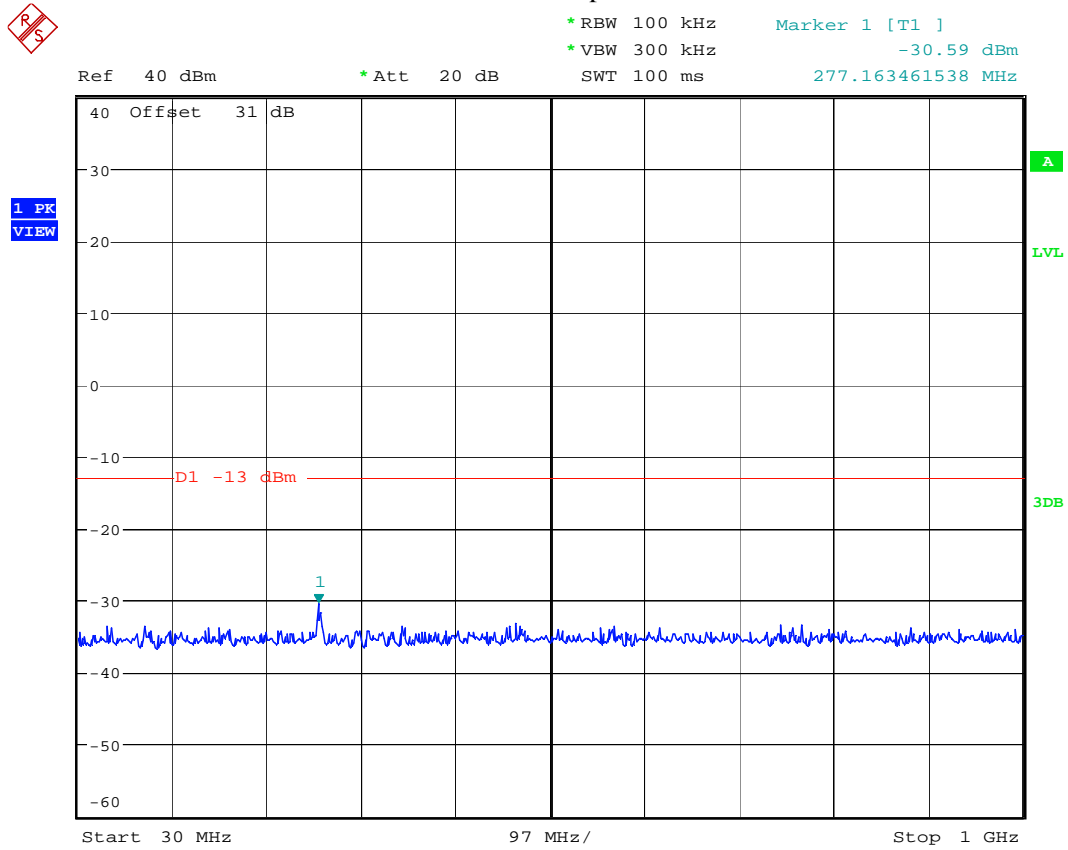

16QAM, MID CHANNEL

Date: 23.JUN.2009 02:41:32


Graph 4.20

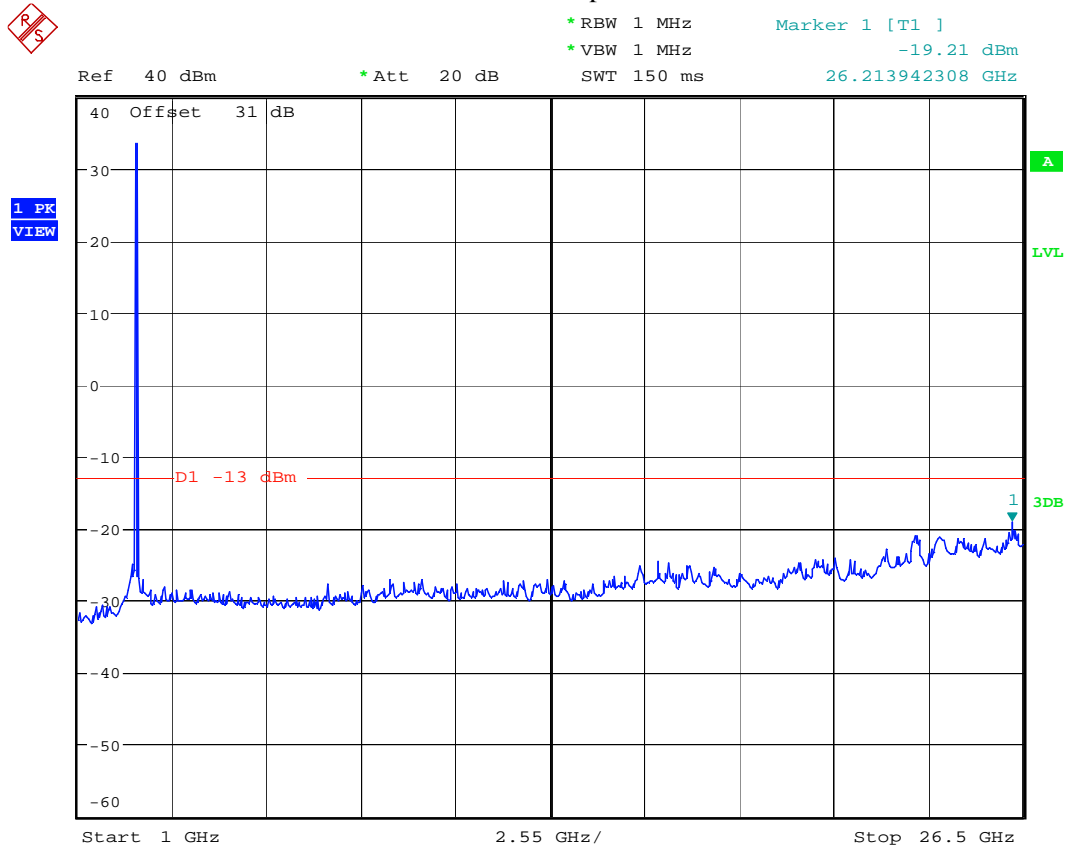

16QAM, MID CHANNEL


Date: 23.JUN.2009 01:39:54

Graph 4.21

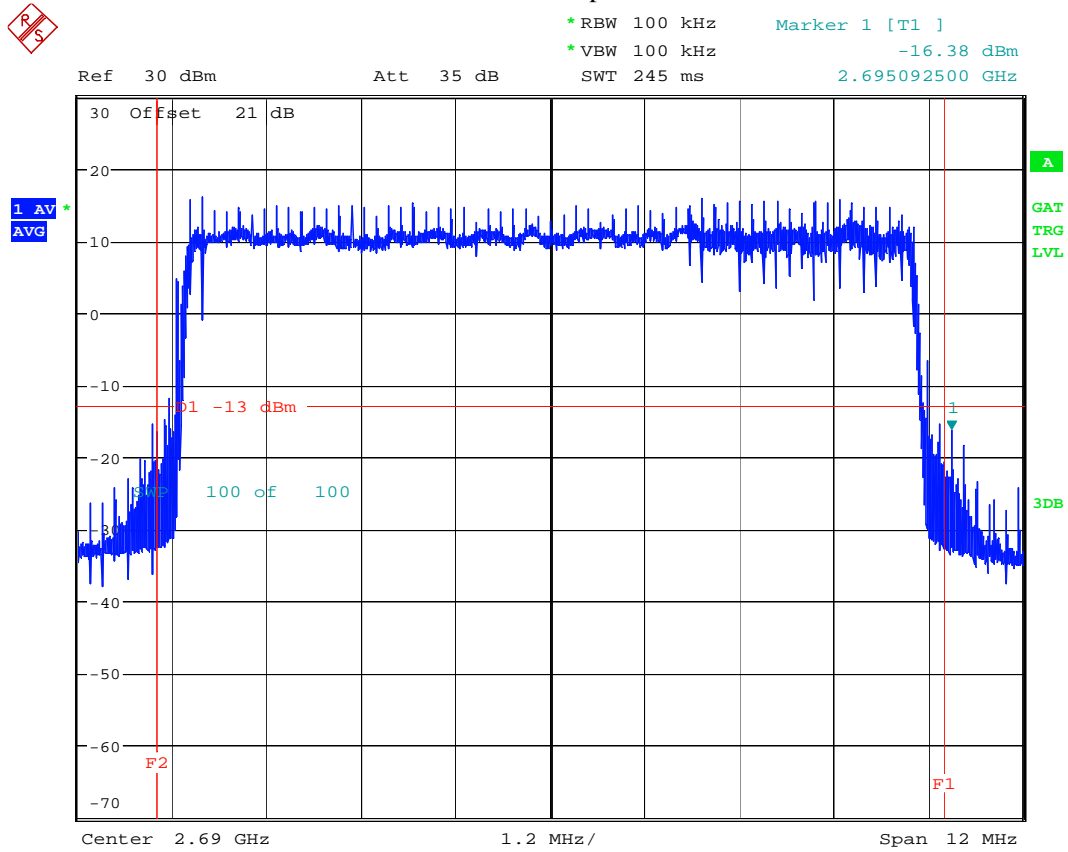


16QAM, High Channel

Graph 4.22

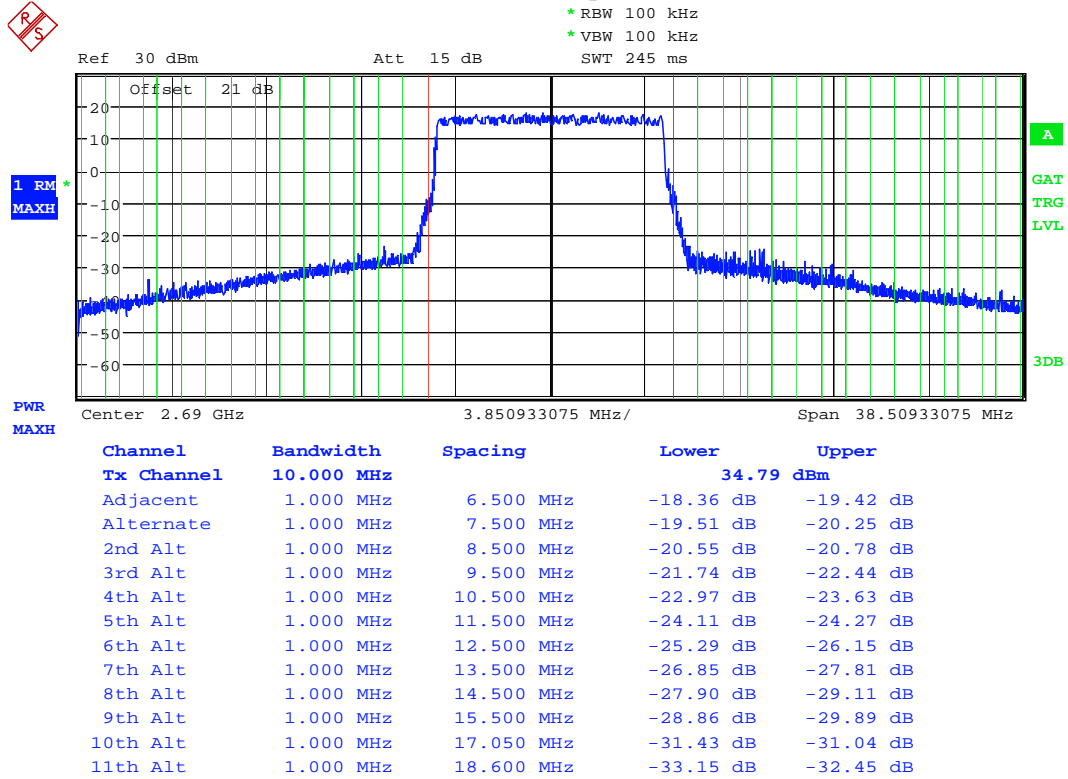

16QAM, High Channel


Graph 4.23

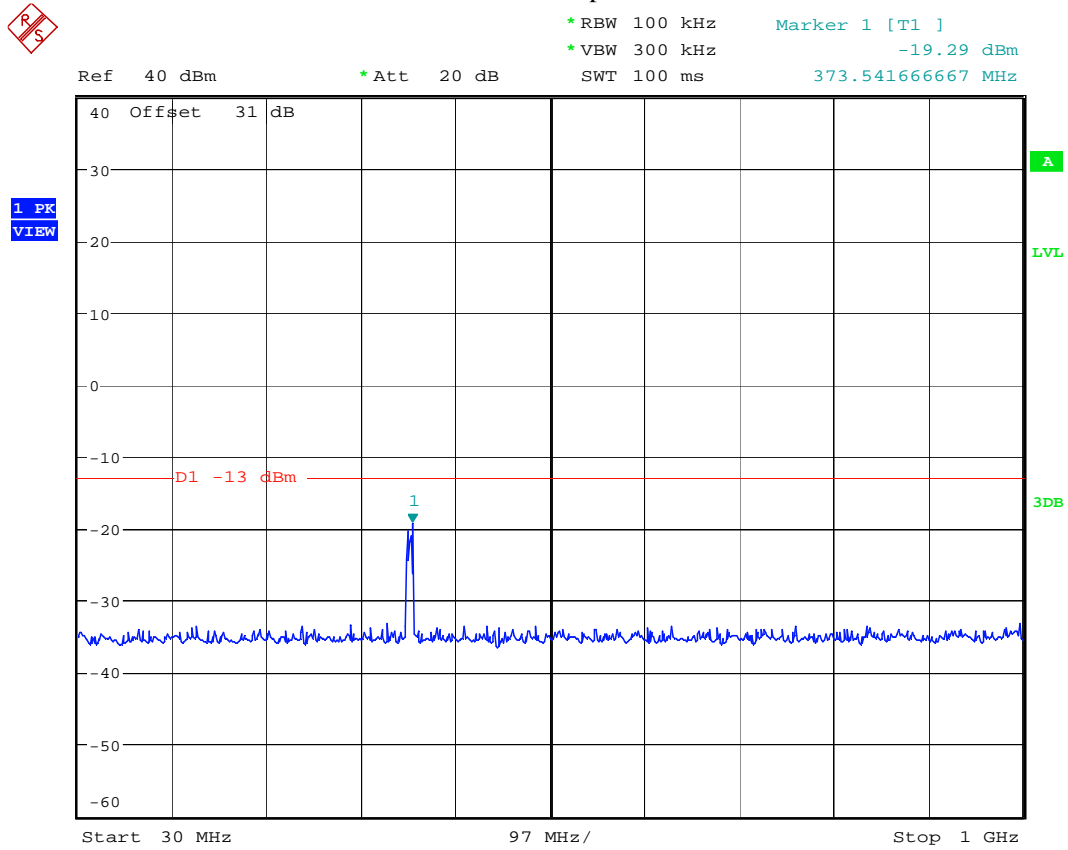

16QAM, HIGH CHANNEL

Date: 23.JUN.2009 02:31:01


Graph 4.24

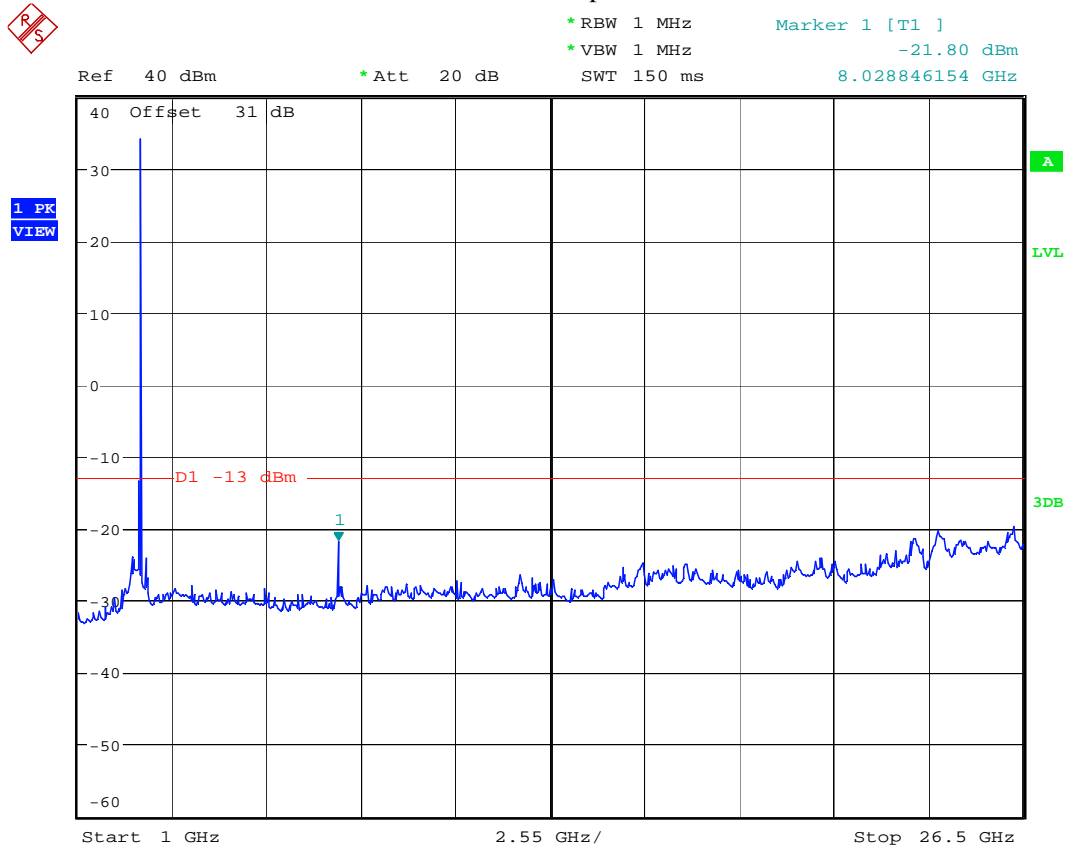

16QAM, HIGH CHANNEL


Date: 23.JUN.2009 02:25:06

Graph 4.25

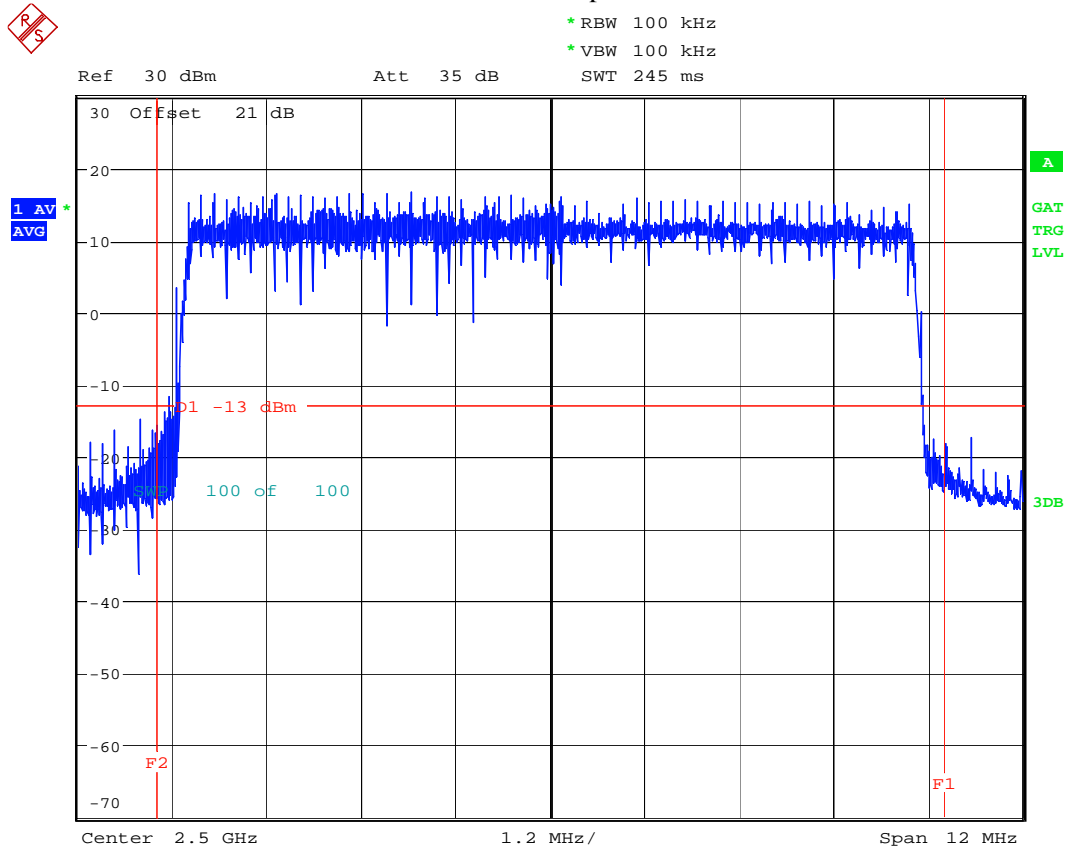


64QAM, Low Channel

Graph 4.26

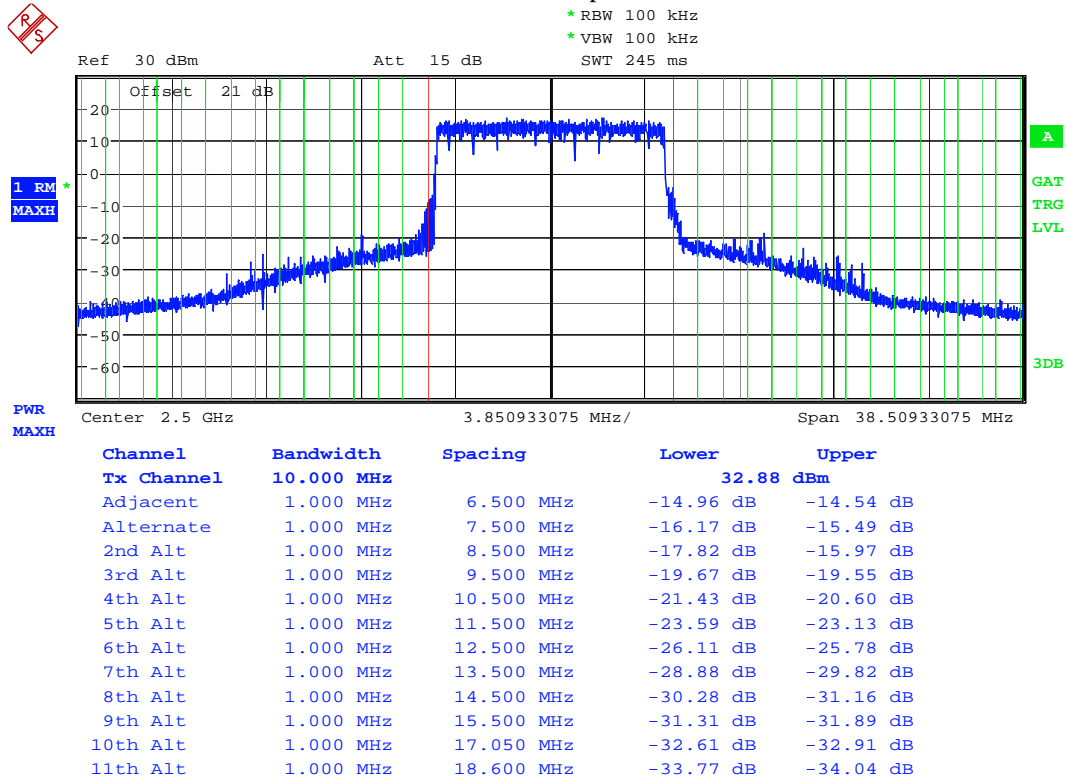

64QAM, Low Channel


Graph 4.27

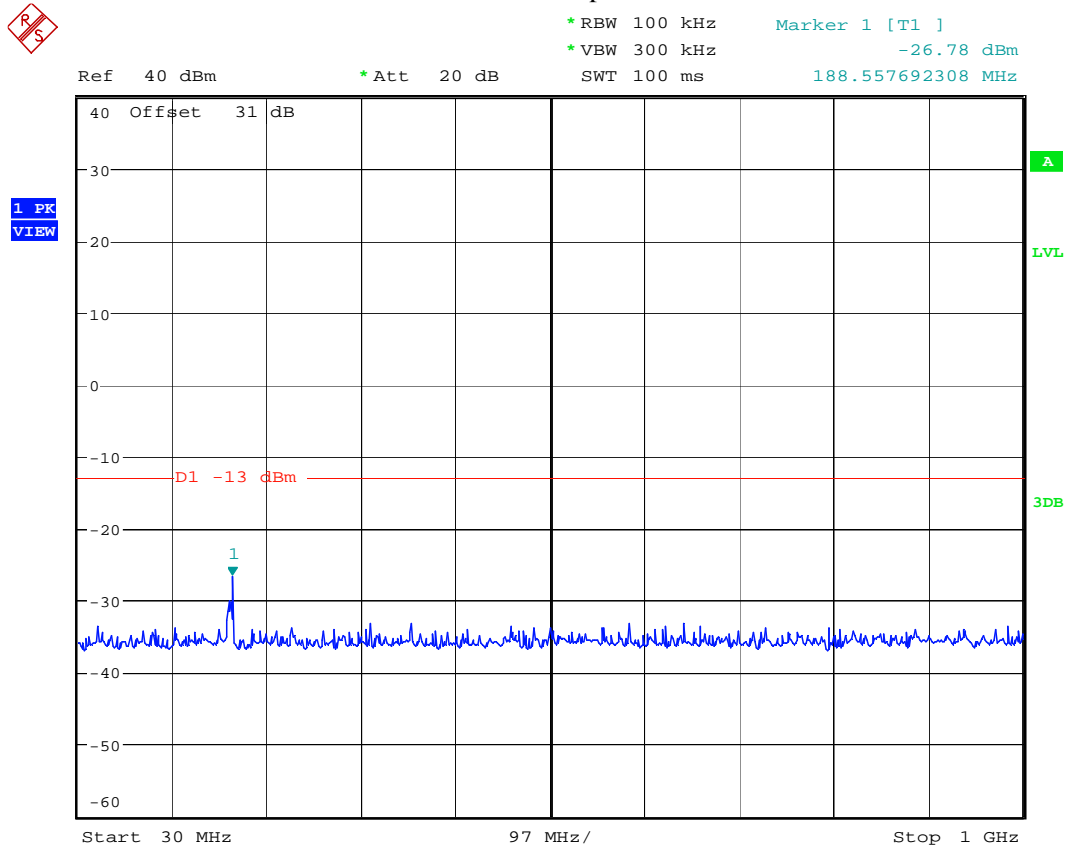

64QAM, LOW CHANNEL

Date: 23.JUN.2009 02:44:42


Graph 4.28

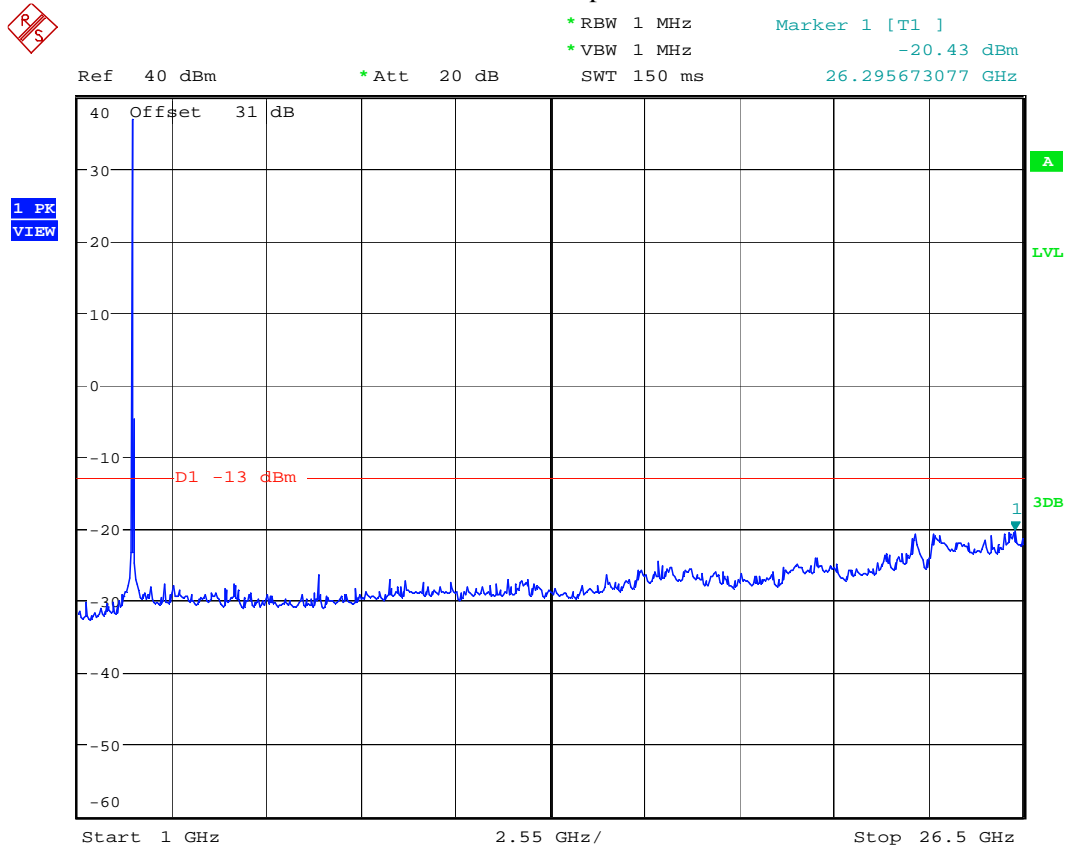

64QAM, LOW CHANNEL


Date: 23.JUN.2009 01:43:06

Graph 4.29

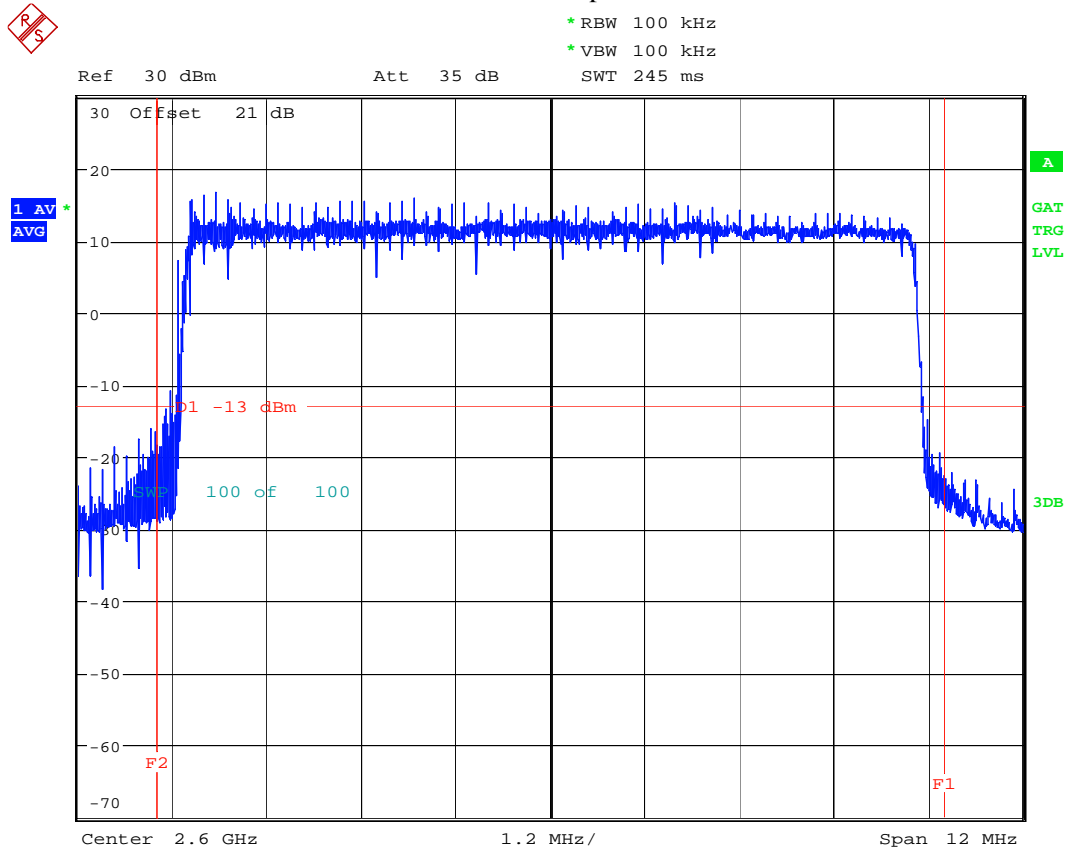


64QAM, Mid Channel

Graph 4.30

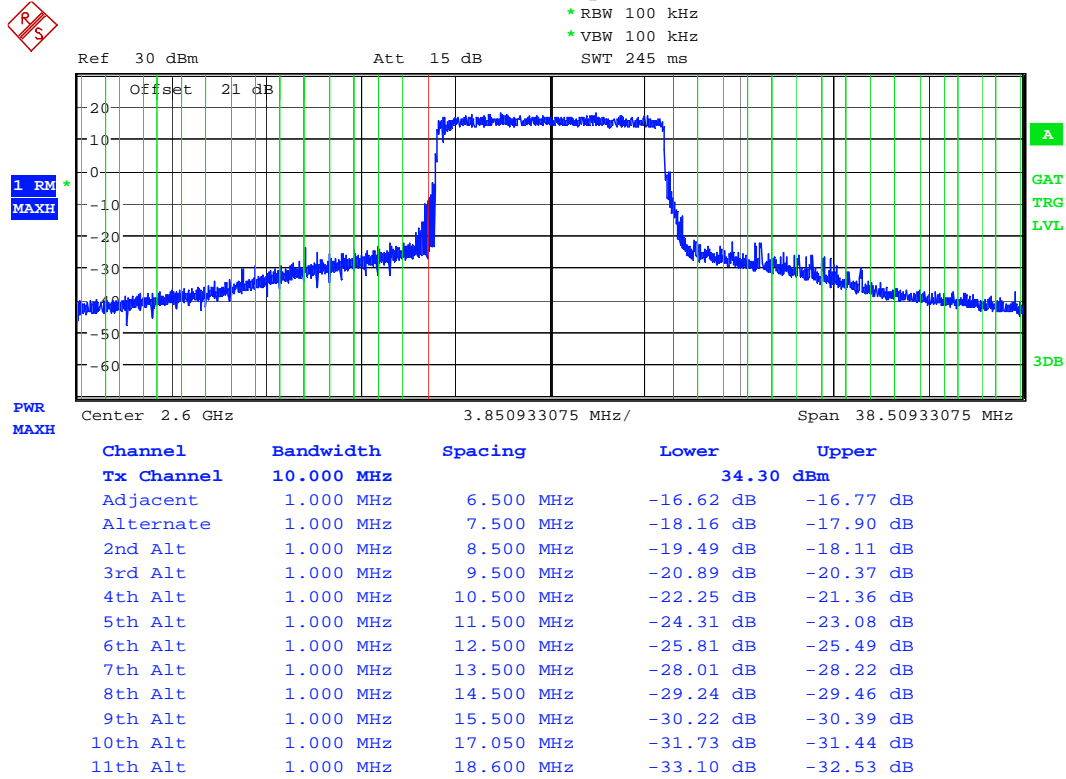

64QAM, Mid Channel


Graph 4.31

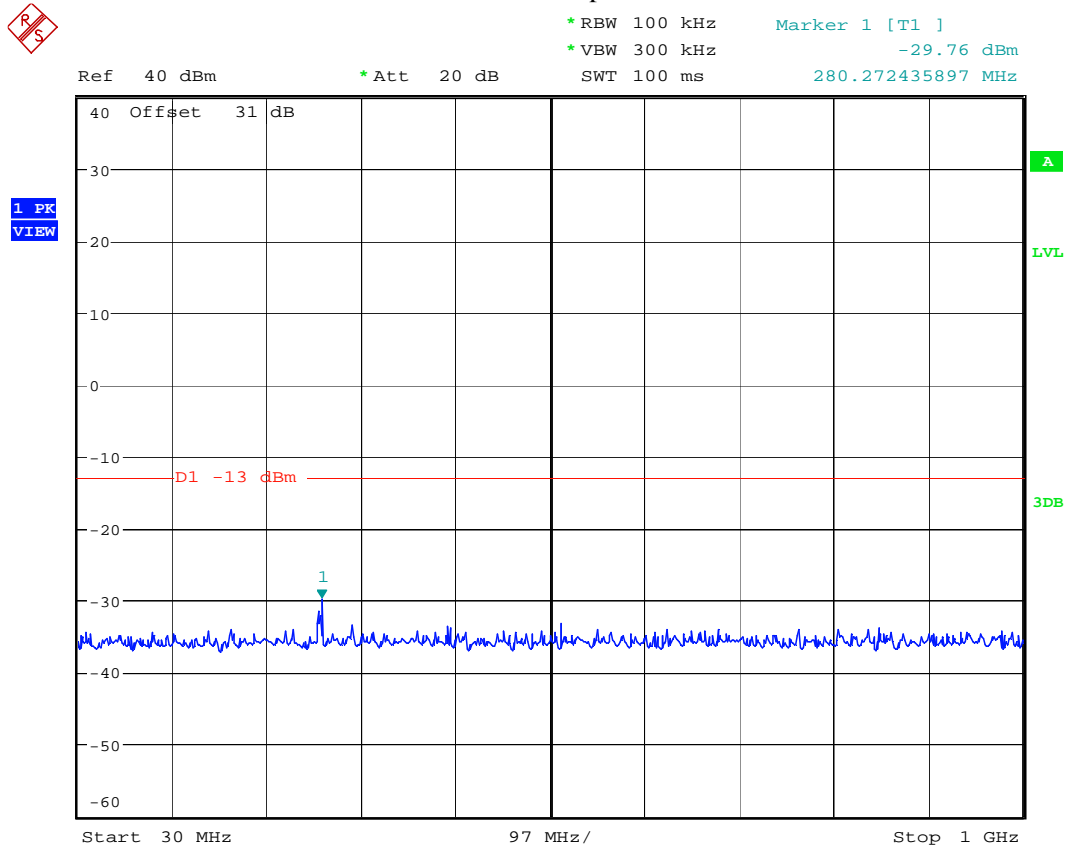

64QAM, MID CHANNEL

Date: 23.JUN.2009 02:42:26


Graph 4.32

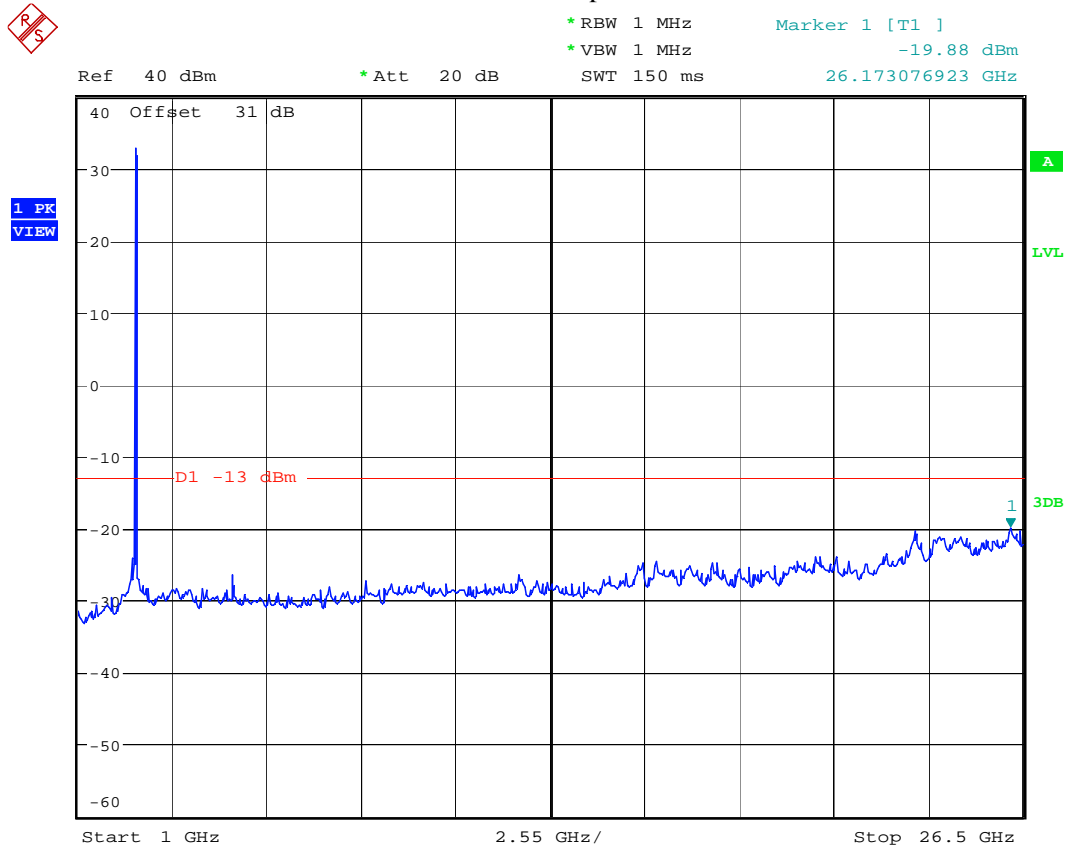

64QAM, MID CHANNEL


Date: 23.JUN.2009 01:41:03

Graph 4.33

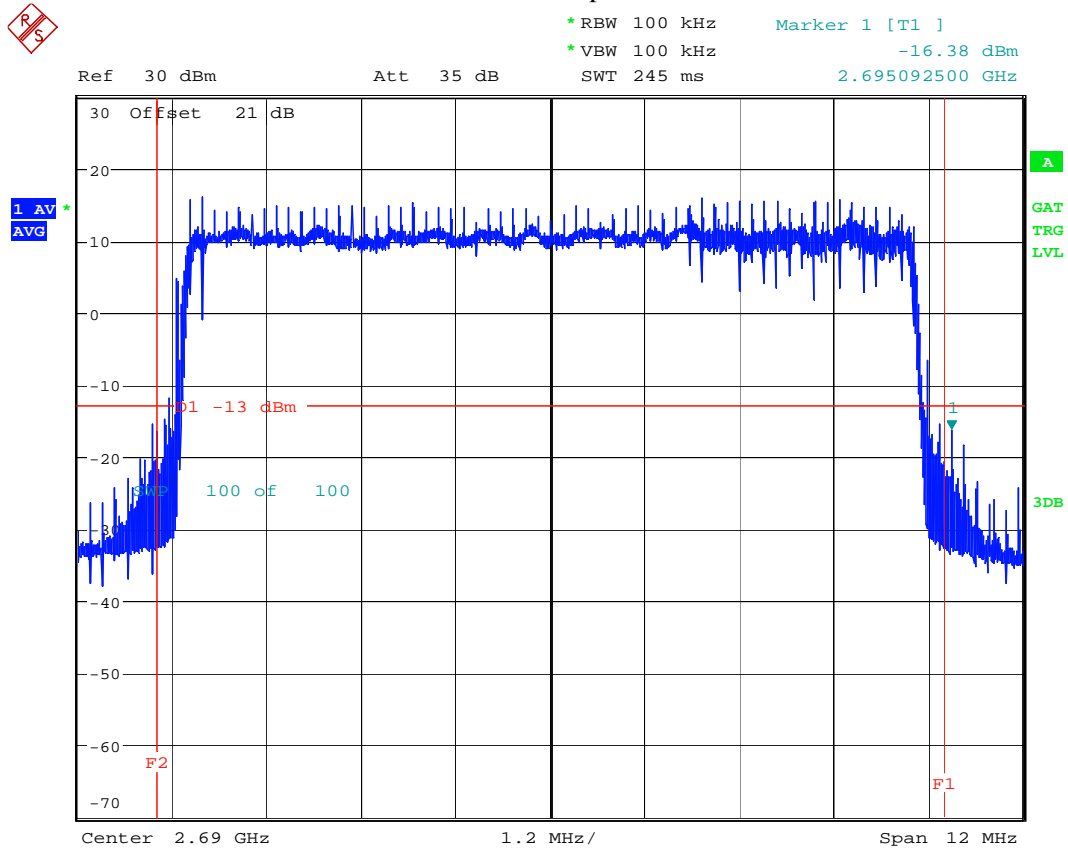


64QAM, High Channel

Graph 4.34

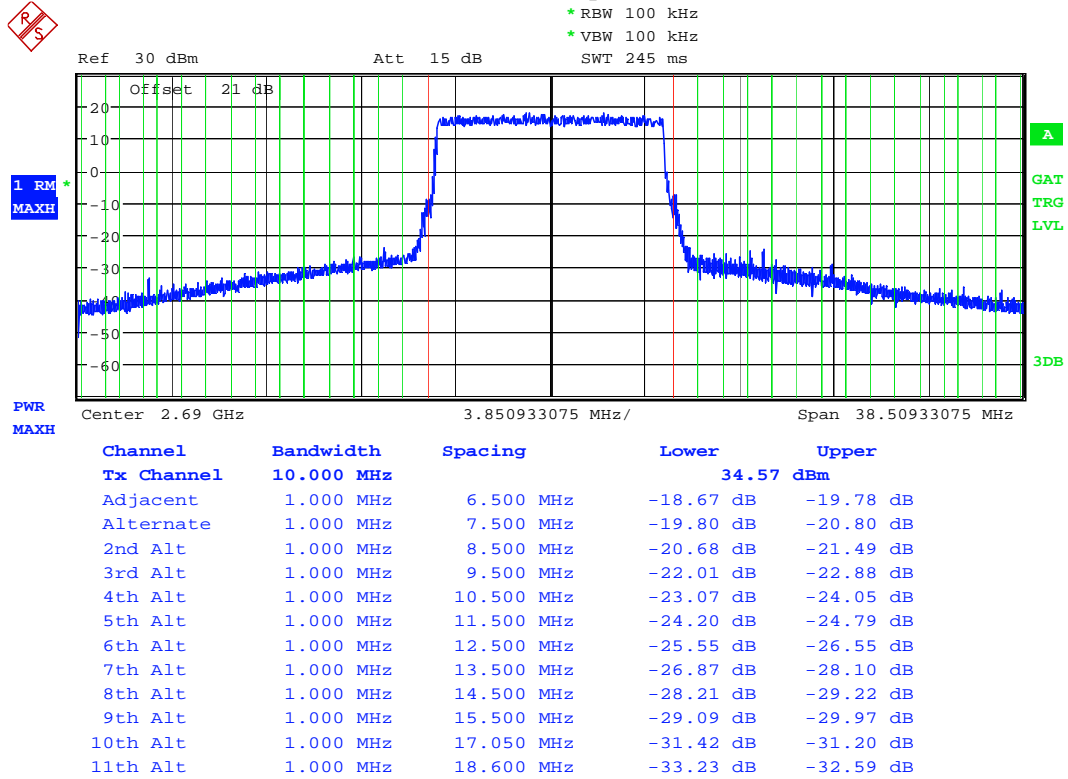

64QAM, High Channel


Graph 4.35

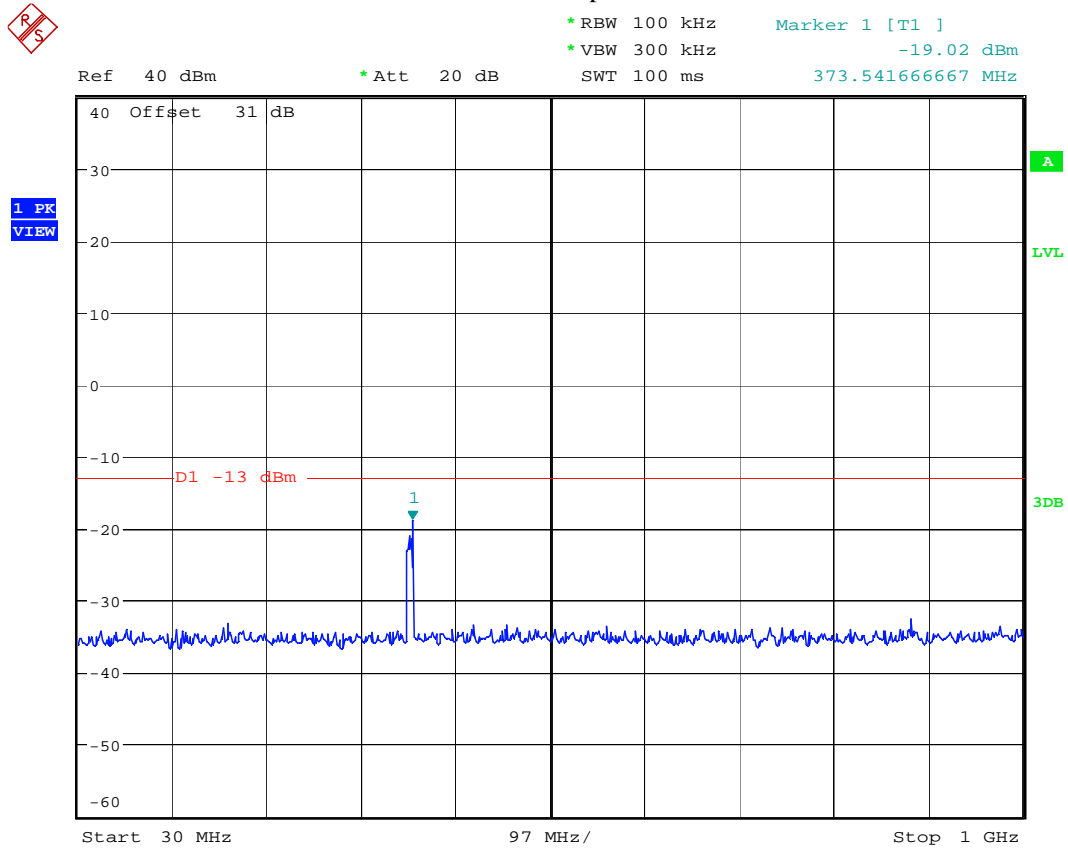

64QAM, HIGH CHANNEL

Date: 23.JUN.2009 02:29:26

Graph 4.36

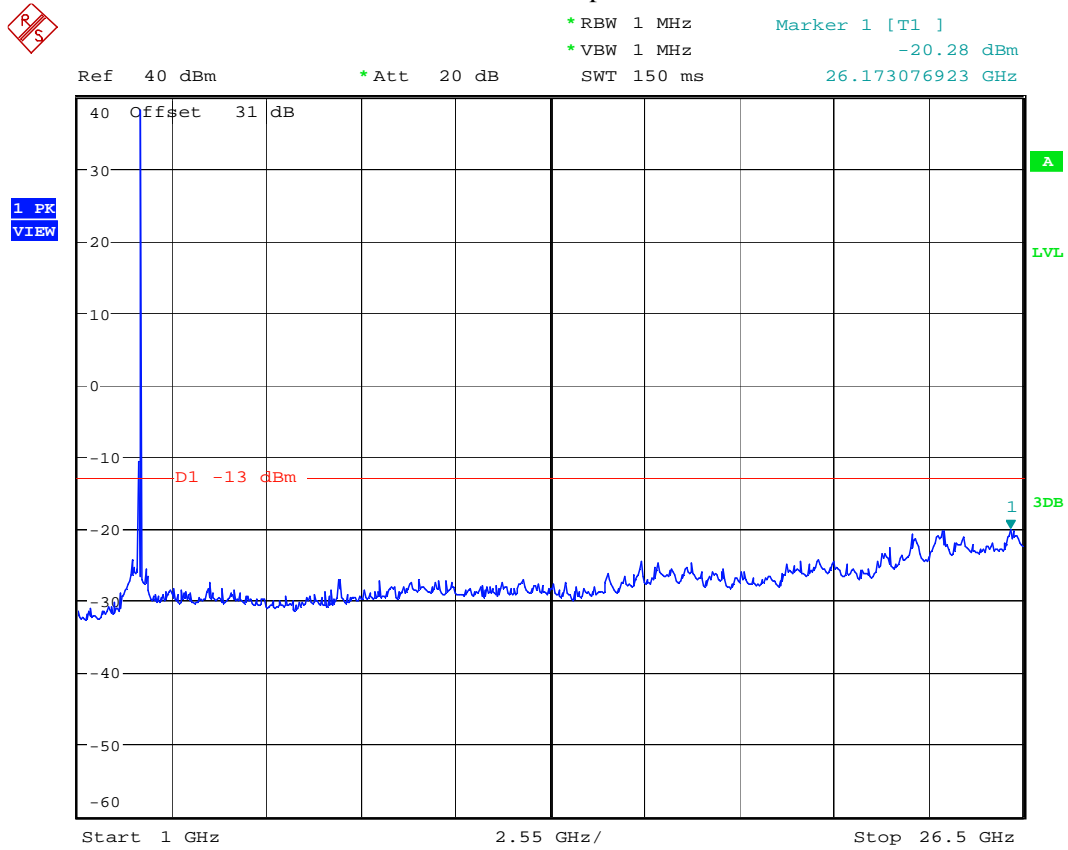

64QAM, HIGH CHANNEL

Date: 23.JUN.2009 02:26:53

5.0 Spurious Radiation

FCC 2.1053

5.1 Requirement

The power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

5.2 Test Procedure

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.

The frequency range up to 10th harmonic of each of the three fundamental frequency (low, middle, and high channels) was investigated. The worst case emissions are reported.

5.3 Test Equipment

EMCO 3115 Horn Antennas
Rohde & Schwarz FSU Spectrum Analyzer
Low Pass Filter
Preamplifiers

5.4 Test Results

Spurious Radiated Emissions Horizontal

| Frequency | FS | Limit@3m | Margin | Raw | Cable | Preampl | AF |
|--|----------|----------|--------|--------|-------|---------|-----------|
| Hz | (dBuV/m) | (dBuV/m) | (dB) | (dBuV) | (dB) | (dB) | (dB(1/m)) |
| 1.236E+09 | 36.3 | 84.1 | -47.8 | 43.0 | 3.4 | 35.0 | 24.9 |
| 1.499E+09 | 37.7 | 84.1 | -46.4 | 43.5 | 4.2 | 35.0 | 25.0 |
| 1.599E+09 | 40.3 | 84.1 | -43.8 | 45.3 | 4.4 | 35.0 | 25.6 |
| 1.633E+09 | 37.4 | 84.1 | -46.7 | 42.2 | 4.4 | 35.0 | 25.8 |
| 1.646E+09 | 38.6 | 84.1 | -45.5 | 43.3 | 4.4 | 35.0 | 25.9 |
| 1.712E+09 | 36.3 | 84.1 | -47.8 | 40.6 | 4.5 | 35.1 | 26.3 |
| 1.742E+09 | 36.1 | 84.1 | -48.0 | 40.2 | 4.6 | 35.1 | 26.4 |
| 1.916E+09 | 36.8 | 84.1 | -47.3 | 39.7 | 4.8 | 35.2 | 27.5 |
| 1.975E+09 | 38.0 | 84.1 | -46.1 | 40.4 | 4.9 | 35.2 | 27.9 |
| 2.133E+09 | 42.8 | 84.1 | -41.3 | 44.7 | 5.2 | 35.3 | 28.2 |
| 2.500E+09 | 41.7 | 84.1 | -42.4 | 42.7 | 5.6 | 35.4 | 28.8 |
| 2.594E+09 | 56.1 | 84.1 | -28.0 | 56.7 | 5.7 | 35.3 | 29.0 |
| 2.664E+09 | 38.1 | 84.1 | -46.0 | 38.4 | 5.8 | 35.3 | 29.2 |
| 3.000E+09 | 46.9 | 84.1 | -37.2 | 46.2 | 6.2 | 35.6 | 30.1 |
| 3.197E+09 | 37.0 | 84.1 | -47.1 | 35.7 | 6.5 | 35.7 | 30.5 |
| 3.733E+09 | 39.2 | 84.1 | -44.9 | 36.0 | 6.9 | 35.5 | 31.8 |
| 4.264E+09 | 37.2 | 84.1 | -46.9 | 32.8 | 7.4 | 35.3 | 32.3 |
| 4.999E+09 | 38.5 | 84.1 | -45.6 | 31.7 | 8.3 | 34.8 | 33.3 |
| 6.000E+09 | 43.7 | 84.1 | -40.4 | 34.6 | 8.9 | 34.0 | 34.2 |
| 1.800E+10 | 52.1 | 84.1 | -32.0 | 24.6 | 15.4 | 35.2 | 47.3 |
| Test mode: Tx @ Low Channel, Mid and High Channels | | | | | | | |
| Test Date: 10-27-09 | | | | | | | |
| By: KV | | | | | | | |

Spurious Radiated Emissions Vertical

| Frequency (MHz) | FS (dBuV/m) | Limit@3m (dBuV/m) | Margin (dB) | Raw (dBuV) | Cable (dB) | Preamplifier (dB) | AF dB(1/m) |
|---|----------------|----------------------|----------------|---------------|---------------|----------------------|---------------|
| 1.123E+09 | 34.8 | 84.1 | -49.3 | 41.6 | 3.4 | 35.1 | 24.9 |
| 1.266E+09 | 37.0 | 84.1 | -47.1 | 43.6 | 3.4 | 35.0 | 25.0 |
| 1.332E+09 | 35.6 | 84.1 | -48.5 | 42.0 | 3.6 | 35.0 | 25.0 |
| 1.465E+09 | 34.7 | 84.1 | -49.4 | 40.5 | 4.1 | 35.0 | 25.1 |
| 1.533E+09 | 42.7 | 84.1 | -41.4 | 48.1 | 4.3 | 35.0 | 25.3 |
| 1.599E+09 | 39.5 | 84.1 | -44.6 | 44.5 | 4.4 | 35.0 | 25.6 |
| 1.665E+09 | 35.5 | 84.1 | -48.6 | 40.0 | 4.5 | 35.0 | 26.0 |
| 1.975E+09 | 35.0 | 84.1 | -49.1 | 37.7 | 4.9 | 35.2 | 27.6 |
| 2.133E+09 | 40.5 | 84.1 | -43.6 | 42.6 | 5.2 | 35.3 | 28.0 |
| 2.400E+09 | 34.8 | 84.1 | -49.3 | 36.2 | 5.5 | 35.4 | 28.5 |
| 2.500E+09 | 45.9 | 84.1 | -38.2 | 47.0 | 5.6 | 35.4 | 28.7 |
| 2.596E+09 | 55.5 | 84.1 | -28.6 | 56.1 | 5.7 | 35.3 | 29.0 |
| 2.664E+09 | 36.7 | 84.1 | -47.4 | 37.0 | 5.8 | 35.3 | 29.2 |
| 3.000E+09 | 41.1 | 84.1 | -43.0 | 40.4 | 6.2 | 35.6 | 30.1 |
| 3.197E+09 | 36.6 | 84.1 | -47.5 | 35.3 | 6.5 | 35.7 | 30.5 |
| 5.195E+09 | 43.8 | 84.1 | -40.3 | 36.4 | 8.3 | 34.6 | 33.7 |
| 6.000E+09 | 43.8 | 84.1 | -40.3 | 34.6 | 8.9 | 34.0 | 34.3 |
| 7.500E+09 | 42.7 | 84.1 | -41.4 | 29.2 | 10.3 | 33.4 | 36.6 |
| 9.001E+09 | 45.0 | 84.1 | -39.1 | 29.5 | 11.7 | 34.0 | 37.8 |
| 1.800E+10 | 52.3 | 84.1 | -31.8 | 24.6 | 15.4 | 35.2 | 47.5 |
| Test mode: Tx @ Low Channel, Mid and High Channels Test Date: 10-27-09 By: KV | | | | | | | |

All other emissions are at least 20dB below the limit.

| | |
|--------|----------|
| Result | Complies |
|--------|----------|

6.0 Frequency Stability vs Temperature and Voltage

FCC 2.1055

6.1 Requirement

The frequency stability shall be measured with variation of ambient temperature as follows:

From -30° to $+50^{\circ}$ centigrade. Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement.

The frequency stability shall be measured with variation of primary supply voltage as follows:

Vary primary supply voltage from 85 to 115 percent of the nominal value.

6.2 Test Procedure

The EUT was placed inside the temperature chamber. The RF power output was connected to frequency counter. The EUT was setup to transmit the maximum power.

After the temperature stabilized for approximately 20 minutes, the transmitting frequency was measured by the frequency counter and recorded.

At the room temperature, the frequency was measured when the EUT was powered with the nominal voltage and with 85% and 115% of the nominal voltage.

6.3 Test Equipment

Temperature Chamber
Rohde & Schwarz FSU Spectrum Analyzer

6.4 Test Results

Nominal frequency: 2,593,000,156 Hz

| Temperature (°C) | Measured Frequency Hz | Maximum deviation from nominal at 20°C Hz |
|---------------------|--------------------------|---|
| -30 | 2,593,000,130 | -26 |
| -20 | 2,593,000,179 | +23 |
| -10 | 2,593,000,192 | +36 |
| 0 | 2,593,000,181 | +25 |
| 10 | 2,593,000,190 | +34 |
| 20 | 2,593,000,156 | 0 |
| 30 | 2,593,000,132 | -24 |
| 40 | 2,593,000,178 | +22 |
| 50 | 2,593,000,196 | +40 |

| DC Voltage | Measured Frequency Hz | Maximum deviation from nominal at 20°C Hz |
|--------------|--------------------------|---|
| -48V Nominal | 2,593,000,156 | - |
| 85% | 2,593,000,187 | +31 |
| 115% | 2,593,000,195 | +39 |

| | |
|--------|----------|
| Result | Complies |
|--------|----------|

7.0 Emission from Digital Parts and Receiver

7.1 Radiated emissions FCC 15.109

7.1.1 Test Limit

Radiated Emission Limit for FCC Part 15 Subpart B

| Radiated Emission Limits for Class A at 10 meters | |
|---|------------------------------|
| Frequency (MHz) | Quasi-Peak limits, dB (μV/m) |
| 30 to 88 | 39.1 |
| 88 to 216 | 43.5 |
| 216 to 960 | 46.4 |
| 960 and up | 49.5 |
| Radiated Emission Limits for Class B at 3 meters | |
| Frequency (MHz) | Quasi-Peak limits, dB (μV/m) |
| 30 to 88 | 40.0 |
| 88 to 216 | 43.5 |
| 216 to 960 | 46.0 |
| 960 and up | 54.0 |

7.1.2 Test Procedure

Measurements are conducted with a quasi-peak detector instrument in the frequency range of 30 MHz to 1000 MHz and with the average detector instrument in the frequency range above 1000 MHz. The measuring receiver meets the requirements of Section One of CISPR 16 and the measuring antenna correlates to a balanced dipole.

Measurements of the radiated field are made with the antenna located at a distance of 10 meters from the EUT. If the field-strength measurements at 10m cannot be made because of high ambient noise level or for other reasons, measurements of Class B equipment may be made at a closer distance, for example 3m. An inverse proportionality factor of 20 dB per decade should be used to normalize the measured data to the specified distance for determining compliance.

The antenna is adjusted between 1m and 4m in height above the ground plane for maximum meter reading at each test frequency.

The antenna-to-EUT azimuth is varied during the measurement to find the maximum field-strength readings.

The antenna-to-EUT polarization (horizontal and vertical) is varied during the measurements to find the maximum field-strength readings.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for a larger EUT.

Floor standing EUTs are placed on a horizontal metal ground plane and isolated from the ground plane by 3 to 12 mm of insulating material.

Equipment setup for radiated emission tests followed the guidelines of ANSI C63.4 (2003).

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG + DF$$

Where FS = Field Strength in dB(μ V/m)


RA = Receiver Amplitude (including preamplifier) in dB(μ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB(1/m)

AG = Amplifier Gain in dB

7.1.3 Test Results

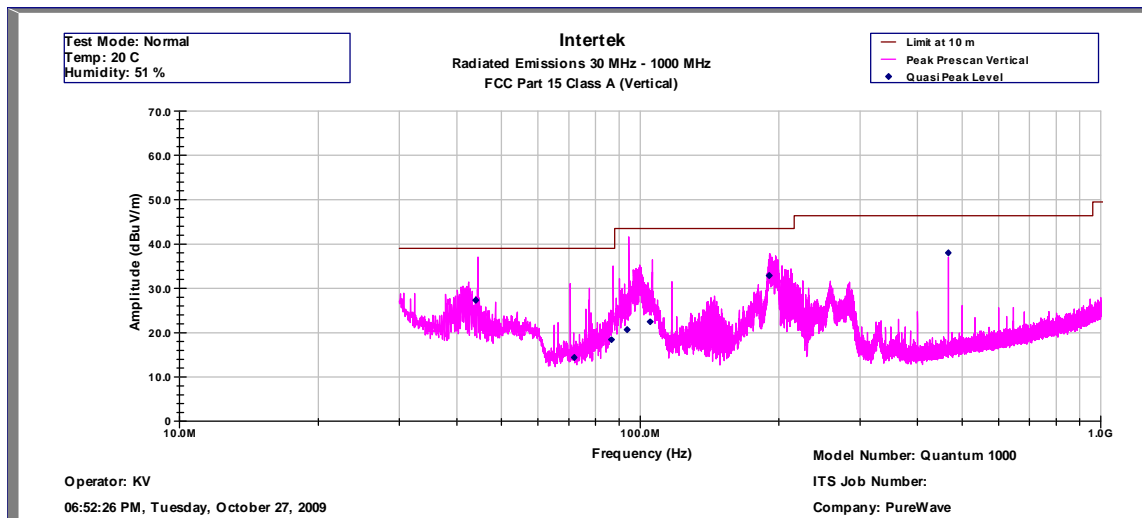

Intertek Testing Services
Radiated Emissions 30 MHz - 1000 MHz
FCC Part 15 Class A (QP-Vertical)

Operator: KV


Model Number: Quantum 1000

06:38:22 PM, Tuesday, October 27, 2009

Company: PureWave

| Frequency | Quasi Pk FS | Limit@10m | Margin | RA | CF | AG | AF |
|-----------|-------------|-----------|--------|------|-----|------|---------|
| Hz | dB(uV/m) | dB(uV/m) | dB | dB | dB | dB | dB(1/m) |
| 4.396E+07 | 27.3 | 39.0 | -11.7 | 42.9 | 0.7 | 32.0 | 5.6 |
| 7.191E+07 | 14.4 | 39.0 | -24.6 | 38.2 | 0.9 | 32.0 | 5.5 |
| 8.666E+07 | 18.4 | 39.0 | -20.6 | 40.6 | 0.9 | 32.0 | 7.2 |
| 9.366E+07 | 20.7 | 43.5 | -22.8 | 41.9 | 1.0 | 32.0 | 7.1 |
| 1.051E+08 | 22.4 | 43.5 | -21.1 | 42.2 | 1.0 | 32.0 | 6.9 |
| 1.907E+08 | 32.8 | 43.5 | -10.7 | 53.4 | 1.4 | 31.9 | 10.9 |
| 4.667E+08 | 38.0 | 46.4 | -8.4 | 50.5 | 2.3 | 32.1 | 18.2 |

Test Mode: Normal
Temp: 20 C
Humidity: 51 %

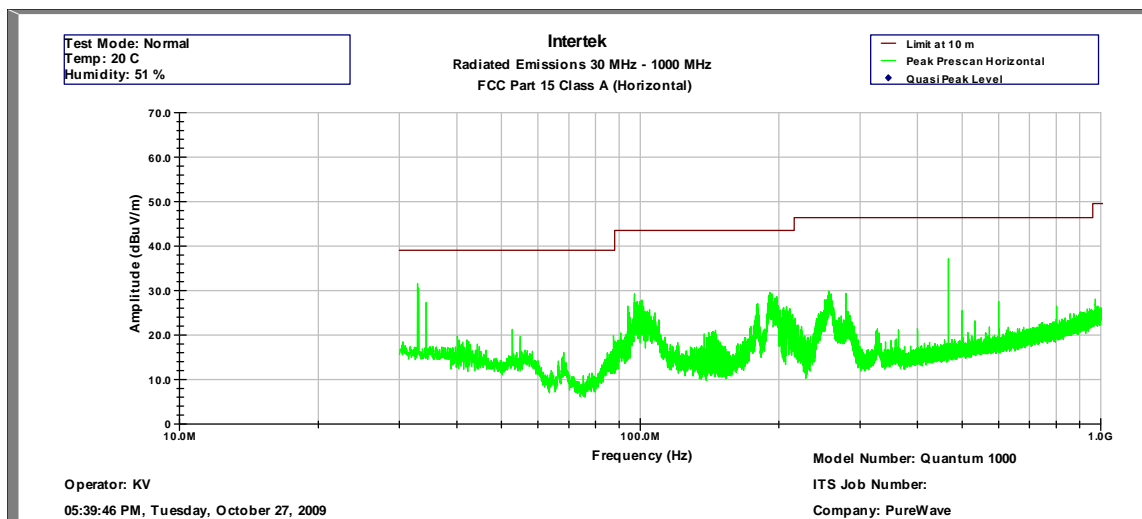

Intertek
Radiated Emissions 30 MHz - 1000 MHz
FCC Part 15 Class A (Pk-Horizontal)

Operator: KV Model Number: Quantum 1000

05:39:45 PM, Tuesday, October 27, 2009 Company: PureWave

| Frequency (Hz) | Peak FS dB(uV/m) | Limit@10m dB(uV/m) | Margin dB | RA dB(uV) | CF dB | AG dB | AF dB(1/m) |
|-------------------|---------------------|-----------------------|--------------|--------------|----------|----------|---------------|
| 3.287E+07 | 31.5 | 39.0 | -7.5 | 44.6 | 0.6 | 32.0 | 12.6 |
| 3.303E+07 | 30.5 | 39.0 | -8.5 | 43.6 | 0.6 | 32.0 | 12.6 |
| 3.432E+07 | 27.3 | 39.0 | -11.7 | 40.6 | 0.6 | 32.0 | 11.9 |
| 9.713E+07 | 29.3 | 43.5 | -14.2 | 50.5 | 1.0 | 32.0 | 6.2 |
| 9.863E+07 | 27.5 | 43.5 | -16.0 | 48.5 | 1.0 | 32.0 | 6.2 |
| 9.984E+07 | 27.5 | 43.5 | -16.0 | 48.3 | 1.0 | 32.0 | 6.1 |
| 1.005E+08 | 27.7 | 43.5 | -15.8 | 48.4 | 1.0 | 32.0 | 6.1 |
| 1.009E+08 | 27.8 | 43.5 | -15.7 | 48.4 | 1.0 | 32.0 | 6.1 |
| 1.911E+08 | 29.6 | 43.5 | -13.9 | 50.3 | 1.4 | 31.9 | 9.4 |
| 1.961E+08 | 28.2 | 43.5 | -15.3 | 48.8 | 1.5 | 31.9 | 9.7 |
| 1.977E+08 | 28.6 | 43.5 | -14.9 | 49.2 | 1.5 | 31.9 | 9.7 |
| 4.667E+08 | 37.1 | 46.4 | -9.3 | 49.9 | 2.3 | 32.1 | 18.0 |

Test Mode: Normal
Temp: 20 C
Humidity: 51 %

Result Complies

8.0 List of Test Equipment

Measurement equipment used for compliance testing utilized the equipment on the following list:

| Equipment | Manufacturer | Model/Type | Serial # | Cal Int | Cal Due |
|-------------------|-----------------|----------------------|------------|---------|----------|
| RF Filter Section | Hewlett Packard | 85460A | 3448A00267 | 12 | 07/01/10 |
| EMI Receiver | Hewlett Packard | 8546A | 3710A00373 | 12 | 07/01/10 |
| Bi-Log Antenna | EMCO | 3143 | 9509 | 12 | 11/07/09 |
| Pre-Amplifier | Sonoma | 310N | 185634 | 12 | 11/10/09 |
| Pre-Amplifier | Miteq | AMF-4D-001180-24-10P | 799159 | 12 | 07/28/10 |
| Spectrum Analyzer | Rohde&Schwarz | FSU26 | 200482 | 12 | 11/20/09 |
| Horn Antenna | EMCO | 3115 | 9107-3712 | 12 | 10/3/10 |



9.0 Document History

| Revision/ Job Number | Writer Initials | Date | Change |
|-------------------------|--------------------|-------------------|-------------------|
| 1.0 / 3183595 | KV | November 30, 2009 | Original document |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |