

# Report on the FCC and IC Testing of:

SureFlap Ltd

Microchip Pet Feeder Connect. Model: iMPF

In accordance with FCC 47 CFR Part 15C and  
Industry Canada RSS-247 and Industry Canada  
RSS-GEN

Prepared for: SureFlap Ltd, 7 The Irwin Centre, Scotland Road  
Dry Drayton, Cambridge, Cambridgeshire  
CD23 8AR, United Kingdom,

FCC ID: XO9-IMF00-001

IC: 8906A-IMPF0001



Add value.  
Inspire trust.

## COMMERCIAL-IN-CONFIDENCE

Document Number: 75944242-07 | Issue: 02

### SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Matt Russell	RF Team Leader	Authorised Signatory	20 May 2019

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

### ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C and Industry Canada RSS-247 and Industry Canada RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

### SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Mehadi Choudhury	Engineer	Testing	20 May 2019
Graeme Lawler	Engineer	Testing	20 May 2019
Mohammad Malik	Engineer	Testing	20 May 2019

FCC Accreditation

90987 Octagon House, Fareham Test Laboratory

Industry Canada Accreditation

IC2932B-1 Octagon House, Fareham Test Laboratory

### EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C: 2017, Industry Canada RSS-247: Issue 2 (2017-02) and Industry Canada RSS-GEN: Issue 5 (April-2018) for the tests detailed in section 1.3.



#### DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2019 TÜV SÜD.

#### ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD  
is a trading name of TÜV SÜD Ltd  
Registered in Scotland at East Kilbride,  
Glasgow G75 0QF, United Kingdom  
Registered number: SC215164

TÜV SÜD Ltd is a  
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100  
Fax: +44 (0) 1489 558101  
[www.tuv-sud.co.uk](http://www.tuv-sud.co.uk)

TÜV SÜD  
Octagon House  
Concorde Way  
Fareham  
Hampshire PO15 5RL  
United Kingdom



Contents

1      **Report Summary .....2**

1.1    Report Modification Record.....2

1.2    Introduction.....2

1.3    Brief Summary of Results .....3

1.4    Application Form .....4

1.5    Product Information ..... 11

1.6    Deviations from the Standard..... 12

1.7    EUT Modification Record ..... 12

1.8    Test Location ..... 13

2      **Test Details ..... 14**

2.1    Maximum Conducted Output Power ..... 14

2.2    Power Spectral Density..... 16

2.3    Restricted Band Edges..... 20

2.4    Authorised Band Edges ..... 25

2.5    Spurious Radiated Emissions ..... 29

2.6    Emission Bandwidth ..... 50

3      **Photographs ..... 53**

3.1    Test Setup Photographs ..... 53

4      **Measurement Uncertainty ..... 55**



## 1 Report Summary

### 1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	23 January 2019
2	Change FCC ID from XO9-IMPF00-001 to XO9-IMF00-001	20 May 2019

**Table 1**

### 1.2 Introduction

Applicant	SureFlap Ltd
Manufacturer	SureFlap Ltd
Model Number(s)	iMPF
Serial Number(s)	U001-0001174 U001-0001192
Hardware Version(s)	00818-DA_05 iMPF General Assembly (_05: revision 05)
Software Version(s)	Firmware 01233_FF (but special version for TUV SUD testing)
Number of Samples Tested	2
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2017 Industry Canada RSS-247: Issue 2 (2017-02) Industry Canada RSS-GEN: Issue 5 (April-2018)
Order Number	2745
Date	07-November-2018
Date of Receipt of EUT	15-November-2018 and 13-November-2018
Start of Test	16-November-2018
Finish of Test	05-December-2018
Name of Engineer(s)	Mehadi Choudhury, Graeme Lawler and Mohammad Malik
Related Document(s)	ANSI C63.10 (2013) KDB 662911 D01 v02r02



### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C and Industry Canada RSS-247 and Industry Canada RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 15C	RSS-247	RSS-GEN			
Configuration and Mode: 2.4 GHz (802.15.4 Proprietary)						
2.1	15.247 (b)	5.4	6.12	Maximum Conducted Output Power	Pass	ANSI C63.10 (2013)
2.2	15.247 (e)	5.2	6.12	Power Spectral Density	Pass	ANSI C63.10 (2013)
2.3	15.205	-	8.10	Restricted Band Edges	Pass	ANSI C63.10 (2013)
2.4	15.247 (d)	5.5	-	Authorised Band Edges	Pass	ANSI C63.10 (2013)
2.5	15.247 (d) and 15.205	5.5	6.13	Spurious Radiated Emissions	Pass	ANSI C63.10 (2013)
2.6	15.247 (a)(2)	5.2	6.7	Emission Bandwidth	Pass	ANSI C63.10 (2013)

**Table 2**



#### 1.4 Application Form

EQUIPMENT DESCRIPTION	
Model Name/Number	iMPF
Part Number	N/A
Hardware Version	00818-DA_05 iMPF General Assembly (_05: revision 05)
Software Version	Firmware 01233_FF (but special version for TUV SUD testing)
FCC ID (if applicable)	XO9-IMF00-001
Industry Canada ID (if applicable)	8906A-IMPF0001
Technical Description (Please provide a brief description of the intended use of the equipment)	Feeder connected by 2.4 GHz RF to a hub which is connected to the internet. Allows the conditional access to food based on the animal RFID tags. Usually situated on the floor in a kitchen..

Types of Modulations used by the Equipment	
<input type="checkbox"/>	FHSS
<input checked="" type="checkbox"/>	Other forms of modulation
In case of FHSS Modulation	
In case of non-Adaptive Frequency Hopping equipment:	
Number of Hopping Frequencies:	
In case of Adaptive Frequency Hopping Equipment:	
Maximum number of Hopping Frequencies:	
Minimum number of Hopping Frequencies:	
Dwell Time:	
Adaptive / non-adaptive equipment:	
<input checked="" type="checkbox"/>	non-adaptive Equipment
<input type="checkbox"/>	adaptive Equipment without the possibility to switch to a non-adaptive mode
<input type="checkbox"/>	adaptive Equipment which can also operate in a non-adaptive mode
In case of adaptive equipment:	
The maximum Channel Occupancy Time implemented by the equipment: ms	
<input type="checkbox"/>	The equipment has implemented an LBT based DAA mechanism
In case of equipment using modulation different from FHSS:	
<input type="checkbox"/>	The equipment is Frame Based equipment
<input type="checkbox"/>	The equipment is Load Based equipment
<input type="checkbox"/>	The equipment can switch dynamically between Frame Based and Load Based equipment
The CCA time implemented by the equipment: μs	
<input type="checkbox"/>	The equipment has implemented an non-LBT based DAA mechanism
<input type="checkbox"/>	The equipment can operate in more than one adaptive mode



In case of non-adaptive Equipment:	
The maximum RF Output Power (e.i.r.p.):	7.5 dBm
The maximum (corresponding) Duty Cycle:	1 %
Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):	
N/A	
The worst case operational mode for each of the following tests:	
RF Output Power: conducted	4.5 dBm
Power Spectral Density:	
Duty cycle, Tx-Sequence, Tx-gap:	1%
Accumulated Transmit Time, Frequency Occupation & Hopping Sequence (only for FHSS equipment):	
Hopping Frequency Separation (only for FHSS equipment):	
Medium Utilisation:	
Adaptivity & Receiver Blocking:	
Nominal Channel Bandwidth:	
Transmitter unwanted emissions in the OOB domain:	
Transmitter unwanted emissions in the spurious domain:	
Receiver spurious emissions:	
The different transmit operating modes (tick all that apply):	
<input checked="" type="checkbox"/>	Operating mode 1: Single Antenna Equipment
<input checked="" type="checkbox"/>	Equipment with only 1 antenna
<input type="checkbox"/>	Equipment with 2 diversity antennas but only 1 antenna active at any moment in time
<input type="checkbox"/>	Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode only where antenna is used. (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)
<input type="checkbox"/>	Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming
<input type="checkbox"/>	Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 3
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 4
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 5
<i>NOTE: Add more lines if more channel bandwidths are supported.</i>	
<input type="checkbox"/>	Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming
<input type="checkbox"/>	Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 3



<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 4
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 5
<i>NOTE: Add more lines if more channel bandwidths are supported.</i>	

In case of Smart Antenna Systems:	
The number of Receive chains:	
The number of Transmit chains:	
<input type="checkbox"/>	symmetrical power distribution
<input type="checkbox"/>	asymmetrical power distribution
In case of beam forming, the maximum (additional) beam forming gain:          dB	
<i>NOTE: The additional beam forming gain does not include the basic gain of a single antenna.</i>	
Operating Frequency Range(s) of the equipment:	
Operating Frequency Range 1: 2425 MHz to 2480 MHz	
Operating Frequency Range 2:	MHz to          MHz
Operating Frequency Range 3:	MHz to          MHz
<i>NOTE: Add more lines if more Frequency Ranges are supported.</i>	
Nominal Channel Bandwidth(s):	
Nominal Channel Bandwidth1: 2.5 MHz	
Nominal Channel Bandwidth2:	MHz
Nominal Channel Bandwidth3:	MHz
Nominal Channel Bandwidth4:	MHz
Nominal Channel Bandwidth5:	MHz
<i>NOTE: Add more lines if more channel bandwidths are supported.</i>	
Type of Equipment (stand-alone, combined, plug-in radio device, etc.):	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)
<input type="checkbox"/>	Plug-in radio device (Equipment intended for a variety of host systems)
<input type="checkbox"/>	Other
The normal and extreme operating conditions that apply to the equipment:	
Normal operating conditions (if applicable):	
Operating temperature: 25 °C	
Other (please specify if applicable):	
Extreme operating conditions:	
Operating temperature range: Minimum 0 °C to Maximum 35 °C	
Other (please specify if applicable): Minimum          °C to Maximum          °C	
Details provided are for the:	
<input checked="" type="checkbox"/>	stand-alone equipment



<input type="checkbox"/>	combined (or host) equipment
<input type="checkbox"/>	test jig

The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:						
Antenna Type:						
<input checked="" type="checkbox"/>	Integral Antenna (information to be provided in case of conducted measurements)					
	Antenna Gain: 3 dBi					
	If applicable, additional beamforming gain (excluding basic antenna gain):          dB					
<input type="checkbox"/>	Temporary RF connector provided					
<input type="checkbox"/>	No temporary RF connector provided					
<input type="checkbox"/>	Dedicated Antennas (equipment with antenna connector)					
<input type="checkbox"/>	Single power level with corresponding antenna(s)					
<input type="checkbox"/>	Multiple power settings and corresponding antenna(s)					
	Number of different Power Levels: 2					
	Power Level 1: 7.5 dBm					
	Power Level 2: -1.5 dBm					
	Power Level 3:          dBm					
<i>NOTE 1: Add more lines in case the equipment has more power levels.</i>						
<i>NOTE 2: These power levels are conducted power levels (at antenna connector).</i>						
For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable						
Power Level 1: 4.5 dBm						
Number of antenna assemblies provided for this power level:						
Assembly #	Gain (dBi)	e.i.r.p (dBm)	Part number or model number			
1	3	7.5				
2						
3						
4						
<i>NOTE: Add more rows in case more antenna assemblies are supported for this power level.</i>						
Power Level 2: -4.5 dBm						
Number of antenna assemblies provided for this power level:						
Assembly #	Gain (dBi)	e.i.r.p (dBm)	Part number or model number			
1	3	-1.5				
2						
3						
4						
<i>NOTE: Add more rows in case more antenna assemblies are supported for this power level.</i>						





Power Level 3:          dBm			
Number of antenna assemblies provided for this power level:			
Assembly #	Gain (dBi)	e.i.r.p (dBm)	Part number or model number
1			
2			
3			
4			
<i>NOTE: Add more rows in case more antenna assemblies are supported for this power level.</i>			

<b>The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:</b>	
Details provided are for the:	
<input checked="" type="checkbox"/>	stand-alone equipment
<input type="checkbox"/>	combined (or host) equipment
<input type="checkbox"/>	test jig
Supply Voltage <input type="checkbox"/> AC mains	State AC voltage          V
<input checked="" type="checkbox"/> DC	State DC voltage 6 V
In case of DC, indicate the type of power source	
<input type="checkbox"/>	Internal Power Supply
<input type="checkbox"/>	External Power Supply or AC/DC adapter
<input checked="" type="checkbox"/>	Battery
<input type="checkbox"/>	Other:
<b>Describe the test modes available which can facilitate testing:</b>	
described in separate document	
<b>The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3] IEEE 802.15.4™ [i.4], proprietary, etc.):</b>	
proprietary IEEE 802.15.4	
<b>If applicable, the statistical analysis referred in clause 5.4.1 q)</b>	
To be provided as separate attachment	
<b>If applicable, the statistical analysis referred in clause 5.4.1 r)</b>	
To be provided as separate attachment	
<b>Geo-location capability supported by the equipment:</b>	
<input type="checkbox"/> Yes	
<input type="checkbox"/> The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user.	
<input checked="" type="checkbox"/> No	
<b>Describe the minimum performance criteria that apply to the equipment (see clause 4.3.1.12.3 or 4.3.2.11.3)</b>	
under immunity testing it should still stop intruder pets accessing food from the feeder	



Combination for testing (see clause 5.3.2.3 of EN 300 328 V21.1)	
From all combinations of conducted power settings and intended antenna assembly(ies) specified in clause 5.4.1 m), specify the combination resulting in the highest e.i.r.p. for the radio equipment.	
Unless otherwise specified in ETSI EN 300 328, this power setting is to be used for testing against the requirements of ETSI EN 300 328. In case there is more than one such conducted power setting resulting in the same (highest) e.i.r.p. level, the highest power setting is to be used for testing. See also ETS EN 300 328, clause 5.3.2.3	
Highest overall e.i.r.p. value: 7.5 dBm	
Corresponding Antenna assembly gain: 3 dBi	Antenna Assembly #: n/a
Corresponding conducted power setting: n/a dBm (also the power level to be used for testing)	Listed as Power Setting #: n/a
Additional information provided by the applicant	
Modulation	
ITU Class(es) of emission: 2M50G1D	
Can the transmitter operate unmodulated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	

Duty Cycle
The transmitter is intended for:
<input type="checkbox"/> Continuous duty
<input checked="" type="checkbox"/> Intermittent duty
<input type="checkbox"/> Continuous operation possible for testing purposes
About the UUT
<input type="checkbox"/> The equipment submitted are representative production models
<input checked="" type="checkbox"/> If not, the equipment submitted are pre-production models?
<input checked="" type="checkbox"/> If pre-production equipment are submitted, the final production equipment will be identical in all respects with the equipment tested
<input type="checkbox"/> If not, supply full details
<input checked="" type="checkbox"/> The equipment submitted is CE marked
Additional items and/or supporting equipment provided
<input checked="" type="checkbox"/> Spare batteries (e.g. for portable equipment)
<input type="checkbox"/> Battery charging device
<input type="checkbox"/> External Power Supply or AC/DC adapter
<input type="checkbox"/> Test Jig or interface box
<input type="checkbox"/> RF test fixture (for equipment with integrated antennas)
<input type="checkbox"/> Host System
Manufacturer
Model
Model Name
<input type="checkbox"/> Combined equipment
Manufacturer



Model	
Model Name	
<input checked="" type="checkbox"/>	User Manual
<input checked="" type="checkbox"/>	Technical documentation (Handbook and circuit diagrams)

I hereby declare that the information supplied is correct and complete.

Name: Nick Hill

Position held:

Managing Director

Date: 7<sup>th</sup> May 2019

## 1.5 Product Information

### 1.5.1 Technical Description

Feeder connected by 2.4 GHz RF to a hub which is connected to the internet. Allows the conditional access to food based on the animal RFID tags. Usually situated on the floor in a kitchen.

### 1.5.2 Test Setup Diagram(s)

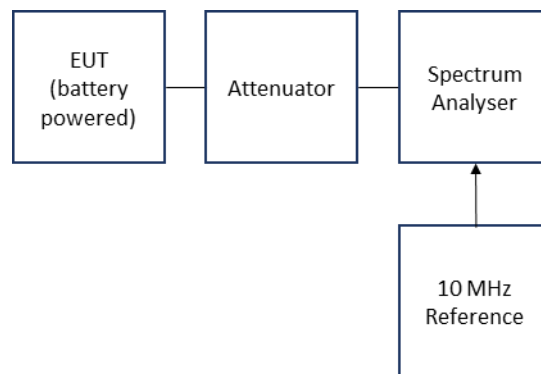


Figure 1 - Conducted Tests

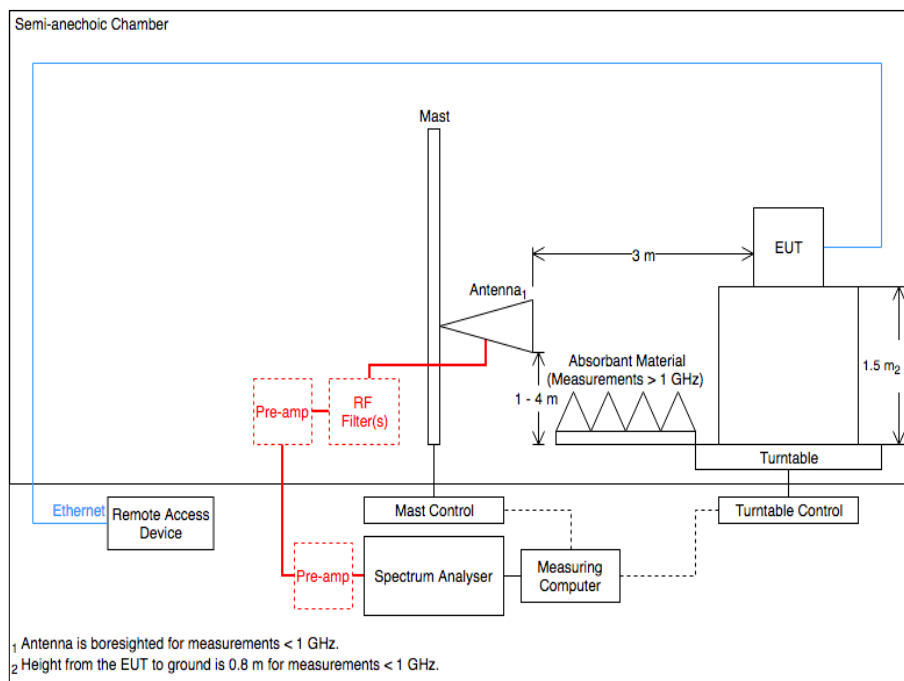


Figure 2 - Radiated Spurious Emissions Setup



### 1.5.3 EUT Configuration and Rationale for Radiated Spurious Emissions

The EUT was placed on the non-conducting platform in a manner typical of a normal installation. Measurements were made with the EUT situated in a single axis.

### 1.6 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

### 1.7 EUT Modification Record

The table below details modifications made to the EUT during the test programme. The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Serial Number: U001-0001192			
0	As supplied by the customer	Not Applicable	Not Applicable
Serial Number: U001-0001174			
0	As supplied by the customer	Not Applicable	Not Applicable

**Table 3**



## 1.8 Test Location

TÜV SÜD conducted the following tests at our Fareham Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 2.4 GHz (802.15.4 Proprietary) -		
Maximum Conducted Output Power	Mehadi Choudhury	UKAS
Power Spectral Density	Mehadi Choudhury	UKAS
Restricted Band Edges	Graeme Lawler	UKAS
Authorised Band Edges	Graeme Lawler	UKAS
Spurious Radiated Emissions	Graeme Lawler and Mohammad Malik	UKAS
Emission Bandwidth	Mehadi Choudhury	UKAS

**Table 4**

Office Address:

Octagon House  
Concorde Way  
Segensworth North  
Fareham  
Hampshire  
PO15 5RL  
United Kingdom



## 2 Test Details

### 2.1 Maximum Conducted Output Power

#### 2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (b)  
Industry Canada RSS-247, Clause 5.4  
Industry Canada RSS-GEN, Clause 6.12

#### 2.1.2 Equipment Under Test and Modification State

iMPFWT, S/N: U001-0001174 - Modification State 0

#### 2.1.3 Date of Test

16-November-2018

#### 2.1.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 11.9.1.2.

#### 2.1.5 Environmental Conditions

Ambient Temperature	22.0 °C
Relative Humidity	47.9 %



## 2.1.6 Test Results

### 2.4 GHz (802.15.4 Proprietary)

250 kbps

Frequency (MHz)	Output Power	
	dBm	mW
2425	4.05	2.54
2450	3.73	2.36
2480	-4.34	0.37

**Table 5**

### FCC 47 CFR Part 15, Limit Clause 15.247 (b)(3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### Industry Canada RSS-247, Limit Clause 5.4 (d)

For DTSSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e) of the specification.

## 2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Attenuator (20dB, 2W)	Pasternack	PE7004-20	2943	12	18-Jul-2019
Hygrometer	Rotronic	I-1000	3220	12	13-Sep-2019
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	17-Oct-2019
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	22-Oct-2019
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	16-Apr-2019
EXA	Keysight Technologies	N9010B	4969	24	21-Dec-2018
Cable (40GHz)	Rosenberger	LU1-001-2000	5024	-	O/P Mon

**Table 6**

O/P Mon – Output Monitored using calibrated equipment





## 2.2 Power Spectral Density

### 2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (e)  
Industry Canada RSS-247, Clause 5.2  
Industry Canada RSS-GEN, Clause 6.12

### 2.2.2 Equipment Under Test and Modification State

iMPFWT, S/N: U001-0001174 - Modification State 0

### 2.2.3 Date of Test

16-November-2018

### 2.2.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.10.2.

### 2.2.5 Environmental Conditions

Ambient Temperature 22.0 °C  
Relative Humidity 47.9 %

### 2.2.6 Test Results

2.4 GHz (802.15.4 Proprietary)

Frequency (MHz)	Power Spectral Density (dBm)
2425	1.44
2450	0.88
2480	-7.52

**Table 7 - Power Spectral Density**



Table 8 – 2425 MHz



Table 9 – 2450 MHz



Table 10 – 2480 MHz

FCC 47 CFR Part 15, Limit Clause 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Industry Canada RSS-247, Limit Clause 5.2(b)

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission



### 2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Attenuator (20dB, 2W)	Pasternack	PE7004-20	2943	12	18-Jul-2019
Hygrometer	Rotronic	I-1000	3220	12	13-Sep-2019
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	17-Oct-2019
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	22-Oct-2019
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	16-Apr-2019
EXA	Keysight Technologies	N9010B	4969	24	21-Dec-2018
Cable (40GHz	Rosenberger	LU1-001-2000	5024	-	O/P Mon

**Table 11**

O/P Mon – Output Monitored using calibrated equipment



## **2.3 Restricted Band Edges**

### **2.3.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.205  
Industry Canada RSS-GEN, Clause 8.10

### **2.3.2 Equipment Under Test and Modification State**

iMPFWT, S/N: U001-0001192 - Modification State 0

### **2.3.3 Date of Test**

05-December-2018

### **2.3.4 Test Method**

This test was performed in accordance with ANSI C63.10, clause 6.10.5.

Plots for average measurements were taken in accordance with ANSI C63.10 clause 4.1.4.2.3. These are shown for information purposes and were used to determine the worst-case measurement point. Final average measurements were then taken in accordance with ANSI C63.10 clause 4.1.4.2.2. to obtain the measurement result recorded in the test results tables.

The following conversion can be applied to convert from dB $\mu$ V/m to  $\mu$ V/m:  
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$ .

### **2.3.5 Environmental Conditions**

Ambient Temperature	19.8 °C
Relative Humidity	55.8 %



## 2.3.6 Test Results

### 2.4 GHz (802.15.4 Proprietary)

Mode	Frequency (MHz)	Measured Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	2425	2390.0	57.12	43.58
Static	2480	2483.5	62.04	51.76

Table 12

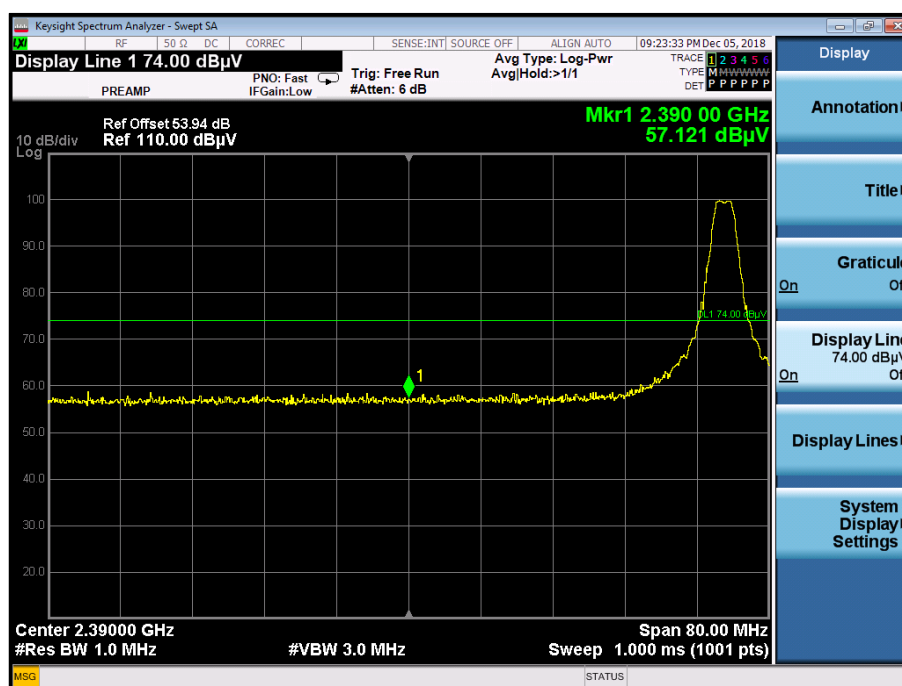


Figure 3 - Static 2425 MHz - Measured Frequency 2390.0 MHz - Peak

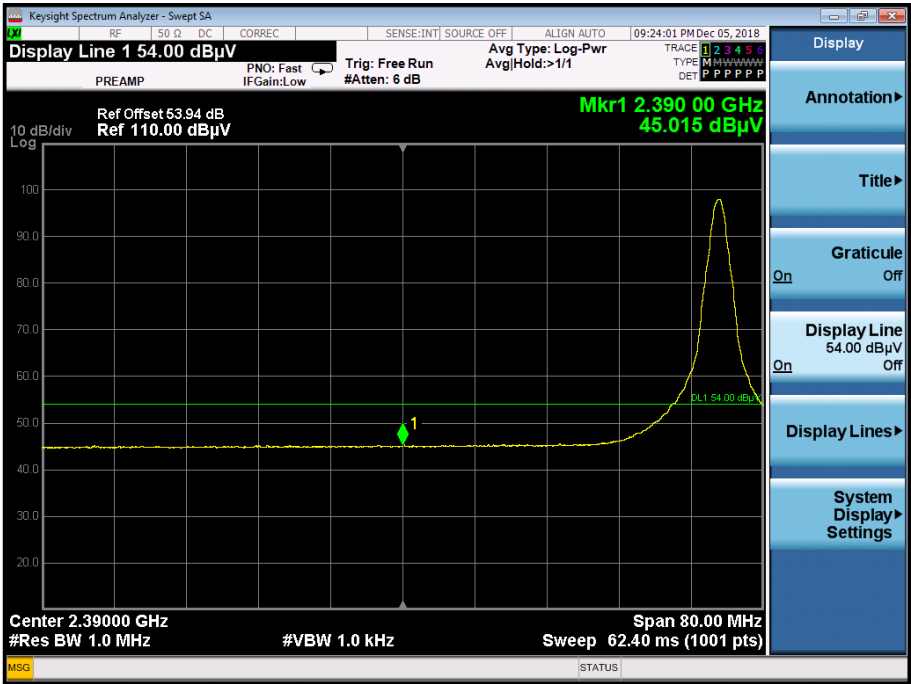


Figure 4 - Static 2425 MHz - Measured Frequency 2390.0 MHz - Average



Figure 5 - Static 2480 MHz - Measured Frequency 2483.5 MHz - Peak



Figure 6 - Static 2480 MHz - Measured Frequency 2483.5 MHz - Average

FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength (μV/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 13

Industry Canada RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength (μV/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960*	500

Table 14

\*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.





### 2.3.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Screened Room (5)	Rainford	Rainford	1545	36	23-Jan-2021
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Cable (Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4526	6	26-Apr-2019
Double Ridged Waveguide Horn Antenna	ETS-Lindgren	3117	4722	12	01-Mar-2019
Mast Controller	Maturo GmbH	NCD	4810	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
9m N type RF cable	Rosenberger	2303-0 9.0m PNm PNm	4827	6	04-Jan-2019
Hygrometer	Rotronic	HP21	4989	12	26-Apr-2019

**Table 15**

TU - Traceability Unscheduled



## **2.4 Authorised Band Edges**

### **2.4.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (d)  
Industry Canada RSS-247, Clause 5.5

### **2.4.2 Equipment Under Test and Modification State**

iMPFWT, S/N: U001-0001192 - Modification State 0

### **2.4.3 Date of Test**

05-December-2018

### **2.4.4 Test Method**

The test was performed in accordance with ANSI C63.10, clause 6.10.4.

The following conversion can be applied to convert from dB $\mu$ V/m to  $\mu$ V/m:  
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$ .

### **2.4.5 Environmental Conditions**

Ambient Temperature	19.8 °C
Relative Humidity	55.8 %



2.4.6 Test Results

2.4 GHz (802.15.4 Proprietary)

Mode	Frequency (MHz)	Measured Frequency (MHz)	Level (dBc)
Static	2425	2400.0	-50.83
Static	2480	2483.5	-35.95

Table 16

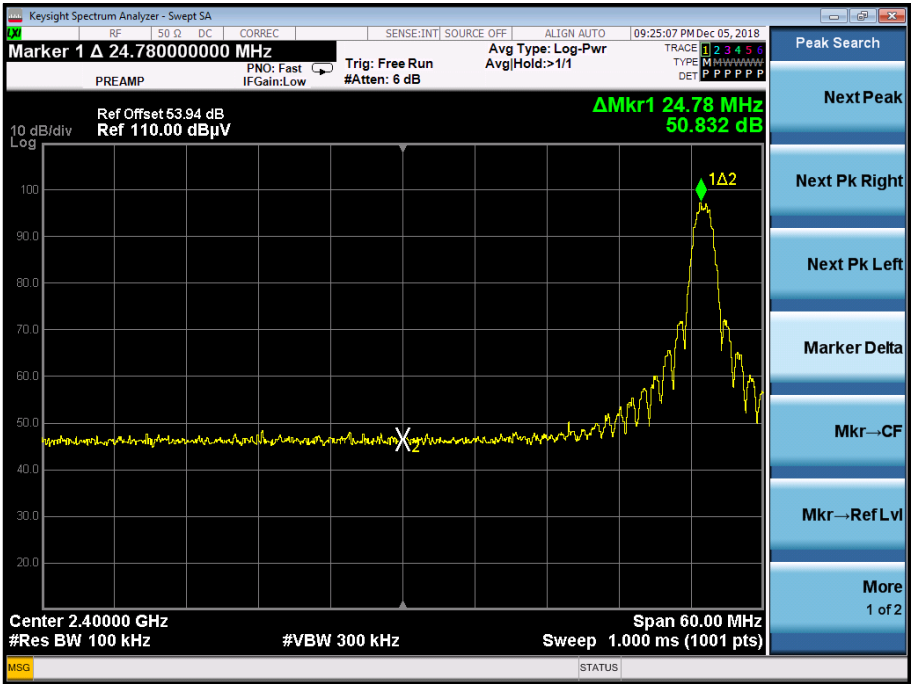


Figure 7 - Static 2425 MHz - Measured Frequency 2400.0 MHz



Figure 8 - Static 2480 MHz - Measured Frequency 2483.5 MHz

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

Industry Canada RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.



#### 2.4.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Screened Room (5)	Rainford	Rainford	1545	36	23-Jan-2021
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Cable (Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4526	6	26-Apr-2019
Double Ridged Waveguide Horn Antenna	ETS-Lindgren	3117	4722	12	01-Mar-2019
Mast Controller	Maturo GmbH	NCD	4810	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
9m N type RF cable	Rosenberger	2303-0 9.0m PNm PNm	4827	6	04-Jan-2019
Hygrometer	Rotronic	HP21	4989	12	26-Apr-2019

**Table 17**

TU - Traceability Unscheduled



## **2.5 Spurious Radiated Emissions**

### **2.5.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (d) and 15.205  
Industry Canada RSS-247, Clause 5.5  
Industry Canada RSS-GEN, Clause 8.10

### **2.5.2 Equipment Under Test and Modification State**

iMPFWT, S/N: U001-0001192 - Modification State 0

### **2.5.3 Date of Test**

04-December-2018 to 05-December-2018

### **2.5.4 Test Method**

This test was performed in accordance with ANSI C63.10-2013 clause 6.3, 6.5 and 6.6.

For frequencies > 1 GHz, plots for average measurements were taken in accordance with ANSI C63.10 clause 4.1.4.2.3 to characterize the EUT. Where emissions were detected, final average measurements were taken in accordance with ANSI C63.10 clause 4.1.4.2.2.

The plots shown are the characterization of the EUT. The limits on the plots represent the most stringent case for restricted bands, (74/54 dBuV/m) when compared to 20 dBc outside restricted bands. The limits shown have been used as a threshold to determine where further measurements are necessary. Where results are within 10 dB of the limits shown on the plots, further investigation was carried out and reported in results tables.

The following conversion can be applied to convert from dBμV/m to μV/m:  
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$

For frequencies > 18 GHz, the measurement distance was reduced to 1 meter and the limit line was increased by  $20 \cdot \text{LOG}(3/1) = 9.54$  dB.

### **2.5.5 Environmental Conditions**

Ambient Temperature	19.8 °C
Relative Humidity	55.8 %



2.5.6 Test Results

2.4 GHz (802.15.4 Proprietary)

Frequency (GHz)	Result (dBμV/m)		Limit (dBμV/m)		Margin (dBμV/m)	
	Peak	Average	Peak	Average	Peak	Average
*						

Table 18 - 2425 MHz - 30 MHz to 1 GHz Emissions Results

\*No emissions were detected within 10 dB of the limit.

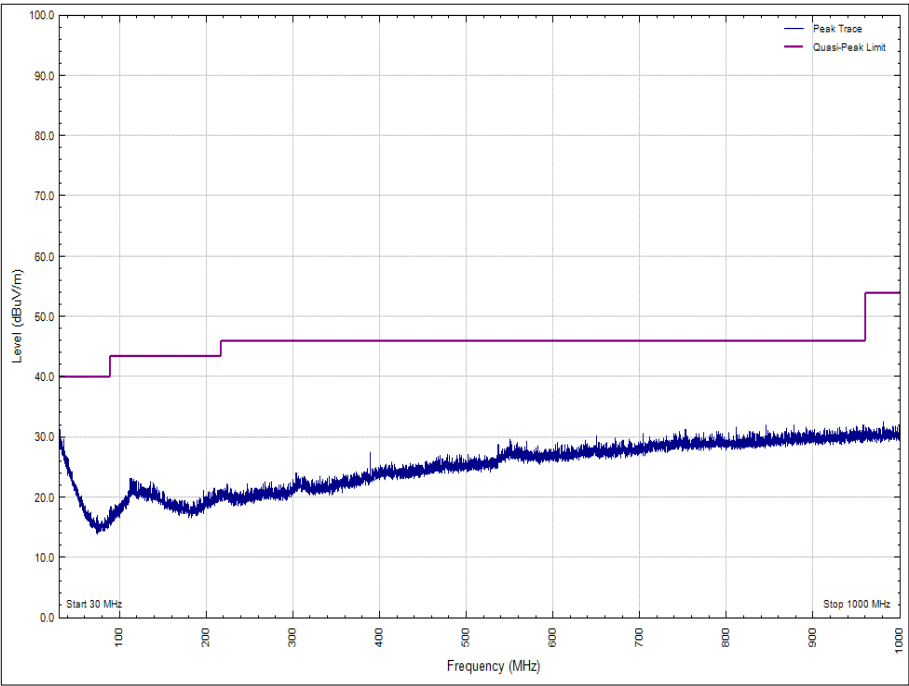


Figure 9 – 2425 MHz - 30 MHz to 1 GHz, Polarity: Vertical

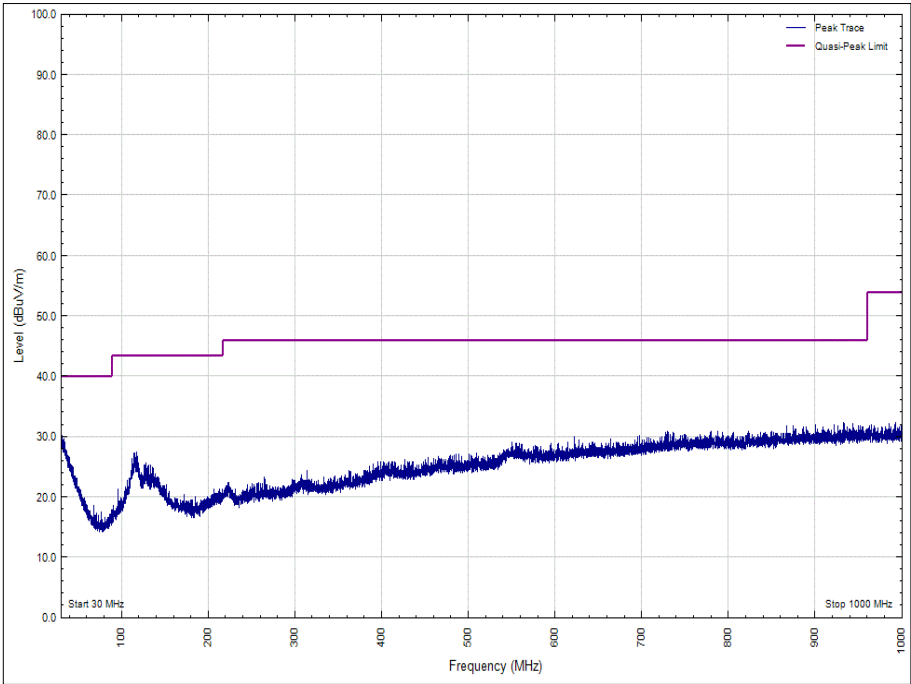


Figure 10 – 2425 MHz - 30 MHz to 1 GHz, Polarity: Horizontal

Frequency (GHz)	Result (dBµV/m)		Limit (dBµV/m)		Margin (dBµV/m)	
	Peak	Average	Peak	Average	Peak	Average
*						

Table 19 - 2425 MHz - 1 GHz to 25 GHz Emissions Results

\*No emissions were detected within 10 dB of the limit.



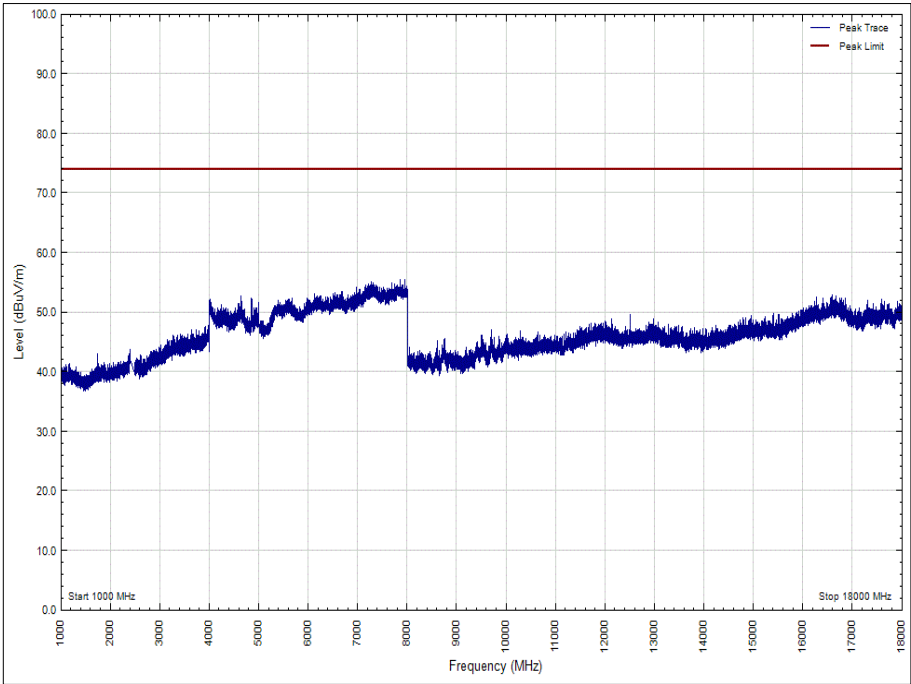


Figure 11 - 2425 MHz - 1 GHz to 18 GHz Peak, Polarity: Vertical

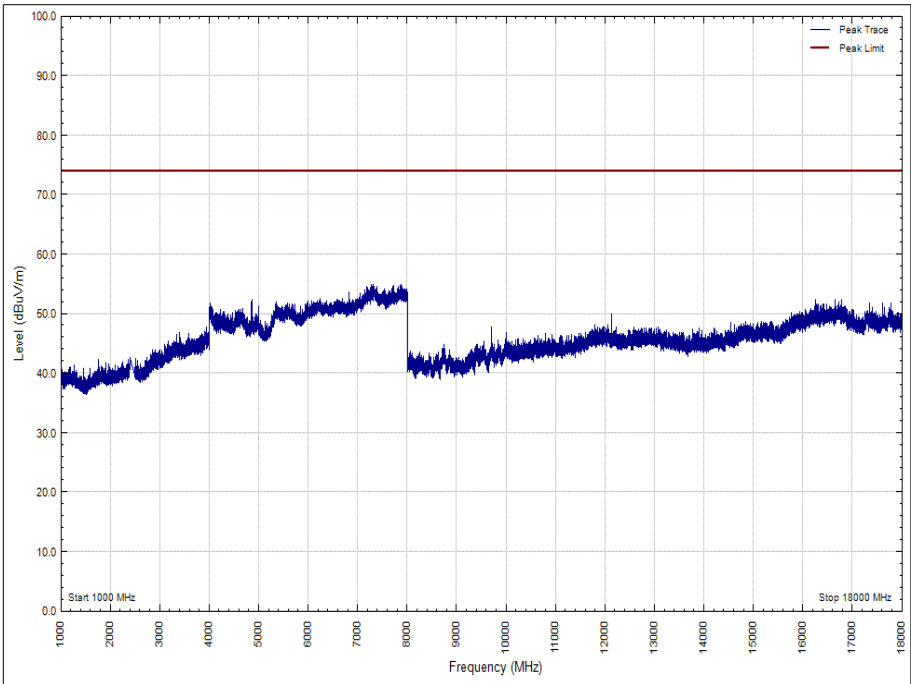


Figure 12 - 2425 MHz - 1 GHz to 18 GHz Peak, Polarity: Horizontal

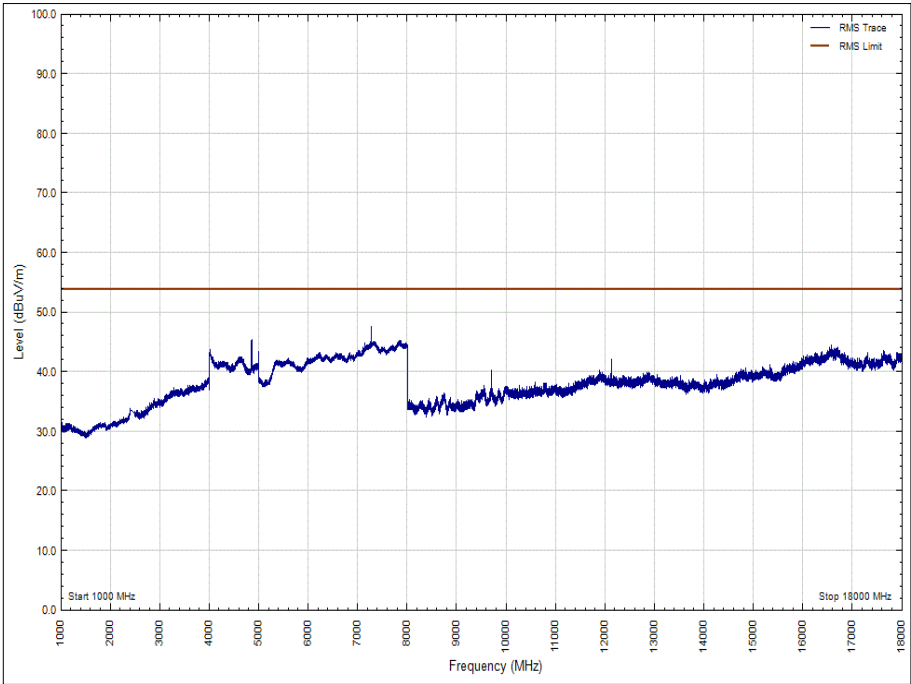


Figure 13 - 2425 MHz - 1 GHz to 18 GHz Average, Polarity: Vertical

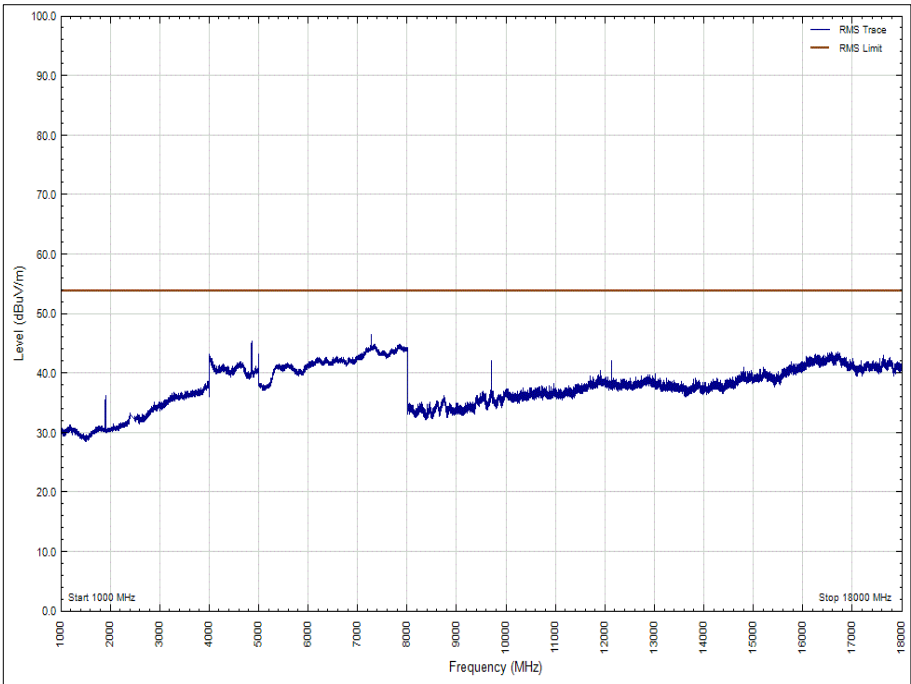


Figure 14 - 2425 MHz - 1 GHz to 18 GHz Average, Polarity: Horizontal

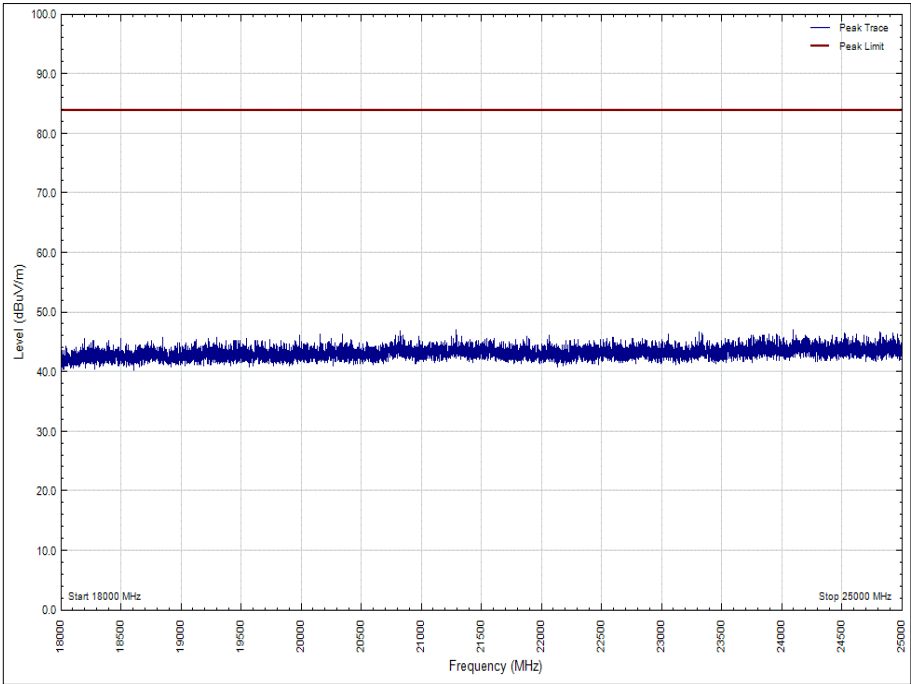


Figure 15 - 2425 MHz - 18 GHz to 25 GHz Peak, Polarity: Vertical

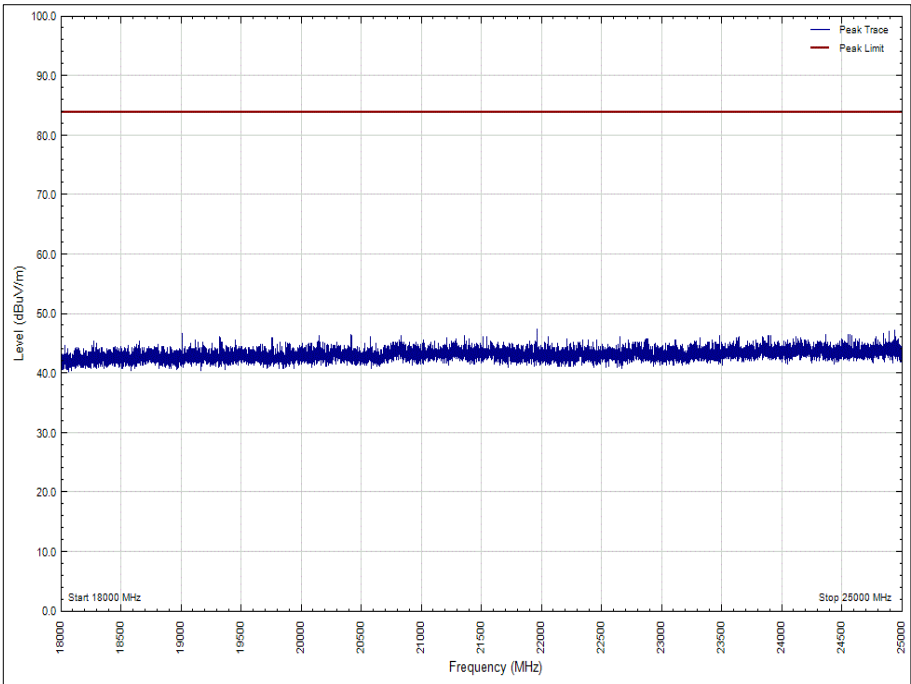


Figure 16 - 2425 MHz - 18 GHz to 25 GHz Peak, Polarity: Horizontal

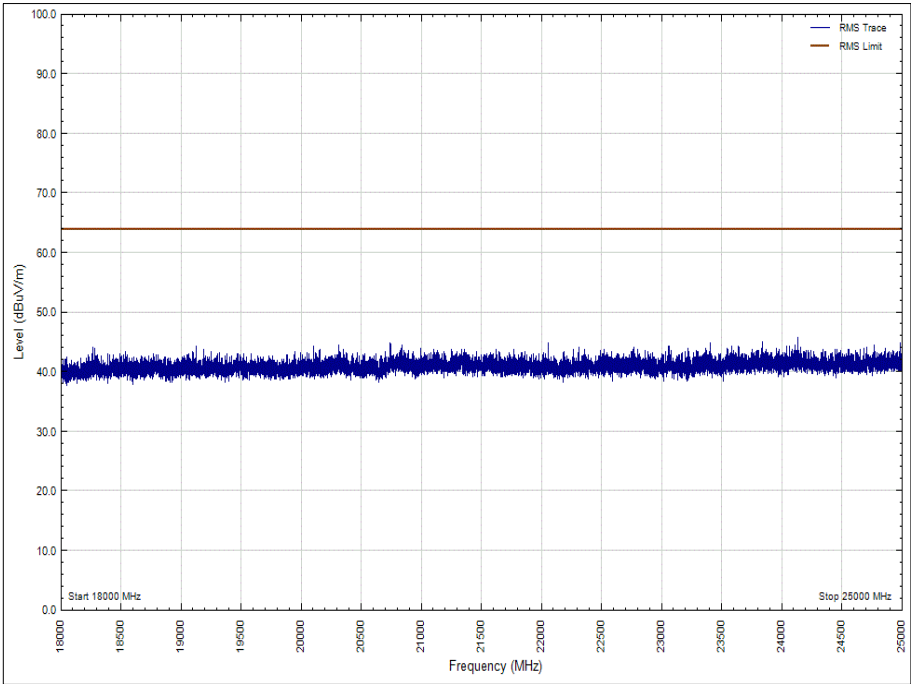


Figure 17 - 2425 MHz - 18 GHz to 25 GHz Average, Polarity: Vertical

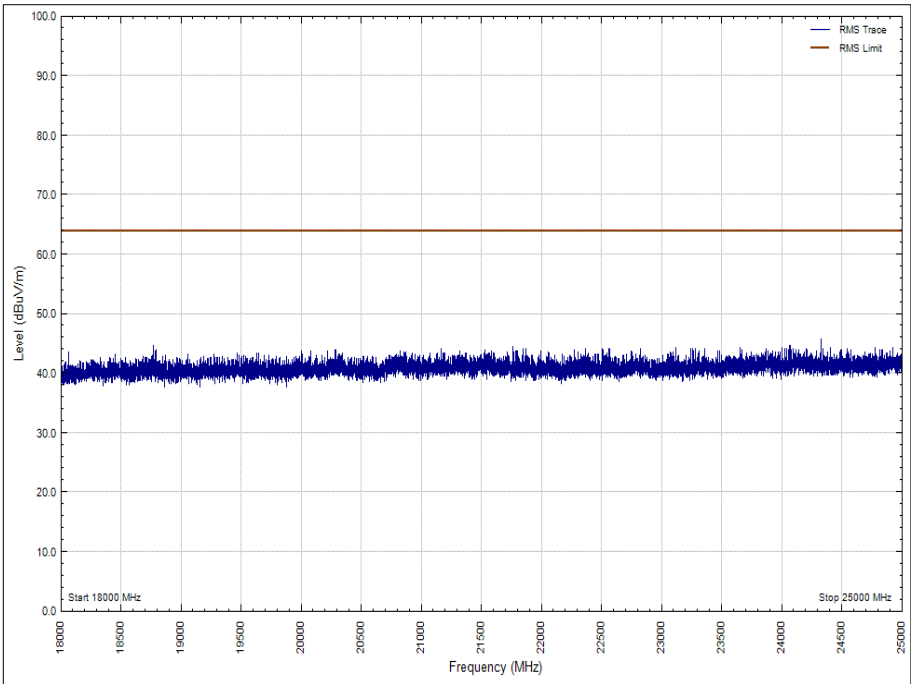


Figure 18 - 2425 MHz - 18 GHz to 25 GHz Average, Polarity: Horizontal



Frequency (GHz)	Result (dBµV/m)		Limit (dBµV/m)		Margin (dBµV/m)	
	Peak	Average	Peak	Average	Peak	Average
*						

Table 20 - 2450 MHz - 30 MHz to 1 GHz Emissions Results

\*No emissions were detected within 10 dB of the limit.

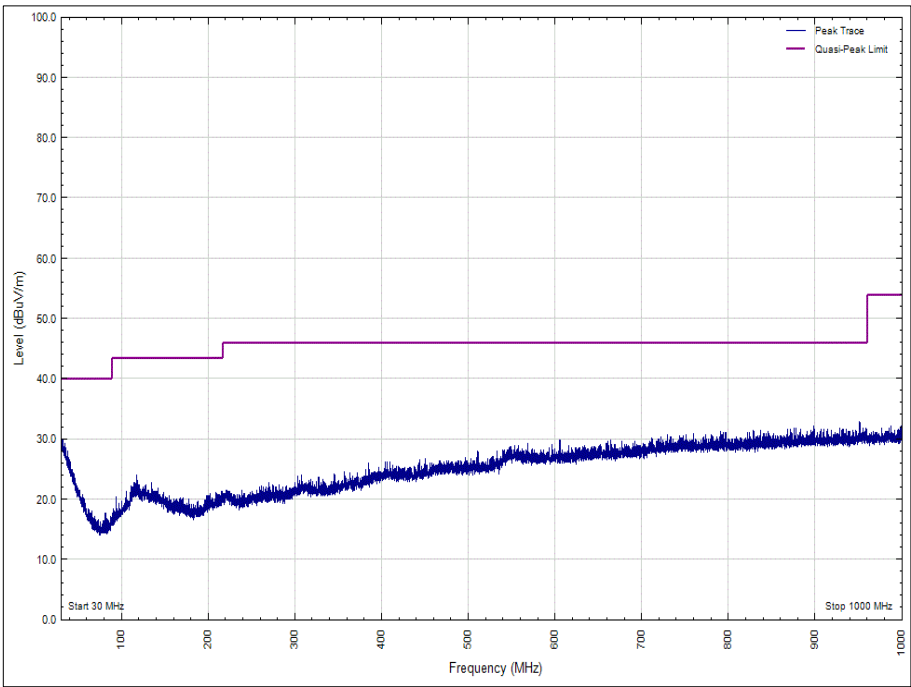


Figure 19 – 2450 MHz - 30 MHz to 1 GHz, Polarity: Vertical

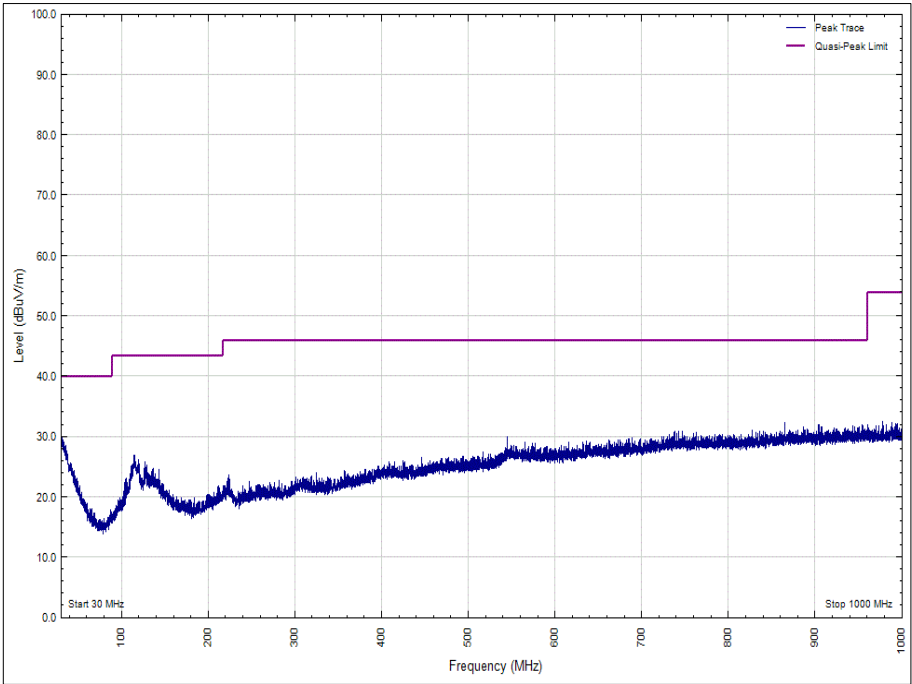


Figure 20 – 2450 MHz - 30 MHz to 1 GHz, Polarity: Horizontal

Frequency (GHz)	Result (dBμV/m)		Limit (dBμV/m)		Margin (dBμV/m)	
	Peak	Average	Peak	Average	Peak	Average
*						

Table 21 - 2450 MHz - 1 GHz to 25 GHz Emissions Results

\*No emissions were detected within 10 dB of the limit.

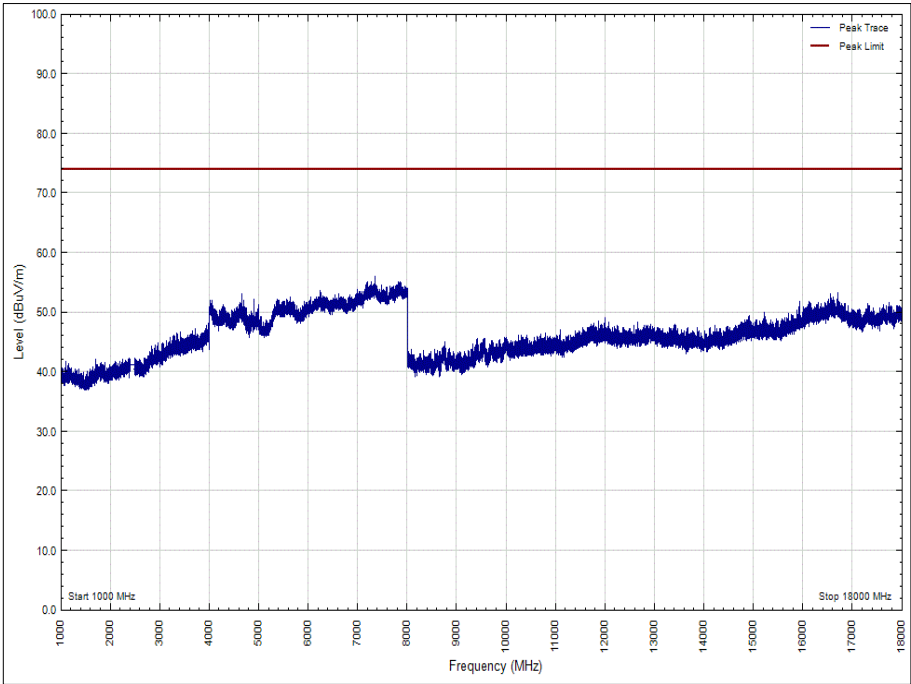


Figure 21 - 2450 MHz - 1 GHz to 18 GHz Peak, Polarity: Vertical

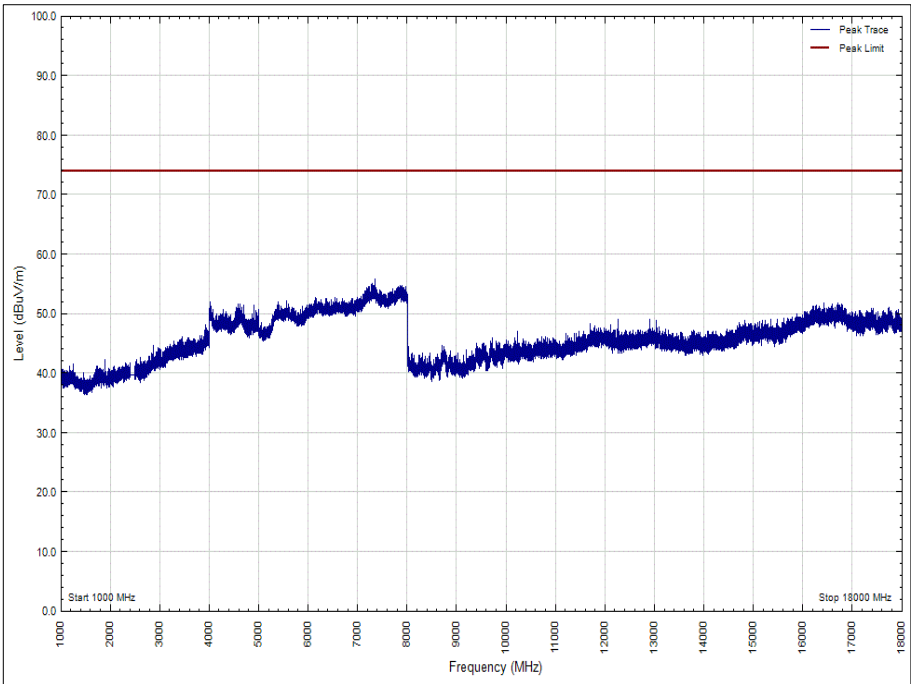


Figure 22 - 2450 MHz - 1 GHz to 18 GHz Peak, Polarity: Horizontal

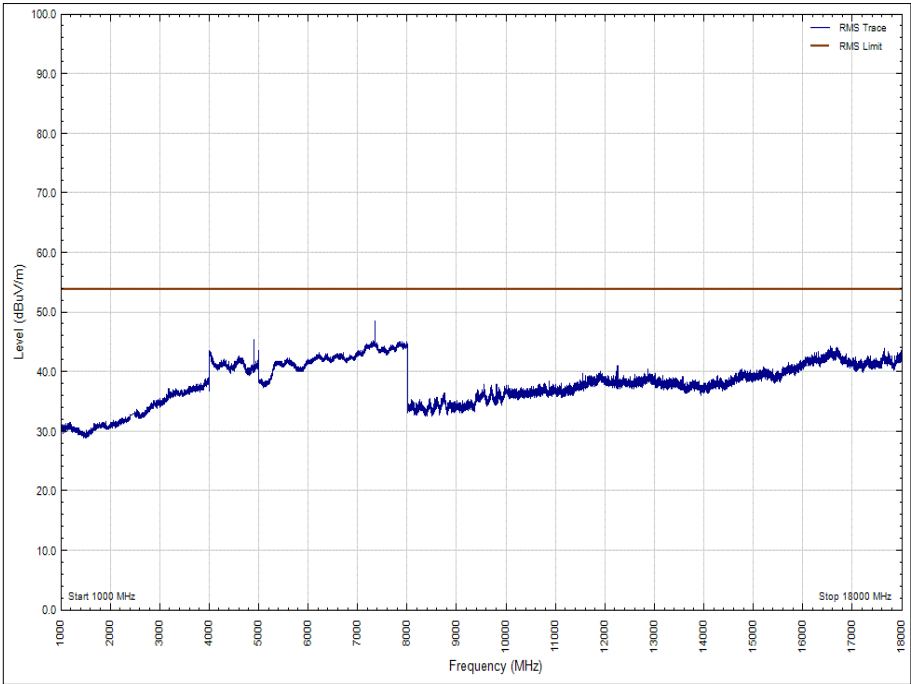


Figure 23 - 2450 MHz - 1 GHz to 18 GHz Average, Polarity: Vertical

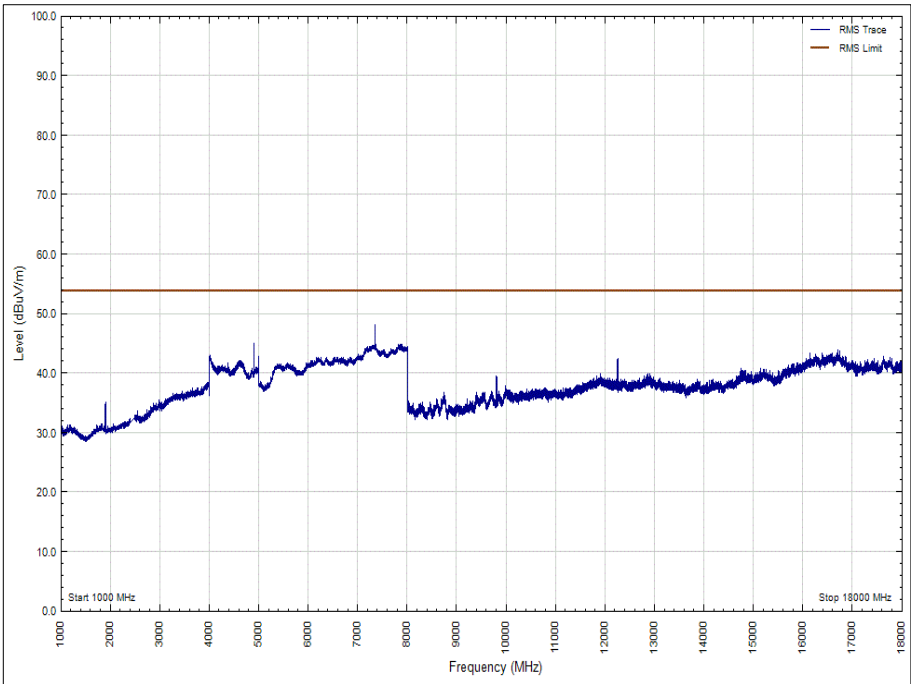


Figure 24 - 2450 MHz - 1 GHz to 18 GHz Average, Polarity: Horizontal



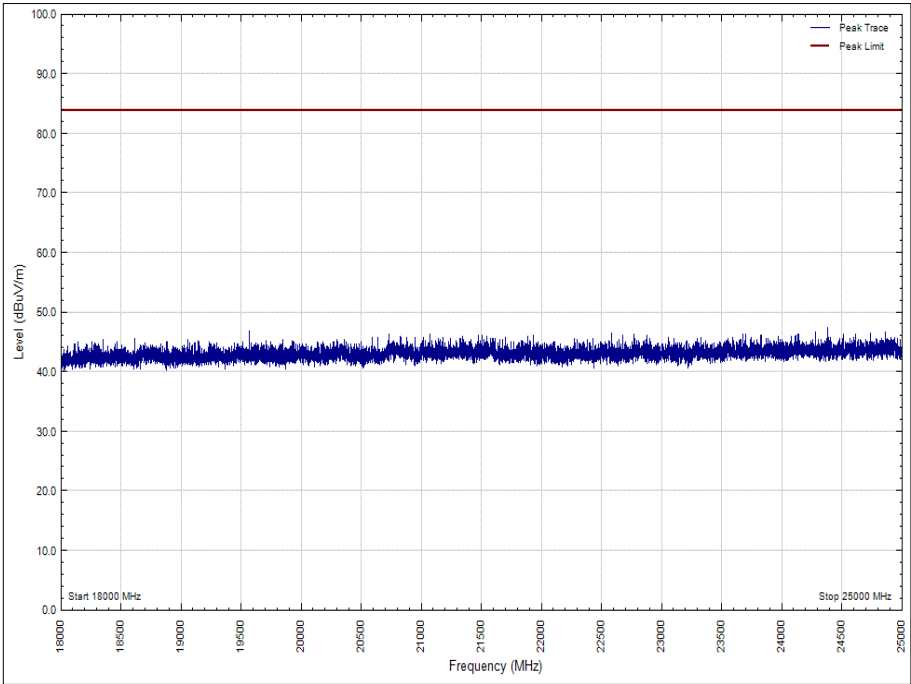


Figure 25 - 2450 MHz - 18 GHz to 25 GHz Peak, Polarity: Vertical

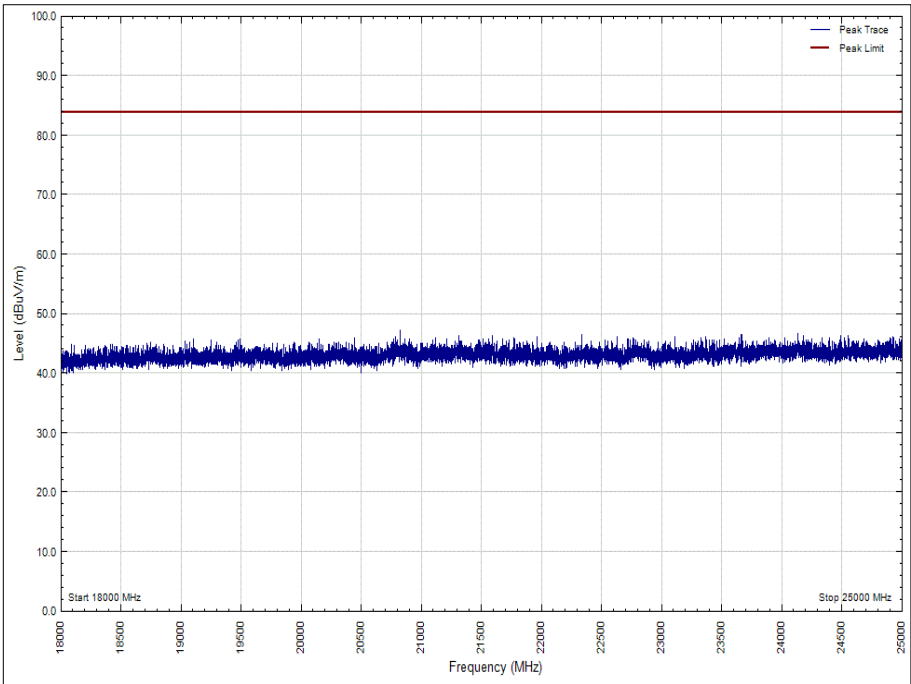


Figure 26 - 2450 MHz - 18 GHz to 25 GHz Peak, Polarity: Horizontal

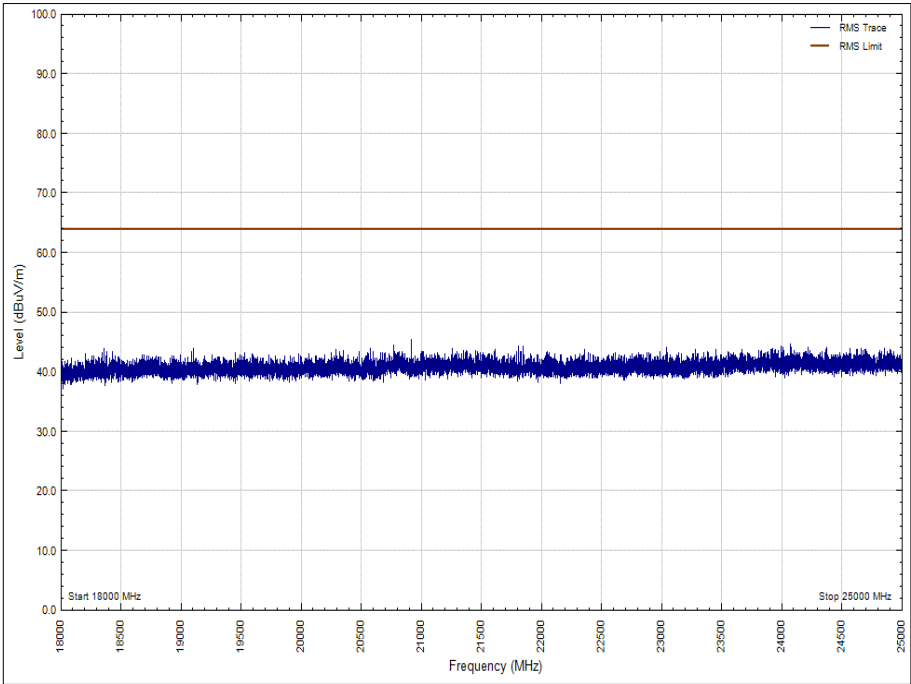


Figure 27 - 2450 MHz - 18 GHz to 25 GHz Average, Polarity: Vertical

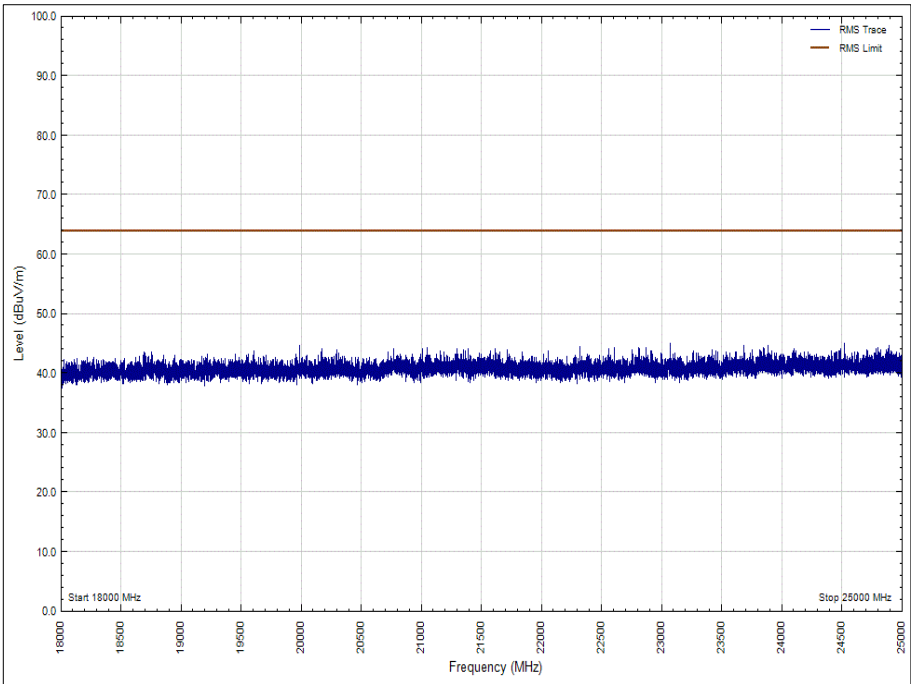


Figure 28 - 2450 MHz - 18 GHz to 25 GHz Average, Polarity: Horizontal



Frequency (GHz)	Result (dBµV/m)		Limit (dBµV/m)		Margin (dBµV/m)	
	Peak	Average	Peak	Average	Peak	Average
*						

Table 22 - 2480 MHz - 30 MHz to 1 GHz Emissions Results

\*No emissions were detected within 10 dB of the limit.

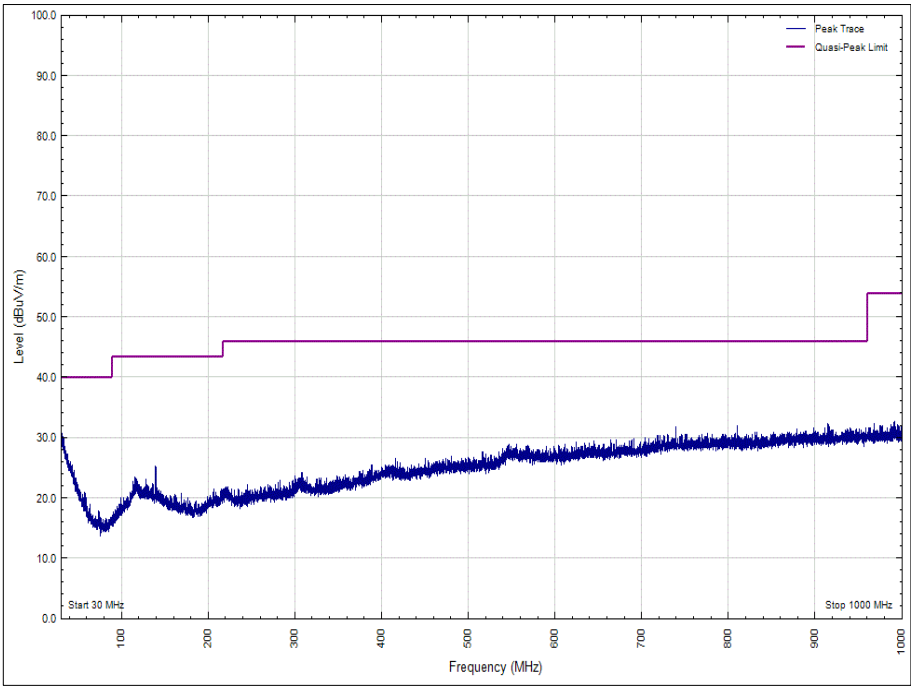


Figure 29 – 2480 MHz - 30 MHz to 1 GHz, Polarity: Vertical

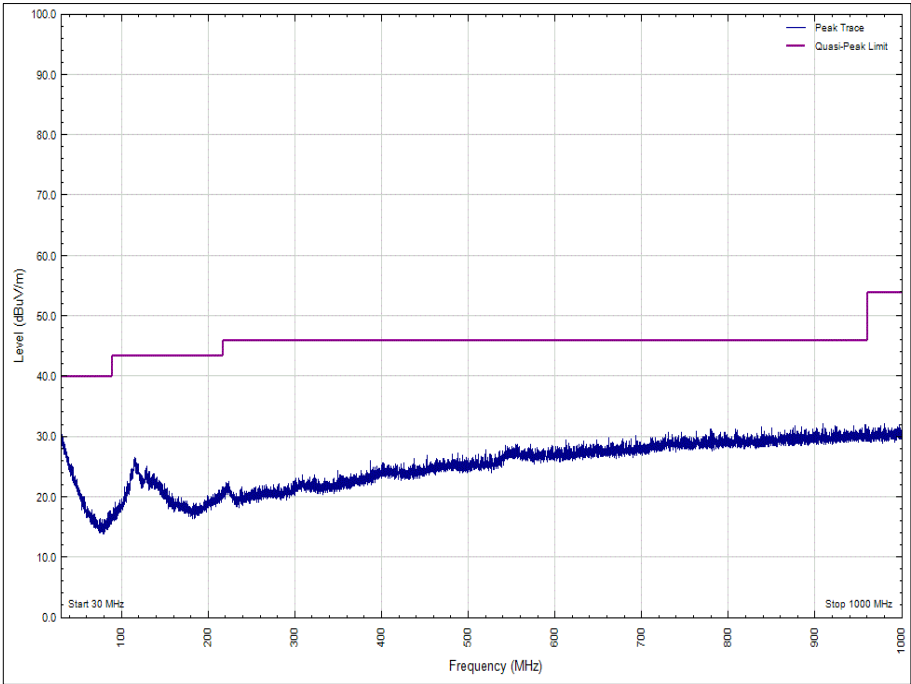


Figure 30 – 2480 MHz - 30 MHz to 1 GHz, Polarity: Horizontal

Frequency (GHz)	Result (dBµV/m)		Limit (dBµV/m)		Margin (dBµV/m)	
	Peak	Average	Peak	Average	Peak	Average
*						

Table 23 - 2480 MHz - 1 GHz to 25 GHz Emissions Results

\*No emissions were detected within 10 dB of the limit.

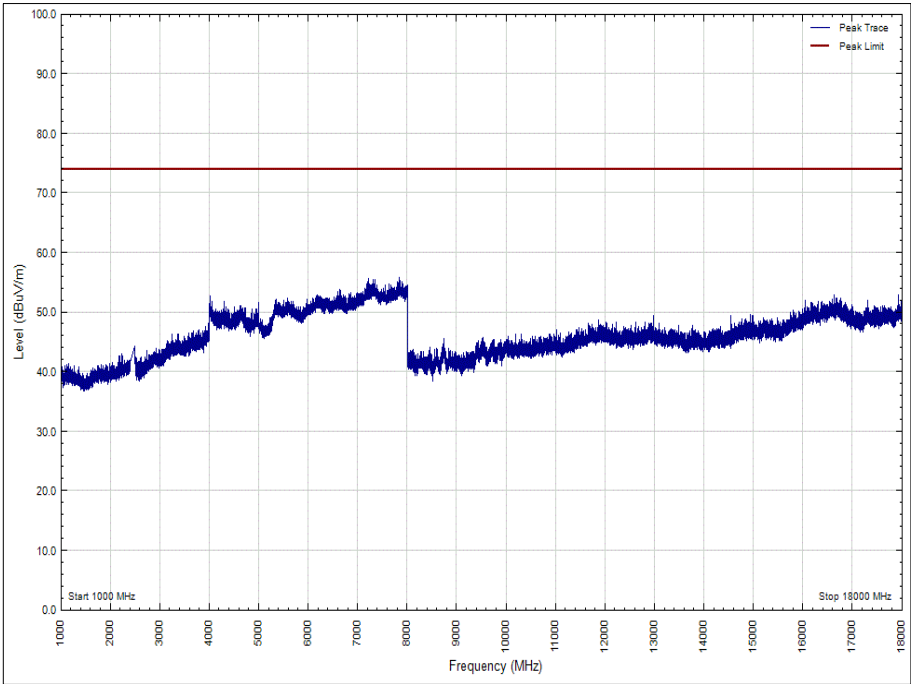


Figure 31 - 2480 MHz - 1 GHz to 18 GHz Peak, Polarity: Vertical

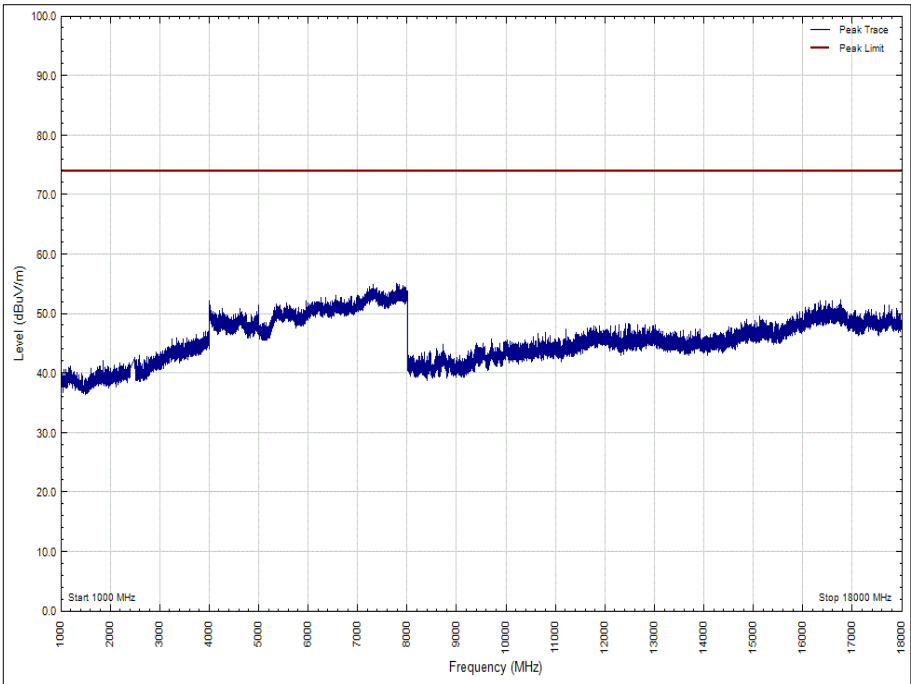


Figure 32 - 2480 MHz - 1 GHz to 18 GHz Peak, Polarity: Horizontal

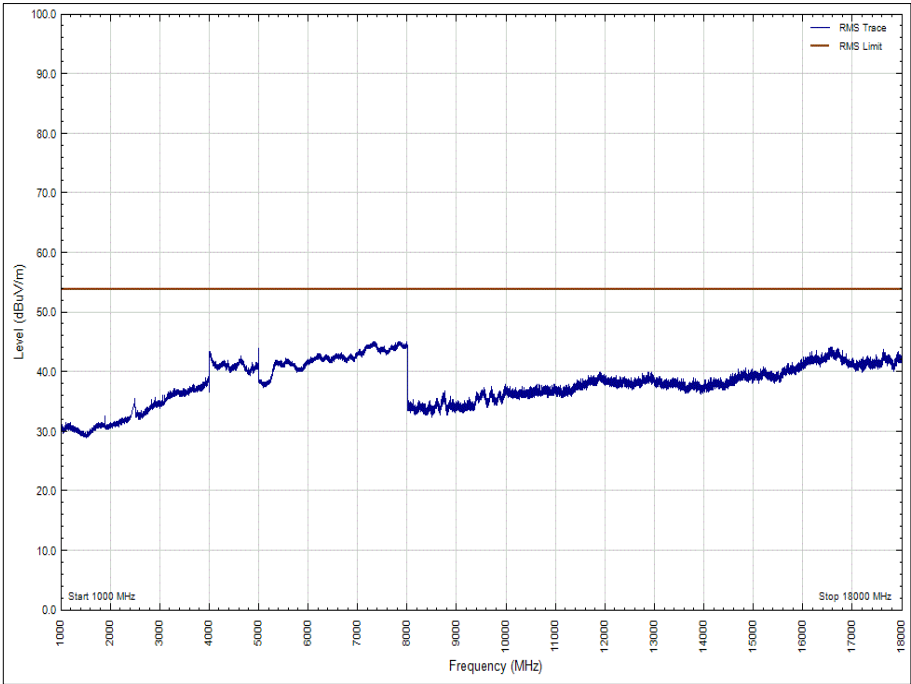


Figure 33 - 2480 MHz - 1 GHz to 18 GHz Average, Polarity: Vertical

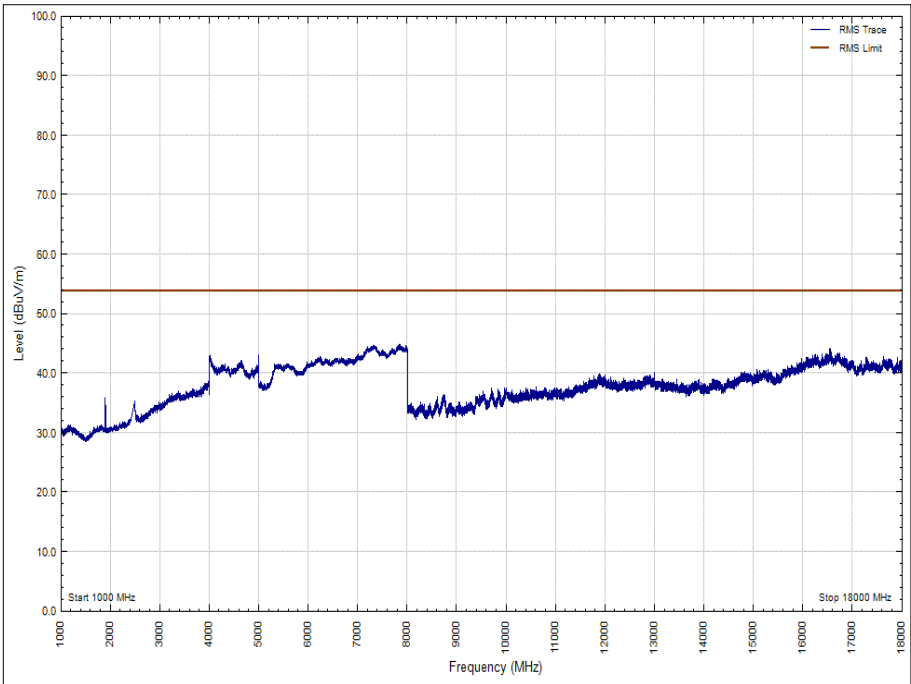


Figure 34 - 2480 MHz - 1 GHz to 18 GHz Average, Polarity: Horizontal

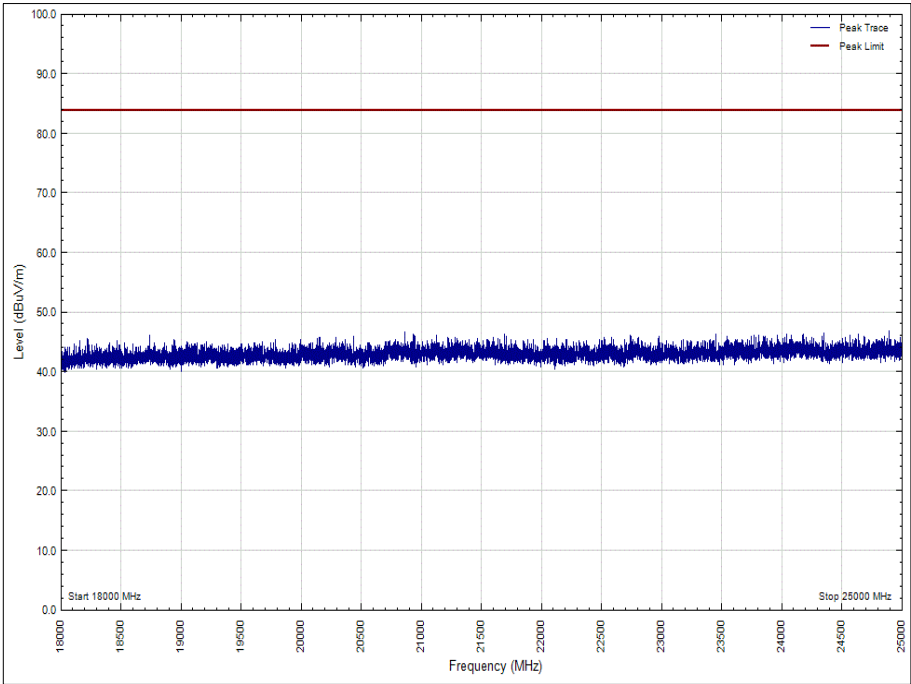


Figure 35 - 2480 MHz - 18 GHz to 25 GHz Peak, Polarity: Vertical

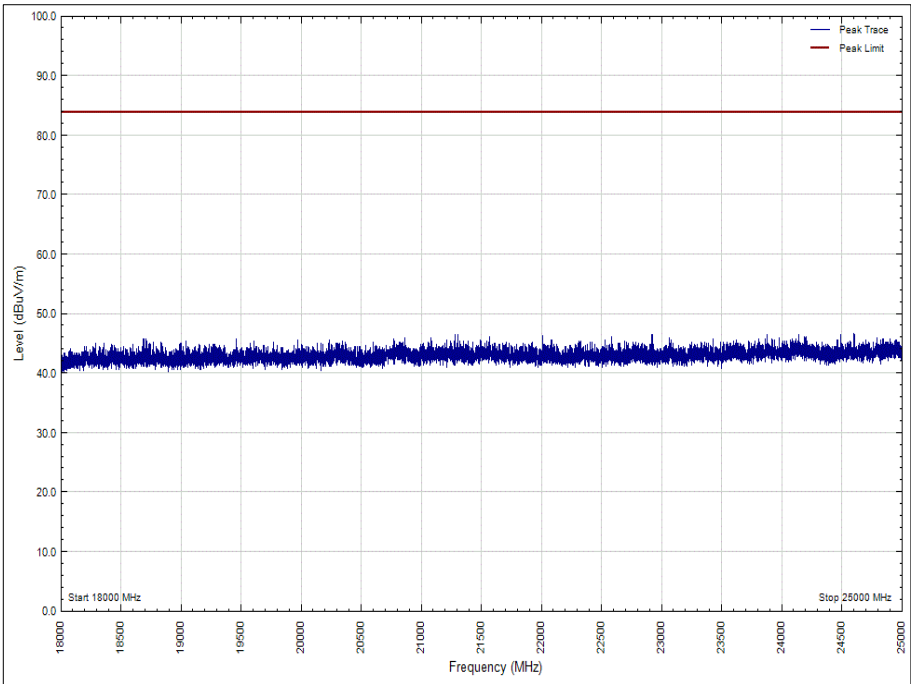


Figure 36 - 2480 MHz - 18 GHz to 25 GHz Peak, Polarity: Horizontal

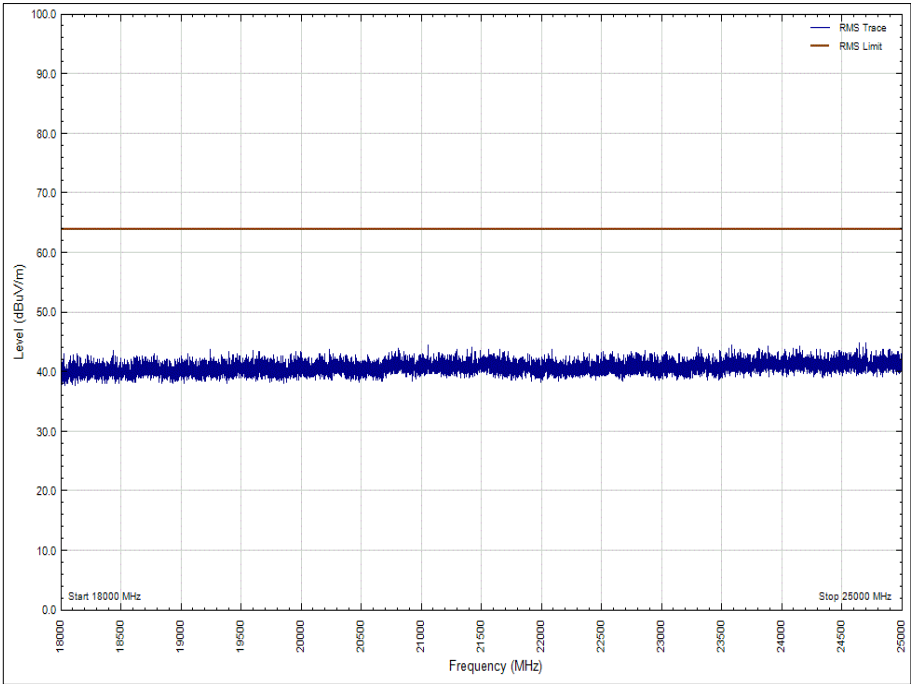


Figure 37 - 2480 MHz - 18 GHz to 25 GHz Average, Polarity: Vertical

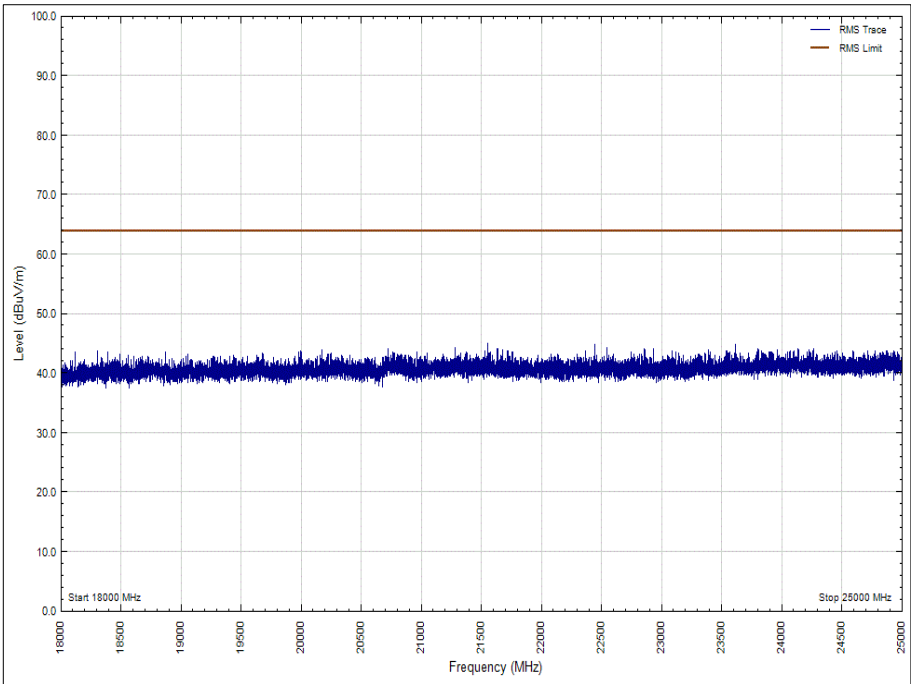


Figure 38 - 2480 MHz - 18 GHz to 25 GHz Average, Polarity: Horizontal





FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

Industry Canada RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.



## 2.5.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Antenna 18-40GHz (Double Ridge Guide)	Link Microtek Ltd	AM180HA-K-TU2	230	24	02-May-2020
18GHz - 40GHz Pre-Amplifier	Phase One	PSO4-0087	1534	12	02-Feb-2019
Screened Room (5)	Rainford	Rainford	1545	36	23-Jan-2021
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna with permanent attenuator (Bilog)	Chase	CBL6143	2904	24	08-Aug-2019
Comb Generator	Schaffner	RSG1000	3034	-	TU
1501A 4.0M Km Km Cable	Rhophase	KPS-1501A-4000-KPS	4301	12	19-Feb-2019
1 metre K-Type Cable	Florida Labs	KMS-180SP-39.4-KMS	4520	12	13-Feb-2019
Cable (Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4526	6	26-Apr-2019
PXA Signal Analyser	Keysight Technologies	N9030A	4653	12	05-Feb-2019
Mast Controller	Maturo GmbH	NCD	4810	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
9m N type RF cable	Rosenberger	2303-0 9.0m PNm PNm	4827	6	04-Jan-2019
4dB Attenuator	Pasternack	PE7047-4	4935	24	28-Nov-2019
Hygrometer	Rotronic	HP21	4989	12	26-Apr-2019

**Table 24**

TU - Traceability Unscheduled



## **2.6 Emission Bandwidth**

### **2.6.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (a)(2)  
Industry Canada RSS-247, Clause 5.2  
Industry Canada RSS-GEN, Clause 6.7

### **2.6.2 Equipment Under Test and Modification State**

iMPFWT, S/N: U001-0001174 - Modification State 0

### **2.6.3 Date of Test**

16-November-2018

### **2.6.4 Test Method**

The test was performed in accordance with ANSI C63.10, clause 11.8.2 for 6 dB bandwidth and Industry Canada RSS-GEN clause 6.7 for 99% occupied bandwidth.

### **2.6.5 Environmental Conditions**

Ambient Temperature 22.0 °C  
Relative Humidity 47.9 %

### **2.6.6 Test Results**

2.4 GHz (802.15.4 Proprietary)

Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
2425	1.58	2.46
2450	1.57	2.44
2800	1.68	2.52

**Table 25**

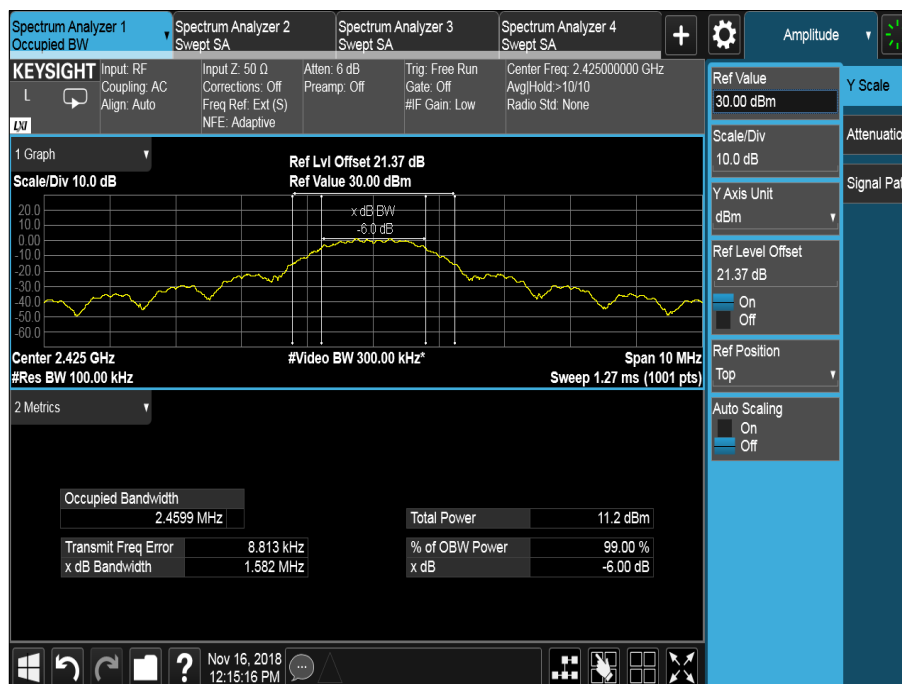


Figure 39 - 2425 MHz – 6 dB Bandwidth and 99% Occupied Bandwidth

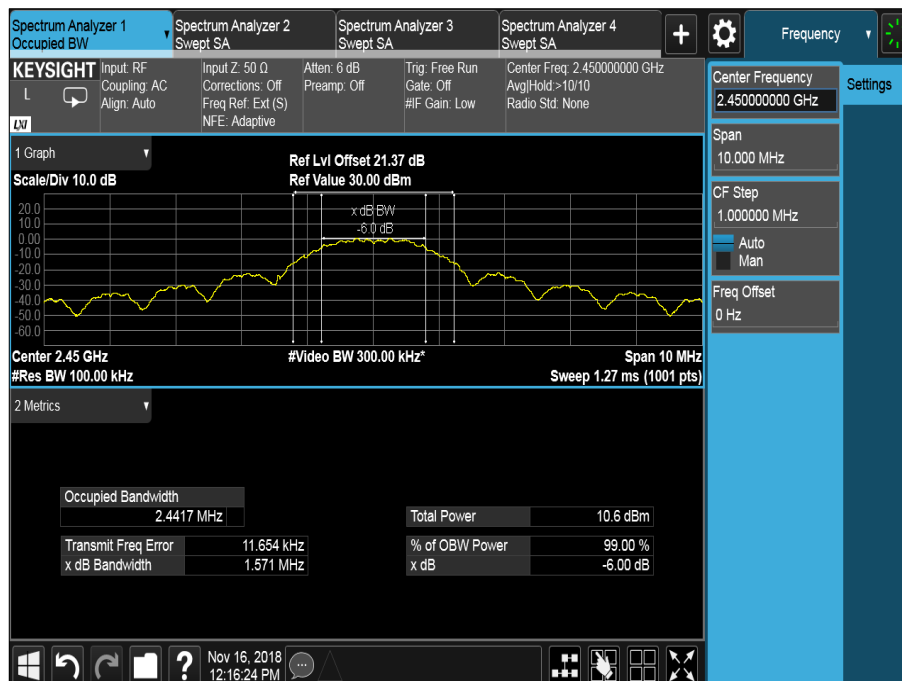
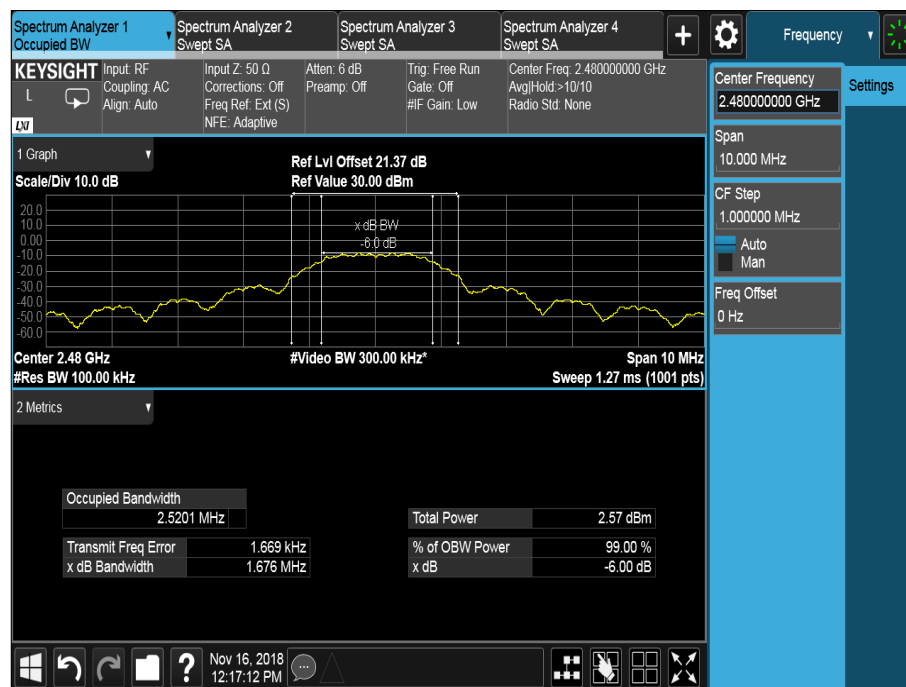


Figure 40 - 2450 MHz – 6 dB Bandwidth and 99% Occupied Bandwidth



**Figure 41 - 2480 MHz – 6 dB Bandwidth and 99% Occupied Bandwidth**

FCC 47 CFR Part 15, Limit Clause 15.247(a)(2) and Industry Canada RSS-247, Clause 5.2(a)

The minimum 6 dB Bandwidth shall be at least 500 kHz.

## 2.6.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Attenuator (20dB, 2W)	Pasternack	PE7004-20	2943	12	18-Jul-2019
Hygrometer	Rotronic	I-1000	3220	12	13-Sep-2019
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	17-Oct-2019
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	22-Oct-2019
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	16-Apr-2019
EXA	Keysight Technologies	N9010B	4969	24	21-Dec-2018
Cable (40GHz)	Rosenberger	LU1-001-2000	5024	-	O/P Mon

**Table 26**

O/P Mon – Output Monitored using calibrated equipment

### 3 Photographs

#### 3.1 Test Setup Photographs


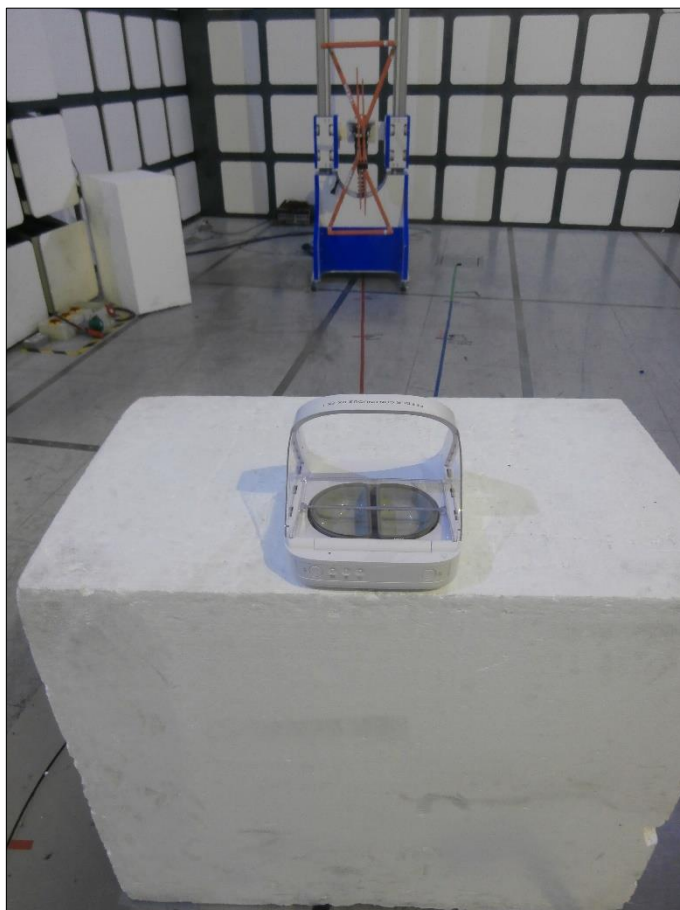


Figure 42 - 30 MHz to 1 GHz



**Figure 43 - 1 GHz to 25 GHz**

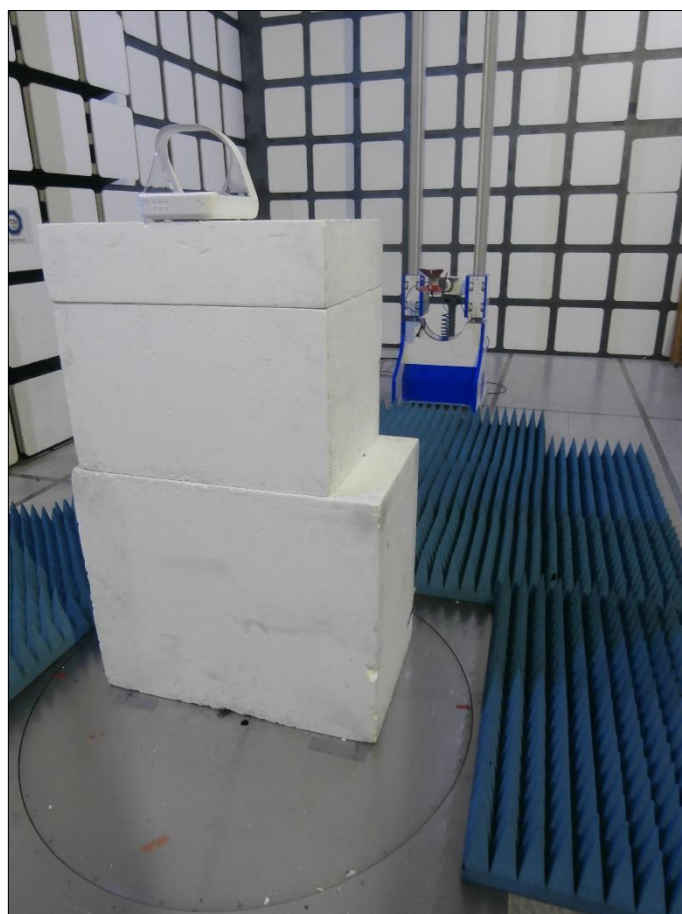

## 4 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Maximum Conducted Output Power	$\pm 3.2$ dB
Power Spectral Density	$\pm 3.2$ dB
Restricted Band Edges	30 MHz to 1 GHz: $\pm 5.2$ dB 1 GHz to 40 GHz: $\pm 6.3$ dB
Authorised Band Edges	30 MHz to 1 GHz: $\pm 5.2$ dB 1 GHz to 40 GHz: $\pm 6.3$ dB
Spurious Radiated Emissions	30 MHz to 1 GHz: $\pm 5.2$ dB 1 GHz to 40 GHz: $\pm 6.3$ dB
Emission Bandwidth	$\pm 85759.091$ kHz

**Table 27**