



FCC RF Test Report

APPLICANT : Tabletop Media, LLC d/b/a Ziosk
EQUIPMENT : Ziosk Aurizon
BRAND NAME : Ziosk
MODEL NAME : Z500
FCC ID : XOX-Z500
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Feb. 08, 2018 and testing was completed on Apr. 10, 2018. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.

Eric Shih

Approved by: Eric Shih / Manager



Sporton International (Shenzhen) Inc.

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City
Guangdong Province 518055 China**



TABLE OF CONTENTS

1	GENERAL DESCRIPTION	5
1.1	Applicant	5
1.2	Manufacturer	5
1.3	Product Feature of Equipment Under Test.....	5
1.4	Product Specification of Equipment Under Test.....	6
1.5	Modification of EUT	7
1.6	Testing Location	7
1.7	Applicable Standards.....	8
2	TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1	Carrier Frequency and Channel	9
2.2	Test Mode	10
2.3	Connection Diagram of Test System.....	11
2.4	EUT Operation Test Setup	11
2.5	Measurement Results Explanation Example.....	12
3	TEST RESULT	13
3.1	6dB and 26dB and 99% Occupied Bandwidth Measurement	13
3.2	Maximum Conducted Output Power Measurement	16
3.3	Power Spectral Density Measurement	17
3.4	Unwanted Emissions Measurement	20
3.5	Automatically Discontinue Transmission	26
3.6	Antenna Requirements	27
4	LIST OF MEASURING EQUIPMENT	28
5	UNCERTAINTY OF EVALUATION	29
APPENDIX A. CONDUCTED TEST RESULTS		
APPENDIX B. RADIATED SPURIOUS EMISSION		
APPENDIX C. DUTY CYCLE PLOTS		
APPENDIX D. SETUP PHOTOGRAPHS		



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR820812F	Rev. 01	Initial issue of report	Apr. 16, 2018

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 5.51 dB at 273.470 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Required	-
3.5	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.6	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

Note: Not required means after assessing, test items are not necessary to carry out.



1 General Description

1.1 Applicant

Tabletop Media, LLC d/b/a Ziosk
12404 Park Central Dr, Suite 350, Dallas, TX 75251

1.2 Manufacturer

SMTC de Chihuahua SA. DE C.V.
Washington 3701 building 20. Parque Industrial Las Americas, Chihuahua, Chih. 31200

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Ziosk Aurizon
Brand Name	Ziosk
Model Name	Z500
FCC ID	XOX-Z500
EUT supports Radios application	NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0 + EDR / Bluetooth v4.0 LE/ Bluetooth v4.1 LE
HW Version	DV2
SW Version	Android 5.1.1
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification			
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz		
Maximum Output Power	<5745 MHz ~ 5825 MHz> SISO <Ant. 1> 802.11a : 19.69 dBm / 0.0931 W MIMO <Ant. 1 + 2> 802.11n HT20 : 18.12 dBm / 0.0649 W 802.11n HT40 : 17.75 dBm / 0.0596 W 802.11ac VHT20: 18.02 dBm / 0.0634 W 802.11ac VHT40: 17.63 dBm / 0.0579 W 802.11ac VHT80: 15.71 dBm / 0.0372 W		
99% Occupied Bandwidth	<Ant. 1> 802.11a : 23.13 MHz <Ant. 1+2(1)> 802.11n HT20 : 18.78 MHz 802.11n HT40 : 36.36 MHz 802.11ac VHT80 : 74.93 MHz <Ant. 2> 802.11a : 26.12 MHz <Ant. 1+2(2)> 802.11n HT20 : 19.08 MHz 802.11n HT40 : 36.46 MHz 802.11ac VHT80 : 74.81 MHz		
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)		
Antenna Type / Gain	<Ant. 1> : PIFA Antenna with gain 2.46 dBi <Ant. 2> : PIFA Antenna with gain 3.69 dBi		
Antenna Function Description		Ant. 1	Ant. 2
	802.11 a/n/ac SISO	V	V
	802.11 n/ac MIMO	V	V

Note:

1. MIMO Ant. 1+2 is a calculated result from sum of the power MIMO Ant. 1 and MIMO Ant. 2.
2. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20/ HT40 by referring to their higher conducted power.
3. For SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0) and the FCC designation No. are CN5018 and CN5019.

Test Site	Sporton International (Shenzhen) Inc.	
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City Guangdong Province 518055 China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	FCC Test Firm Registration No.
	TH01-SZ	251365

Test Site	Sporton International (Shenzhen) Inc.	
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District Shenzhen City Guangdong Province 518055 China TEL: +86-755-3320-2398	
Test Site No.	Sporton Site No.	FCC Test Firm Registration No.
	03CH04-SZ	577730

Note: The test site complies with ANSI C63.4 2014 requirement.



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

SISO Antenna

Modulation	Data Rate
802.11a	6 Mbps

MIMO Antenna


Modulation	Data Rate
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

Ch. #		Band IV : 5745-5825 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	149	151
M	Middle	157	157	-
H	High	165	165	159

Ch. #		Band IV : 5745-5825 MHz		
		802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	149	151	-
M	Middle	157	-	155
H	High	165	159	-

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

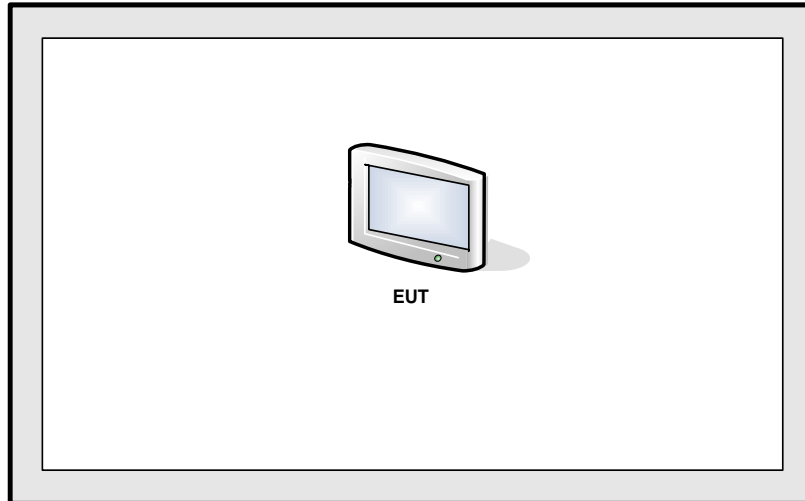

2.4 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.3 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 6.3 + 10 = 16.3 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



3.1.4 Test Setup

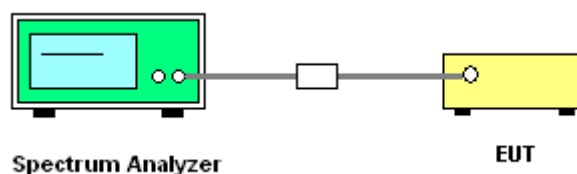




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

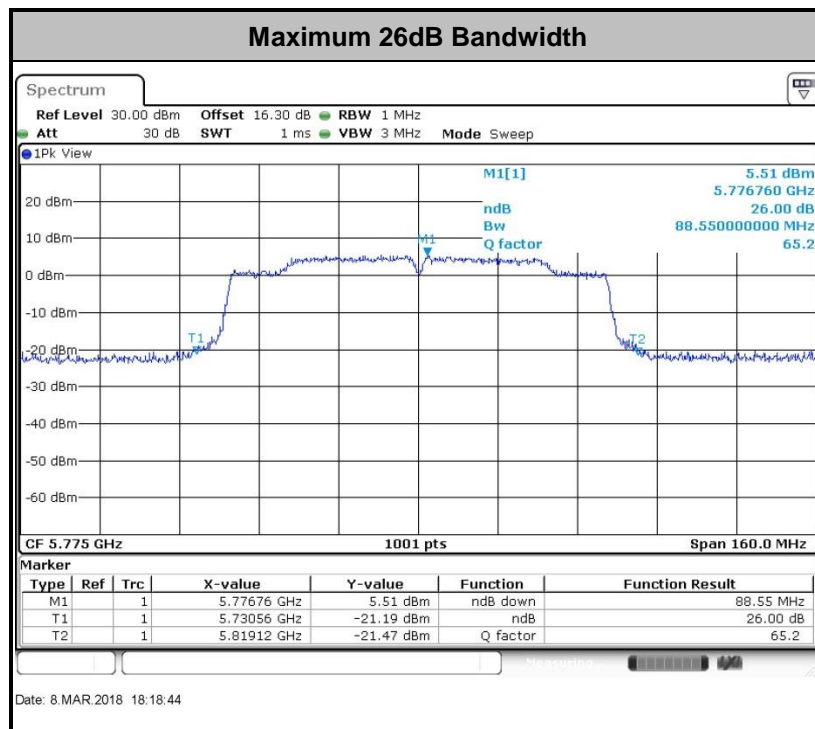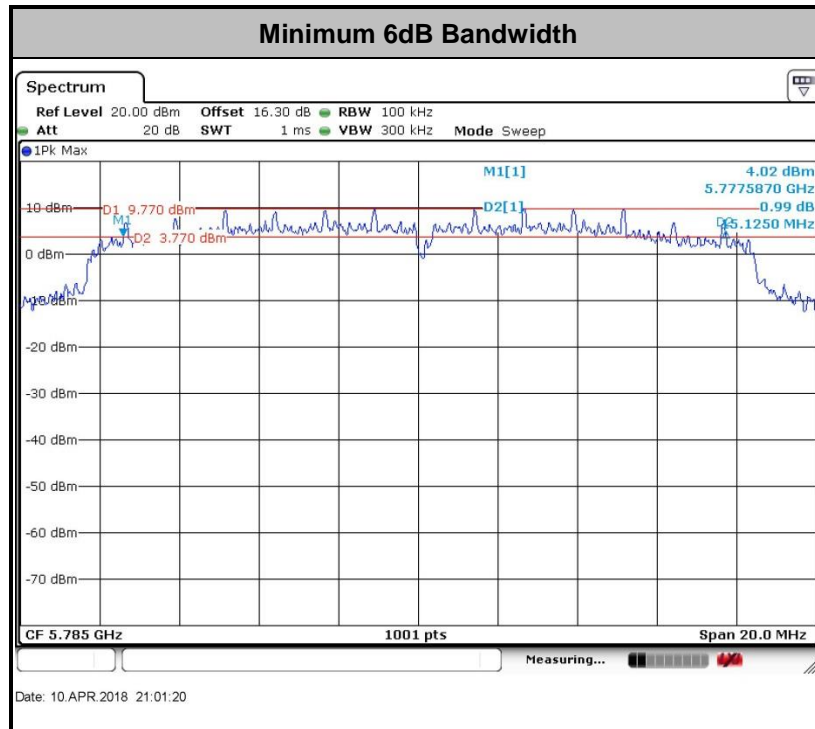

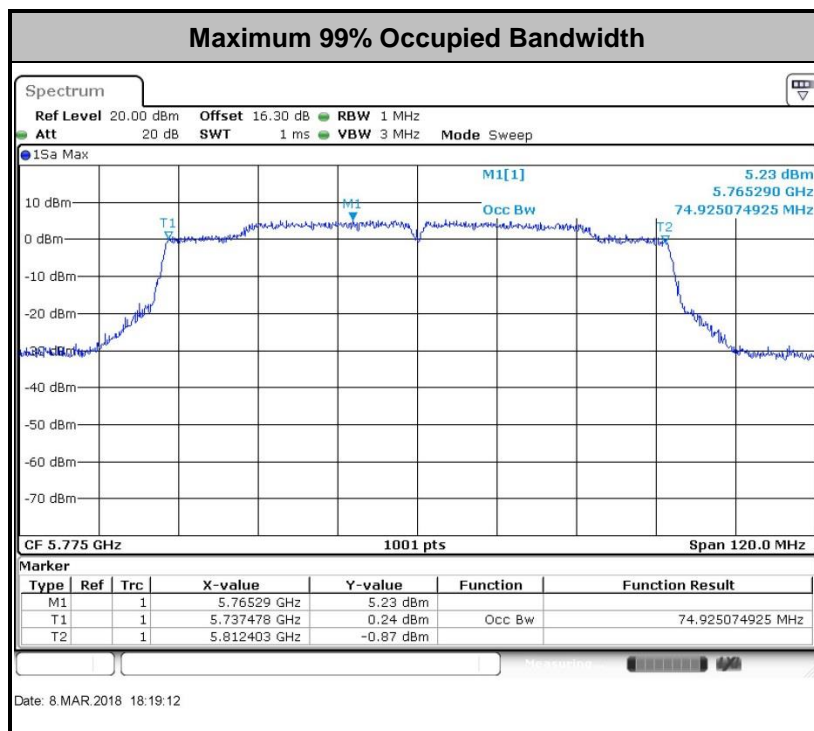

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

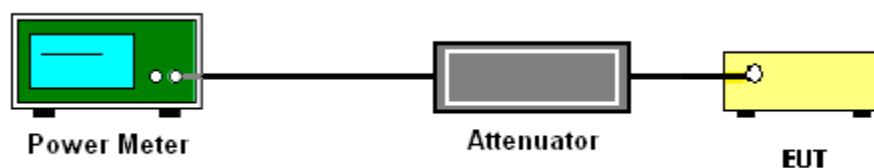

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{\text{ANT}})$ dB.


With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{\text{ANT}})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{\text{ANT}})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{\text{ANT}}^{\text{th}}$ of the PSD limit.

3.3.4 Test Setup

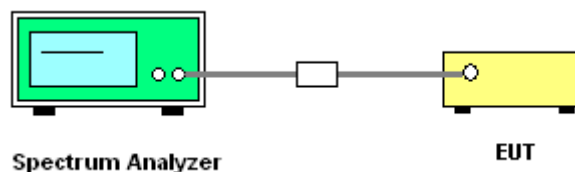

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

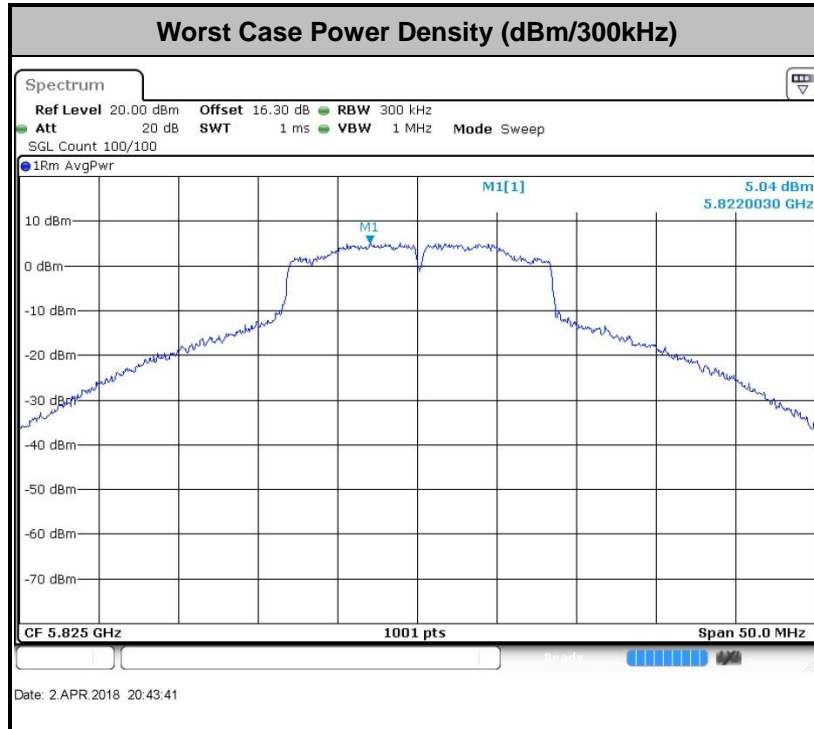

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part 15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dB μ V/m)
- 27	68.3

(3) KDB789033 D02 v01r04 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


(4) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 3 MHz
- Detector = power averaging (rms), set span/(# of points in sweep) \geq RBW/2.
- Averaging type = power averaging(RMS)
- The correction factor shall be offset is 10 log (1/x), where x is the duty cycle.


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

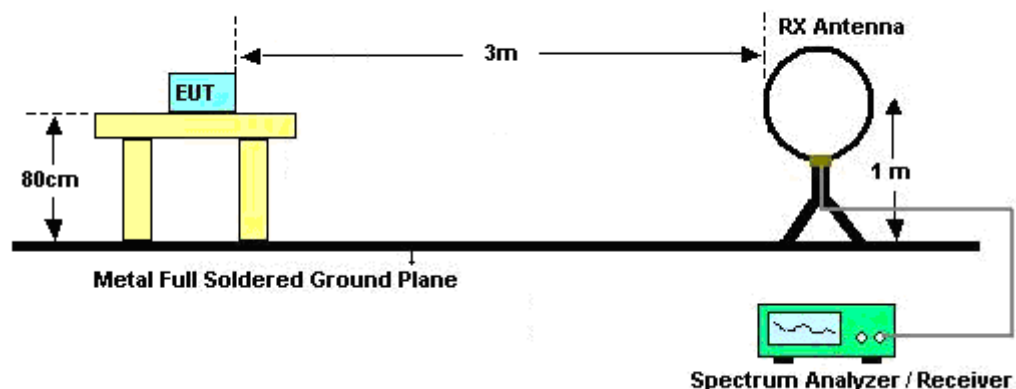

For radiated emissions from 30MHz to 1GHz

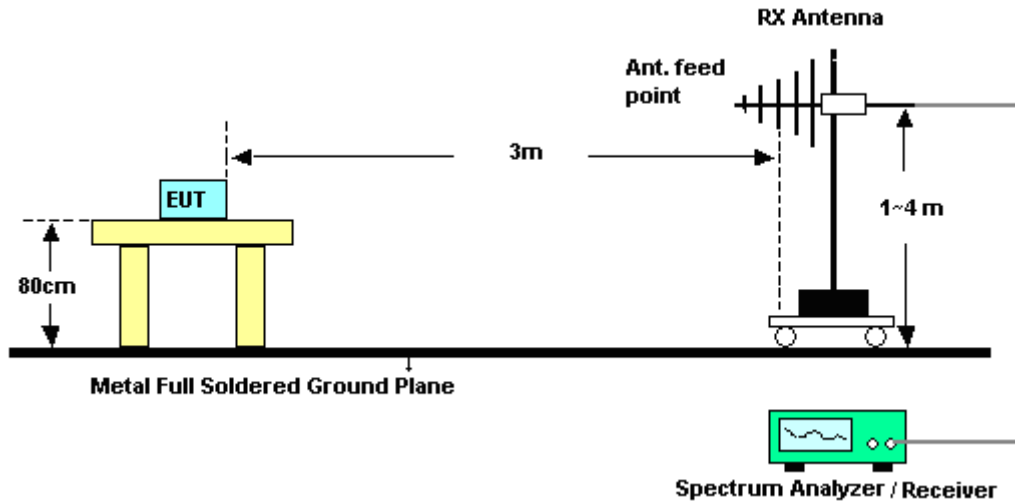

For radiated emissions above 1GHz

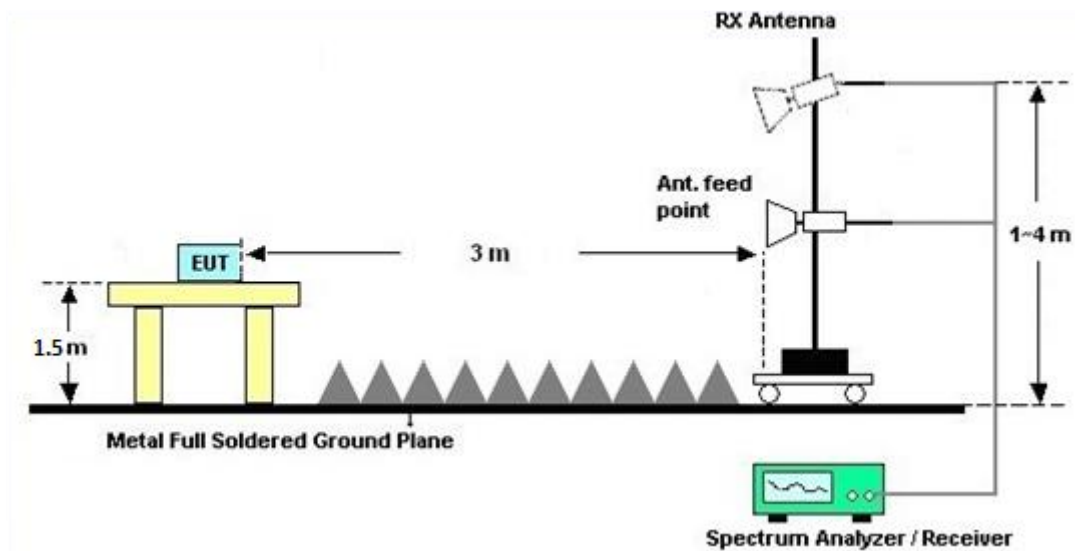

**3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.4.7 Duty Cycle

Please refer to Appendix C.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.5 Automatically Discontinue Transmission

3.5.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant 1 (dBi)	Ant 2 (dBi)				
Band IV	2.46	3.69	3.69	6.11	0.00	0.11

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	Apr. 20, 2017	Mar. 08, 2018~ Apr. 10, 2018	Apr. 19, 2018	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 26, 2017	Mar. 08, 2018~ Apr. 10, 2018	Dec. 25, 2018	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 26, 2017	Mar. 08, 2018~ Apr. 10, 2018	Dec. 25, 2018	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Apr. 20, 2017	Apr. 04, 2018	Apr. 19, 2018	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Apr. 20, 2017	Apr. 04, 2018	Apr. 19, 2018	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 14, 2017	Apr. 04, 2018	May 13, 2018	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May 16, 2017	Apr. 04, 2018	May 15, 2018	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1285	1GHz~18GHz	Dec. 13, 2017	Apr. 04, 2018	Dec. 12, 2018	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	May 17, 2017	Apr. 04, 2018	May 16, 2018	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct.19, 2017	Apr. 04, 2018	Oct 18, 2018	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1989346	1GHz~18GHz	Jul. 27, 2017	Apr. 04, 2018	Jul. 26, 2018	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-H G	1988315	18GHz~40GHz	Jul.27, 2017	Apr. 04, 2018	Jul.26, 2018	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY53270156	500MHz~26.5GHz	Apr. 20, 2017	Apr. 04, 2018	Apr. 19, 2018	Radiation (03CH04-SZ)
AC Power Source	Chroma	61601	N/A	N/A	NCR	Apr. 04, 2018	NCR	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 04, 2018	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Apr. 04, 2018	NCR	Radiation (03CH04-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.8dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.3dB
---	-------



Appendix A. Conducted Test Results

Report Number : FR820812F

Test Engineer:	Bruce Hang	Temperature:	21~25	°C
Test Date:	2018/3/8 ~ 2018/4/10	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	22.98	23.93	38.11	37.71	15.70	16.26	0.5	0.5	Pass
11a	6Mbps	1	157	5785	23.13	24.13	38.11	37.56	15.13	15.86	0.5	0.5	Pass
11a	6Mbps	1	165	5825	20.58	26.12	33.27	37.21	16.00	16.08	0.5	0.5	Pass
HT20	MCS0	2	149	5745	18.68	18.78	25.67	26.27	15.27	16.92	0.5		Pass
HT20	MCS0	2	157	5785	18.78	19.08	24.63	25.08	15.96	15.76	0.5		Pass
HT20	MCS0	2	165	5825	18.78	18.88	25.23	24.98	15.86	15.27	0.5		Pass
HT40	MCS0	2	151	5755	36.36	36.36	45.58	44.78	35.72	35.09	0.5		Pass
HT40	MCS0	2	159	5795	36.36	36.46	45.94	46.39	35.25	35.25	0.5		Pass
VHT80	MCS0	2	155	5775	74.93	74.81	88.55	85.83	72.49	72.81	0.5		Pass

TEST RESULTS DATA
Average Power Table

Band IV														
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	0.08	0.08	19.42	19.18		30.00	30.00	2.46	3.69	Pass
11a	6Mbps	1	157	5785	0.08	0.08	19.62	19.58		30.00	30.00	2.46	3.69	Pass
11a	6Mbps	1	165	5825	0.08	0.08	19.69	19.66		30.00	30.00	2.46	3.69	Pass
HT20	MCS0	2	149	5745	0.10	0.10	15.00	15.21	18.12	30.00		3.69		Pass
HT20	MCS0	2	157	5785	0.10	0.10	14.88	14.85	17.88	30.00		3.69		Pass
HT40	MCS0	2	151	5755	0.10	0.10	14.57	14.90	17.75	30.00		3.69		Pass
HT40	MCS0	2	159	5795	0.10	0.10	14.43	14.35	17.41	30.00		3.69		Pass
VHT20	MCS0	2	149	5745	0.10	0.10	14.88	15.12	18.02	30.00		3.69		Pass
VHT20	MCS0	2	157	5785	0.10	0.10	14.72	14.72	17.73	30.00		3.69		Pass
VHT40	MCS0	2	151	5755	0.10	0.10	14.45	14.78	17.63	30.00		3.69		Pass
VHT40	MCS0	2	159	5795	0.10	0.10	14.33	14.20	17.28	30.00		3.69		Pass
VHT80	MCS0	2	155	5775	0.10	0.10	12.58	12.80	15.71	30.00		3.69		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail	
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	149	5745	0.08	0.08	2.22	2.22	7.29	7.25		30.00	30.00	2.46	3.69	Pass	
11a	6Mbps	1	157	5785	0.08	0.08	2.22	2.22	6.89	7.28		30.00	30.00	2.46	3.69	Pass	
11a	6Mbps	1	165	5825	0.08	0.08	2.22	2.22	6.24	7.34		30.00	30.00	2.46	3.69	Pass	
HT20	MCS0	2	149	5745	0.10	0.10	2.22					6.20	29.89		6.11		Pass
HT20	MCS0	2	157	5785	0.10	0.10	2.22					6.65	29.89		6.11		Pass
HT20	MCS0	2	165	5825	0.10	0.10	2.22					5.51	29.89		6.11		Pass
HT40	MCS0	2	151	5755	0.10	0.10	2.22					2.41	29.89		6.11		Pass
HT40	MCS0	2	159	5795	0.10	0.10	2.22					1.80	29.89		6.11		Pass
VHT80	MCS0	2	155	5775	0.10	0.10	2.22					-2.52	29.89		6.11		Pass



Appendix B. Radiated Spurious Emission

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5640.4	50.91	-17.29	68.2	39.12	32.4	6.25	26.86	225	356	P	H
		5699.8	60.92	-44.13	105.05	49.13	32.45	6.22	26.88	225	356	P	H
		5719.8	71.49	-39.25	110.74	59.68	32.48	6.22	26.89	225	356	P	H
		5724.8	76.67	-45.07	121.74	64.86	32.48	6.22	26.89	225	356	P	H
	*	5745	108.8	-	-	97.01	32.49	6.2	26.9	225	356	P	H
	*	5745	100.91	-	-	89.12	32.49	6.2	26.9	225	356	A	H
		5640	50.16	-18.04	68.2	38.37	32.4	6.25	26.86	232	95	P	V
		5698.6	56.89	-47.28	104.17	45.09	32.45	6.23	26.88	232	95	P	V
		5720	70.14	-40.66	110.8	58.33	32.48	6.22	26.89	232	95	P	V
		5725	75.29	-46.91	122.2	63.48	32.48	6.22	26.89	232	95	P	V
	*	5745	108.73	-	-	96.94	32.49	6.2	26.9	232	95	P	V
	*	5745	100.83	-	-	89.04	32.49	6.2	26.9	232	95	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5635.8	50.29	-17.91	68.2	38.5	32.4	6.25	26.86	303	349	P	H
		5667.8	51.11	-30.3	81.41	39.32	32.43	6.23	26.87	303	349	P	H
		5716.8	53.37	-56.54	109.91	41.58	32.46	6.22	26.89	303	349	P	H
		5725	57.86	-64.34	122.2	46.05	32.48	6.22	26.89	303	349	P	H
	*	5785	109.48	-	-	97.7	32.52	6.18	26.92	303	349	P	H
	*	5785	102.84	-	-	91.06	32.52	6.18	26.92	303	349	A	H
		5851	50.94	-68.98	119.92	39.01	32.58	6.29	26.94	303	349	P	H
		5865.2	52.02	-55.92	107.94	39.97	32.6	6.4	26.95	303	349	P	H
		5909.6	51.94	-27.62	79.56	39.67	32.72	6.52	26.97	303	349	P	H
		5936.8	50.27	-17.93	68.2	37.86	32.76	6.63	26.98	303	349	P	H
		5635.8	50.53	-17.67	68.2	38.74	32.4	6.25	26.86	237	102	P	V
		5690.6	51.15	-47.12	98.27	39.35	32.45	6.23	26.88	237	102	P	V
		5717.4	53.75	-56.32	110.07	41.96	32.46	6.22	26.89	237	102	P	V
		5725	53.91	-68.29	122.2	42.1	32.48	6.22	26.89	237	102	P	V
	*	5785	109.11	-	-	97.33	32.52	6.18	26.92	237	102	P	V
	*	5785	102.02	-	-	90.24	32.52	6.18	26.92	237	102	A	V
		5850	52.33	-69.87	122.2	40.4	32.58	6.29	26.94	237	102	P	V
		5857.4	52.71	-57.42	110.13	40.65	32.6	6.4	26.94	237	102	P	V
		5875.8	52.62	-51.99	104.61	40.53	32.64	6.4	26.95	237	102	P	V
		5948.8	50.52	-17.68	68.2	38.07	32.8	6.63	26.98	237	102	P	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz	*	5825	109.82	-	-	97.89	32.57	6.29	26.93	285	351	P	H
	*	5825	102.68	-	-	90.75	32.57	6.29	26.93	285	351	A	H
		5850	61.93	-60.27	122.2	50	32.58	6.29	26.94	285	351	P	H
		5855.4	61.05	-49.64	110.69	49.1	32.6	6.29	26.94	285	351	P	H
		5880.6	54.63	-46.41	101.04	42.54	32.64	6.4	26.95	285	351	P	H
		5937.2	50.56	-17.64	68.2	38.15	32.76	6.63	26.98	285	351	P	H
	*	5825	108.23	-	-	96.3	32.57	6.29	26.93	249	100	P	V
	*	5825	101.82	-	-	89.89	32.57	6.29	26.93	249	100	A	V
		5851	62.72	-57.2	119.92	50.79	32.58	6.29	26.94	249	100	P	V
		5857	58	-52.24	110.24	45.94	32.6	6.4	26.94	249	100	P	V
		5882	52.64	-47.36	100	40.55	32.64	6.4	26.95	249	100	P	V
		5925.2	50.7	-17.5	68.2	38.39	32.76	6.52	26.97	249	100	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	49.12	-24.88	74	55.7	39.28	9.5	55.36	160	360	P	H
		17235	50.92	-17.28	68.2	49.48	43.04	14.89	56.49	149	0	P	H
		11490	47.89	-26.11	74	54.53	39.22	9.5	55.36	160	360	P	V
		17235	50.96	-17.24	68.2	51.07	41.49	14.89	56.49	170	360	P	V
802.11a CH 157 5785MHz		11570	48.92	-25.08	74	55.34	39.3	9.52	55.24	175	198	P	H
		17355	50.79	-17.41	68.2	48.44	43.81	15.12	56.58	189	185	P	H
		11570	48.11	-25.89	74	54.69	39.14	9.52	55.24	175	198	P	V
		17355	50.54	-17.66	68.2	49.76	42.24	15.12	56.58	189	185	P	V
802.11a CH 165 5825MHz		11650	48.92	-25.08	74	55.21	39.3	9.54	55.13	156	347	P	H
		17475	50.65	-17.55	68.2	47.39	44.58	15.36	56.68	150	360	P	H
		11650	48.76	-25.24	74	55.26	39.09	9.54	55.13	156	347	P	V
		17475	50.88	-17.32	68.2	49.21	42.99	15.36	56.68	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5635.8	50.16	-18.04	68.2	38.37	32.4	6.25	26.86	100	360	P	H
		5675.2	51.63	-35.26	86.89	39.84	32.43	6.23	26.87	100	360	P	H
		5717.8	58.31	-51.87	110.18	46.5	32.48	6.22	26.89	100	360	P	H
		5723.8	66.77	-52.69	119.46	54.96	32.48	6.22	26.89	100	360	P	H
	*	5745	107.64	-	-	95.85	32.49	6.2	26.9	100	360	P	H
	*	5745	100.25	-	-	88.46	32.49	6.2	26.9	100	360	A	H
		5642.6	50.91	-17.29	68.2	39.12	32.4	6.25	26.86	243	104	P	V
		5655.6	51.75	-20.61	72.36	39.95	32.42	6.25	26.87	243	104	P	V
		5717.2	58.03	-51.99	110.02	46.24	32.46	6.22	26.89	243	104	P	V
		5723.2	60.89	-57.21	118.1	49.08	32.48	6.22	26.89	243	104	P	V
	*	5745	106.24	-	-	94.45	32.49	6.2	26.9	243	104	P	V
	*	5745	99.47	-	-	87.68	32.49	6.2	26.9	243	104	A	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5609.6	50.36	-17.84	68.2	38.55	32.39	6.27	26.85	100	358	P	H
		5661.2	50.4	-26.12	76.52	38.62	32.42	6.23	26.87	100	358	P	H
		5701	51.81	-53.67	105.48	40.01	32.46	6.22	26.88	100	358	P	H
		5722.2	51.79	-64.03	115.82	39.98	32.48	6.22	26.89	100	358	P	H
	*	5785	107.12	-	-	95.34	32.52	6.18	26.92	100	358	P	H
	*	5785	99.92	-	-	88.14	32.52	6.18	26.92	100	358	A	H
		5854	50.5	-62.58	113.08	38.55	32.6	6.29	26.94	100	358	P	H
		5863.4	51	-57.45	108.45	38.95	32.6	6.4	26.95	100	358	P	H
		5877.8	51.58	-51.54	103.12	39.49	32.64	6.4	26.95	100	358	P	H
		5925	50.77	-17.43	68.2	38.46	32.76	6.52	26.97	100	358	P	H
		5636.6	50.05	-18.15	68.2	38.26	32.4	6.25	26.86	238	94	P	V
		5697.6	49.63	-53.8	103.43	37.83	32.45	6.23	26.88	238	94	P	V
		5704.6	50.43	-56.06	106.49	38.63	32.46	6.22	26.88	238	94	P	V
		5722.8	50.43	-66.75	117.18	38.62	32.48	6.22	26.89	238	94	P	V
	*	5785	106.48	-	-	94.7	32.52	6.18	26.92	238	94	P	V
	*	5785	99.64	-	-	87.86	32.52	6.18	26.92	238	94	A	V
		5853.8	49.49	-64.05	113.54	37.54	32.6	6.29	26.94	238	94	P	V
		5863.6	52.63	-55.76	108.39	40.58	32.6	6.4	26.95	238	94	P	V
		5887.8	51.51	-44.19	95.7	39.39	32.68	6.4	26.96	238	94	P	V
		5940.6	50.37	-17.83	68.2	37.92	32.8	6.63	26.98	238	94	P	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz	*	5825	107.26	-	-	95.33	32.57	6.29	26.93	100	360	P	H
	*	5825	100.27	-	-	88.34	32.57	6.29	26.93	100	360	A	H
		5852.4	54.08	-62.65	116.73	42.15	32.58	6.29	26.94	100	360	P	H
		5873.8	51.36	-54.18	105.54	39.27	32.64	6.4	26.95	100	360	P	H
		5878.6	52.01	-50.52	102.53	39.92	32.64	6.4	26.95	100	360	P	H
		5943.8	49.97	-18.23	68.2	37.52	32.8	6.63	26.98	100	360	P	H
	*	5825	106.41	-	-	94.48	32.57	6.29	26.93	230	94	P	V
	*	5825	99.64	-	-	87.71	32.57	6.29	26.93	230	94	A	V
		5852.6	54.61	-61.66	116.27	42.68	32.58	6.29	26.94	230	94	P	V
		5855.4	54.92	-55.77	110.69	42.97	32.6	6.29	26.94	230	94	P	V
		5897.4	51.22	-37.37	88.59	38.98	32.68	6.52	26.96	230	94	P	V
		5927.4	49.91	-18.29	68.2	37.6	32.76	6.52	26.97	230	94	P	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	49.1	-24.9	74	55.68	39.28	9.5	55.36	160	360	P	H
		17235	50.74	-17.46	68.2	49.3	43.04	14.89	56.49	170	360	P	H
		11490	49.65	-24.35	74	56.29	39.22	9.5	55.36	160	360	P	V
		17235	50.12	-18.08	68.2	50.23	41.49	14.89	56.49	170	360	P	V
802.11n HT20 CH 157 5785MHz		11570	49.9	-24.1	74	56.32	39.3	9.52	55.24	175	198	P	H
		17355	50.17	-18.03	68.2	47.82	43.81	15.12	56.58	189	185	P	H
		11570	50.23	-23.77	74	56.81	39.14	9.52	55.24	175	198	P	V
		17355	49.24	-18.96	68.2	48.46	42.24	15.12	56.58	189	185	P	V
802.11n HT20 CH 165 5825MHz		11650	50.28	-23.72	74	56.57	39.3	9.54	55.13	156	347	P	H
		17475	50.97	-17.23	68.2	47.71	44.58	15.36	56.68	150	360	P	H
		11650	49.39	-24.61	74	55.89	39.09	9.54	55.13	156	347	P	V
		17475	50.82	-17.38	68.2	49.15	42.99	15.36	56.68	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5648.2	50.12	-18.08	68.2	38.33	32.4	6.25	26.86	100	360	P	H
		5697.8	54.01	-49.57	103.58	42.21	32.45	6.23	26.88	100	360	P	H
		5719.8	61.89	-48.85	110.74	50.08	32.48	6.22	26.89	100	360	P	H
		5722.8	63.09	-54.09	117.18	51.28	32.48	6.22	26.89	100	360	P	H
	*	5755	105.33	-	-	93.52	32.51	6.2	26.9	100	360	P	H
	*	5755	97.95	-	-	86.14	32.51	6.2	26.9	100	360	A	H
		5854	50.05	-63.03	113.08	38.1	32.6	6.29	26.94	100	360	P	H
		5857.2	50.52	-59.66	110.18	38.46	32.6	6.4	26.94	100	360	P	H
		5905.8	50.88	-31.49	82.37	38.6	32.72	6.52	26.96	100	360	P	H
		5938.4	49.92	-18.28	68.2	37.51	32.76	6.63	26.98	100	360	P	H
		5631.6	50.51	-17.69	68.2	38.73	32.39	6.25	26.86	233	95	P	V
		5697.4	54.12	-49.16	103.28	42.32	32.45	6.23	26.88	233	95	P	V
		5719	61.36	-49.16	110.52	49.55	32.48	6.22	26.89	233	95	P	V
		5724.4	62.52	-58.31	120.83	50.71	32.48	6.22	26.89	233	95	P	V
	*	5755	102.69	-	-	90.88	32.51	6.2	26.9	233	95	P	V
	*	5755	95.7	-	-	83.89	32.51	6.2	26.9	233	95	A	V
		5850.8	49.53	-70.85	120.38	37.6	32.58	6.29	26.94	233	95	P	V
		5874.4	51.16	-54.21	105.37	39.07	32.64	6.4	26.95	233	95	P	V
		5920.4	52.48	-19.11	71.59	40.21	32.72	6.52	26.97	233	95	P	V
		5925.2	49.92	-18.28	68.2	37.61	32.76	6.52	26.97	233	95	P	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5647.4	51.57	-16.63	68.2	39.78	32.4	6.25	26.86	100	56	P	H
		5693.2	51.78	-48.41	100.19	39.98	32.45	6.23	26.88	100	56	P	H
		5718.8	53.9	-56.56	110.46	42.09	32.48	6.22	26.89	100	56	P	H
		5722.8	52	-65.18	117.18	40.19	32.48	6.22	26.89	100	56	P	H
	*	5795	104.97	-	-	93.17	32.54	6.18	26.92	100	56	P	H
	*	5795	97.74	-	-	85.94	32.54	6.18	26.92	100	56	A	H
		5853.8	53.53	-60.01	113.54	41.58	32.6	6.29	26.94	100	56	P	H
		5863	53.26	-55.3	108.56	41.21	32.6	6.4	26.95	100	56	P	H
		5875.4	51.76	-53.14	104.9	39.67	32.64	6.4	26.95	100	56	P	H
		5941.6	50.24	-17.96	68.2	37.79	32.8	6.63	26.98	100	56	P	H
		5605.6	51.02	-17.18	68.2	39.21	32.39	6.27	26.85	218	130	P	V
		5685	50.33	-43.8	94.13	38.53	32.45	6.23	26.88	218	130	P	V
		5713.2	50.64	-58.26	108.9	38.85	32.46	6.22	26.89	218	130	P	V
		5721.8	51.06	-63.84	114.9	39.25	32.48	6.22	26.89	218	130	P	V
	*	5795	102.13	-	-	90.33	32.54	6.18	26.92	218	130	P	V
	*	5795	94.97	-	-	83.17	32.54	6.18	26.92	218	130	A	V
		5853.8	51.98	-61.56	113.54	40.03	32.6	6.29	26.94	218	130	P	V
		5860.4	51.94	-57.35	109.29	39.89	32.6	6.4	26.95	218	130	P	V
		5924.6	51.55	-16.94	68.49	39.24	32.76	6.52	26.97	218	130	P	V
		5935.8	49.63	-18.57	68.2	37.22	32.76	6.63	26.98	218	130	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		11510	48.78	-25.22	74	55.32	39.3	9.5	55.34	160	360	P	H
		17265	50.43	-17.77	68.2	48.72	43.26	14.97	56.52	170	360	P	H
		11510	50.02	-23.98	74	56.66	39.2	9.5	55.34	160	360	P	V
		17265	50.14	-18.06	68.2	49.98	41.71	14.97	56.52	170	360	P	V
802.11n HT40 CH 159 5795MHz		11590	49.83	-24.17	74	56.21	39.3	9.53	55.21	170	300	P	H
		17385	50.3	-17.9	68.2	47.68	44.03	15.2	56.61	150	200	P	H
		11590	49.12	-24.88	74	55.67	39.13	9.53	55.21	170	300	P	V
		17385	50.41	-17.79	68.2	49.37	42.45	15.2	56.61	150	200	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5634	52.02	-16.18	68.2	40.23	32.4	6.25	26.86	239	45	P	H
		5698.2	58.05	-45.82	103.87	46.25	32.45	6.23	26.88	239	45	P	H
		5717.2	59.87	-50.15	110.02	48.08	32.46	6.22	26.89	239	45	P	H
		5722.6	61.16	-55.57	116.73	49.35	32.48	6.22	26.89	239	45	P	H
	*	5775	100.13	-	-	88.32	32.52	6.2	26.91	239	45	P	H
	*	5775	93.18	-	-	81.37	32.52	6.2	26.91	239	45	A	H
		5854	53.94	-59.14	113.08	41.99	32.6	6.29	26.94	239	45	P	H
		5858.2	53.31	-56.59	109.9	41.26	32.6	6.4	26.95	239	45	P	H
		5920.6	51.16	-20.28	71.44	38.89	32.72	6.52	26.97	239	45	P	H
		5941.8	50.51	-17.69	68.2	38.06	32.8	6.63	26.98	239	45	P	H
		5631.4	52.54	-15.66	68.2	40.76	32.39	6.25	26.86	238	97	P	V
		5693.6	53.9	-46.58	100.48	42.1	32.45	6.23	26.88	238	97	P	V
		5718.2	57.38	-52.92	110.3	45.57	32.48	6.22	26.89	238	97	P	V
		5722.2	56.98	-58.84	115.82	45.17	32.48	6.22	26.89	238	97	P	V
	*	5775	97.95	-	-	86.14	32.52	6.2	26.91	238	97	P	V
	*	5775	91.15	-	-	79.34	32.52	6.2	26.91	238	97	A	V
		5855	52.48	-58.32	110.8	40.53	32.6	6.29	26.94	238	97	P	V
		5856.6	53.92	-56.43	110.35	41.86	32.6	6.4	26.94	238	97	P	V
		5878.6	51.35	-51.18	102.53	39.26	32.64	6.4	26.95	238	97	P	V
		5938	50.11	-18.09	68.2	37.7	32.76	6.63	26.98	238	97	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		11550	49.7	-24.3	74	56.14	39.3	9.52	55.26	160	360	P	H
VHT80		17325	50.05	-18.15	68.2	47.9	43.59	15.12	56.56	170	360	P	H
CH 155		11550	49.01	-24.99	74	55.59	39.16	9.52	55.26	160	360	P	V
5775MHz		17325	50.64	-17.56	68.2	50.05	42.03	15.12	56.56	170	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz WIFI 802.11ac VHT80		32.91	24.03	-15.97	40	32.19	23.49	0.32	31.97	-	-	P	H
		206.54	37.89	-5.61	43.5	52.29	15.3	1.62	31.32	-	-	P	H
		273.47	40.49	-5.51	46	50.47	19.47	1.78	31.23	100	43	P	H
		363.68	38.28	-7.72	46	46.37	21	2.12	31.21	-	-	P	H
		546.04	38.41	-7.59	46	42.29	24.82	2.55	31.25	-	-	P	H
		916.58	38.64	-7.36	46	36.94	29.5	3.42	31.22	-	-	P	H
		30	24.59	-15.41	40	31.41	24.9	0.25	31.97	-	-	P	V
		203.63	28.48	-15.02	43.5	42.88	15.3	1.62	31.32	-	-	P	V
		353.01	37.03	-8.97	46	45.41	20.73	2.1	31.21	-	-	P	V
		460.68	37.35	-8.65	46	43.13	23.17	2.33	31.28	-	-	P	V
		574.17	38.31	-7.69	46	41.61	25.33	2.63	31.26	100	199	P	V
		936.95	34.99	-11.01	46	33.09	29.74	3.45	31.29	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix C. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1	802.11a	98.08	-	-	10kHz
2	802.11a	98.08	-	-	10kHz
1+2	802.11n HT20	97.62	1.486	0.673	1kHz
1+2	802.11n HT40	97.62	1.486	0.673	1kHz
1+2	802.11ac VHT80	97.62	1.486	0.673	1kHz

802.11a Ant.1

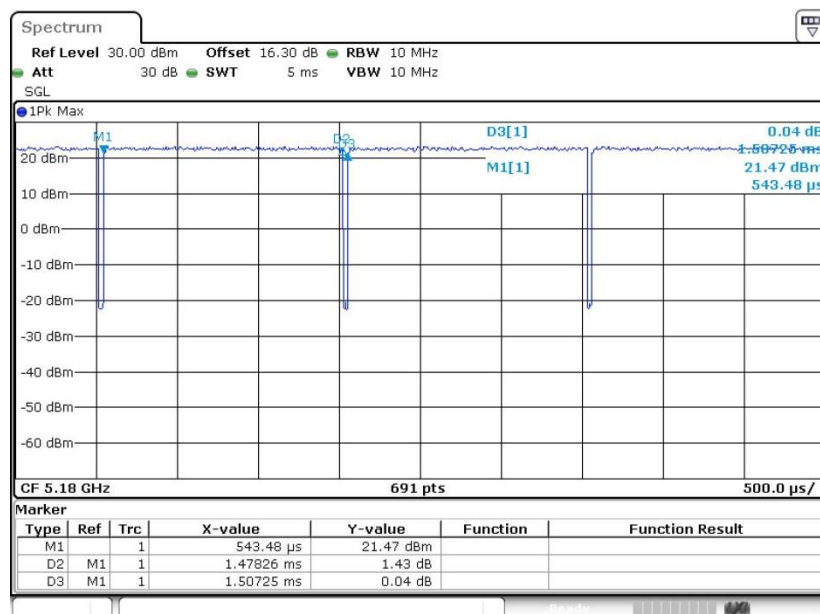




802.11a Ant.2

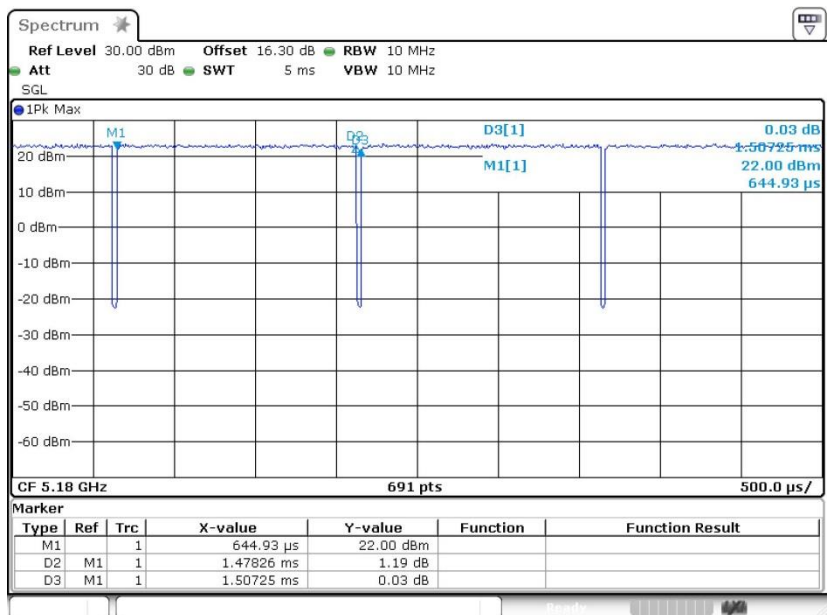


802.11n HT20 Ant.1+2

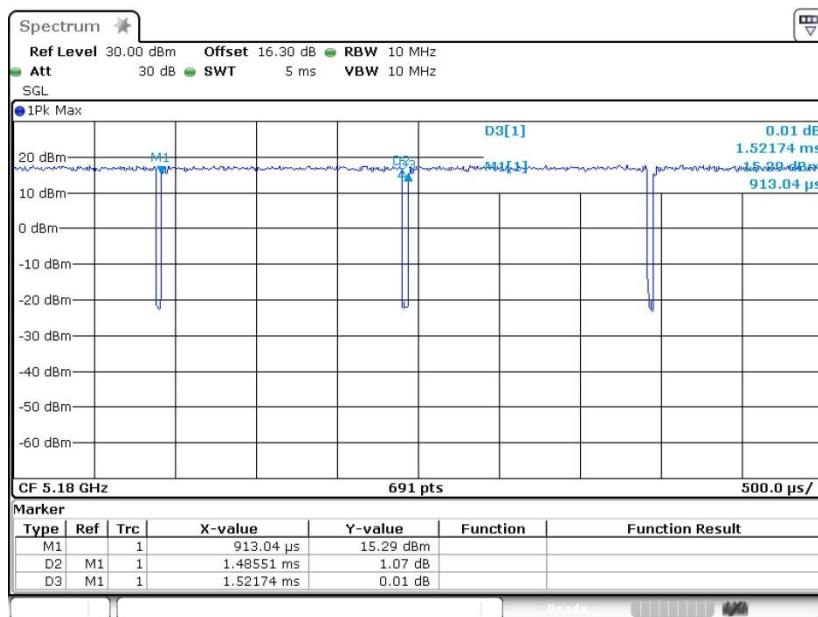

:51


802.11n HT40 Ant.1+2

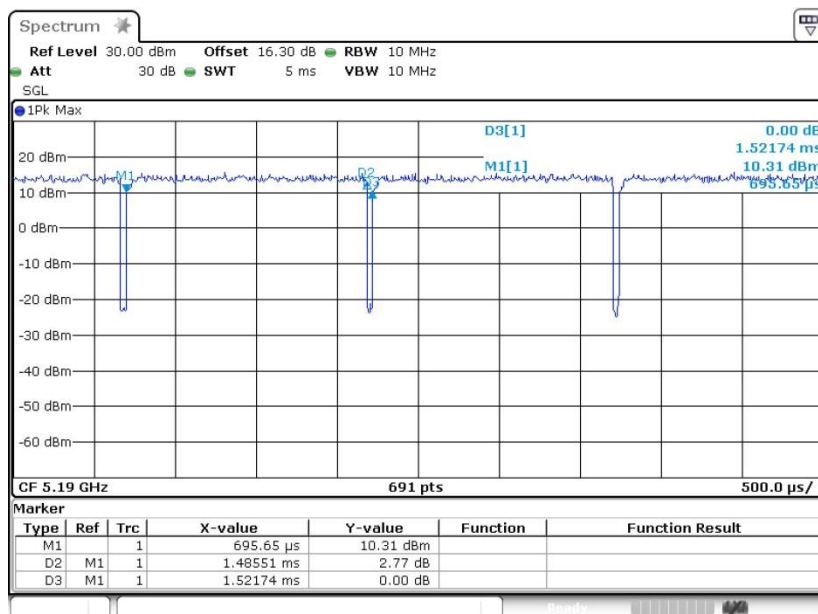

9



802.11ac VHT80 Ant.1+2

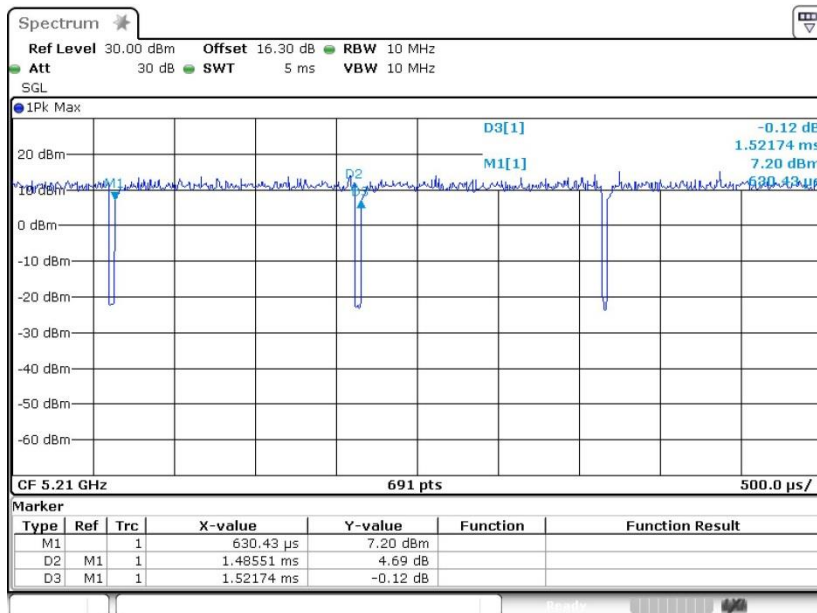

5:48