







ISO/IEC17025 Accredited Lab.

Report No: FCC 0908010 File reference No: 2009-08-28

Applicant: Double Power (Shenzhen) Electronics Co., Ltd

Product: WEATHER STATION

Brand Name: N/A

Model No: DP-866RF

Test Standards: FCC Part 15 Subpart B: 2008

Test result:

It is herewith confirmed and found to comply with the requirements

set up by ANSI C63.4&FCC Part 15 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: August 28, 2009

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. Chegongmiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0908010 Page 2 of 23

Date: 2009-8-28



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 23

Report No: 0908010 Date: 2009-8-28



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Test Uncertainty	4
1.5	Submitted Sample	4
1.6	Test Duration	4
2.0	List of Measurement Equipment	5
2.1	Conducted Emission Test	5
2.2	Radiated electromagnetic disturbance test	5
3.0	Technical Details	5
3.1	Investigations Requested	5
3.2	Test Standards	5
4.0	Power line Conducted Emission Test.	6
5.0	Radiated Disturbance Test	8
6.0	FCC ID Label	14
7.0	Photo of testing	15

Report No: 0908010 Page 4 of 23

Date: 2009-8-28



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: Double Power (Shenzhen) Electronics Co., Ltd

Address: Room 15B,15/F, Fu Qiao Bldg., No.21 Fu Hua Rd.,Fu Tian, Shenzhen, Guangdong

Telephone: +86-755-27318801-888 Fax: +86-755-27318801-802

1.3 Description of EUT

Product: WEATHER STATION

Manufacturer: Double Power (Shenzhen) Electronics Co., Ltd

Address: Room 15B,15/F, Fu Qiao Bldg., No.21 Fu Hua Rd., Fu Tian, Shenzhen, Guangdong

Brand Name: N/A

Model Number: DP-866RF

Additional Model Number: DP-866RCC, DP-866

Remark: --

Rating: Input: DC 3.0V (Powered by 2pcs AAA batteries)

Operation Frequency: 433.92MHz

1.4 Submitted Sample(s): 2 Samples

1.5 Test Duration: 2009-08-03 to 2009-08-28

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty = 4.7dB

1.7 Test Engineer

Ting Tong

The sample tested by

Print Name: Terry Tang



2.0 List of Measurement Equipment

2.1 Conducted Emission Test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESCS30	830245/009	RS	2009.2.23	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
LISN	NTFM8132	8132137	SCHWARZBECK	2009.2.24	1Year
LISN	NTFM8134	8134109	SCHWARZBECK	2009.2.24	1Year
LISN	NTFM8136	8136102	SCHWARZBECK	2009.2.24	1Year

2.2 Radiated electromagnetic disturbance test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESI26	838786/013	RS	2009.2.23	1Year
Amplifier	MH648A	M20494	ANRITSU	2009.2.24	1Year
Bilog Antenna	CBL6101C	2576	CHASE	2009.2.23	1Year
Horn Antenna	BBHA 9120D	9120D-631	SCHWARZBECK	2009-4-26	1Year

3.0 Technical Details

3.1 Investigations Requested

Perform Electromagnetic Interference [EMI] tests for FCC Requirement.


3.2 Test Standards

FCC Part 15 Subpart B: 2008



4.0 Conducted Power line Test

4.1 Schematics of the test

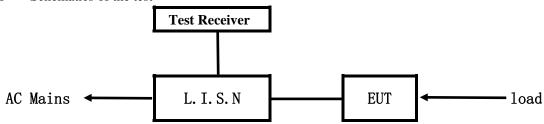


EUT: Equipment Under Test

4.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003. Cables and peripherals were moved to find the maximum emission levels for each frequency.

Block diagram of Test setup

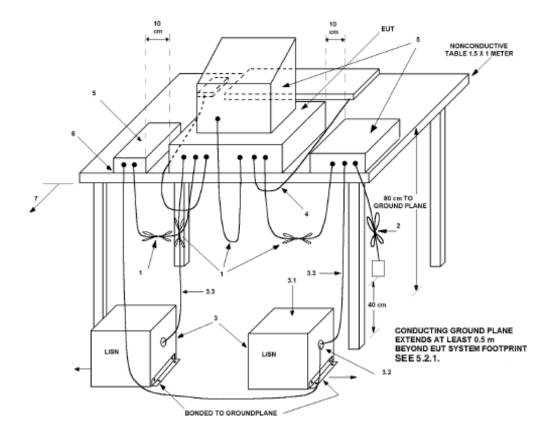

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0908010 Page 7 of 23

Date: 2009-8-28



4.3 Power line conducted Emission Limit

Eraguanay (MHz)	Class A Limits dB(μV)		Class B Limits dB(µV)	
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	79.00	66.00	66.00~56.00*	56.00~46.00*
$0.50 \sim 5.00$	73.00	60.00	56.00	46.00
5.00 ~ 30.00	73.00	60.00	60.00	50.00

Notes: 1. *de

- 1. *decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

4.4 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: Due to DC operation, this test item not applicable


Page 8 of 23

Report No: 0908010 Date: 2009-8-28



5.0 Radiated Disturbance Test


5.1 Schematics of the test




5.2 Test Method and test Procedure:

The EUT was tested according to ANSI C63.4 –2003, The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak 0values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Block diagram of Test setup

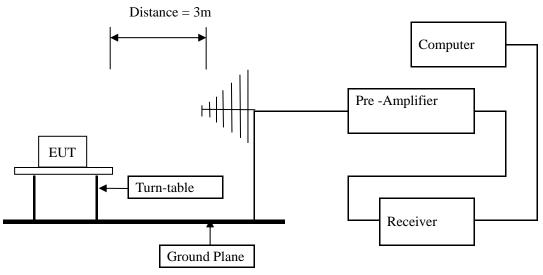



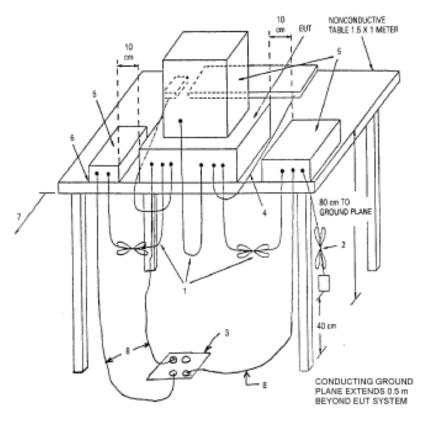

5.3 Radiated Emission Limit

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.00
88-216	3	43.50
216-960	3	46.00
Above 960	3	54.00

Note: The lower limit shall apply at the transition frequencies

5.4 Test result

The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.




A: Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Normal operation model

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

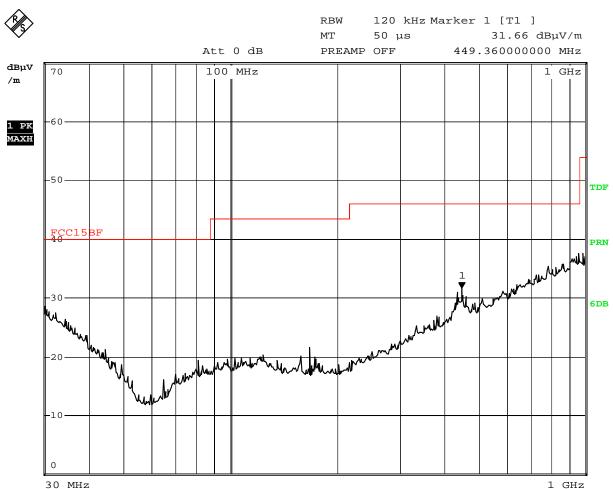

Date: 11.AUG.2009 16:49:58

Frequency (MHz)	Level@3m ($dB\mu V/m$)	Antenna Polarity	Limit@3m (dBµV/m)
449.36	31.66	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 11 of 23

Report No: 0908010 Date: 2009-8-28




A1: Radiated Disturbance In Horizontal (1000MHz----2000MHz)

EUT set Condition: Normal operation model

Level: Class B
Results: PASS
Please refer to following diagram for individual

Picture of the test

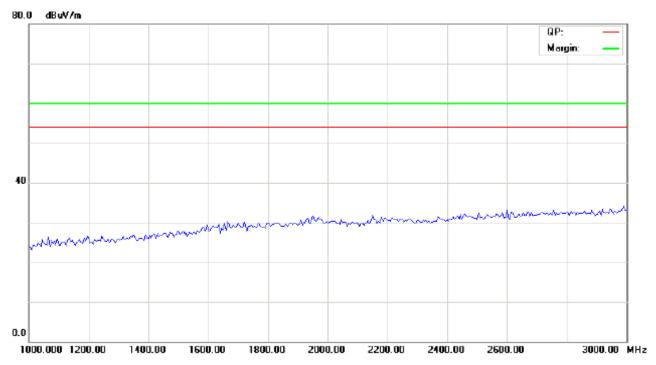

Frequency (MHz) Level@3m (dBµV/m)		Antenna Polarity	Limit@3m (dBµV/m)
		Н	54 (AV) /74 (PK)
	-	Н	54 (AV) /74 (PK)

Note: From 1GHz to 2GHz, the emission level was below 10dB under the Limit at least.




B: Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Normal operation model

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

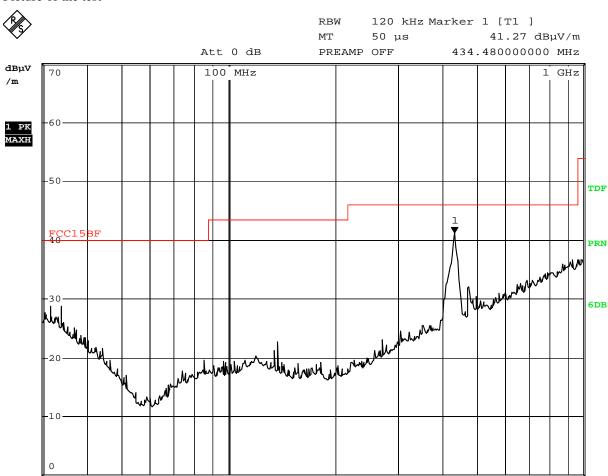

Date: 11.AUG.2009 16:47:06

30 MHz

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m ($dB\mu V/m$)
434.48	41.27	V	46.00

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 13 of 23

Report No: 0908010 Date: 2009-8-28




B1: Radiated Disturbance In Vertical (1000MHz----2000MHz)

EUT set Condition: Normal operation model

Level: Class B
Results: PASS

Please refer to following diagram for individual

Picture of the test

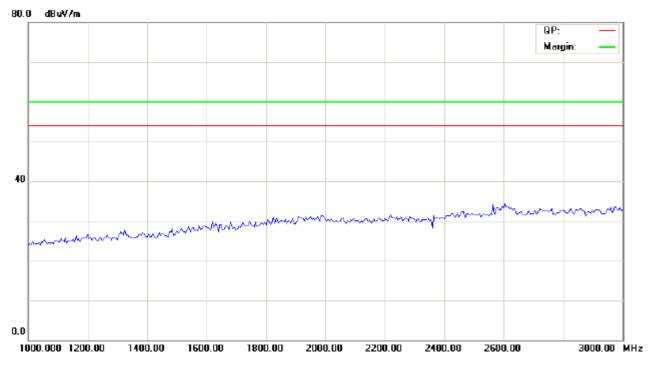

Frequency (MHz) Level@3m (dBµV/m)		Antenna Polarity	Limit@3m (dBµV/m)
		V	54 (AV) /74 (PK)
		V	54 (AV) /74 (PK)

Note: 1. for the emission test, A 433.92 MHz CW signal was injected (radiated) from a nearby signal generator using a rod antenna

2. New batteries were installed in the equipment under test for radiated emission testing.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 14 of 23

Report No: 0908010 Date: 2009-8-28



6.0 FCC ID Label

FCC ID: XPM7661

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 15 of 23

Report No: 0908010 Date: 2009-8-28



7.0 Photo of testing

7.1 Conducted test View—

N/A

7.2 Radiated emission test view--




Page 16 of 23

Report No: 0908010 Date: 2009-8-28



7.3 Photo for the EUT

Front View

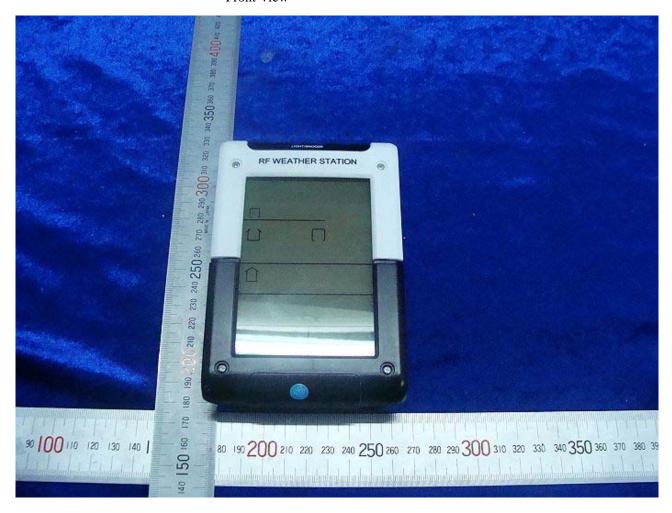

Page 17 of 23






Page 18 of 23





Page 19 of 23




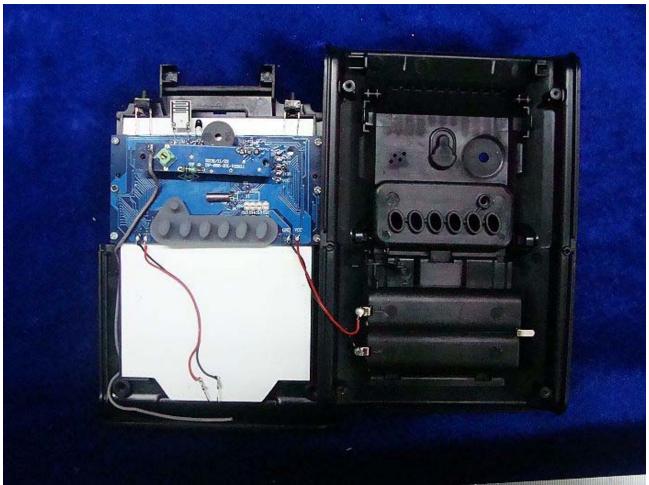

Page 20 of 23



Inside View

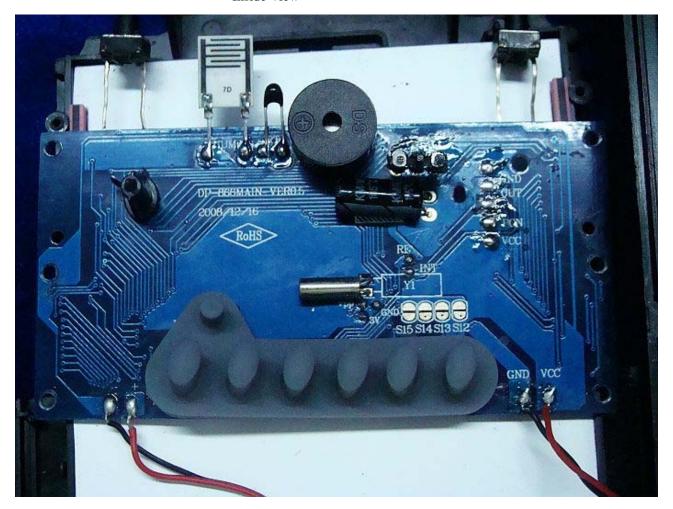


Page 21 of 23





Page 22 of 23



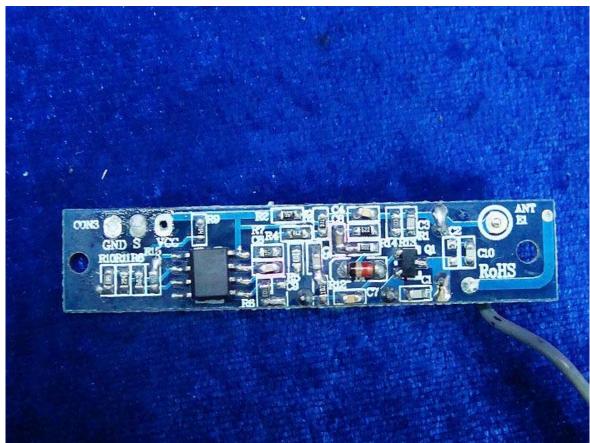

Page 23 of 23





-End of the report-