





## ISO/IEC17025 Accredited Lab.

Report No: FCC0912081-02 File reference No: 2010-01-07

Applicant: Guangzhou Sunday Electronics Co., Ltd.

Product: Wireless Keyboard with Touchpad

Model No: S-KW425TG

Brand Name: SUNDAY

Test Standards: FCC Part 15 Subpart C, Paragraph 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: Jan 07, 2010

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0912081-02 Page 2 of 37

Date: 2010-01-07



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

## **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

# IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Date: 2010-01-07



# Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	5
3.0	Technical Details	6
3.1	Summary of Test Results	6
3.2	Test Standards	6
4.0	EUT Modification.	6
5.0	Power Line Conducted Emission Test.	7
5.1	Schematics of the Test.	7
5.2	Test Method and Test Procedure.	7
5.3	Configuration of the EUT	7
5.4	EUT Operating Condition.	8
5.5	Conducted Emission Limit.	8
5.6	Test Result.	8
6.0	Radiated Emission test.	11
6.1	Test Method and Test Procedure.	11
6.2	Configuration of the EUT	11
6.3	EUT Operation Condition.	11
6.4	Radiated Emission Limit.	12
6.5	Test Result.	13
7.0	Band Edge.	26
7.1	Test Method and Test Procedure.	26
7.2	Radiated Test Setup.	26
7.3	Configuration of the EUT.	26
7.4	EUT Operating Condition.	26
7.5	Band Edge Limit.	26
7.6	Band Edge Test Result.	27
8.0	Antenna Requirement.	29
9.0	20dB bandwidth measurement	30
10.0	FCC ID Label	33
11.0	Photo of Test Setup and EUT View	34

Date: 2010-01-07



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Page 4 of 37

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-01

For 3m & 10 m OATS

## 1.2 Applicant Details

Applicant: Guangzhou Sunday Electronics Co., Ltd. Address: Guangzhou Sunday Electronics Co., Ltd.

Telephone: NO.236-238, Minsheng Road, Lanhe Town, Panyu District, Guangzhou, China

Fax: 020-8492 8933/8492 8938

## 1.3 Description of EUT

Product: Wireless Keyboard with Touchpad

Manufacturer: Guangzhou Sunday Electronics Co., Ltd.

Brand Name: SUNDAY
Model Number: S-KW425TG

Additional Model Name N/A
Additional Trade Name N/A

Rating: DC5.0V, By to PC

Modulation Type: GFSK

Operation Frequency 2404-2480MHz

Antenna Designation Printed antenna, which is built-in, designed as an indispensable part of the EUT.

## 1.4 Submitted Sample

1 Sample

#### 1.5 Test Duration

2009-12-08 to 2010-01-07

The report refers only to the sample tested and does not apply to the bulk.

Page 5 of 37

Report No: 0912081-02

Date: 2010-01-07



1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

2.0		Test Equi	pments		
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2009-12-05	2010-12-04
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2009-12-05	2010-12-04
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2009-12-05	2010-12-04
Ultra Broadband ANT	Schwarebeck	VULB9163	9163/340	2009.2.22	2010-02-21
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2009-03-30	2010-03-29
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2009-02-18	2010-02-17
Power meter	Anritsu	ML2487A	6K00003613	2009-02-18	2010-02-17
Power sensor	Anritsu	MA2491A	32263	2009-02-8	2010-02-17
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2009-02-18	2010-02-17
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2009-08-15	2010-08-14
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2009-07-02	2010-07-01

Page 6 of 37

Report No: 0912081-02

Date: 2010-01-07



#### 3.0 **Technical Details**

#### 3.1 **Summary of test results**


The EUT has been tested according to the	ne following speci	fications:	
Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	PASS	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	PASS	Complies

#### 3.2 **Test Standards**


FCC Part 15 Subpart C, Paragraph 15.249

#### 4.0 **EUT Modification**

No modification by Shenzhen Timeway Technology Consulting Co.,Ltd



## Schematics of the test




**EUT: Equipment Under Test** 

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 -2003.

Actual Working Voltage and Frequency: 120V~, 60Hz

Block diagram of Test setup

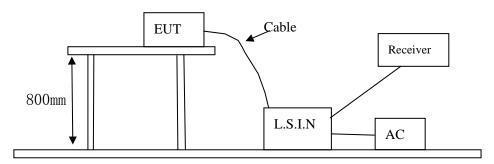

#### 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

#### **EUT** A.

Device	Manufacturer	Model	FCC ID
Wireless	Guangzhou Sunday Electronics Co., Ltd.	S-KW425G	XQLSD0912410
keyboard with			
Touchpad			

#### B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 8 of 37

Report No: 0912081-02

Date: 2010-01-07



# C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
				Data cable of 1.5m length unshielded
Monitor	BENQ	FP51G	FCC DOC	and 1.8m length AC Mains cable
Notebook	DELL	Vostro 1310	FCC DOC	
				Data cable of 1.5m length unshielded
Printer	ESPON	BOISB-027-00	FCC DOC	and 1.8m length AC Mains cable
Mouse	DELL		FCC DOC	Data cable of 1.5m length unshielded

## 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Eraguanay (MHz)	Class A Lir	nits (dB \mu V)	Class B Lim	nits (dB $\mu$ V)
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

## 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2010-01-07



**EUT Operating Environment** 

Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: Normal operation mode** 

**Equipment Level: Class B** 

**Results: Pass** 

Please refer to following diagram for individual

#### 80.0 dBuV



Frequency	Line	Reading(dBμV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.4713	Live	49.44	32.04	56.49	46.49
0.3803	Live	45.14	29.44	58.27	48.27
0.7720	Live	51.00	39.70	56.00	46.00
0.9231	Live	51.02	29.44	56.00	46.00
1.4134	Live	51.43	30.29	56.00	46.00
2.7176	Live	48.19	29.10	56.00	46.00

Date: 2010-01-07



# **EUT Operating Environment**

Humidity: 75%RH Temperature: 25°C Atmospheric Pressure: 101 KPa

**EUT set Condition: Normal operation mode** 

**Equipment Level: Class B** 

**Results: Pass** 

Please refer to following diagram for individual

# 80.0 dBuV



Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.3836	Neutral	48.05	36.25	58.20	48.20
0.4696	Neutral	52.14	40.24	56.52	46.52
0.7995	Neutral	46.79	33.49	56.00	46.00
0.8653	Neutral	46.76	33.16	56.00	46.00
1.3983	Neutral	48.89	42.33	56.00	46.00
1.5620	Neutral	52.56	38.67	56.00	46.00

Page 11 of 37

Report No: 0912081-02


Date: 2010-01-07



## **6** Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

# **Block diagram of Test setup**

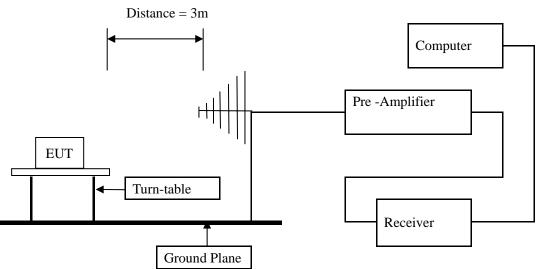

- 6.2 Configuration of The EUT

  Same as section 5.3 of this report
- 6.3 EUT Operating Condition
  Same as section 5.4 of this report.

Page 12 of 37

Report No: 0912081-02

Date: 2010-01-07



## 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

#### A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

	Fundamental Frequency	Field Strength of Fundamental (3m)			Field S	trength of Harmo	onics (3m)
	(MHz)	mV/m	dBuV/m		uV/m	dBu	V/m
Ī	2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

## B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK and AV detector.

Report No: 0912081-02 Page 13 of 37

Date: 2010-01-07



#### 6.5 Test result

#### $\mathbf{A}$ **Fundamental & Harmonics Radiated Emission Data**

Product:	Wireless Keyboard with Touchpad	Test Mode:	Low Channel
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	5.0VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
2404	66.5 (PK)	Н	114/94	-27.5
2404	61.1 (PK)	V	V 114/94	
4808		H/V	74/54	
7212		H/V	H/V 74/54	
9616		H/V 74/54		
12020		H/V 74/54		
14424		H/V 74/54		
16828		H/V	74/54	
19232		H/V	H/V 74/54	
21636		H/V	H/V 74/54	
24040		H/V	74/54	

Report No: 0912081-02 Page 14 of 37

Date: 2010-01-07

Product: Wireless Keyboard with Test Mode: Middle Channel Touchpad

Test Item: Fundamental Radiated Emission Data Temperature: Test Voltage: 5.0VDC Humidity: 56% Test Result: Pass

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin	
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)	
2442	63.1(PK)	Н	114/94	-30.9	
2442	59.6(PK)	V	114/94	-34.4	
4884		Н	74/54		
7326		V	74/54		
9769		H/V	74/54		
12210		H/V 74/54			
14652	H/V 74/54		74/54		
17094	17094		74/54		
19536	19536		74/54		
21978		H/V	74/54		
24420		H/V	74/54		

Page 15 of 37

Report No: 0912081-02 Date: 2010-01-07

Product:	Wireless Keyboard with Touchpad	Test Mode:	High Channel
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	5.0VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Emission PK/AV Horiz /		Margin	
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)	
2480	64.2(PK)	Н	114/94	-29.8	
2480	60.8(PK)	V	114/94	-33.2	
4960		H/V	74/54		
7440		H/V	74/54		
9920		H/V	74/54		
12400		H/V 74/54			
14880	O H/V 74/54		74/54		
17360		H/V	74/54		
19840		H/V	74/54		
22320		H/V	74/54		
24800		H/V	74/54		

Note: (1) PK= Peak, AV= Average


- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
- (3)Margin=Emission-Limits
- (4)According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) The measured PK value less than the AV limit.

Date: 2010-01-07



Please refer to the following test plots for details

Low Channel: Horizontal

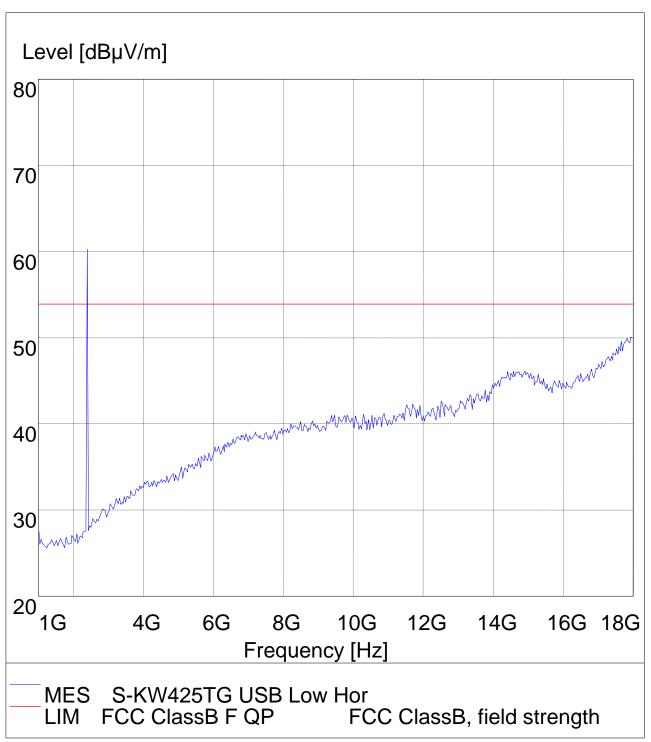

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 17 of 37

Report No: 0912081-02

Date: 2010-01-07



**Low Channel: Vertical** 

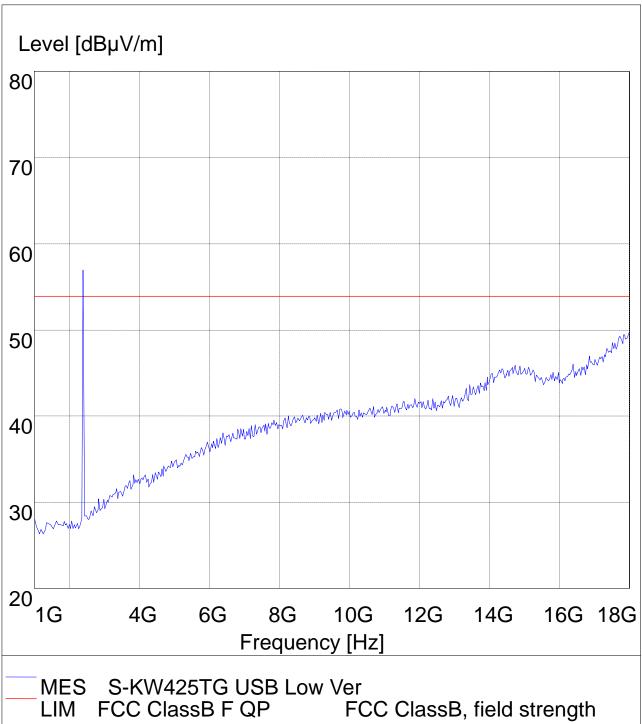


Page 18 of 37

Report No: 0912081-02

Date: 2010-01-07



**Middle Channel: Horizontal** 

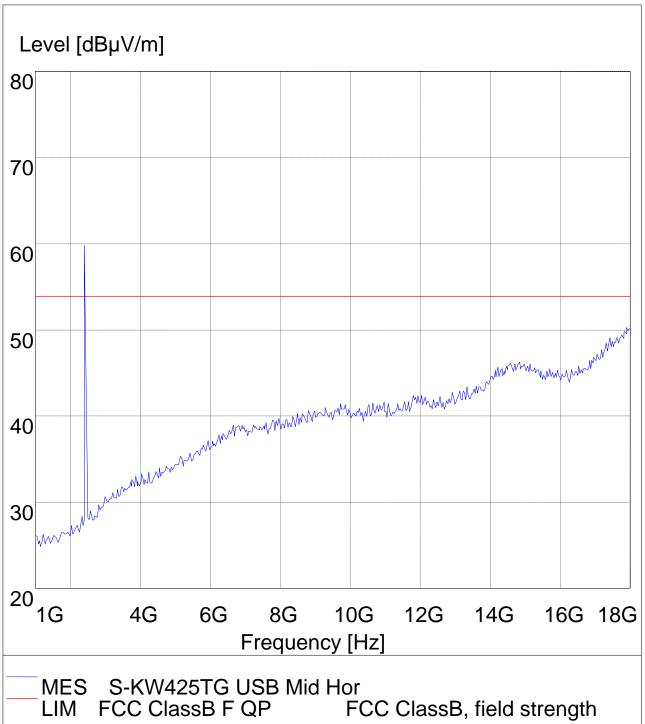

The report refers only to the sample tested and does not apply to the bulk.


Page 19 of 37

Report No: 0912081-02

Date: 2010-01-07



**Middle Channel :: Vertical** 

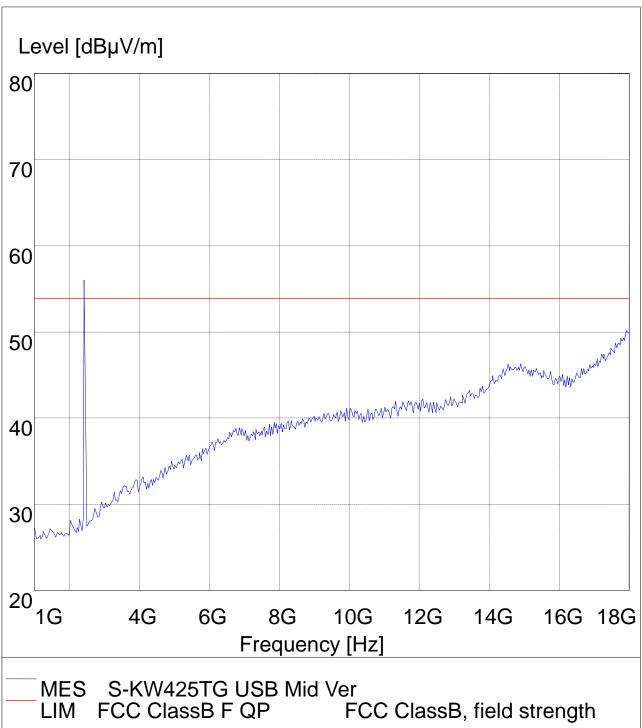

The report refers only to the sample tested and does not apply to the bulk.


Page 20 of 37

Report No: 0912081-02

Date: 2010-01-07



**High Channel: Horizontal** 

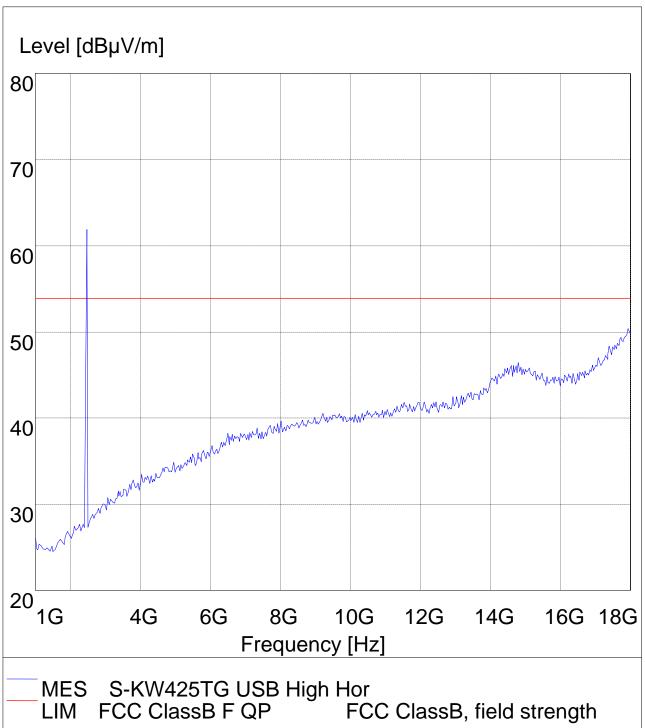


Page 21 of 37

Report No: 0912081-02

Date: 2010-01-07



**High Channel: Vertical** 

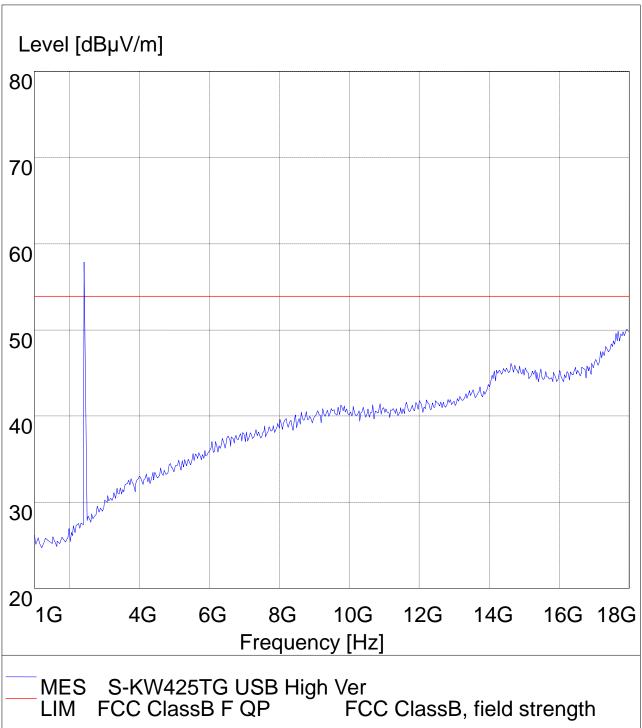


Page 22 of 37

Report No: 0912081-02

Date: 2010-01-07



18-25G High Channel

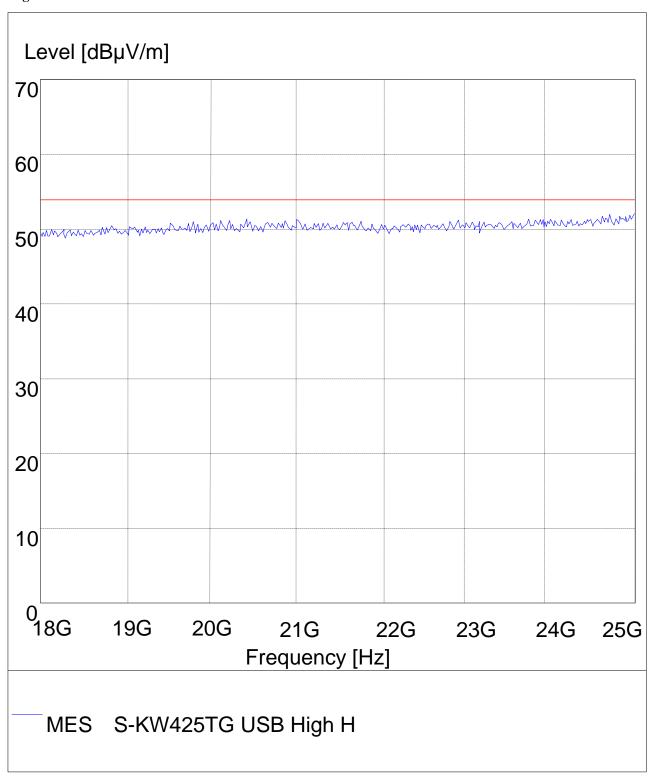

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 23 of 37

Report No: 0912081-02

Date: 2010-01-07



18-25G High Channel

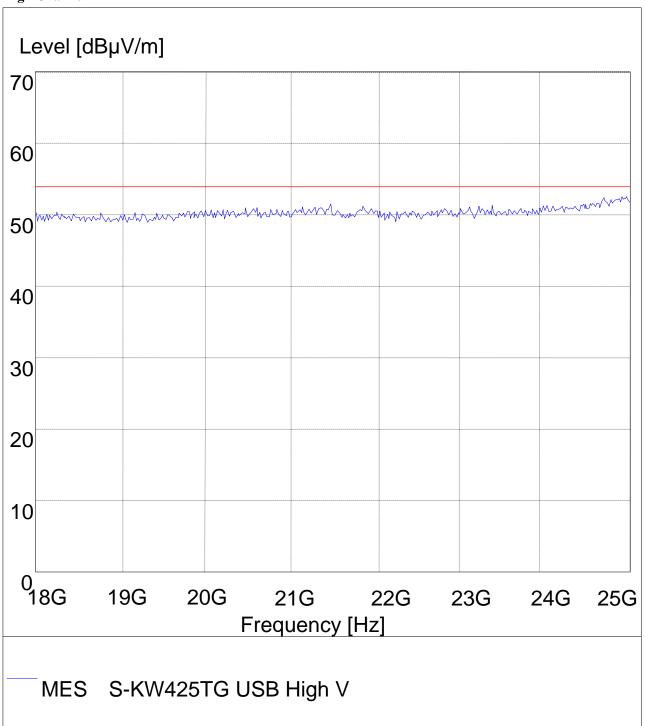

The report refers only to the sample tested and does not apply to the bulk.

Date: 2010-01-07




# B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep transmitting Mode: Low Channel

**Results:** Pass

Please refer to following diagram for individual

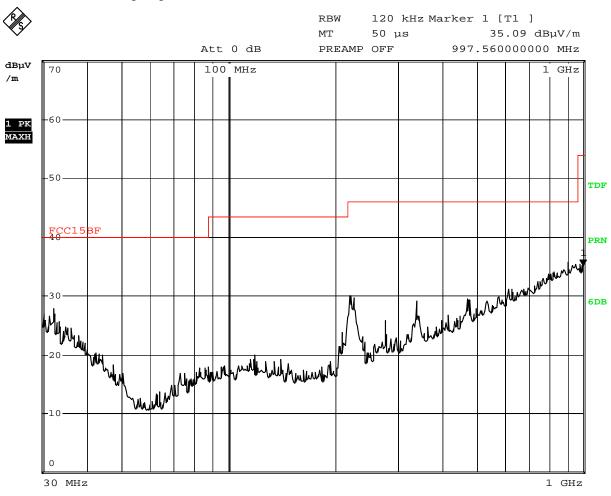

Date: 28.DEC.2009 19:48:51

Frequency (MHz)	Level@3m (dB $\mu$ V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)		
		Н			

Date: 2010-01-07




# Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep transmitting Mode: Low Channel

**Results:** Pass

Please refer to following diagram for individual

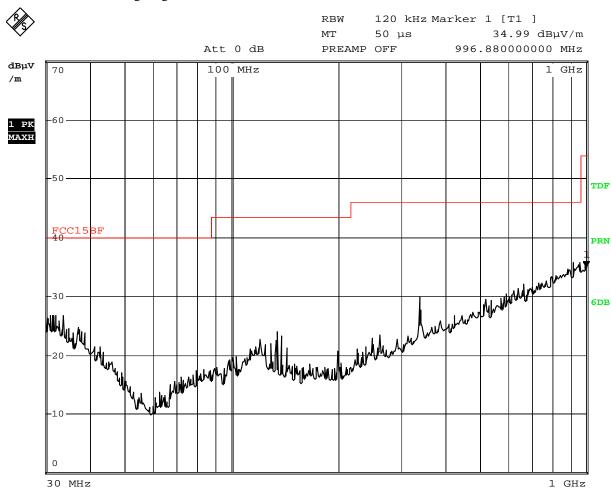

Date: 28.DEC.2009 19:49:48

Frequency (MHz)	Level@3m (dB $\mu$ V/m)	Antenna Polarity	Limit@3m (dB $\mu$ V/m)		
		V			

Date: 2010-01-07




# 7. Band Edge

#### 7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) Set Spectrum as RBW=VBW=100kHz and Peak detector used
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

## 7. 2 Radiated Test Setup

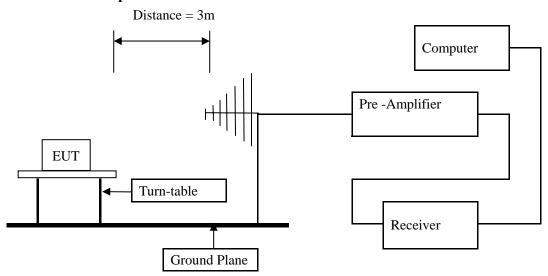

For the actual test configuration, please refer to the related items – Photos of Testing

## 7.3 Configuration of The EUT

Same as section 5.3 of this report

## 7.4 EUT Operating Condition

Same as section 5.4 of this report.

## 7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Page 27 of 37

Report No: 0912081-02

Date: 2010-01-07



#### 7.6 Test Result

Product:		Keyboard with achpad	Test	Test Mode:		Low Channel		
Mode		Transmitting	Test	Voltage	DC5V			
Temperature	24 deg. C Pass		Hu	Humidity Detector		56% RH PK		
Test Result:			De					
2390MHz	PK (dBµV/m)	Less than 40	T	Limit	$74(dB\mu V/m)$		μV/m)	
237011112	$AV(dB\mu V/m)$			Limit		$54(dB\mu V/m)$		
Ref Lvl	Marker	$62.31~\mathrm{dB}\mu\mathrm{V}$	RBW VBW	1 MH 1 MH	Z	Att	0 dB	
97 dB $\mu$ V	2	.40412826 GHz	SWT	5 ms	Ur	nit	$\mathrm{dB}\mu\mathrm{V}$	/
97				<b>▼</b> 1 [	T1]	62.	.31 dBμV	F
				∇2 [	T1]	1	.09 dBµV .000 GHz	
80						2.33000	0000 0112	
	$\beta\mu$ V							ł
70						1		١
1MAX 60						Ā		11
50								
30								
40					2			
30	more maker	whompsome when we want	M-renth	Monday		Mul 4	anthone and	
20								l
10								
10								
Start 2.3	1 GHz	11 M	Hz/			Stop 2	2.42 GHz	
ate: 26.	DEC.2009 18:	44:38						

Note: Field Strength in restrict band measured in conventional manner

Page 28 of 37

Report No: 0912081-02 Date: 2010-01-07

Product: Wireless Keyboard with			with	Tes	t Mode:		High Channel					
				Tou	chpad							
Mode			Kee	Keeping Transmitting				Test Voltage		DC5V		
Tempe	erature			24 c	deg. C,		Humid	nidity 56% RH			RH	
Tes	st Result:			F	Pass		De	etector		Pl	K	
246	2483.5MHz		PK (dBµV/m) Less than 40			,	- Limit		74(dBμV/m)			
248			AV(dBμV/m)					LIIIII		54(dBμV/m)		
			Mark	ker 1	[T1]		RBW	1 MI	tz RI	- Att	0 dB	
	Ref Lvl					$3 \text{ dB}\mu\text{V}$	VBW	1 MI				
	97 dB $\mu$	V		2.	479899	80 GHz	SWT	5 m:	s Ur	nit	dB $\mu$ V	,
97								<b>▼</b> 1	[T1]	60.	43 dBμV	
90								1	LIII	2 47909	43 UDAV	Α
								∇2	[T1]	33.	43 dBμV	
80										2.48350	000 GHz	
	<b>—</b> D1 74	dBµ\	/									
70												
	1MAX 1											1MA
60	$\overline{\Lambda}$											
	/\											
50												
40										1.1	. 1 4 4	
	\	2 74.4.1	nengulul		at at					LANGE LANGE	M-vacore.	
30	~~~~	(MILC)	Mary Market	WWW	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	Mymy	W WWW	-4/1-11/WA				
20												
20												
10												
-3												
	Start 2	.47	GHz			13 1	1Hz/			Stop	2.6 GHz	-
Date	: 7	26.DI	EC.2009	18:	32:58							
Date. 20.DLC.2005 10.32.30												

## Note: Field Strength in restrict band measured in conventional manner

Report No: 0912081-02 Page 29 of 37

Date: 2010-01-07



## 8.0 Antenna Requirement

## **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.


This product has a PCB permanent antenna, fulfill the requirement of this section.

Test Result: Pass

Page 30 of 37

Report No: 0912081-02


Date: 2010-01-07

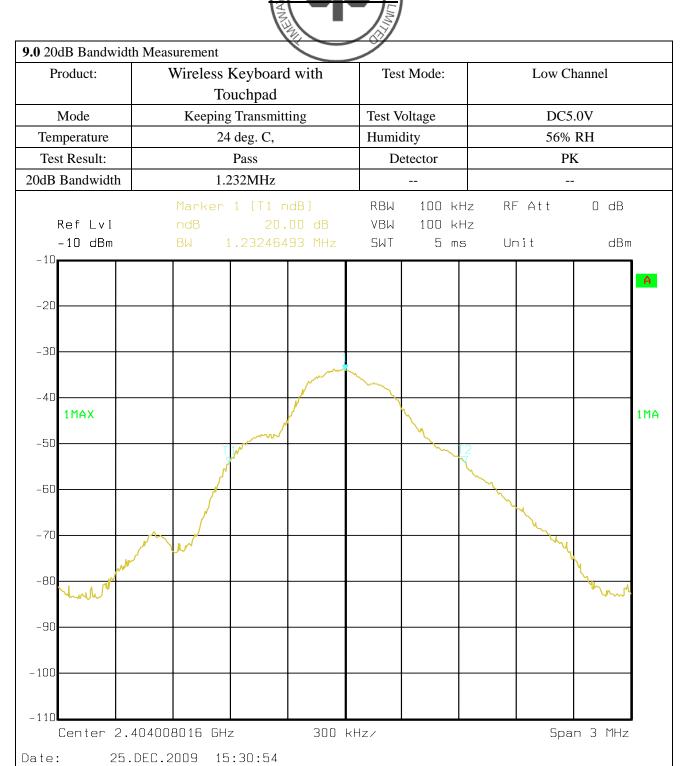

Page 31 of 37

Report No: 0912081-02

Date: 2010-01-07

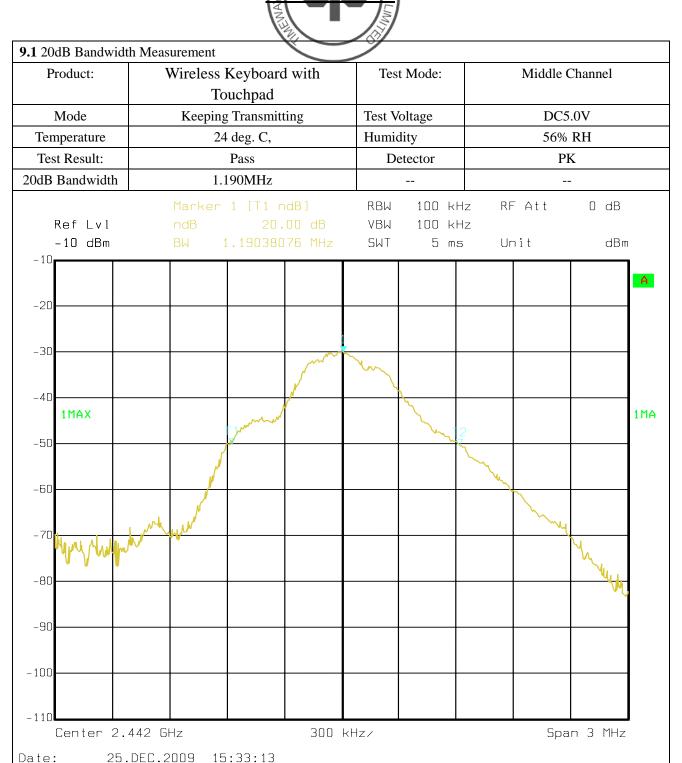


Page 32 of 37

Span 3 MHz

Report No: 0912081-02

Date: 2010-01-07

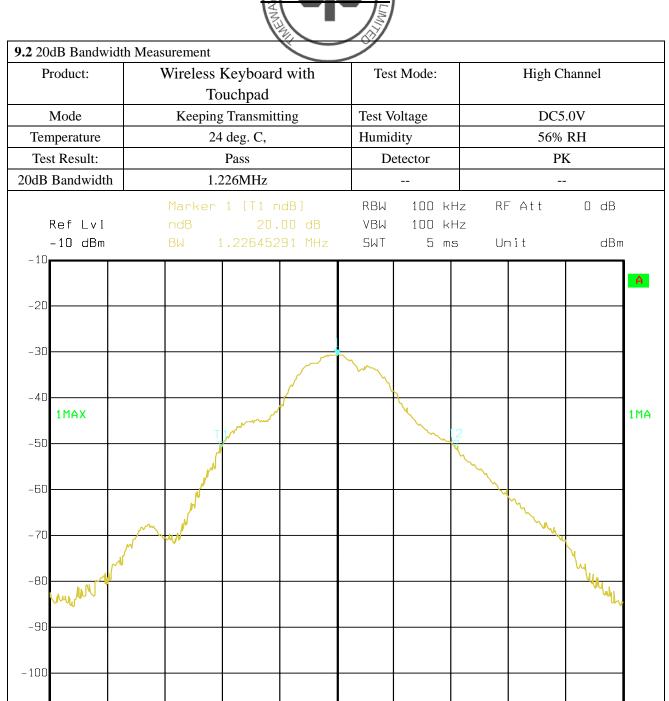

The report refers only to the sample tested and does not apply to the bulk.

15:34:00

-110

Date:

Center 2.48 GHz

25.DEC.2009

300 kHz/

Page 33 of 37

Report No: 0912081-02

Date: 2010-01-07




#### 10.0

# **FCC ID: XQLSD0912410**

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### **Mark Location:**

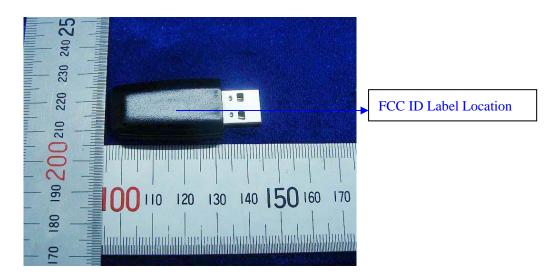


Date: 2010-01-07



#### 11.0 Photo of testing

#### 11.1 Conducted test View--

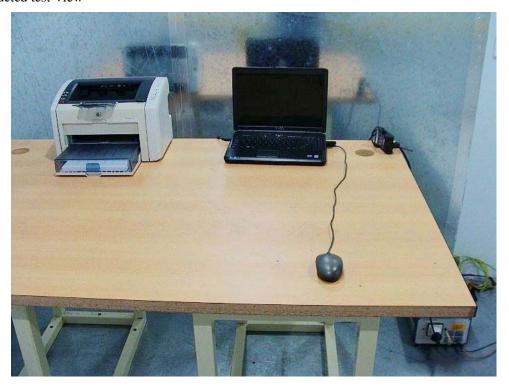

#### 11.2 Radiated emission test view



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Date: 2010-01-07



#### 11.3 Photo for the EUT



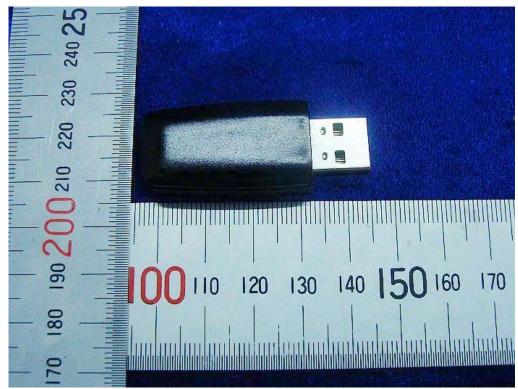


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2010-01-07



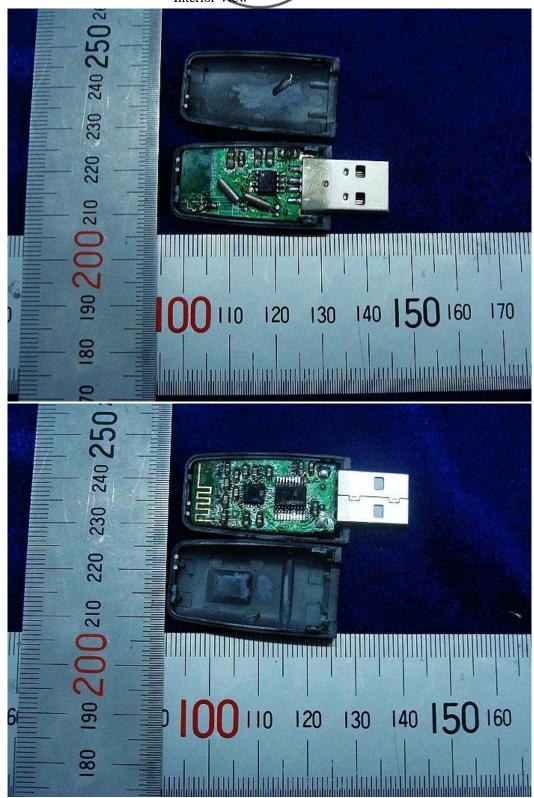

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2010-01-07



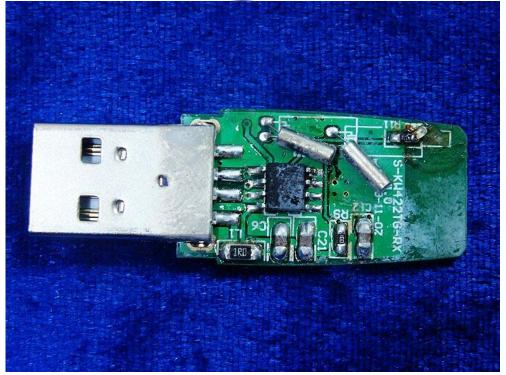

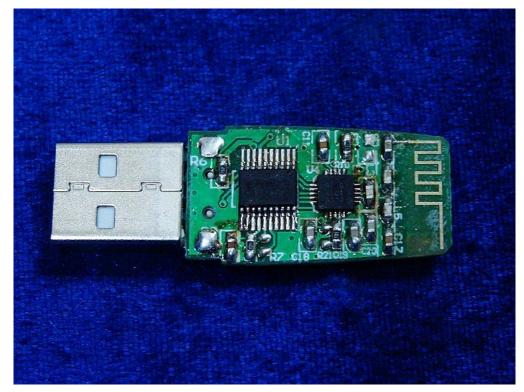

# -- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.