

# **FCC Test Report**

FCC ID : XU8TEW822DRE

Equipment : AC1200 WiFi Range Extender

Model No. : TEW-822DRE

Brand Name : TRENDnet

Applicant : TRENDnet, Inc.

Address : 20675 Manhattan Place, Torrance, CA 90501,

**USA** 

Standard : 47 CFR FCC Part 15.247

Received Date : Feb. 04, 2015

Tested Date : Feb. 26 ~ Mar. 11, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager

Iac MRA



Report No.: FR520406AC Report Version: Rev. 01 Page : 1 of 63



## **Table of Contents**

| 1   | GENERAL DESCRIPTION                                | 5  |
|-----|--|----|
| 1.1 | Information  | 5  |
| 1.2 | Local Support Equipment List                       |    |
| 1.3 | Test Setup Chart                                   |    |
| 1.4 | The Equipment List                                 | 9  |
| 1.5 | Test Standards                                     | 10 |
| 1.6 | Measurement Uncertainty                            | 10 |
| 2   | TEST CONFIGURATION                                 | 11 |
| 2.1 | Testing Condition                                  | 11 |
| 2.2 | The Worst Test Modes and Channel Details           | 11 |
| 3   | TRANSMITTER TEST RESULTS                           | 12 |
| 3.1 | Conducted Emissions                                | 12 |
| 3.2 | 6dB and Occupied Bandwidth                         | 15 |
| 3.3 | RF Output Power                                    |    |
| 3.4 | Power Spectral Density                             | 20 |
| 3.5 | Unwanted Emissions into Restricted Frequency Bands | 22 |
| 3.6 | Emissions in Non-Restricted Frequency Bands        | 50 |
| 4   | TEST LABORATORY INFORMATION                        | 63 |



## **Release Record**

| Report No. | Version | Description   | Issued Date   |
|------------|---------|---------------|---------------|
| FR520406AC | Rev. 01 | Initial issue | Jun. 04, 2015 |

Report No.: FR520406AC Page: 3 of 63



# **Summary of Test Results**

| FCC Rules    | Test Items             | Measured  | Result |
|--------------|------------------------|---|--------|
| 15.207       | Conducted Emissions    | [dBuV]: 0.464MHz<br>43.11 (Margin -3.52dB) - AV           | Pass   |
| 15.247(d)    | Dedicted Emissions     | [dBuV/m at 3m]: 2390.00MHz<br>72.99 (Margin -1.01dB) – PK | Door   |
| 15.209       | Radiated Emissions     | [dBuV/m at 3m]: 2483.50MHz<br>72.99 (Margin -1.01dB) - PK | Pass   |
| 15.247(b)(3) | Maximum Output Power   | Max Power [dBm]: 29.65                                    | Pass   |
| 15.247(a)(2) | 6dB Bandwidth          | Meet the requirement of limit                             | Pass   |
| 15.247(e)    | Power Spectral Density | Meet the requirement of limit                             | Pass   |
| 15.203       | Antenna Requirement    | Meet the requirement of limit                             | Pass   |

Report No.: FR520406AC Page: 4 of 63



## 1 General Description

## 1.1 Information

## 1.1.1 Specification of the Equipment under Test (EUT)

| RF General Information   |                     |                 |                   |                                       |                    |  |  |  |
|--------------------------|---------------------|-----------------|-------------------|---------------------------------------|--------------------|--|--|--|
| Frequency<br>Range (MHz) | IEEE Std.<br>802.11 | Ch. Freq. (MHz) | Channel<br>Number | Transmit<br>Chains (N <sub>TX</sub> ) | Data Rate /<br>MCS |  |  |  |
| 2400-2483.5              | b                   | 2412-2462       | 1-11 [11]         | 2                                     | 1-11 Mbps          |  |  |  |
| 2400-2483.5              | g                   | 2412-2462       | 1-11 [11]         | 2                                     | 6-54 Mbps          |  |  |  |
| 2400-2483.5              | n (HT20)            | 2412-2462       | 1-11 [11]         | 2                                     | MCS 0-15           |  |  |  |
| 2400-2483.5              | n (HT40)            | 2422-2452       | 3-9 [7]           | 2                                     | MCS 0-15           |  |  |  |

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.

Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

#### 1.1.2 Antenna Details

| Ant No   | Type   |           | Operating Frequencies (MHz) / Antenna Gain (dBi) |           |           |  |
|----------|--------|-----------|--|-----------|-----------|--|
| Ant. No. | Туре   | Connector | 2400~2483.5                                      | 5150~5250 | 5725~5850 |  |
| 1        | Dipole | UFL       | 2  | 3         | 3         |  |

## 1.1.3 Power Supply Type of Equipment under Test (EUT)

| Power Supply Type | 100-240Vac, 50-60Hz, 0.5A |
|-------------------|---------------------------|
|-------------------|---------------------------|

### 1.1.4 Accessories

N/A

Report No.: FR520406AC Page: 5 of 63



## 1.1.5 Channel List

| Frequenc | y band (MHz)           | 2400~2483.5  |                |  |
|----------|------------------------|--------------|----------------|--|
| 802.11 b | / g / n HT20           | 802.11n HT40 |                |  |
| Channel  | Channel Frequency(MHz) |              | Frequency(MHz) |  |
| 1        | 2412                   | 3            | 2422           |  |
| 2        | 2417                   | 4            | 2427           |  |
| 3        | 2422                   | 5            | 2432           |  |
| 4        | 2427                   | 6            | 2437           |  |
| 5        | 2432                   | 7            | 2442           |  |
| 6        | 2437                   | 8            | 2447           |  |
| 7        | 2442                   | 9            | 2452           |  |
| 8        | 2447                   |              |                |  |
| 9        | 2452                   |              |                |  |
| 10       | 2457                   |              |                |  |
| 11       | 2462                   |              |                |  |

## 1.1.6 Test Tool and Duty Cycle

| Test Tool                  | MP-Tool, version RTL819x 3.0 |                |                  |  |  |
|----------------------------|------------------------------|----------------|------------------|--|--|
|                            | Mode                         | Duty cycle (%) | Duty factor (dB) |  |  |
|                            | 11b                          | 98.99%         | 0.04             |  |  |
| Duty Cycle and Duty Factor | 11g                          | 89.04%         | 0.50             |  |  |
|                            | HT20                         | 90.15%         | 0.45             |  |  |
|                            | HT40                         | 85.07%         | 0.70             |  |  |

Report No.: FR520406AC Page: 6 of 63



## 1.1.7 Power Setting

| Modulation Mode | Test Frequency (MHz) | Power Set |
|-----------------|----------------------|-----------|
| 11b             | 2412                 | 28/30     |
| 11b             | 2437                 | 29/31     |
| 11b             | 2462                 | 28/30     |
| 11g             | 2412                 | 45/47     |
| 11g             | 2437                 | 52/54     |
| 11g             | 2462                 | 42/44     |
| HT20            | 2412                 | 43/45     |
| HT20            | 2437                 | 52/54     |
| HT20            | 2462                 | 40/42     |
| HT40            | 2422                 | 36/38     |
| HT40            | 2437                 | 44/46     |
| HT40            | 2452                 | 31/33     |

Report No.: FR520406AC


Page: 7 of 63



## 1.2 Local Support Equipment List

|     | Support Equipment List                                    |      |                |     |  |  |  |  |
|-----|---|------|----------------|-----|--|--|--|--|
| No. | No. Equipment Brand Model FCC ID Signal cable / Length (n |      |                |     |  |  |  |  |
| 1   | Notebook  | DELL | Latitude E5420 | DoC | RJ45, 10m non-shielded cable w/o core. |  |  |  |

## 1.3 Test Setup Chart

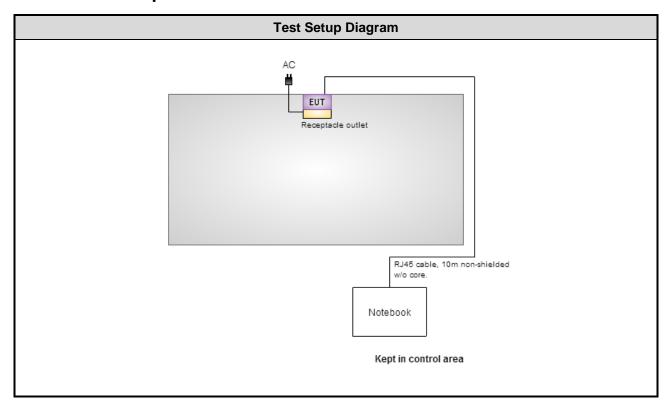

Report No.: FR520406AC Page: 8 of 63



## 1.4 The Equipment List

| Test Item                         | Conducted Emission   |   |               |               |               |  |  |  |
|-----------------------------------|--|---|---------------|---------------|---------------|--|--|--|
| Test Site                         | Conduction room 1 / (  | Conduction room 1 / (CO01-WS)                                       |               |               |               |  |  |  |
| Instrument                        | Manufacturer Model No. Serial No. Calibration Date Calibration Until |   |               |               |               |  |  |  |
| EMC Receiver                      | R&S  | ESCS 30   | 100169        | Oct. 17, 2014 | Oct. 16, 2015 |  |  |  |
| LISN                              | SCHWARZBECK  | Schwarzbeck 8127  | 8127-667      | Nov. 17, 2014 | Nov. 16, 2015 |  |  |  |
| LISN<br>(Support Unit)            | SCHWARZBECK  | Schwarzbeck 8127  | 8127-666      | Nov. 26, 2014 | Nov. 25, 2015 |  |  |  |
| RF Cable-CON                      | Woken  | CFD200-NL   | CFD200-NL-001 | Dec. 31, 2014 | Dec. 30, 2015 |  |  |  |
| 50 ohm terminal<br>(Support Unit) | NA   | 50  | 04            | Apr. 18, 2014 | Apr. 17, 2015 |  |  |  |
| Measurement<br>Software           | AUDIX  | e3  | 6.120210k     | NA            | NA            |  |  |  |
| Note: Calibration Inte            | rval of instruments liste  | Note: Calibration Interval of instruments listed above is one year. |               |               |               |  |  |  |

| Test Item               | Radiated Emission  | Radiated Emission    |                  |               |   |  |  |  |  |  |  |
|-------------------------|--|----------------------|------------------|---------------|---|--|--|--|--|--|--|
| Test Site               | 966 chamber 2 / (03CH02-WS)  |                      |                  |               |   |  |  |  |  |  |  |
| Instrument              | Manufacturer Model No. Serial No. Calibration Date Calibration Until |                      |                  |               |   |  |  |  |  |  |  |
| Spectrum Analyzer       | R&S  | FSV40                | 101499           | Dec. 31, 2014 | Dec. 30, 2015   |  |  |  |  |  |  |
| Receiver                | R&S  | ESR3                 | 101657           | Jan. 15, 2015 | Jan. 14, 2016   |  |  |  |  |  |  |
| Bilog Antenna           | SCHWARZBECK  | VULB9168             | VULB9168-524     | Oct. 16, 2014 | Oct. 15, 2015   |  |  |  |  |  |  |
| Horn Antenna<br>1G-18G  | SCHWARZBECK  | BBHA 9120 D          | BBHA 9120 D 1095 | Oct. 14, 2014 | Oct. 13, 2015   |  |  |  |  |  |  |
| Horn Antenna<br>18G-40G | SCHWARZBECK  | BBHA 9170            | BBHA 9170517     | Nov. 10, 2014 | Nov. 09, 2015   |  |  |  |  |  |  |
| Loop Antenna            | R&S  | HFH2-Z2              | 11900            | Nov. 10, 2014 | Nov. 09, 2015   |  |  |  |  |  |  |
| Preamplifier            | Burgeon  | BPA-530              | 100218           | Nov. 10, 2014 | Nov. 09, 2015   |  |  |  |  |  |  |
| Preamplifier            | Agilent  | 83017A               | MY39501309       | Sep. 29, 2014 | Sep. 28, 2015   |  |  |  |  |  |  |
| Preamplifier            | EMC  | EMC184045B           | 980192           | Aug. 26, 2014 | Aug. 25, 2015   |  |  |  |  |  |  |
| RF Cable                | HUBER+SUHNER   | SUCOFLEX104          | MY16140/4        | Dec. 16, 2014 | Dec. 15, 2015   |  |  |  |  |  |  |
| RF Cable                | HUBER+SUHNER   | SUCOFLEX104          | MY16018/4        | Dec. 16, 2014 | Dec. 15, 2015   |  |  |  |  |  |  |
| RF Cable                | HUBER+SUHNER   | SUCOFLEX104          | MY16015/4        | Dec. 16, 2014 | Dec. 15, 2015   |  |  |  |  |  |  |
| LF cable 3M             | Woken  | CFD400NL-LW          | CFD400NL-003     | Dec. 16, 2014 | Dec. 15, 2015   |  |  |  |  |  |  |
| LF cable 10M            | Woken  | CFD400NL-LW          | CFD400NL-004     | Dec. 16, 2014 | Dec. 15, 2015   |  |  |  |  |  |  |
| Measurement<br>Software | AUDIX  | e3                   | 6.120210g        | NA            | NA  |  |  |  |  |  |  |
| Note: Calibration Inter | rval of instruments listed   | d above is one year. | _                | _             | Note: Calibration Interval of instruments listed above is one year. |  |  |  |  |  |  |

| Test Item               | RF Conducted |           |            |                  |                   |
|-------------------------|--------------|-----------|------------|------------------|-------------------|
| Test Site               | (TH01-WS)    |           |            |                  |                   |
| Instrument              | Manufacturer | Model No. | Serial No. | Calibration Date | Calibration Until |
| Spectrum Analyzer       | R&S          | FSV40     | 101063     | Feb. 03, 2015    | Feb. 02, 2016     |
| Power Meter             | Anritsu      | ML2495A   | 1241002    | Sep. 29, 2014    | Sep. 28, 2015     |
| Power Sensor            | Anritsu      | MA2411B   | 1207366    | Sep. 29, 2014    | Sep. 28, 2015     |
| Measurement<br>Software | Sporton      | Sporton_1 | 1.3.30     | NA               | NA                |

Report No.: FR520406AC Page: 9 of 63



#### 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2009

FCC KDB 558074 D01 DTS Meas Guidance v03r03

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

Note: FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 02, 2014.

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

| Measurement Uncertainty  |             |  |  |  |  |  |
|--------------------------|-------------|--|--|--|--|--|
| Parameters               | Uncertainty |  |  |  |  |  |
| Bandwidth                | ±34.134 Hz  |  |  |  |  |  |
| Conducted power          | ±0.808 dB   |  |  |  |  |  |
| Power density            | ±0.463 dB   |  |  |  |  |  |
| Conducted emission       | ±2.670 dB   |  |  |  |  |  |
| AC conducted emission    | ±2.92 dB    |  |  |  |  |  |
| Radiated emission ≤ 1GHz | ±3.62 dB    |  |  |  |  |  |
| Radiated emission > 1GHz | ±5.60 dB    |  |  |  |  |  |

Report No.: FR520406AC Page: 10 of 63



## 2 Test Configuration

## 2.1 Testing Condition

| Test Item          | Test Site | Ambient Condition | Tested By  |
|--------------------|-----------|-------------------|------------|
| AC Conduction      | CO01-WS   | 18°C / 78%        | Peter Lin  |
| Radiated Emissions | 03CH02-WS | 22-25°C / 65-68%  | Aska Huang |
| RF Conducted       | TH01-WS   | 20°C / 65%        | Felix Sung |

FCC site registration No.: 657002IC site registration No.: 10807A-2

## 2.2 The Worst Test Modes and Channel Details

| Test item                | Modulation<br>Mode | Test Frequency<br>(MHz) | Data Rate<br>(Mbps) / MCS | Test<br>Configuration |
|--------------------------|--------------------|-------------------------|---------------------------|-----------------------|
| Conducted Emissions      | 11g                | 2437                    | 6 Mbps                    |                       |
| Radiated Emissions ≤1GHz | 11g                | 2437                    | 6 Mbps                    |                       |
| Radiated Emissions >1GHz | 11b                | 2412 / 2437 / 2462      | 1 Mbps                    |                       |
| Maximum Output Power     | 11g                | 2412 / 2437 / 2462      | 6 Mbps                    |                       |
| 6dB bandwidth            | HT20               | 2412 / 2437 / 2462      | MCS 0                     |                       |
| Power spectral density   | HT40               | 2422 / 2437 / 2452      | MCS 0                     |                       |

**NOTE:** The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement -X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.

Report No.: FR520406AC Page: 11 of 63



### 3 Transmitter Test Results

#### 3.1 Conducted Emissions


#### 3.1.1 Limit of Conducted Emissions

| Conducted Emissions Limit                                |           |           |  |  |  |  |  |
|--|-----------|-----------|--|--|--|--|--|
| Frequency Emission (MHz) Quasi-Peak Average              |           |           |  |  |  |  |  |
| 0.15-0.5   | 66 - 56 * | 56 - 46 * |  |  |  |  |  |
| 0.5-5  | 56        | 46        |  |  |  |  |  |
| 5-30 60 50   |           |           |  |  |  |  |  |
| Note 1: * Decreases with the logarithm of the frequency. |           |           |  |  |  |  |  |

#### 3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup

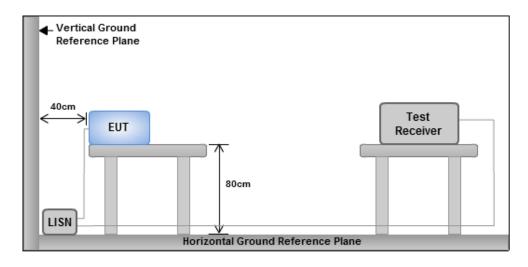


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR520406AC Page: 12 of 63




#### **Test Result of Conducted Emissions** 3.1.4

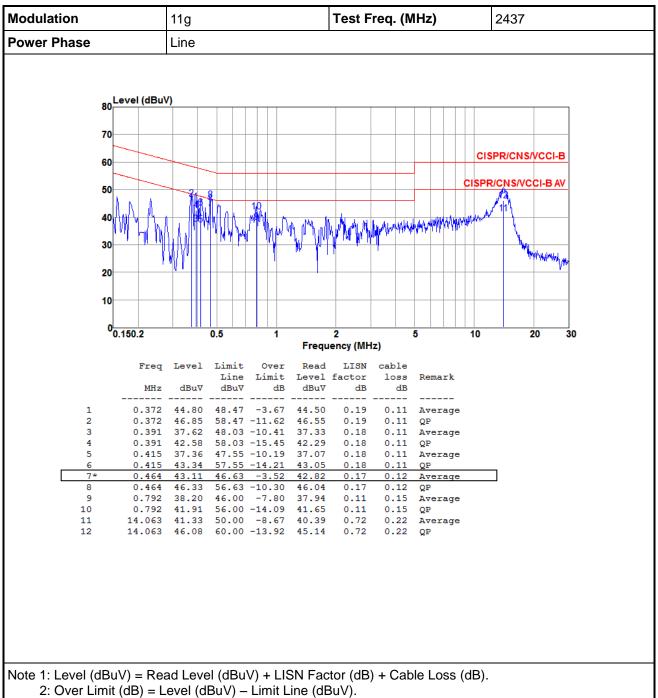

Report No.: FR520406AC Page: 13 of 63



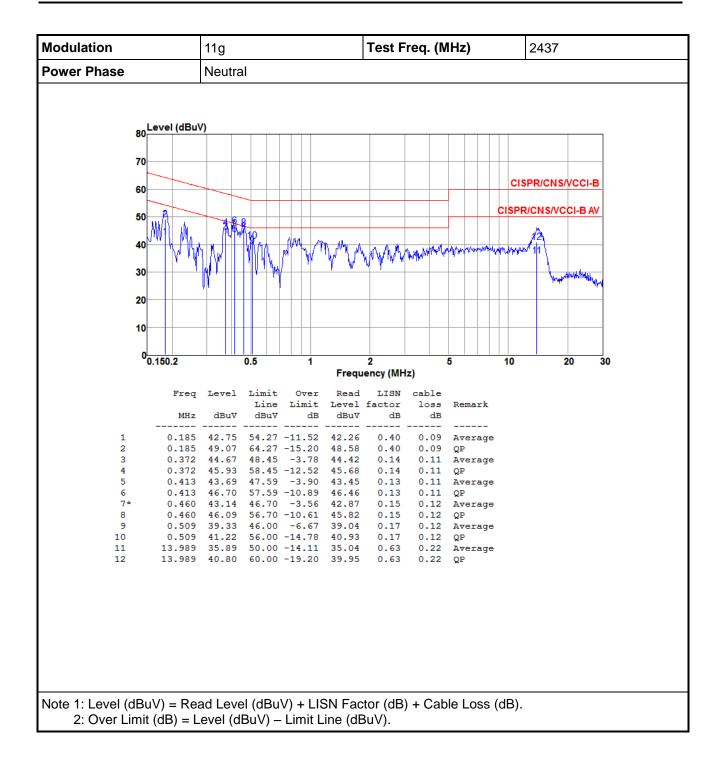

Report No.: FR520406AC Page: 14 of 63



## 3.2 6dB and Occupied Bandwidth


#### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

#### 3.2.2 Test Procedures

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### 3.2.3 Test Setup




Report No.: FR520406AC Page: 15 of 63



## 3.2.4 Test Result of 6dB and Occupied Bandwidth


| Modulation | N               | Erog (MUz)  |         |         | Limit (kUz) |         |             |
|------------|-----------------|-------------|---------|---------|-------------|---------|-------------|
| Mode       | N <sub>TX</sub> | Freq. (MHz) | Chain 0 | Chain 1 | Chain 2     | Chain 3 | Limit (kHz) |
| 11b        | 2               | 2412        | 9.57    | 10.03   |             |         | 500         |
| 11b        | 2               | 2437        | 9.57    | 9.57    |             |         | 500         |
| 11b        | 2               | 2462        | 9.51    | 9.97    |             |         | 500         |
| 11g        | 2               | 2412        | 16.35   | 16.35   |             |         | 500         |
| 11g        | 2               | 2437        | 16.35   | 16.35   |             |         | 500         |
| 11g        | 2               | 2462        | 16.35   | 16.35   |             |         | 500         |
| HT20       | 2               | 2412        | 17.62   | 17.57   |             |         | 500         |
| HT20       | 2               | 2437        | 17.57   | 17.62   |             |         | 500         |
| HT20       | 2               | 2462        | 17.62   | 17.57   |             |         | 500         |
| HT40       | 2               | 2422        | 35.48   | 35.48   |             |         | 500         |
| HT40       | 2               | 2437        | 35.59   | 35.36   |             |         | 500         |
| HT40       | 2               | 2452        | 35.48   | 35.48   |             |         | 500         |

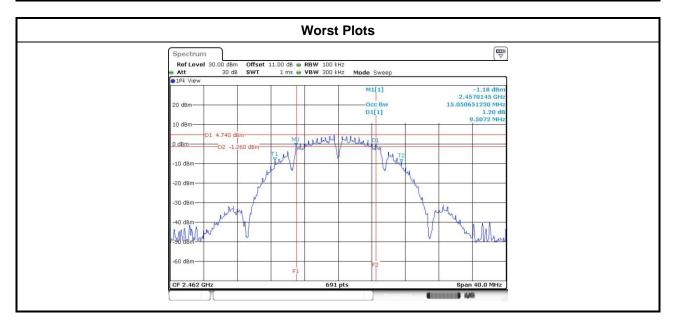

Report No.: FR520406AC Page: 16 of 63



| Modulation | N               | Freq. | 99% Occupied Bandwidth (MHz) |         |         |         |
|------------|-----------------|-------|------------------------------|---------|---------|---------|
| Mode       | N <sub>TX</sub> | (MHz) | Chain 0                      | Chain 1 | Chain 2 | Chain 3 |
| 11b        | 2               | 2412  | 15.07                        | 15.08   |         |         |
| 11b        | 2               | 2437  | 15.11                        | 15.08   |         |         |
| 11b        | 2               | 2462  | 15.09                        | 15.12   |         |         |
| 11g        | 2               | 2412  | 16.93                        | 16.88   |         |         |
| 11g        | 2               | 2437  | 17.07                        | 17.62   |         |         |
| 11g        | 2               | 2462  | 16.94                        | 16.89   |         |         |
| HT20       | 2               | 2412  | 18.04                        | 18.03   |         |         |
| HT20       | 2               | 2437  | 18.15                        | 18.44   |         |         |
| HT20       | 2               | 2462  | 18.02                        | 18.03   |         |         |
| HT40       | 2               | 2422  | 36.30                        | 36.40   |         |         |
| HT40       | 2               | 2437  | 36.30                        | 36.42   |         |         |
| HT40       | 2               | 2452  | 36.32                        | 36.40   |         |         |

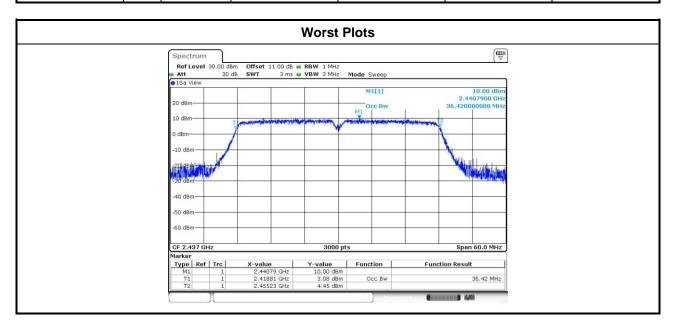

Report No.: FR520406AC Page: 17 of 63



## 3.3 RF Output Power

#### 3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

Antenna gain > 6dBi

Non Fixed, point to point operations.
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB

Fixed, point to point operations
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations, no any corresponding reduction is in transmitter peak output power

#### 3.3.2 Test Procedures

Maximum Peak Conducted Output Power

#### 

- 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
- 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
- 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.

#### Nower meter

- A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power (For reference only)

#### Nower meter

 A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

#### 3.3.3 Test Setup



Report No.: FR520406AC Page: 18 of 63



## 3.3.4 Test Result of Maximum Output Power

| Modulation<br>Mode | N <sub>TX</sub> | Freq. | Peak    | Peak conducted output power (dBm) |         |         | Total<br>Power | Total<br>Power | Limit |
|--------------------|-----------------|-------|---------|-----------------------------------|---------|---------|----------------|----------------|-------|
| Wode               |                 | (MHz) | Chain 0 | Chain 1                           | Chain 2 | Chain 3 | (mW)           | (dBm)          | (dBm) |
| 11b                | 2               | 2412  | 17.23   | 17.06                             |         |         | 103.660        | 20.16          | 30.00 |
| 11b                | 2               | 2437  | 17.62   | 17.53                             |         |         | 114.434        | 20.59          | 30.00 |
| 11b                | 2               | 2462  | 16.68   | 16.83                             |         |         | 94.753         | 19.77          | 30.00 |
| 11g                | 2               | 2412  | 26.27   | 25.35                             |         |         | 766.411        | 28.84          | 30.00 |
| 11g                | 2               | 2437  | 27.32   | 25.83                             |         |         | 922.335        | 29.65          | 30.00 |
| 11g                | 2               | 2462  | 24.79   | 23.93                             |         |         | 548.473        | 27.39          | 30.00 |
| HT20               | 2               | 2412  | 25.92   | 25.02                             |         |         | 708.528        | 28.50          | 30.00 |
| HT20               | 2               | 2437  | 27.18   | 25.82                             |         |         | 904.340        | 29.56          | 30.00 |
| HT20               | 2               | 2462  | 24.64   | 24.02                             |         |         | 543.420        | 27.35          | 30.00 |
| HT40               | 2               | 2422  | 21.92   | 22.09                             |         |         | 317.405        | 25.02          | 30.00 |
| HT40               | 2               | 2437  | 25.09   | 24.11                             |         |         | 580.482        | 27.64          | 30.00 |
| HT40               | 2               | 2452  | 19.92   | 19.97                             |         |         | 197.486        | 22.96          | 30.00 |

| Modulation<br>Mode | N <sub>TX</sub> | Freq.<br>(MHz) | Conduc  |         | age) outpu<br>Bm) | it power | Total<br>Power | Total<br>Power | Limit |
|--------------------|-----------------|----------------|---------|---------|-------------------|----------|----------------|----------------|-------|
| Wiode              |                 | (IVITIZ)       | Chain 0 | Chain 1 | Chain 2           | Chain 3  | (mW)           | (dBm)          | (dBm) |
| 11b                | 2               | 2412           | 15.01   | 14.91   |                   |          | 62.670         | 17.97          | 30.00 |
| 11b                | 2               | 2437           | 15.48   | 15.56   |                   |          | 71.293         | 18.53          | 30.00 |
| 11b                | 2               | 2462           | 14.69   | 14.68   |                   |          | 58.821         | 17.70          | 30.00 |
| 11g                | 2               | 2412           | 18.39   | 18.44   |                   |          | 138.847        | 21.43          | 30.00 |
| 11g                | 2               | 2437           | 21.18   | 20.95   |                   |          | 255.671        | 24.08          | 30.00 |
| 11g                | 2               | 2462           | 17.29   | 16.97   |                   |          | 103.353        | 20.14          | 30.00 |
| HT20               | 2               | 2412           | 17.42   | 17.76   |                   |          | 114.911        | 20.60          | 30.00 |
| HT20               | 2               | 2437           | 21.15   | 21.02   |                   |          | 256.790        | 24.10          | 30.00 |
| HT20               | 2               | 2462           | 15.71   | 15.96   |                   |          | 76.685         | 18.85          | 30.00 |
| HT40               | 2               | 2422           | 12.91   | 13.34   |                   |          | 41.121         | 16.14          | 30.00 |
| HT40               | 2               | 2437           | 16.87   | 16.67   |                   |          | 95.092         | 19.78          | 30.00 |
| HT40               | 2               | 2452           | 10.53   | 10.84   |                   |          | 23.432         | 13.70          | 30.00 |

Note: Conducted average output power is for reference only.

Report No.: FR520406AC Page: 19 of 63



## 3.4 Power Spectral Density

#### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

#### 3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
  - Set the RBW = 3kHz, VBW = 10kHz.
  - 2. Detector = Peak, Sweep time = auto couple.
  - 3. Trace mode = max hold, allow trace to fully stabilize.
  - 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
  - Set the RBW = 100kHz, VBW = 300 kHz.
  - 2. Detector = RMS, Sweep time = auto couple.
  - 3. Set the sweep time to: ≥ 10 x (number of measurement points in sweep) x (maximum data rate per stream).
  - 4. Perform the measurement over a single sweep.
  - 5. Use the peak marker function to determine the maximum amplitude level.

### 3.4.3 Test Setup




Report No.: FR520406AC Page: 20 of 63



## 3.4.4 Test Result of Power Spectral Density

| Modulation<br>Mode | N <sub>TX</sub> | Freq. (MHz) | Total Power Spectral Density<br>(dBm/3kHz) | Limit (dBm/3kHz) |
|--------------------|-----------------|-------------|--|------------------|
| 11b                | 2               | 2412        | -1.93                                      | 8.00             |
| 11b                | 2               | 2437        | -5.92                                      | 8.00             |
| 11b                | 2               | 2462        | -2.52                                      | 8.00             |
| 11g                | 2               | 2412        | -7.65                                      | 8.00             |
| 11g                | 2               | 2437        | -5.03                                      | 8.00             |
| 11g                | 2               | 2462        | -8.96                                      | 8.00             |
| HT20               | 2               | 2412        | -7.83                                      | 8.00             |
| HT20               | 2               | 2437        | -3.96                                      | 8.00             |
| HT20               | 2               | 2462        | -9.61                                      | 8.00             |
| HT40               | 2               | 2422        | -14.35                                     | 8.00             |
| HT40               | 2               | 2437        | -10.12                                     | 8.00             |
| HT40               | 2               | 2452        | -16.07                                     | 8.00             |

**Note:** Test result is bin-by-bin summing measured value of each TX port.

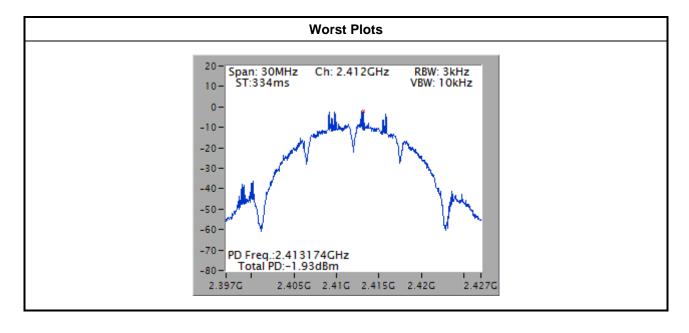

Report No.: FR520406AC Page: 21 of 63



### 3.5 Unwanted Emissions into Restricted Frequency Bands

#### 3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

| Restricted Band Emissions Limit |                       |                         |                      |  |  |  |  |  |
|---------------------------------|-----------------------|-------------------------|----------------------|--|--|--|--|--|
| Frequency Range (MHz)           | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |  |  |  |  |  |
| 0.009~0.490                     | 2400/F(kHz)           | 48.5 - 13.8             | 300                  |  |  |  |  |  |
| 0.490~1.705                     | 24000/F(kHz)          | 33.8 - 23               | 30                   |  |  |  |  |  |
| 1.705~30.0                      | 30                    | 29                      | 30                   |  |  |  |  |  |
| 30~88                           | 100                   | 40                      | 3                    |  |  |  |  |  |
| 88~216                          | 150                   | 43.5                    | 3                    |  |  |  |  |  |
| 216~960                         | 200                   | 46                      | 3                    |  |  |  |  |  |
| Above 960                       | 500                   | 54                      | 3                    |  |  |  |  |  |

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:** 

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.5.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

#### Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR520406AC Page: 22 of 63




## 3.5.3 Test Setup



Report No.: FR520406AC Page: 23 of 63



### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

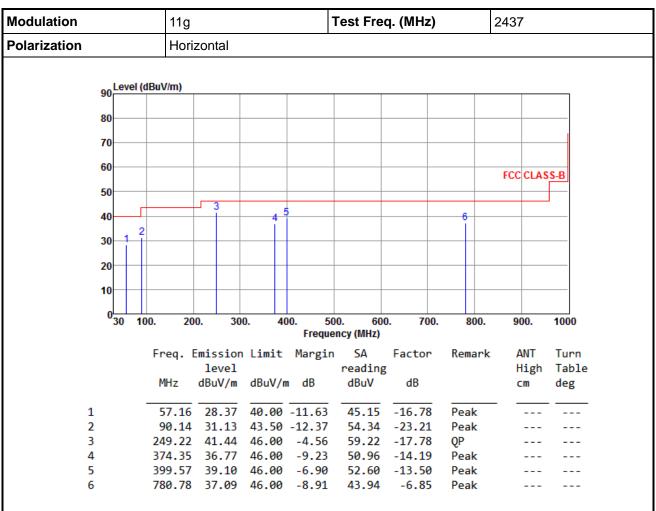

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR520406AC Page: 24 of 63



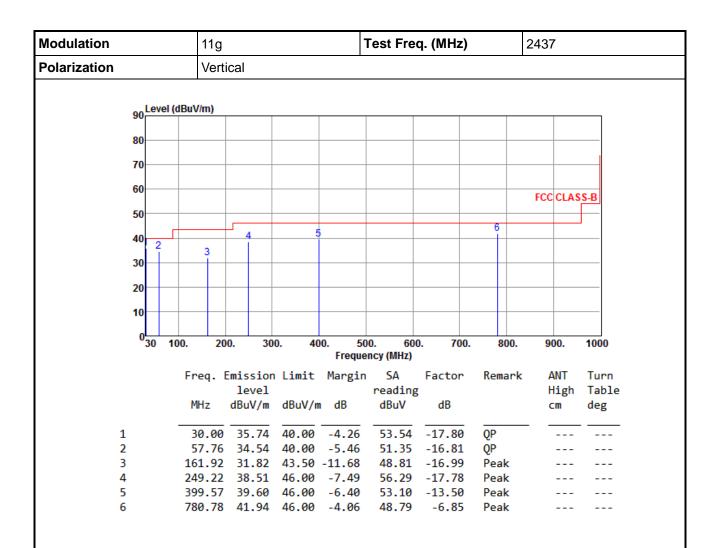

\*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR520406AC Page: 25 of 63



### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

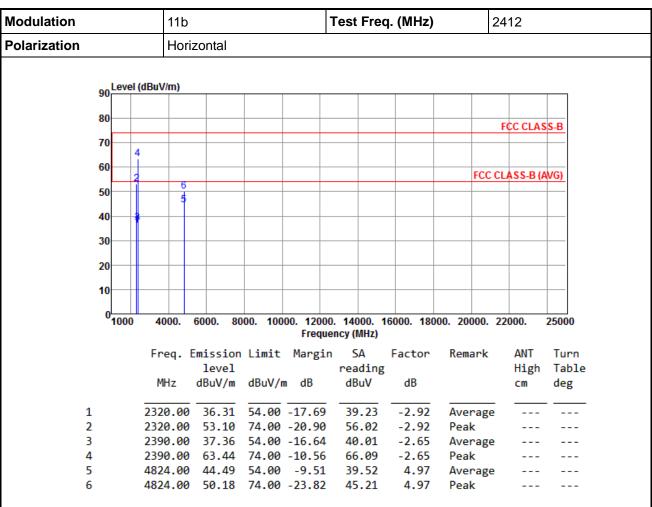

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR520406AC Page: 26 of 63



| Modulation   | 11b      | Test Freq. (MHz) | 2412 |
|--------------|----------|------------------|------|
| Polarization | Vertical |                  |      |
|              |          |                  |      |

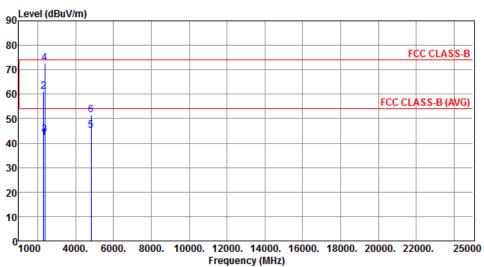


|   | Freq.<br>MHz | Emission<br>level<br>dBuV/m | Limit<br>dBuV/m |        | SA<br>reading<br>dBuV | Factor<br>dB | Remark  | ANT<br>High<br>cm | Turn<br>Table<br>deg |
|---|--------------|-----------------------------|-----------------|--------|-----------------------|--------------|---------|-------------------|----------------------|
| 1 | 2320.00      | 42.10                       | 54.00           | -11.90 | 45.02                 | -2.92        | Average |                   |                      |
| 2 | 2320.00      |                             |                 |        | 64.16                 | -2.92        | Peak    |                   |                      |
| 3 | 2390.00      | 43.40                       | 54.00           | -10.60 | 46.05                 | -2.65        | Average |                   |                      |
| 4 | 2390.00      | 72.63                       | 74.00           | -1.37  | 75.28                 | -2.65        | Peak    |                   |                      |
| 5 | 4824.00      | 45.20                       | 54.00           | -8.80  | 40.23                 | 4.97         | Average |                   |                      |
| 6 | 4824.00      | 51.54                       | 74.00           | -22.46 | 46.57                 | 4.97         | Peak    |                   |                      |

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 27 of 63



| Modulation   | 11b        | Test Freq. (MHz) | 2437 |
|--------------|------------|------------------|------|
| Polarization | Horizontal |                  |      |
|              |            |                  |      |

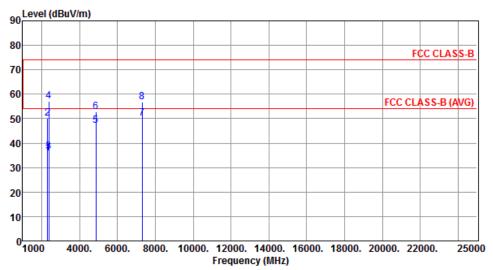


|   | Freq.<br>MHz | Emission<br>level<br>dBuV/m | Limit<br>dBuV/m | Ū      | SA<br>reading<br>dBuV | Factor<br>dB | Remark  | ANT<br>High<br>cm | Turn<br>Table<br>deg |
|---|--------------|-----------------------------|-----------------|--------|-----------------------|--------------|---------|-------------------|----------------------|
| 1 | 2320.00      | 36.02                       | 54.00           | -17.98 | 38.94                 | -2.92        | Average |                   |                      |
| 2 | 2320.00      | 50.07                       | 74.00           | -23.93 | 52.99                 | -2.92        | Peak    |                   |                      |
| 3 | 2390.00      | 36.53                       | 54.00           | -17.47 | 39.18                 | -2.65        | Average |                   |                      |
| 4 | 2390.00      | 57.17                       | 74.00           | -16.83 | 59.82                 | -2.65        | Peak    |                   |                      |
| 5 | 4874.00      | 47.24                       | 54.00           | -6.76  | 42.16                 | 5.08         | Average |                   |                      |
| 6 | 4874.00      | 52.72                       | 74.00           | -21.28 | 47.64                 | 5.08         | Peak    |                   |                      |
| 7 | 7311.00      | 50.04                       | 54.00           | -3.96  | 39.93                 | 10.11        | Average |                   |                      |
| 8 | 7311.00      | 56.81                       | 74.00           | -17.19 | 46.70                 | 10.11        | Peak    |                   |                      |

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 28 of 63



| Modulation   | 11b      | Test Freq. (MHz) | 2437 |
|--------------|----------|------------------|------|
| Polarization | Vertical |                  |      |
|              |          |                  |      |

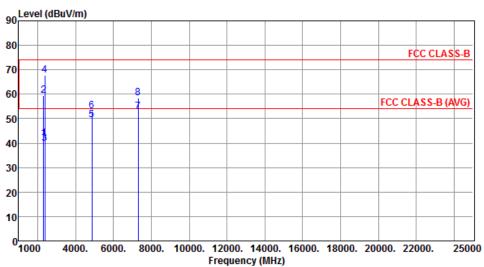


|   | Freq.   | Emission level | Limit  | Margin | SA<br>reading | Factor | Remark  | ANT<br>High | Turn<br>Table |
|---|---------|----------------|--------|--------|---------------|--------|---------|-------------|---------------|
|   | MHz     | dBuV/m         | dBuV/m | dB     | dBuV          | dB     |         | cm          | deg           |
| 1 | 2320.00 | 41.78          | 54.00  | -12.22 | 44.70         | -2.92  | Average |             |               |
| 2 | 2320.00 | 59.30          | 74.00  | -14.70 | 62.22         | -2.92  | Peak    |             |               |
| 3 | 2390.00 | 39.98          | 54.00  | -14.02 | 42.63         | -2.65  | Average |             |               |
| 4 | 2390.00 | 67.83          | 74.00  | -6.17  | 70.48         | -2.65  | Peak    |             |               |
| 5 | 4874.00 | 49.36          | 54.00  | -4.64  | 44.28         | 5.08   | Average |             |               |
| 6 | 4874.00 | 53.11          | 74.00  | -20.89 | 48.03         | 5.08   | Peak    |             |               |
| 7 | 7311.00 | 52.67          | 54.00  | -1.33  | 42.56         | 10.11  | Average |             |               |
| 8 | 7311.00 | 58.57          | 74.00  | -15.43 | 48.46         | 10.11  | Peak    |             |               |

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 29 of 63



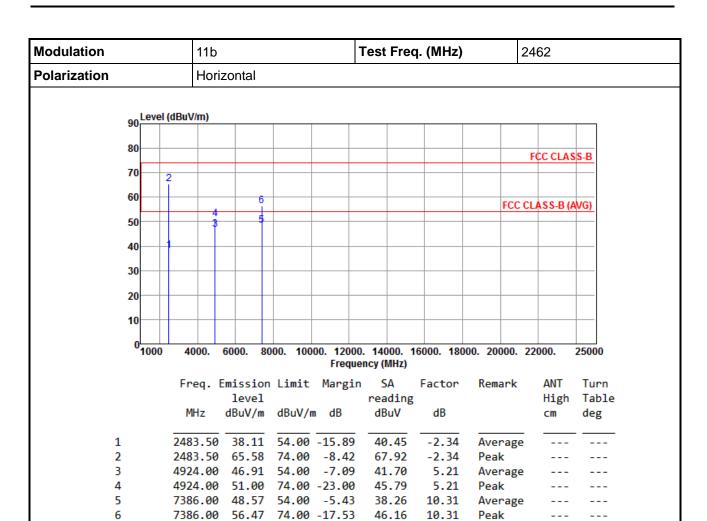


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 30 of 63



| Modulation   |             | 11b  |  |  | Test | Freq. | (MHz) | 24 | 62 |  |
|--------------|-------------|------|--|--|------|-------|-------|----|----|--|
| Polarization | Vertical    |      |  |  |      |       |       |    |    |  |
|              |             |      |  |  |      |       |       |    |    |  |
|              | Level (dBu\ | //m) |  |  |      |       |       |    |    |  |
| 90           | Level (dBu) | //m) |  |  |      |       |       |    |    |  |

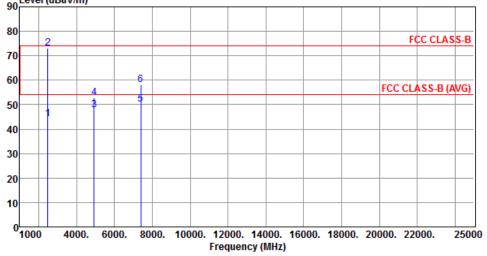


|   | Freq.   | Emission<br>level | Limit  | Margin | SA<br>reading | Factor | Remark  | ANT<br>High | Turn<br>Table |
|---|---------|-------------------|--------|--------|---------------|--------|---------|-------------|---------------|
|   | MHz     | dBuV/m            | dBuV/m | dB     | dBuV          | dB     |         | cm          | deg           |
| 1 | 2483.50 | 44.03             | 54.00  | -9.97  | 46.37         | -2.34  | Average |             |               |
| 2 | 2483.50 | 72.95             | 74.00  | -1.05  | 75.29         | -2.34  | Peak    |             |               |
| 3 | 4924.00 | 47.81             | 54.00  | -6.19  | 42.60         | 5.21   | Average |             |               |
| 4 | 4924.00 | 52.73             | 74.00  | -21.27 | 47.52         | 5.21   | Peak    |             |               |
| 5 | 7386.00 | 50.08             | 54.00  | -3.92  | 39.77         | 10.31  | Average |             |               |
| 6 | 7386.00 | 58.28             | 74.00  | -15.72 | 47.97         | 10.31  | Peak    |             |               |

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 31 of 63



### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

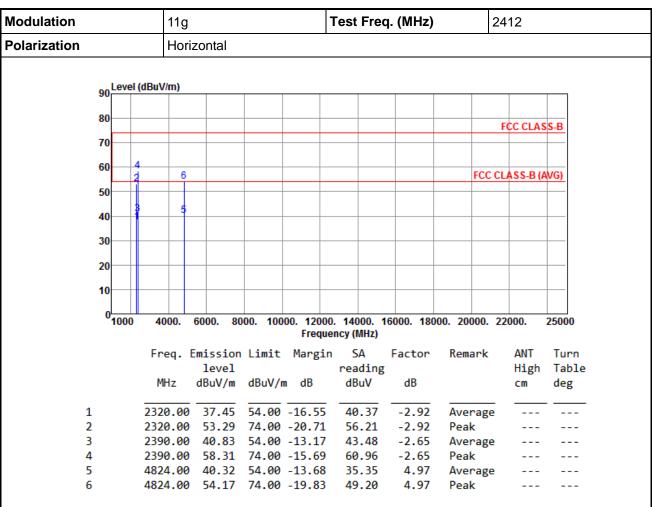

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR520406AC Page: 32 of 63



2

3

4

5

6

| Modulation   | 11g                     | Test Freq. (MHz)                                      | 2412              |  |  |  |  |
|--------------|-------------------------|---|-------------------|--|--|--|--|
| Polarization | Vertical                |   |                   |  |  |  |  |
|              |                         |   |                   |  |  |  |  |
| 90 Level (d  | BuV/m)                  |   |                   |  |  |  |  |
| 80           |                         |   |                   |  |  |  |  |
| 70 4         |                         |   | FCC CLASS-B       |  |  |  |  |
| 70           |                         |   |                   |  |  |  |  |
| 60           | 6                       |   | FCC CLASS-B (AVG) |  |  |  |  |
| 50           |                         |   |                   |  |  |  |  |
| 40           | 5                       |   |                   |  |  |  |  |
| 30           |                         |   |                   |  |  |  |  |
| 20           |                         |   |                   |  |  |  |  |
| 10           |                         |   |                   |  |  |  |  |
| 0            |                         |   |                   |  |  |  |  |
| 1000         | 4000. 6000. 8000. 10000 | ). 12000. 14000. 16000. 18000. 200<br>Frequency (MHz) | 000. 22000. 25000 |  |  |  |  |
|              | Freq. Emission Limit    | Margin SA Factor Rema                                 | ark ANT Tur       |  |  |  |  |
|              | level                   | reading   | High Tab          |  |  |  |  |
|              | MHz dBuV/m dBuV/m       | dB dBuV dB  | cm deg            |  |  |  |  |
| 1            | 2320.00 42.41 54.00 -   | 11.59 45.33 -2.92 Aver                                | rage              |  |  |  |  |

64.18

55.42

74.20

37.67

51.45

-2.92

-2.65

-2.65

4.97

4.97

Peak

Peak

Peak

Average

Average

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB) \*Factor includes antenna factor, cable loss and amplifier gain

2320.00 61.26 74.00 -12.74

2390.00 52.77 54.00 -1.23


2390.00 71.55 74.00 -2.45

4824.00 42.64 54.00 -11.36 4824.00 56.42 74.00 -17.58

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 33 of 63



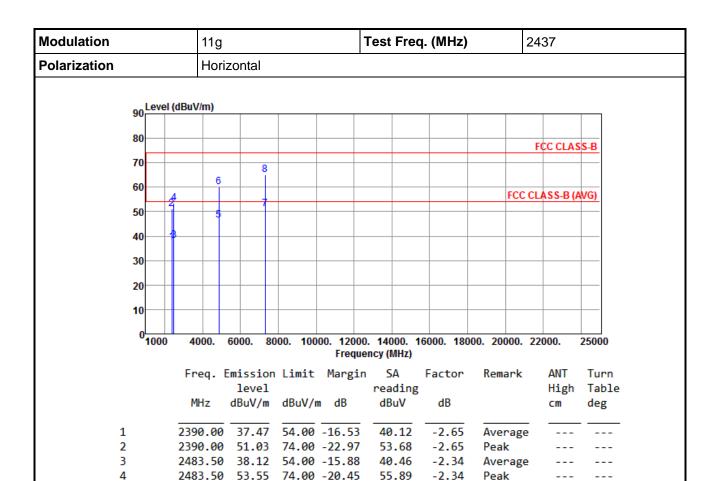

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB) \*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 34 of 63

Report Version: Rev. 01

5

6

7

8

4874.00

4874.00

7311.00

46.57

60.27

51.17

7311.00 65.18 74.00 -8.82

54.00 -7.43

74.00 -13.73

54.00 -2.83

41.49

55.19

41.06

55.07

5.08

5.08

10.11

10.11

Average

Average

---


---

Peak

Peak



| Modulation   | 11g      | Test Freq. (MHz) | 2437 |
|--------------|----------|------------------|------|
| Polarization | Vertical |                  |      |

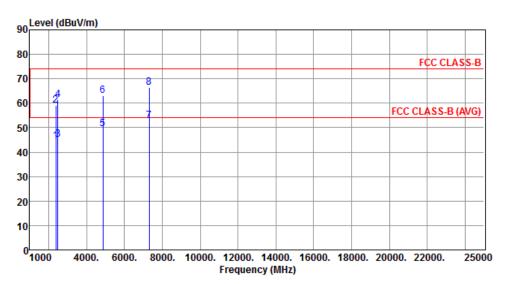


|   | Freq.   | Emission level | Limit  | Margin | SA<br>reading | Factor | Remark  | ANT<br>High | Turn<br>Table |
|---|---------|----------------|--------|--------|---------------|--------|---------|-------------|---------------|
|   | MHz     | dBuV/m         | dBuV/m | dB     | dBuV          | dB     |         | cm          | deg           |
| 1 | 2390.00 | 44.67          | 54.00  | -9.33  | 47.32         | -2.65  | Average |             |               |
| 2 | 2390.00 | 59.04          | 74.00  | -14.96 | 61.69         | -2.65  | Peak    |             |               |
| 3 | 2483.50 | 45.01          | 54.00  | -8.99  | 47.35         | -2.34  | Average |             |               |
| 4 | 2483.50 | 61.55          | 74.00  | -12.45 | 63.89         | -2.34  | Peak    |             |               |
| 5 | 4874.00 | 49.49          | 54.00  | -4.51  | 44.41         | 5.08   | Average |             |               |
| 6 | 4874.00 | 63.25          | 74.00  | -10.75 | 58.17         | 5.08   | Peak    |             |               |
| 7 | 7311.00 | 52.67          | 54.00  | -1.33  | 42.56         | 10.11  | Average |             |               |
| 8 | 7311.00 | 66.44          | 74.00  | -7.56  | 56.33         | 10.11  | Peak    |             |               |

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 35 of 63



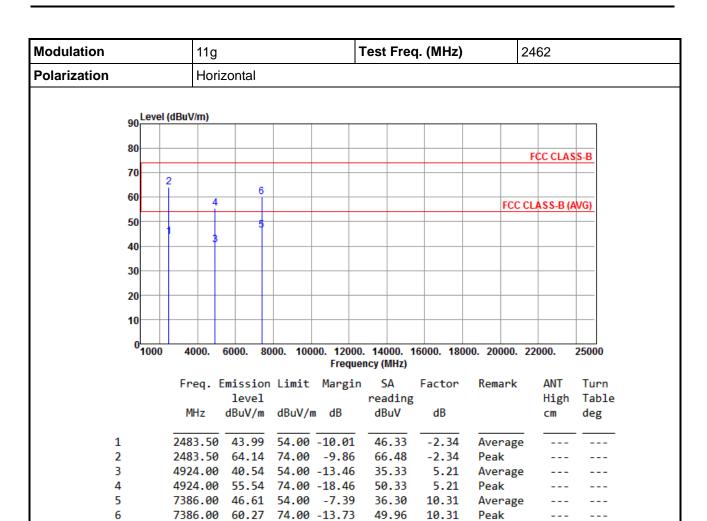

49.96

10.31

Peak

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB) \*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 36 of 63

Report Version: Rev. 01

6



3

4

5

6

| Modulation        | 11g      |          |          |          | Test Fred   | q. (MHz)  |            | 2462       |       |
|-------------------|----------|----------|----------|----------|-------------|-----------|------------|------------|-------|
| Polarization      | Verti    | cal      |          | J        |             |           |            |            |       |
|                   |          |          |          |          |             |           |            |            |       |
| 90 Level (        | (dBuV/m) |          |          |          |             |           |            |            |       |
| 80                |          |          |          |          |             |           |            |            |       |
| 2                 | 2        |          |          |          |             |           |            | FCC CLAS   | S-B   |
| 70                |          |          |          |          |             |           |            |            |       |
| 60                | 4        | 6        |          |          |             |           |            |            |       |
|                   |          |          |          |          |             |           | FCC        | CLASS-B (A | VG)   |
| 50                |          | - 5      |          |          |             |           |            |            |       |
| 40                | 1        |          |          |          |             |           |            |            |       |
| 40                |          |          |          |          |             |           |            |            |       |
| 30                |          |          |          |          |             |           |            |            |       |
|                   |          |          |          |          |             |           |            |            |       |
| 20                |          |          |          |          |             |           |            |            |       |
| 10                |          |          |          |          |             |           |            |            |       |
|                   |          |          |          |          |             |           |            |            |       |
| <sup>0</sup> 1000 | 4000.    | 6000. 80 | 00. 1000 | 00. 1200 | 0. 14000. 1 | 6000. 180 | 00. 20000. | 22000.     | 25000 |
|                   |          |          |          | Frequ    | ency (MHz)  |           |            |            |       |
|                   | Freq. E  | mission  | Limit    | Margin   | n SA        | Factor    | Remark     | ANT        | Turn  |
|                   |          | level    |          |          | reading     |           |            | High       | Table |
|                   | MHz      | dBuV/m   | dBuV/m   | dB       | dBuV        | dB        |            | cm         | deg   |
|                   |          |          |          |          |             |           |            |            |       |
| 1                 | 2483.50  |          |          |          | 54.66       | -2.34     | Average    |            |       |
| 2                 | 2483.50  |          |          | -1.11    | 75.23       | -2.34     | Peak       |            |       |

5.21 5.21 10.31

10.31

Average

Peak

Average

Peak

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB) \*Factor includes antenna factor, cable loss and amplifier gain


4924.00 43.73 54.00 -10.27 38.52 4924.00 58.42 74.00 -15.58 53.21 7386.00 47.61 54.00 -6.39 37.30 7386.00 61.37 74.00 -12.63 51.06

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 37 of 63



# 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

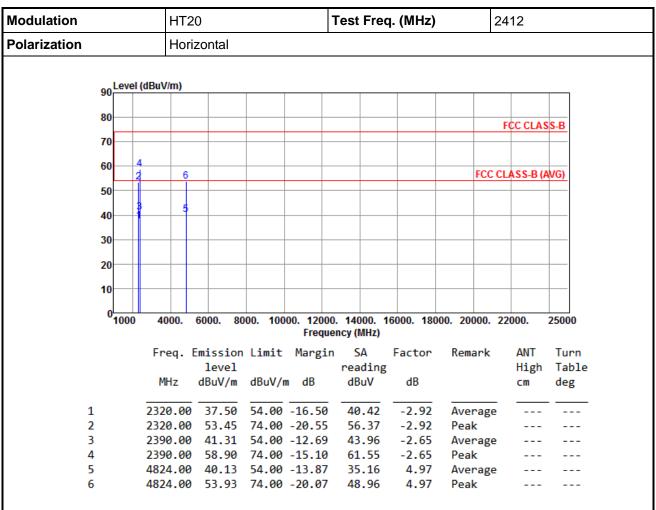

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 38 of 63



| lodulation  | HT20  |           |                      | Т       | est Fred              | q. (MHz)     |                 | 2412       |       |
|-------------|---|-----------|----------------------|---------|-----------------------|--------------|-----------------|------------|-------|
| olarization | Vertic  | al        |                      | ,       |                       |              | 1               |            |       |
|             |   |           |                      |         |                       |              |                 |            |       |
| 90 Level    | (dBuV/m)  |           |                      |         |                       |              |                 |            |       |
| 80          |   |           |                      |         |                       |              |                 |            |       |
| 4           |   |           |                      |         |                       |              |                 | FCC CLAS   | S-B   |
| 70          |   |           |                      |         |                       |              |                 |            |       |
| 60          | 6   |           |                      |         |                       |              |                 |            |       |
|             | <del>-                                     </del> |           |                      |         |                       |              | FCC             | CLASS-B (A | (VG)  |
| 50          | 5   |           |                      |         |                       |              |                 |            |       |
| 40          |   |           |                      |         |                       |              |                 |            |       |
| 30          |   |           |                      |         |                       |              |                 |            |       |
| 30          |   |           |                      |         |                       |              |                 |            |       |
| 20          |   |           |                      |         |                       |              |                 |            |       |
| 10          |   |           |                      |         |                       |              |                 |            |       |
|             |   |           |                      |         |                       |              |                 |            |       |
| 01000       | 4000. 60  | 000. 8000 |                      |         | 14000. 1<br>ncy (MHz) | 6000. 180    | 00. 20000.      | 22000.     | 25000 |
|             | Enoa Em   | nission L |                      |         |                       | Factor       | Remark          | ANT        | Turn  |
|             |   | level     | IIIIIC N             | ai giii | reading               |              | Kelliai K       | High       | Table |
|             | MHz d   | lBuV/m d  | dBuV/m               | dB      | dBuV                  | dB           |                 | cm         | deg   |
| 1           | 2320.00   | 42.61 5   | 4.00 -1              | 1.39    | 45.53                 | -2.92        | Average         |            |       |
| 2           |   |           | 74.00 -1             |         | 64.22                 | -2.92        | Peak            |            |       |
| 3           | 2390.00   |           | 4.00 -               |         | 54.26                 | -2.65        | Average         |            |       |
| 4           | 2390.00   |           |                      | 1.01    | 75.64                 | -2.65        | Peak            |            |       |
| 5<br>6      |   |           | 54.00 -1<br>74.00 -1 |         | 37.55<br>51.48        | 4.97<br>4.97 | Average<br>Peak |            |       |


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 39 of 63



| Modulation       | Modulation HT20 |         |            | Test | Freq. | (MHz) | 24 | 2437 |   |         |     |
|------------------|-----------------|---------|------------|------|-------|-------|----|------|---|---------|-----|
| Polarization     |                 | Horizor | Horizontal |      |       |       |    |      |   |         |     |
| 90 <mark></mark> | evel (dBu       | V/m)    |            |      | I     |       |    |      |   |         |     |
| 80               |                 |         |            |      |       |       |    |      | F | CC CLAS | S-B |
| 70               |                 |         |            |      |       |       |    |      |   |         |     |

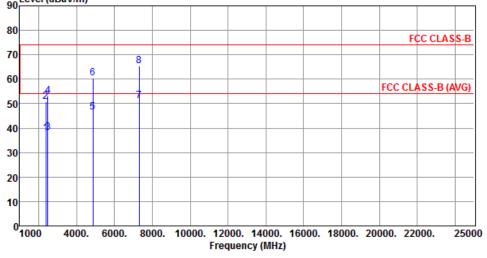


|   | Freq. E | Emission<br>level<br>dBuV/m | Limit<br>dBuV/m | Ū      | SA<br>reading<br>dBuV | Factor<br>dB | Remark  | ANT<br>High<br>cm | Turn<br>Table<br>deg |
|---|---------|-----------------------------|-----------------|--------|-----------------------|--------------|---------|-------------------|----------------------|
| 1 | 2390.00 | 37.79                       | 54.00           | -16.21 | 40.44                 | -2.65        | Average |                   |                      |
| 2 | 2390.00 | 50.83                       | 74.00           | -23.17 | 53.48                 | -2.65        | Peak    |                   |                      |
| 3 | 2483.50 | 38.28                       | 54.00           | -15.72 | 40.62                 | -2.34        | Average |                   |                      |
| 4 | 2483.50 | 53.09                       | 74.00           | -20.91 | 55.43                 | -2.34        | Peak    |                   |                      |
| 5 | 4874.00 | 46.33                       | 54.00           | -7.67  | 41.25                 | 5.08         | Average |                   |                      |
| 6 | 4874.00 | 60.34                       | 74.00           | -13.66 | 55.26                 | 5.08         | Peak    |                   |                      |
| 7 | 7311.00 | 51.14                       | 54.00           | -2.86  | 41.03                 | 10.11        | Average |                   |                      |
| 8 | 7311.00 | 65.38                       | 74.00           | -8.62  | 55.27                 | 10.11        | Peak    |                   |                      |

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 40 of 63



| Modulation   | HT20     | Test Freq. (MHz) | 2437 |
|--------------|----------|------------------|------|
| Polarization | Vertical |                  |      |
|              |          |                  |      |

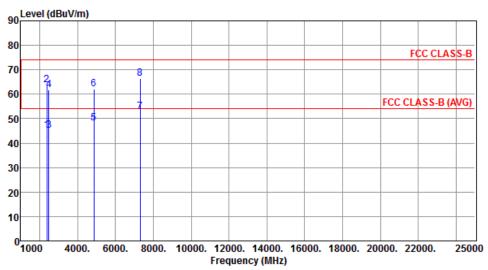

|   | Freq.<br>MHz | Emission<br>level<br>dBuV/m | Limit<br>dBuV/m | Ū      | SA<br>reading<br>dBuV | Factor<br>dB | Remark  | ANT<br>High<br>cm | Turn<br>Table<br>deg |
|---|--------------|-----------------------------|-----------------|--------|-----------------------|--------------|---------|-------------------|----------------------|
| 1 | 2390.00      | 45.10                       | 54.00           | -8.90  | 47.75                 | -2.65        | Average |                   |                      |
| 2 | 2390.00      | 63.87                       | 74.00           | -10.13 | 66.52                 | -2.65        | Peak    |                   |                      |
| 3 | 2483.50      | 45.11                       | 54.00           | -8.89  | 47.45                 | -2.34        | Average |                   |                      |
| 4 | 2483.50      | 61.80                       | 74.00           | -12.20 | 64.14                 | -2.34        | Peak    |                   |                      |
| 5 | 4874.00      | 48.31                       | 54.00           | -5.69  | 43.23                 | 5.08         | Average |                   |                      |
| 6 | 4874.00      | 62.17                       | 74.00           | -11.83 | 57.09                 | 5.08         | Peak    |                   |                      |
| 7 | 7311.00      | 52.64                       | 54.00           | -1.36  | 42.53                 | 10.11        | Average |                   |                      |
| 8 | 7311.00      | 66.55                       | 74.00           | -7.45  | 56.44                 | 10.11        | Peak    |                   |                      |

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 41 of 63



| Modulation   |        |         | HT      | 20      |     |         |        | Test             | Freq | ı. (MHz)       |              | 24     | 62         |       |
|--------------|--------|---------|---------|---------|-----|---------|--------|------------------|------|----------------|--------------|--------|------------|-------|
| Polarization |        |         | Но      | rizonta | I   |         |        |                  |      |                |              |        |            |       |
|              |        |         |         |         |     |         |        |                  |      |                |              |        |            |       |
|              | 90     | Level ( | dBuV/m) |         |     | I       |        |                  | I    |                |              |        |            |       |
|              | 80     |         |         |         |     |         |        |                  |      |                |              |        |            |       |
|              |        |         |         |         |     |         |        |                  |      |                |              | F      | CC CLAS    | S-B   |
|              | 70     | 2       | ,       |         |     |         |        |                  |      |                |              |        |            |       |
|              | 60     |         |         |         | -6- |         |        |                  |      |                |              | ECC CI | ASS-B (A   | MC    |
|              | 50     |         | -       | 1       |     |         |        |                  |      |                |              | FCC CL | A 3 3-B (F | (VG)  |
|              | 30     | -       |         |         | 5   |         |        |                  |      |                |              |        |            |       |
|              | 40     |         |         | B       |     |         |        |                  |      |                |              |        |            |       |
|              | 30     |         |         |         | _   |         |        |                  |      |                |              |        |            |       |
|              |        |         |         |         |     |         |        |                  |      |                |              |        |            |       |
|              | 20     |         |         |         |     |         |        |                  |      |                |              |        |            |       |
|              | 10     |         |         |         |     |         |        |                  |      |                |              |        |            |       |
|              | 0      |         |         |         |     |         |        |                  |      |                |              |        |            |       |
|              | 0,     | 1000    | 4000.   | 6000.   | 80  | 00. 100 |        | 0. 14(<br>ency ( |      | 6000. 180      | 00. 200      | 00. 22 | 000.       | 25000 |
|              |        |         | Freq.   | Emiss   | ion | Limit   | Margi  | n S              | A    | Factor         | Rema         | ırk    | ANT        | Turn  |
|              |        |         |         | lev     |     |         |        |                  | ding |                |              |        | High       | Table |
|              |        |         | MHz     | dBuV    | /m  | dBuV/   | m dB   | dB               | ωV   | dB             |              |        | cm         | deg   |
|              | 1      |         | 2483.50 | 42.     | 18  | 54.00   | -11.82 | 44               | .52  | -2.34          | Aver         | age    |            |       |
|              | 2      |         | 2483.50 |         |     |         | -11.61 |                  | .73  | -2.34          | Peak         |        |            |       |
|              | 3      |         | 4924.00 |         |     |         | -15.52 |                  | .27  | 5.21           | Aver         |        |            |       |
|              | 4      |         |         |         |     |         | -20.54 |                  | .25  | 5.21           | Peak         |        |            |       |
|              | 5<br>6 |         | 7386.00 |         |     |         | -9.16  |                  | .53  | 10.31<br>10.31 | Aver<br>Peak | _      |            |       |


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 42 of 63



| Modulation   | HT20     | Test Freq. (MHz) | 2462 |
|--------------|----------|------------------|------|
| Polarization | Vertical |                  |      |
|              |          |                  |      |

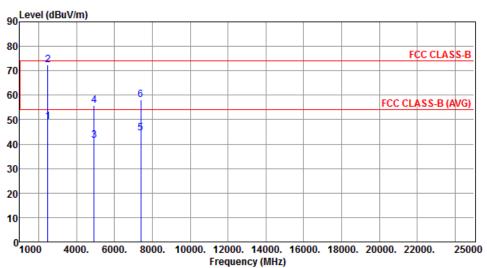


|   | Freq.<br>MHz | Emission<br>level<br>dBuV/m | Limit<br>dBuV/m | Ū      | SA<br>reading<br>dBuV | Factor<br>dB | Remark  | ANT<br>High<br>cm | Turn<br>Table<br>deg |
|---|--------------|-----------------------------|-----------------|--------|-----------------------|--------------|---------|-------------------|----------------------|
| 1 | 2483.50      | 49.20                       | 54.00           | -4.80  | 51.54                 | -2.34        | Average |                   |                      |
| 2 | 2483.50      | 72.52                       | 74.00           | -1.48  | 74.86                 | -2.34        | Peak    |                   |                      |
| 3 | 4924.00      | 41.38                       | 54.00           | -12.62 | 36.17                 | 5.21         | Average |                   |                      |
| 4 | 4924.00      | 55.82                       | 74.00           | -18.18 | 50.61                 | 5.21         | Peak    |                   |                      |
| 5 | 7386.00      | 44.47                       | 54.00           | -9.53  | 34.16                 | 10.31        | Average |                   |                      |
| 6 | 7386.00      | 58.14                       | 74.00           | -15.86 | 47.83                 | 10.31        | Peak    |                   |                      |

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 43 of 63



# 3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

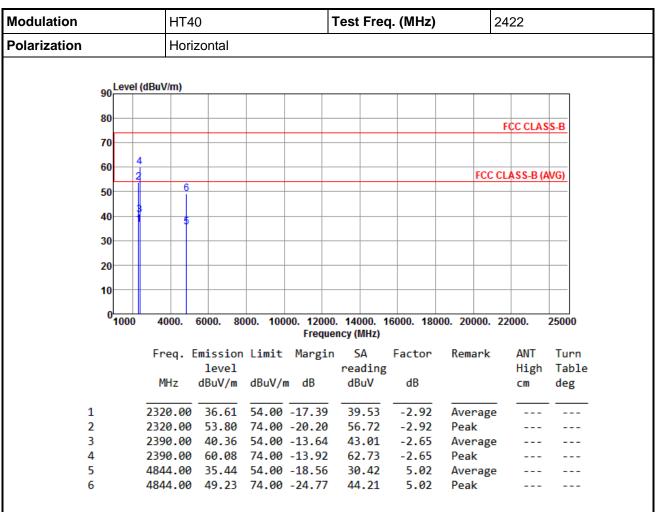

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 44 of 63



| Modulation   | HT40     | Test Freq. (MHz) | 2422 |
|--------------|----------|------------------|------|
| Polarization | Vertical |                  |      |
|              |          |                  |      |

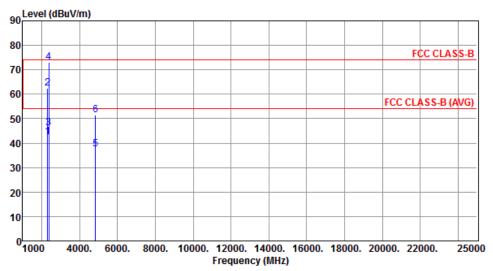


|   | Freq.<br>MHz | Emission<br>level<br>dBuV/m | Limit<br>dBuV/m |        | SA<br>reading<br>dBuV |       | Remark  | ANT<br>High<br>cm | Turn<br>Table<br>deg |
|---|--------------|-----------------------------|-----------------|--------|-----------------------|-------|---------|-------------------|----------------------|
| 1 | 2320.00      | 42.51                       | 54.00           | -11.49 | 45.43                 | -2.92 | Average |                   |                      |
| 2 | 2320.00      |                             |                 |        | 65.27                 | -2.92 | Peak    |                   |                      |
| 3 | 2390.00      | 46.28                       | 54.00           | -7.72  | 48.93                 | -2.65 | Average |                   |                      |
| 4 | 2390.00      | 72.98                       | 74.00           | -1.02  | 75.63                 | -2.65 | Peak    |                   |                      |
| 5 | 4844.00      | 37.45                       | 54.00           | -16.55 | 32.43                 | 5.02  | Average |                   |                      |
| 6 | 4844.00      | 51.59                       | 74.00           | -22.41 | 46.57                 | 5.02  | Peak    |                   |                      |

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 45 of 63



| Modulation   | HT40       | Test Freq. (MHz) | 2437 |
|--------------|------------|------------------|------|
| Polarization | Horizontal |                  |      |
|              |            |                  |      |

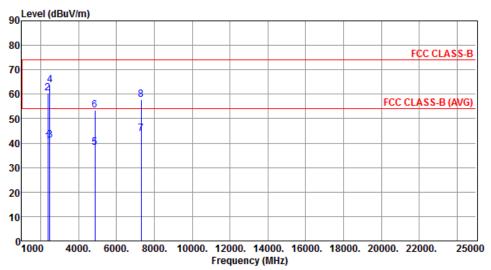


|   | Freq. MHz | Emission<br>level<br>dBuV/m | Limit<br>dBuV/m | Ū      | SA<br>reading<br>dBuV | Factor<br>dB | Remark  | ANT<br>High<br>cm | Turn<br>Table<br>deg |
|---|-----------|-----------------------------|-----------------|--------|-----------------------|--------------|---------|-------------------|----------------------|
| 1 | 2390.00   | 40.52                       | 54.00           | -13.48 | 43.17                 | -2.65        | Average |                   |                      |
| 2 | 2390.00   | 60.53                       | 74.00           | -13.47 | 63.18                 | -2.65        | Peak    |                   |                      |
| 3 | 2483.50   | 41.05                       | 54.00           | -12.95 | 43.39                 | -2.34        | Average |                   |                      |
| 4 | 2483.50   | 63.89                       | 74.00           | -10.11 | 66.23                 | -2.34        | Peak    |                   |                      |
| 5 | 4874.00   | 38.15                       | 54.00           | -15.85 | 33.07                 | 5.08         | Average |                   |                      |
| 6 | 4874.00   | 53.51                       | 74.00           | -20.49 | 48.43                 | 5.08         | Peak    |                   |                      |
| 7 | 7311.00   | 43.96                       | 54.00           | -10.04 | 33.85                 | 10.11        | Average |                   |                      |
| 8 | 7311.00   | 57.93                       | 74.00           | -16.07 | 47.82                 | 10.11        | Peak    |                   |                      |

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 46 of 63



| Modulation   | HT40     | Test Freq. (MHz) | 2437 |
|--------------|----------|------------------|------|
| Polarization | Vertical |                  |      |

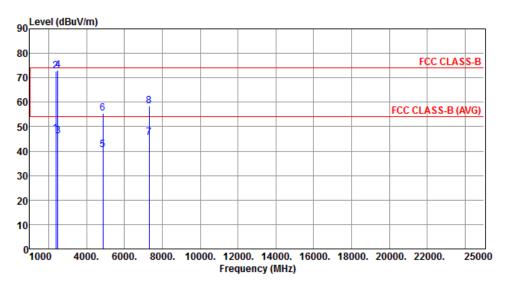


|   | Freq.   | Emission level | Limit  | Margin | SA<br>reading | Factor | Remark  | ANT<br>High | Turn<br>Table |
|---|---------|----------------|--------|--------|---------------|--------|---------|-------------|---------------|
|   | MHz     | dBuV/m         | dBuV/m | dB     | dBuV          | dB     |         | cm          | deg           |
| 1 | 2390.00 | 47.10          | 54.00  | -6.90  | 49.75         | -2.65  | Average |             |               |
| 2 | 2390.00 | 72.79          | 74.00  | -1.21  | 75.44         | -2.65  | Peak    |             |               |
| 3 | 2483.50 | 46.10          | 54.00  | -7.90  | 48.44         | -2.34  | Average |             |               |
| 4 | 2483.50 | 72.98          | 74.00  | -1.02  | 75.32         | -2.34  | Peak    |             |               |
| 5 | 4874.00 | 40.42          | 54.00  | -13.58 | 35.34         | 5.08   | Average |             |               |
| 6 | 4874.00 | 55.36          | 74.00  | -18.64 | 50.28         | 5.08   | Peak    |             |               |
| 7 | 7311.00 | 45.42          | 54.00  | -8.58  | 35.31         | 10.11  | Average |             |               |
| 8 | 7311.00 | 58.57          | 74.00  | -15.43 | 48.46         | 10.11  | Peak    |             |               |

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 47 of 63



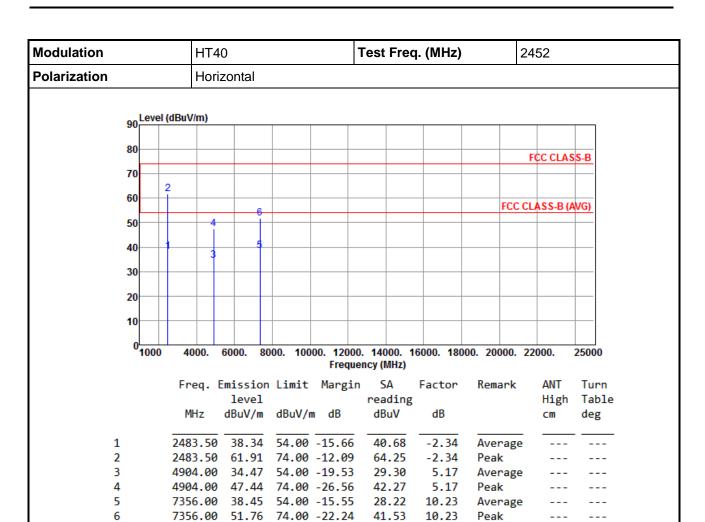


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 48 of 63



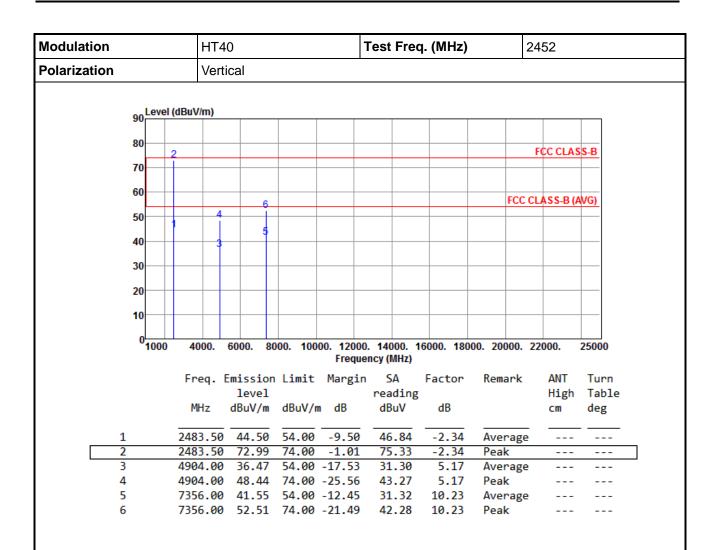

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR520406AC Page: 49 of 63



# 3.6 Emissions in Non-Restricted Frequency Bands

### 3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.6.3 Test Procedures


#### Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

#### **Emission level measurement**

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level

### 3.6.4 Test Setup

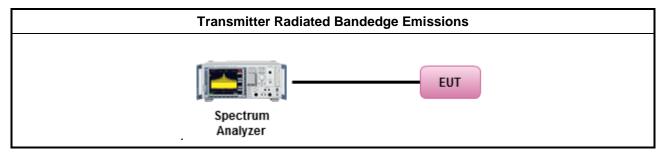

# 3.6.5 Test Result of Emissions in non-restricted frequency bands


This test item is performed on each TX output individually without summing or adding 10  $log(N_{ANT})$  since measurements are made relative to the in-band emissions on the individual outputs. Only worst test result of each operating mode is presented.

Report No.: FR520406AC Page: 50 of 63




### 3.6.6 Unwanted Emissions into Non-Restricted Frequency Bands

### 802.11b

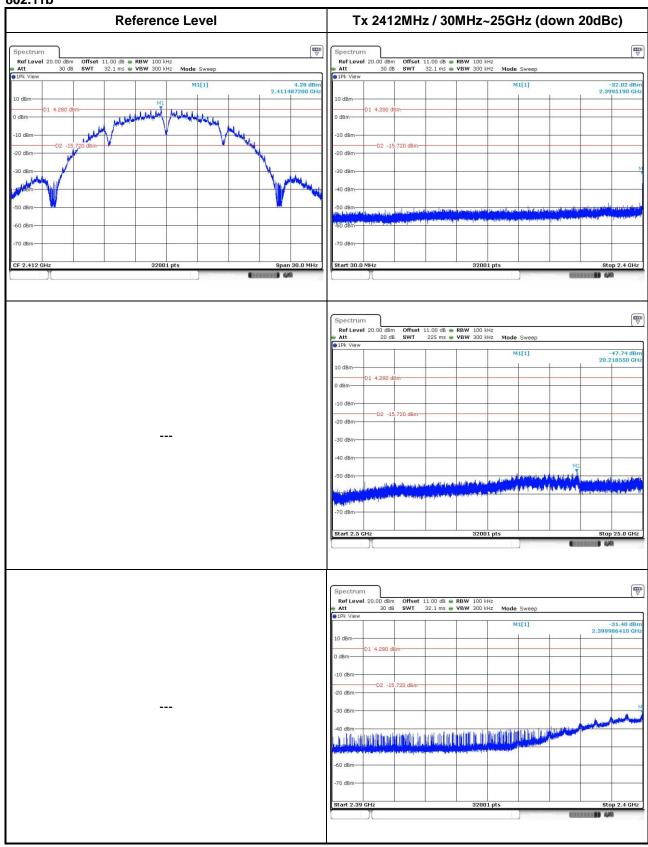


Report No.: FR520406AC Report Version: Rev. 01



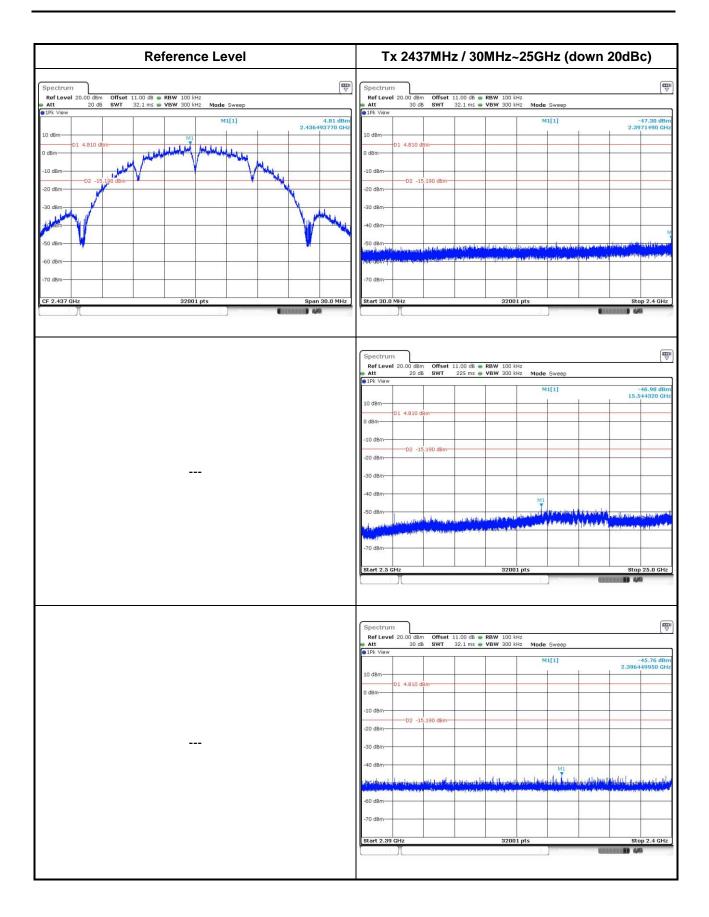


Report No.: FR520406AC Page: 52 of 63



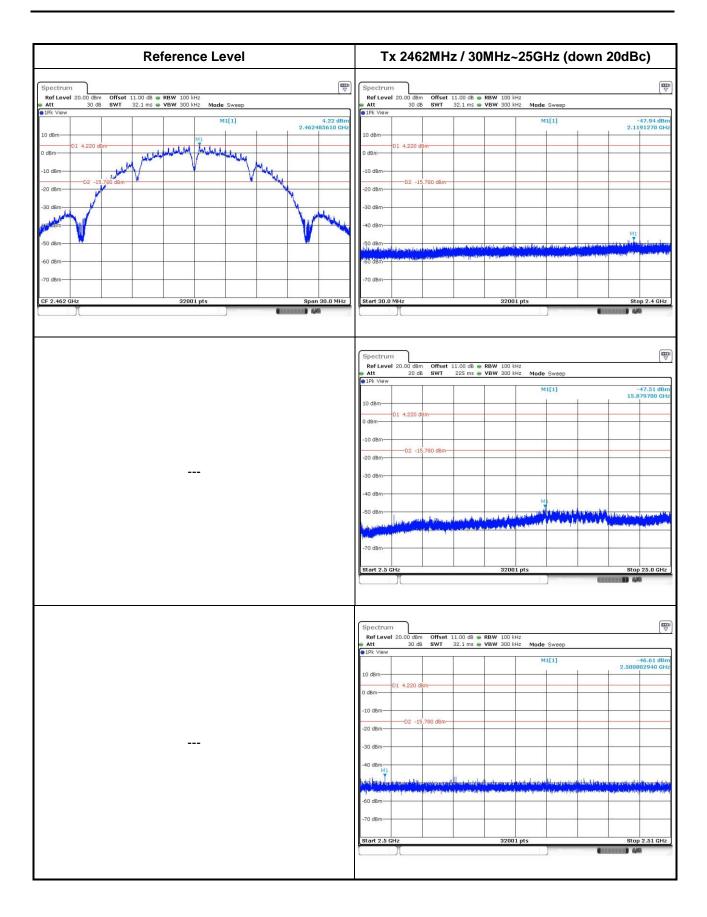


Report No.: FR520406AC Page: 53 of 63



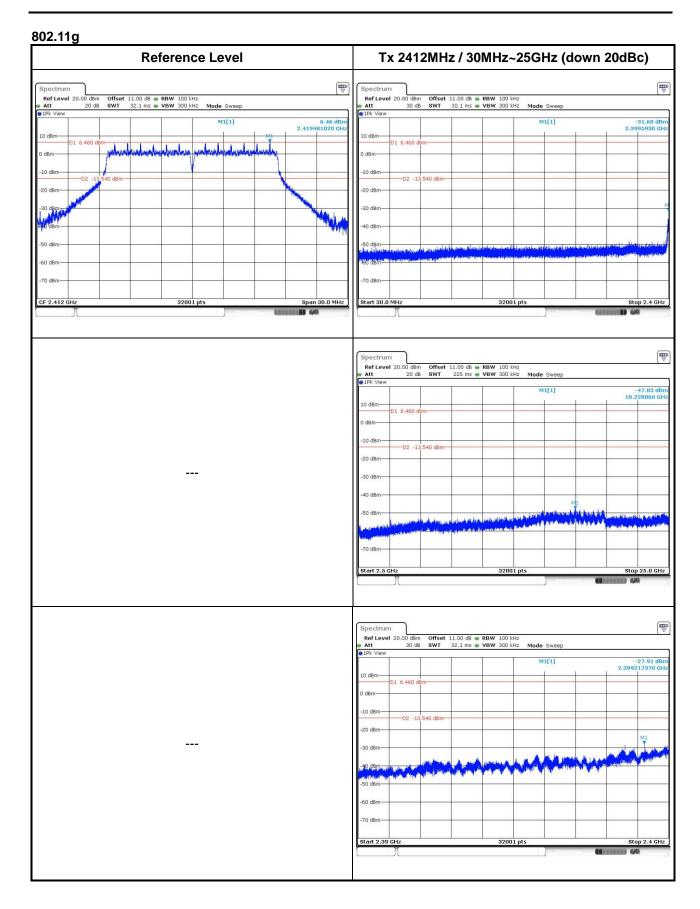


Report No.: FR520406AC Page: 54 of 63



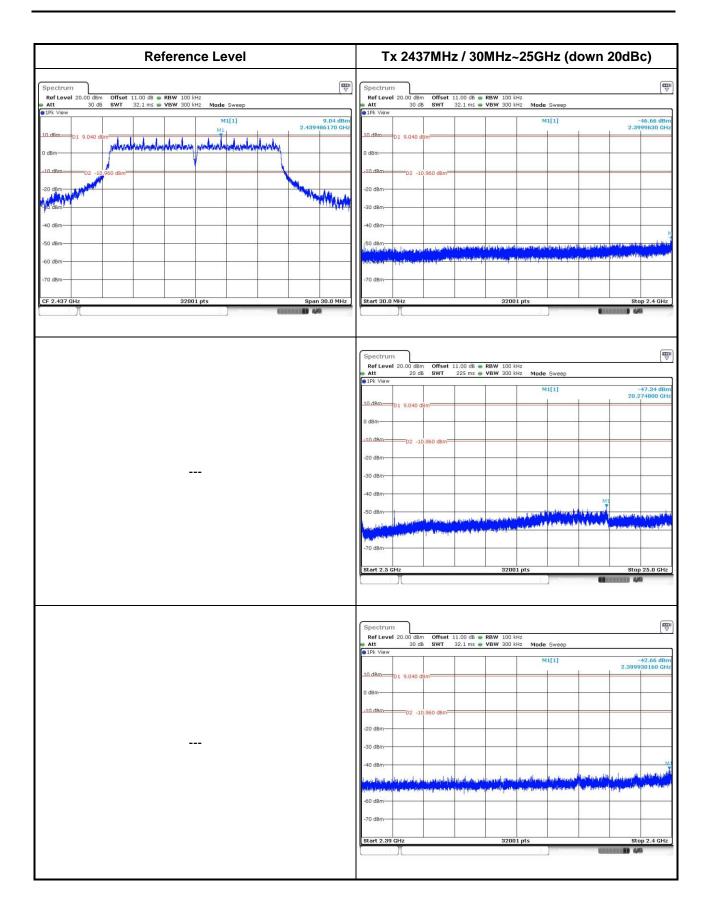

Report No.: FR520406AC Page: 55 of 63




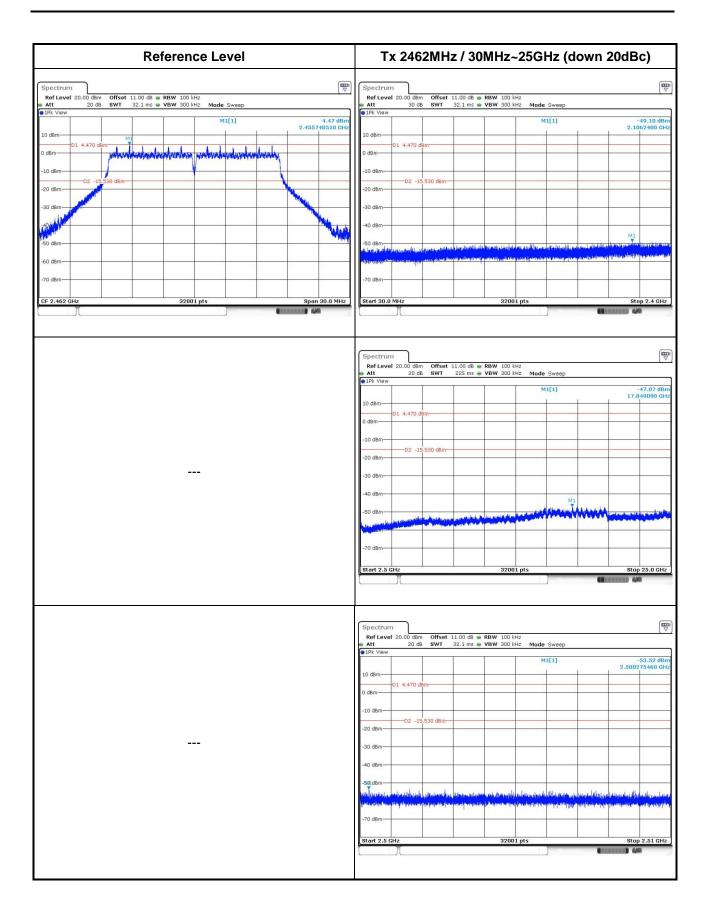

Report No.: FR520406AC Page: 56 of 63




### 802.11n HT20

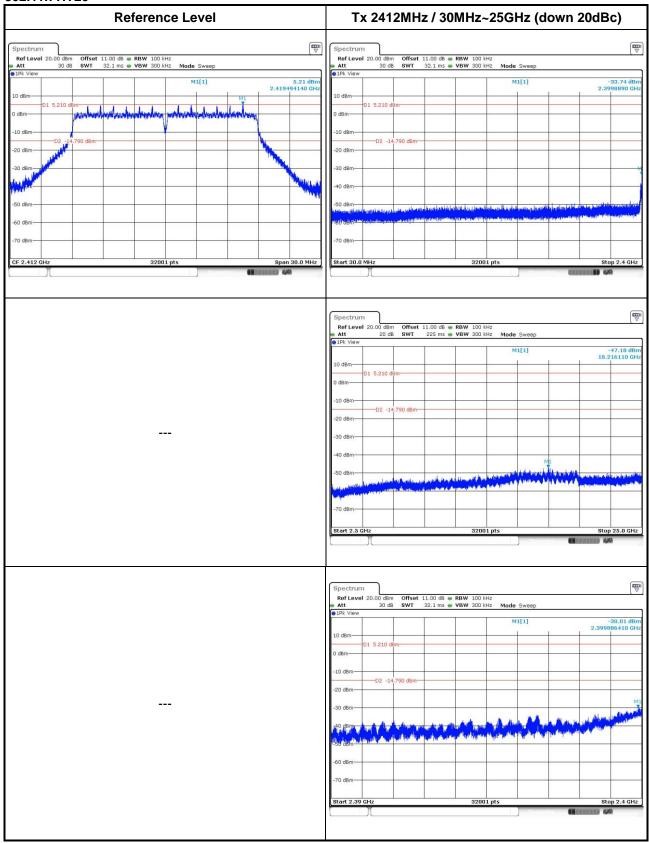


Report No.: FR520406AC Page: 57 of 63



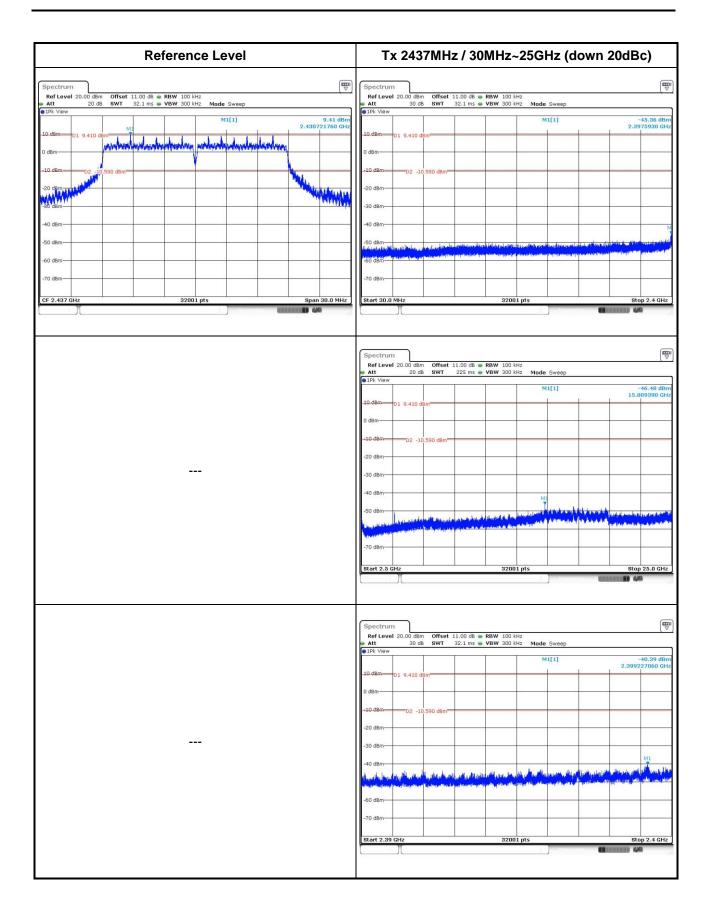

Report No.: FR520406AC Page: 58 of 63




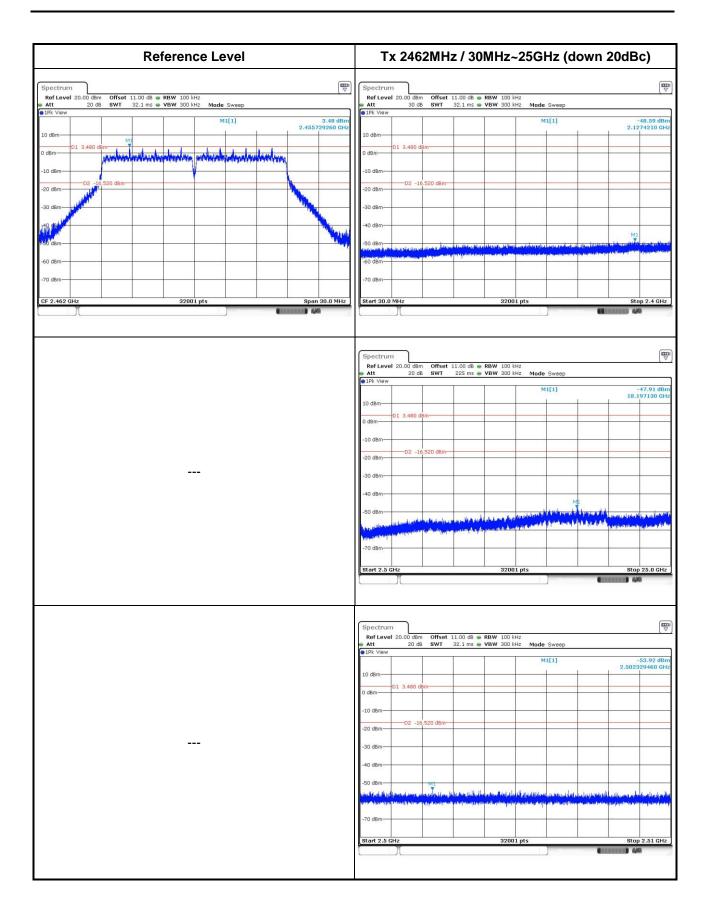

Report No.: FR520406AC Page: 59 of 63




### 802.11n HT40

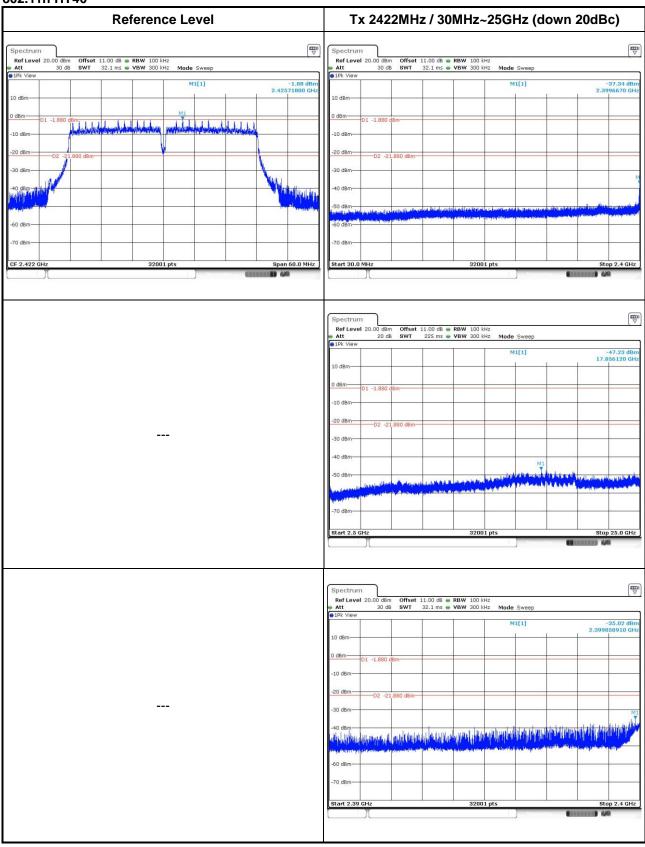


Report No.: FR520406AC Page: 60 of 63



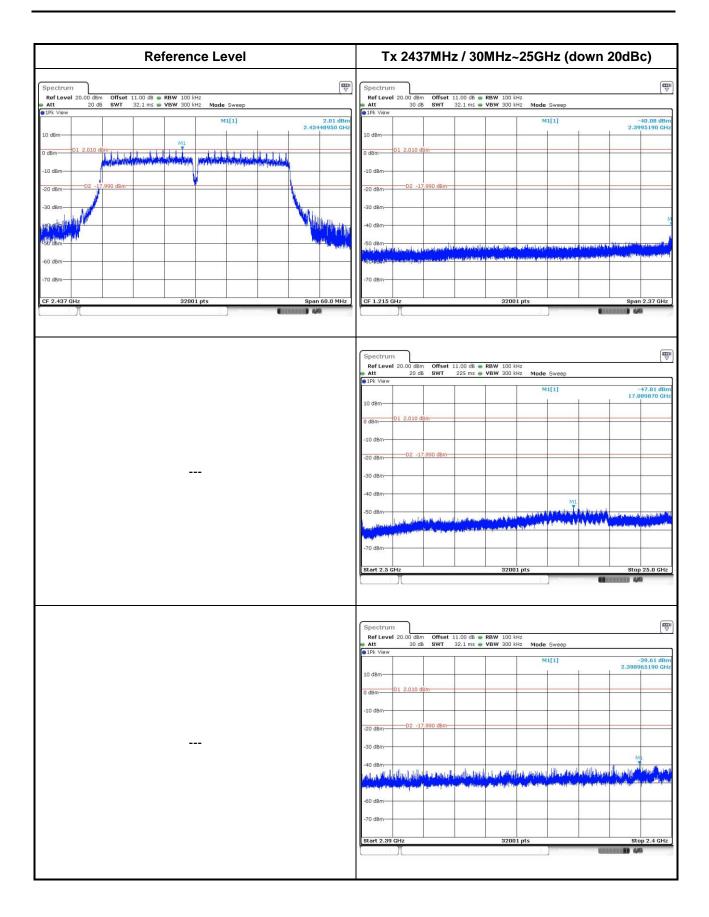

Report No.: FR520406AC Page: 61 of 63



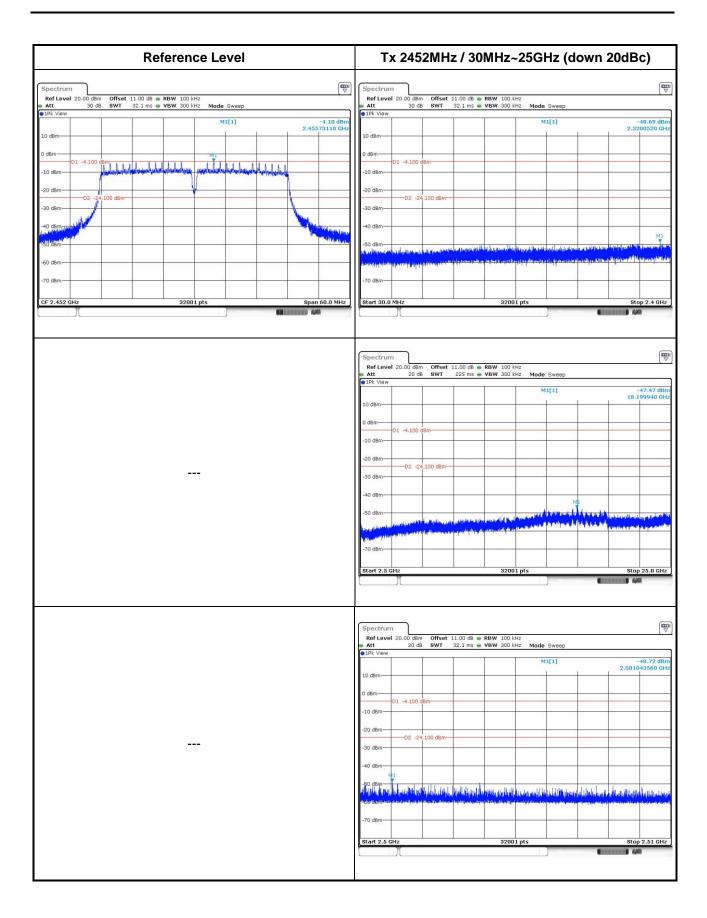

Report No.: FR520406AC Page: 62 of 63



# 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan,

R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan

Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640 No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan

Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END===

Report No.: FR520406AC Page: 63 of 63