



place RT1 close to Power Amp.

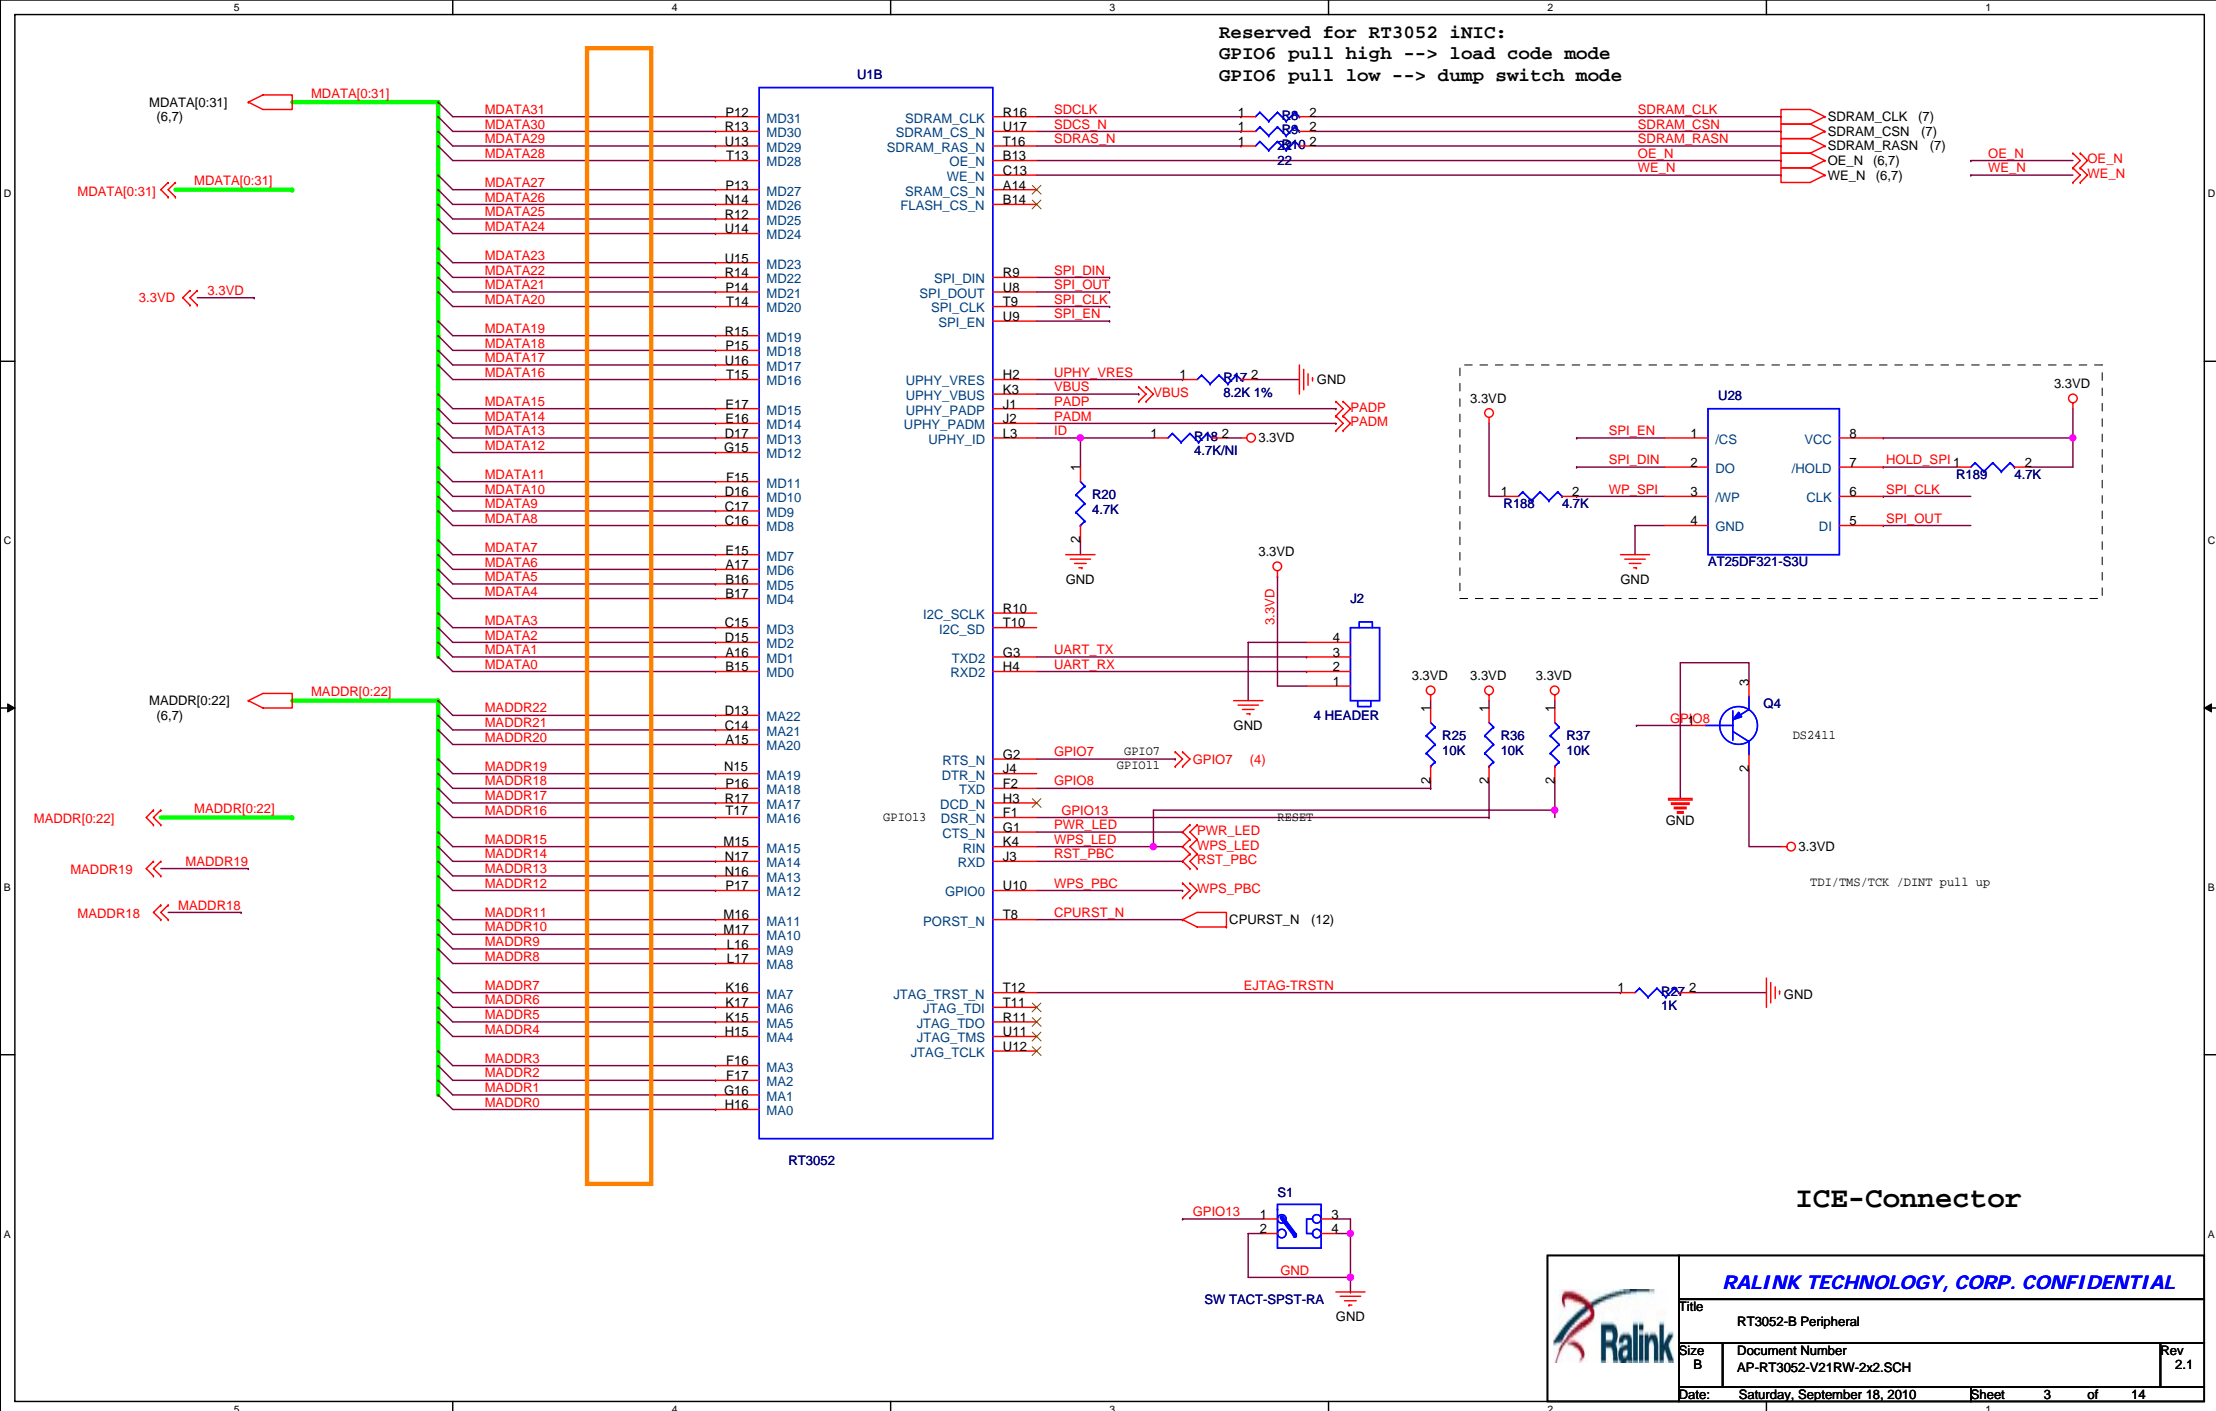

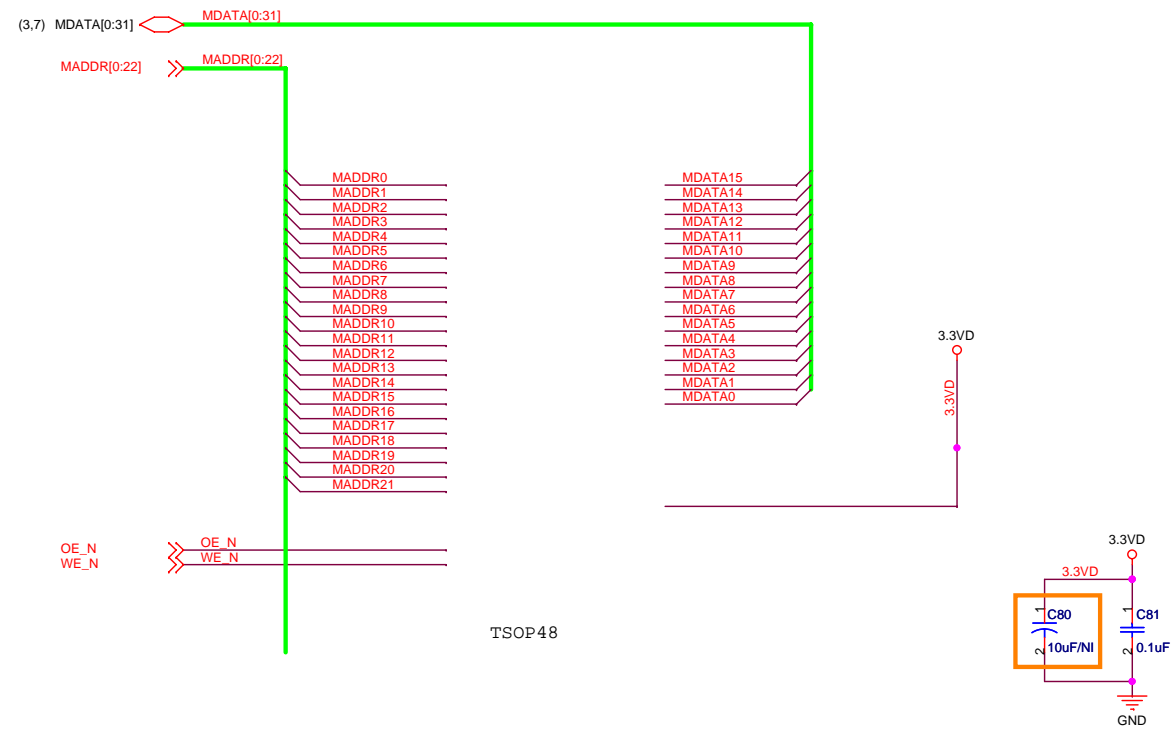


RALINK TECHNOLOGY, CORP. CONFIDENTIAL


Title	Flash
-------	-------

Size B	Document Number AP-RT3052-V21RW-2x2.SCH
-----------	--


Rev	
2.1	

Date: Saturday, September 18, 2010 Sheet 6 of 14

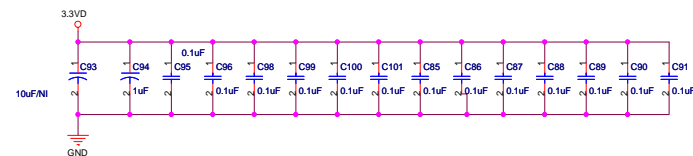

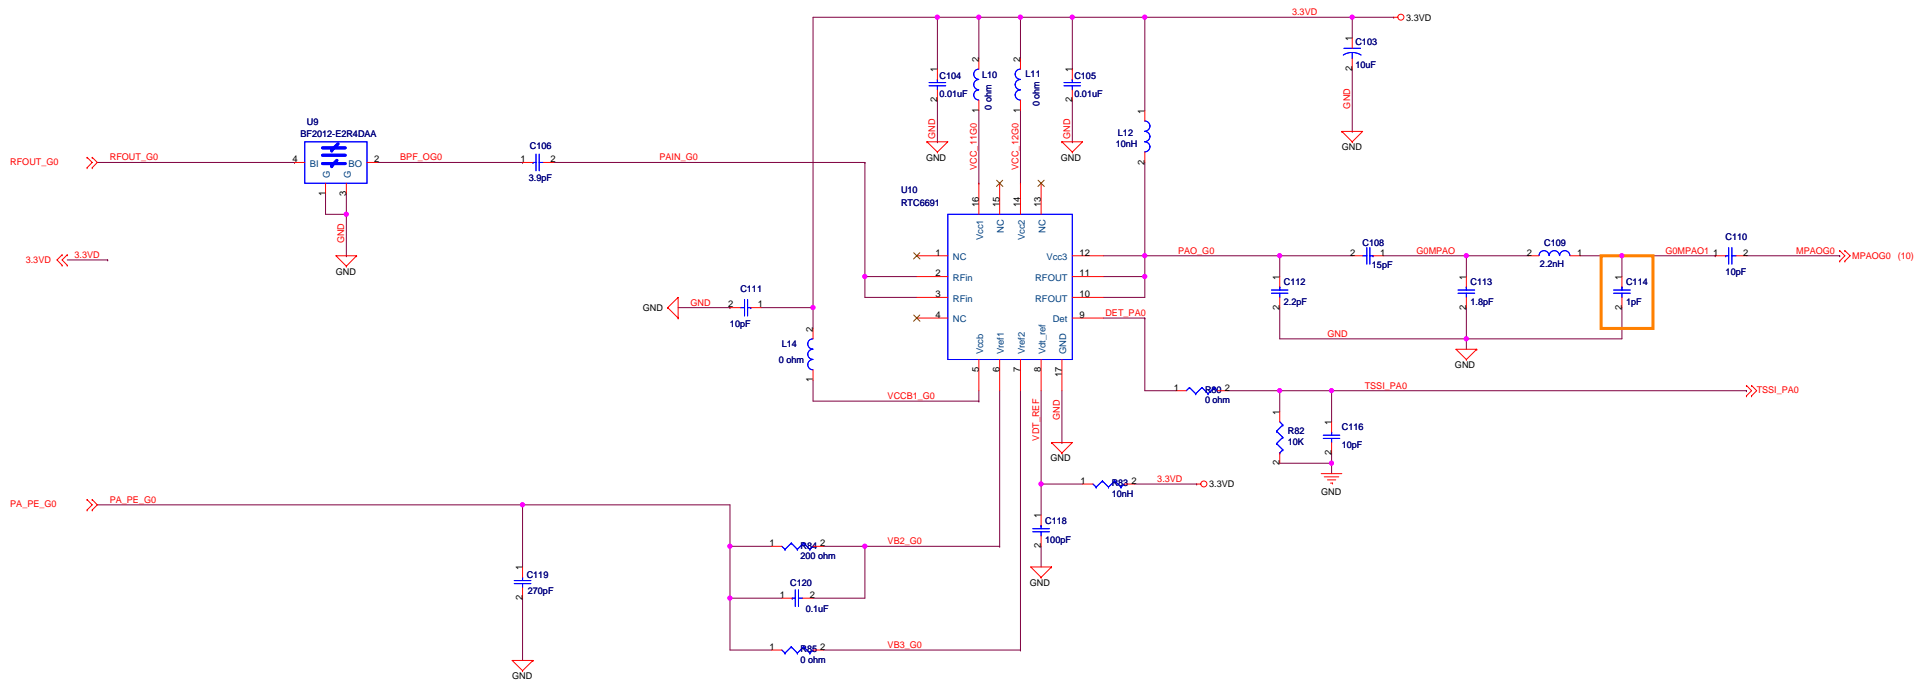


3.3VD << 3.3VD



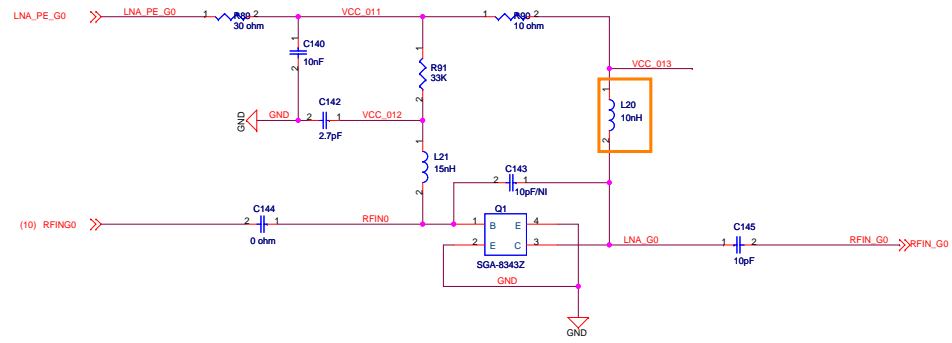



3.3VD << 3.3VD

Ant. 2412~2462MHz

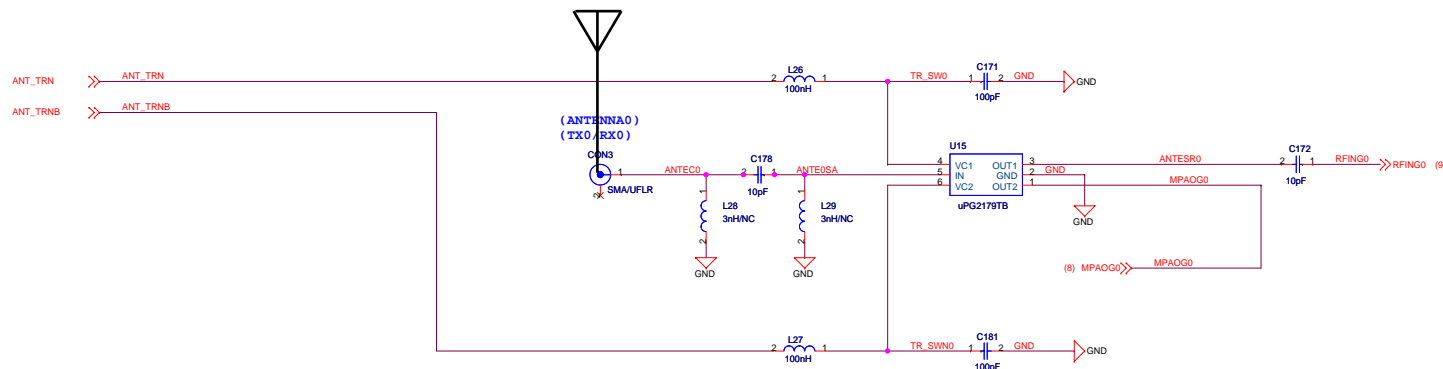

GPI05
GPI03

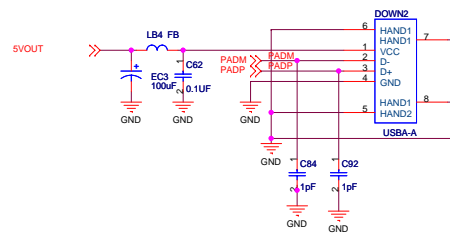



GPIO13

GPIO10

GPIO9

GPIO0
GPIO14

3.3VD << 3.3VD

3.3VD

licon_LED

Wireless ACT LED

iNIC Wireless ACT LED

WPS LED/PBC 3G_LED

LAN1 Port LED

System/Power LED

Software Reset/
Factory Default

WLAN_LED

LAN_LED0

PWR_LED

RST_PBC <<

WLAN_LED

LAN_LED0

D8
LED

D9
LED

WLED

LED

R132
330

R133
330

R139

0/NC

GND


3.3VD

R131
4.7K

1

2

RST_PBC

		RALINK TECHNOLOGY, CORP. CONFIDENTIAL	
		Title	LED
Size B	Document Number AP-RT3052-V21RW-2x2.SCH		Rev 2.1
Date:	Saturday, November 13, 2010	Sheet	13 of 14