



WHA YU INDUSTRIAL CO., LTD.(HEAD OFFICE)
 DONGGUAN AEON TECH CO.,LTD.(CHINA)
 SUZHOU AEON TECH CO.,LTD.(CHINA)
 AEON TECH (SHANGHAI) CO.,LTD(CHINA)
 DONGGUAN PARNER TECH CO.,LTD.(CHINA)

SPECIFICATION FOR APPROVAL

CUSTOMER: 明泰科技股份有限公司 產地: 大陸吳江市。東莞市

PART NAME: PIFA Antenna 產品單重:2050mg

PART NO.: **REVISION:**

W. Y. P/NO.: C037-511024-A (SSR-209370) **REV.:** X2

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
APPROVED BY :	陳達華	
DATE :	09' 12. 10	

WHA YU GROUP

WHA YU INDUSTRIAL CO., LTD.(HEAD OFFICE)

譚裕實業股份有限公司

Address: No. 326, Sec. 2, Kung Tao 5 Road, Hsin Chu City, Taiwan, R.O.C.

Tel: +886-3-5714225 (REP.) Fax: +886-3-5713853 · +886-3-5723600

DONGGUAN AEON TECH CO., LTD.(CHINA)

東莞台霖電子通訊有限公司

Address: Hupan Industrial District, Tai Ling Shan Town, Dong Guan City, Guangdong, China

Tel: +86-769-85655858 Fax: +86-769-85655258

SUZHOU AEON TECH CO., LTD.(CHINA)

蘇州華廣電通有限公司

Address: Limin North Road, LiLi Town, LiLi Industrial Park, LinHu Economic Zone

Wujiang City, Jiangsu Province, China

Tel: +86-512-63627980 Fax: +86-512-63627981

AEON TECH (SHANGHAI) CO., LTD.(CHINA)

普翔電子貿易(上海)有限公司

Address: Flat 501, 5F, Build 27, NO.68, Guiqing Road, Huhui District, Shanghai, China

Tel: +86-21-64959151 Fax: +86-21-64959059

DONGGUAN PARNER TECH CO., LTD.(CHINA)

東莞倍能電子有限公司

Address: Hupan Industrial District, Shida Road, Tai Ling Shan Town,

Dong Guan City, Guangdong, China

Tel: +86-769-81662366 Fax: +86-769-81602681

Contents

<i>Item</i>	<i>Description</i>	<i>Page</i>
1.	規格表 1
2.	成品圖 2
3.	BOM List 3
4.	測試報告 4~6
5.	Cable 規格/UL 7~11
6.	Connector檢驗規格/UL 12~20
7.	PIFA規格 21
8.	雙面背膠材質特性 22~24
9.	鐵粉芯材質特性 25~26
10.	熱縮套管材質特性/UL 27~35
11.	樣品檢驗記錄表 36
12.	樣品圖 37

PIFA Antenna Assembly


Specification

1. Electrical Properties (Free Space)

- 1.1 Frequency Range.....2.4GHz ~ 2.5GHz
- 1.2 Impedance50 Ω Nominal
- 1.3 VSWR4.5:1 Max.
- 1.4 Return Loss.....- 3.9dB Max.
- 1.5 RadiationOmni-directional
- 1.6 Gain(peak).....0.69dBi (excluding cable loss)
- 1.7 Cable Loss..... 0.5dB Max.
- 1.8 Polarization.....Linear ; Vertical
- 1.9 Admitted Power..... 1W
- 1.10 Cable..... Φ 1.13mm Coaxial Cable
- 1.11 Connector.....MHF

2. Physical Properties :

- 2.1 Operating Temp.-10 $^{\circ}$ C ~ +60 $^{\circ}$ C
- 2.2 Storage Temp.-10 $^{\circ}$ C ~ +70 $^{\circ}$ C

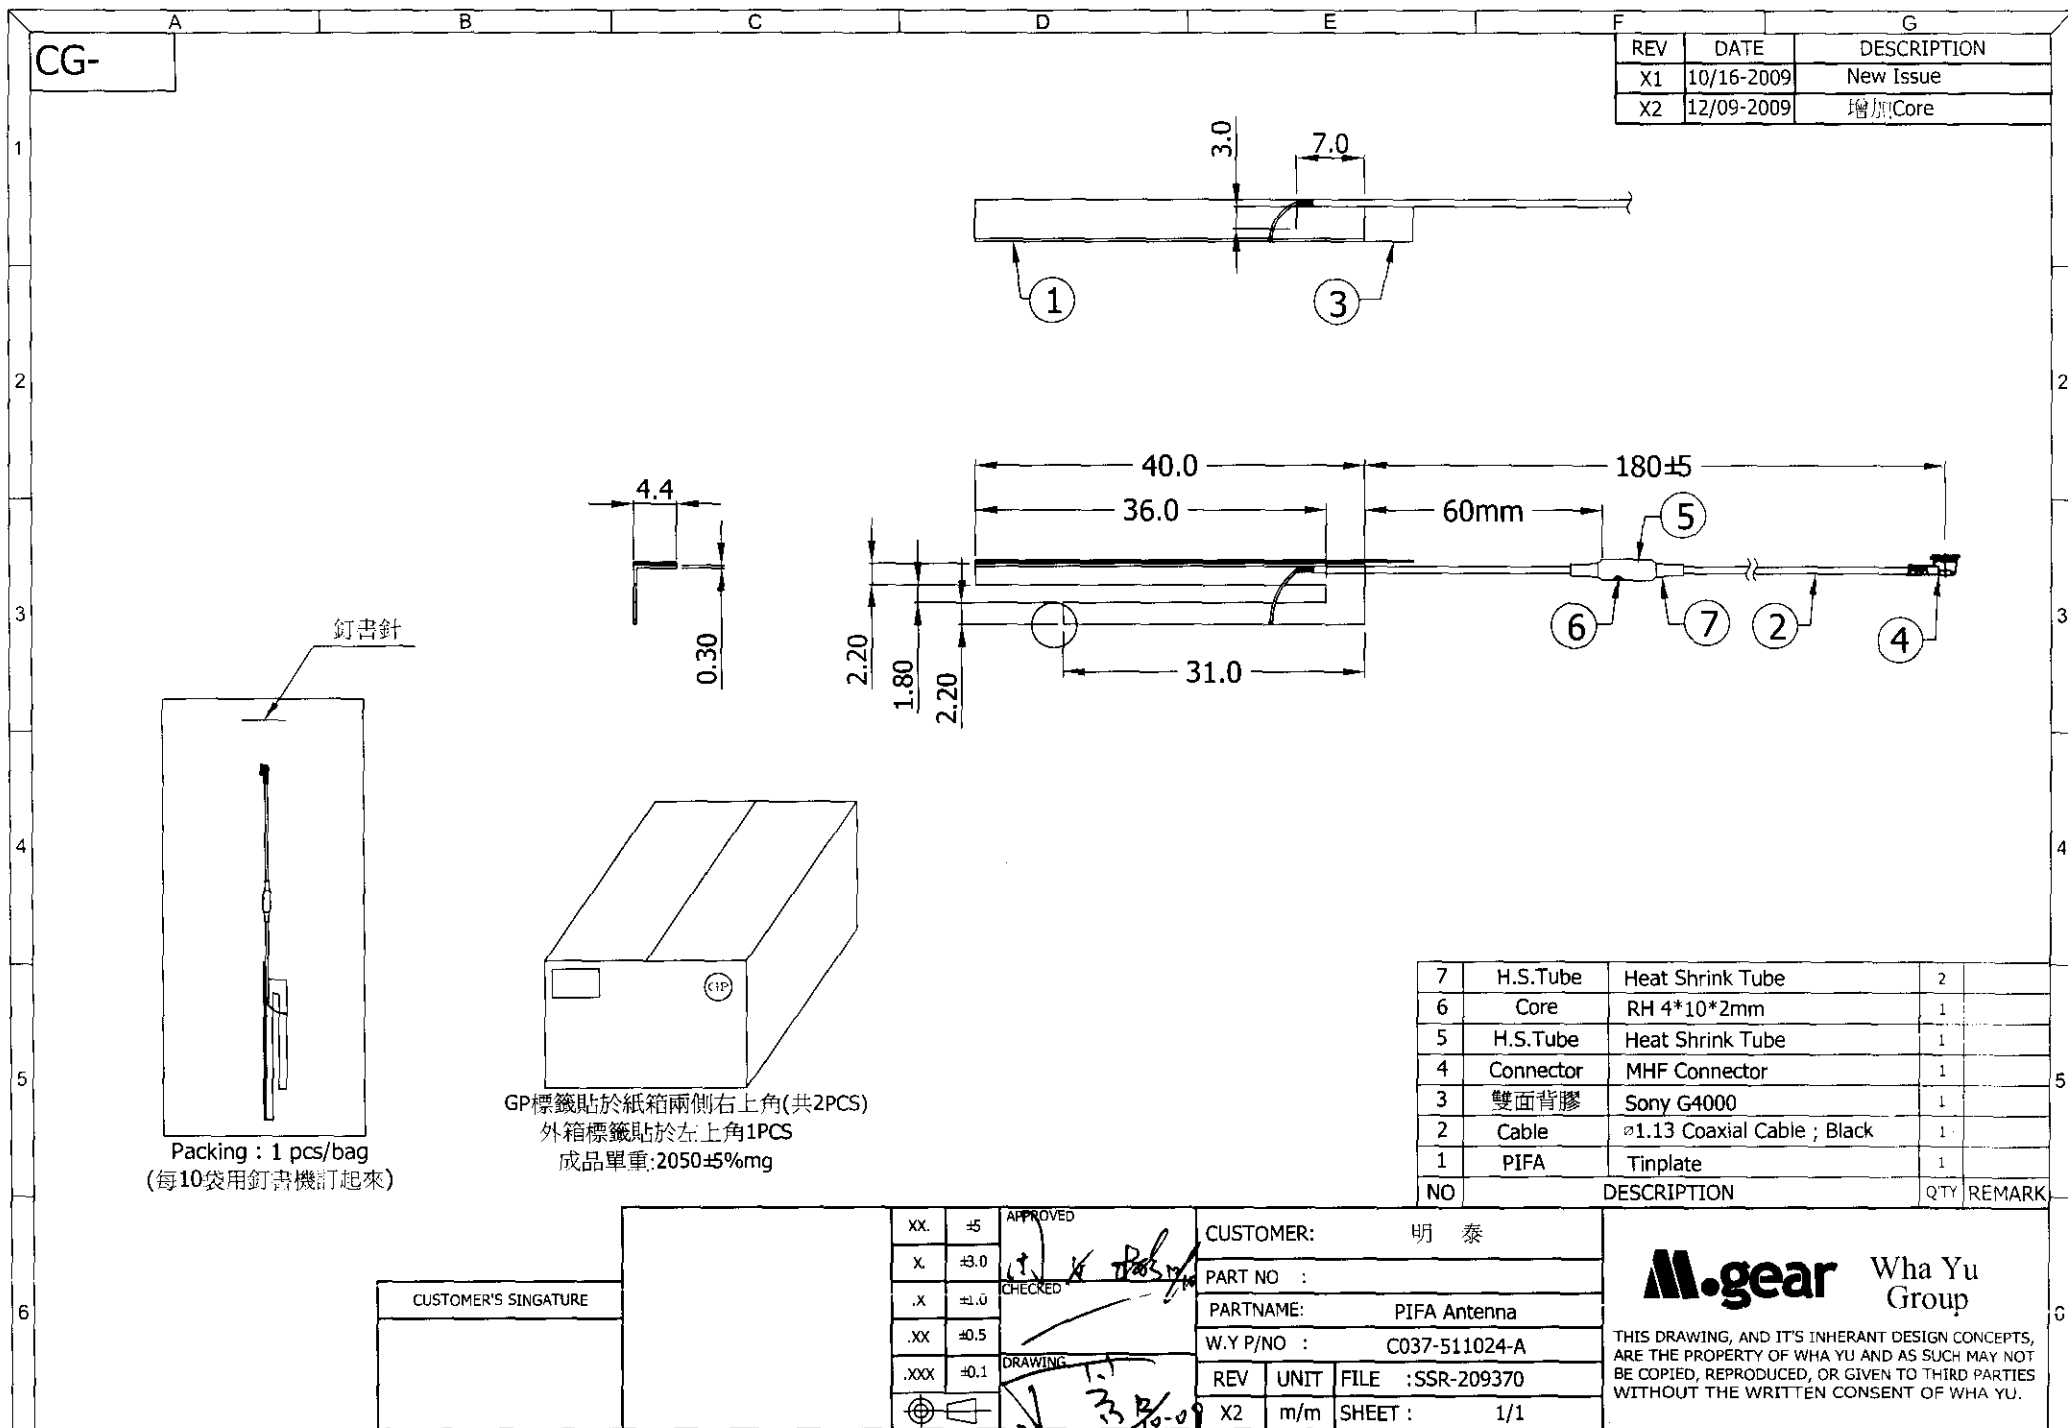



謹裕實業股份有限公司

WHA YU INDUSTRIAL CO., LTD

BILL OF MATERIAL

CUSTOMER P/N: 明泰科技股份有限公司

DATE:2009.12.10

W.Y.P/N:C037-511024-A

PART NO:SSR-209370

PART NAME:PIFA Antenna Assembly

REV:X2

序號	零件名稱	供應商	規格描述	UL 防火等級
1	Cable	EVERNEW	Φ1.13mm Coaxial Cable,Black,50Ω,鍍錫線	60or80℃ 30V
2	Connector	I-PEX	MHF Plug for Φ1.13 Coaxial Cable	V-0
3	PIFA	TON YI	PIFA Antenna 0.3T 馬口鐵 低毒	---
4	雙面背膠	SONY	Sony G4000 雙面背膠;40(L)*3(W)*0.15(T)mm	---
5	Core	KING Core	K5B;RH4*10*2mm	---
6	H.S Tube	HAMBURG	H.S TUBE V4 UL/CSA (T=0.15) Φ4.0*18mm,H-2 (T=0.18) Φ3.0 L=10mm; 收縮比例3:1,Black	125℃,150V
7	H.S Tube	WOER	H.S TUBE V4 UL/CSA (T=0.15) Φ4.0*18mm,H-2 (T=0.18) Φ3.0 L=10mm; 收縮比例3:1,Black	125℃,600V

變更履歷:


序號	變更依據	變更內容	變更日期	版本
1	依客戶需求	增加CORE	2009.12.10	X1=>X2

核 準		審 核		制 作	
--------	---	--------	---	--------	---

工程部"未經許可"不得複印"


PIFA Antenna

P/NO : C037-511024-A(SSR-209370) SPEC :2.4~2.5GHz

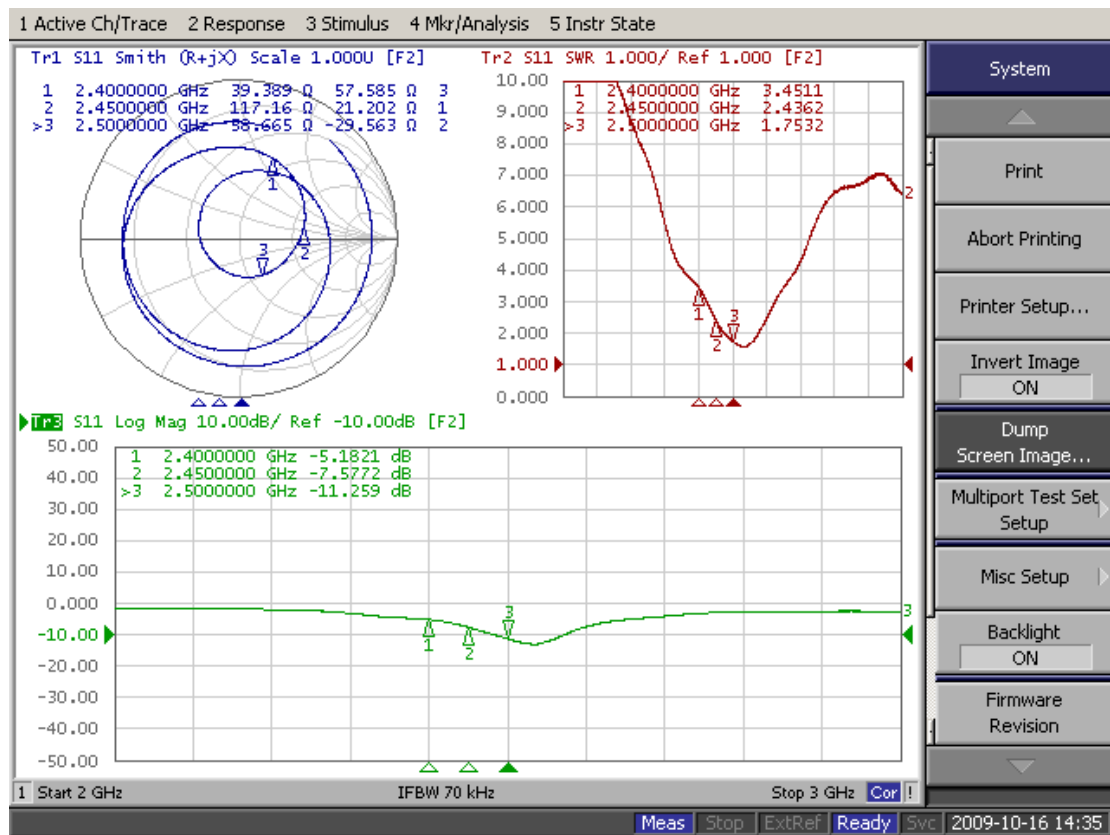


2009/10/16

Far-field amplitude of C037-511024-A SSR-209370-H.nsi

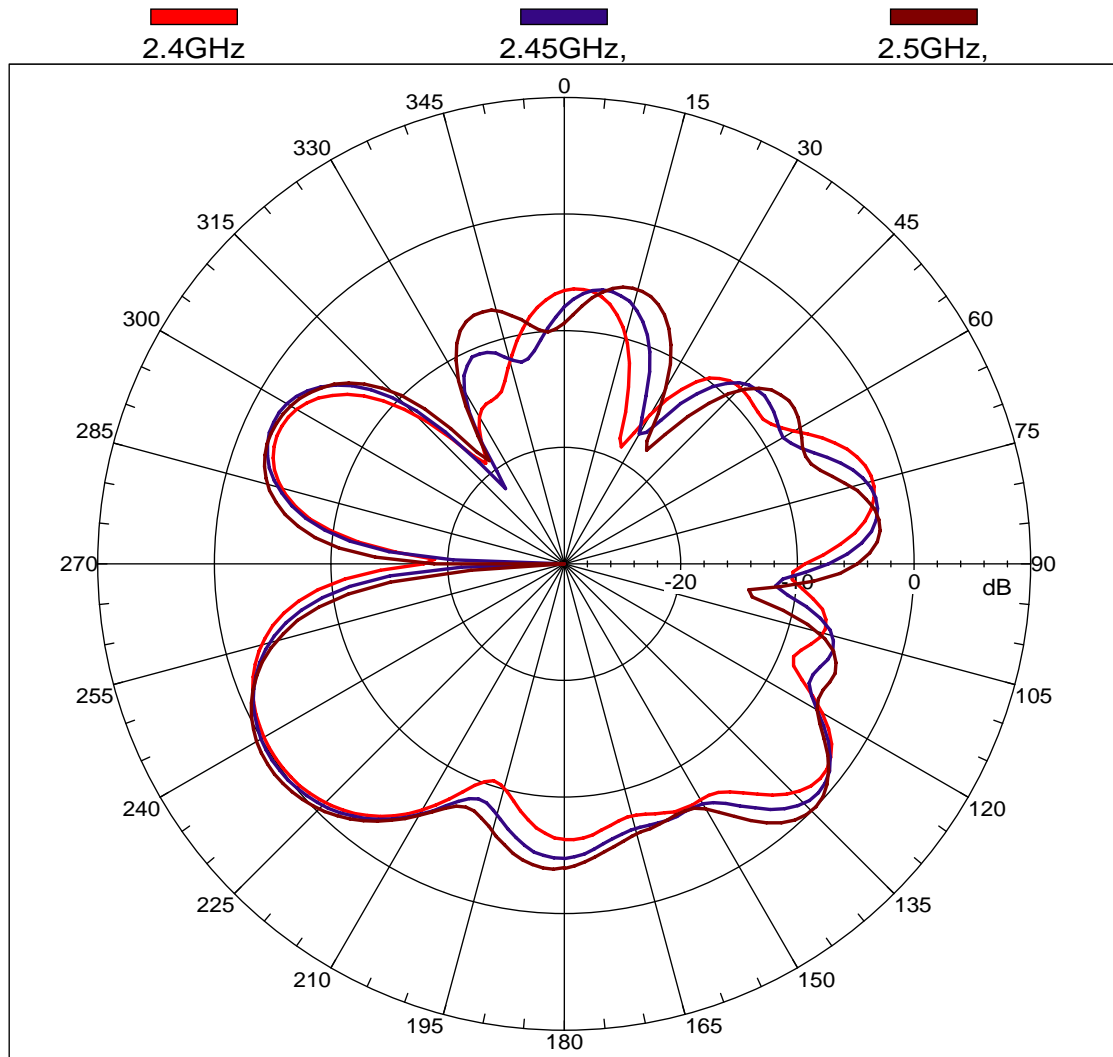

Far-field amplitude of C037-511024-A SSR-209370-V.nsi

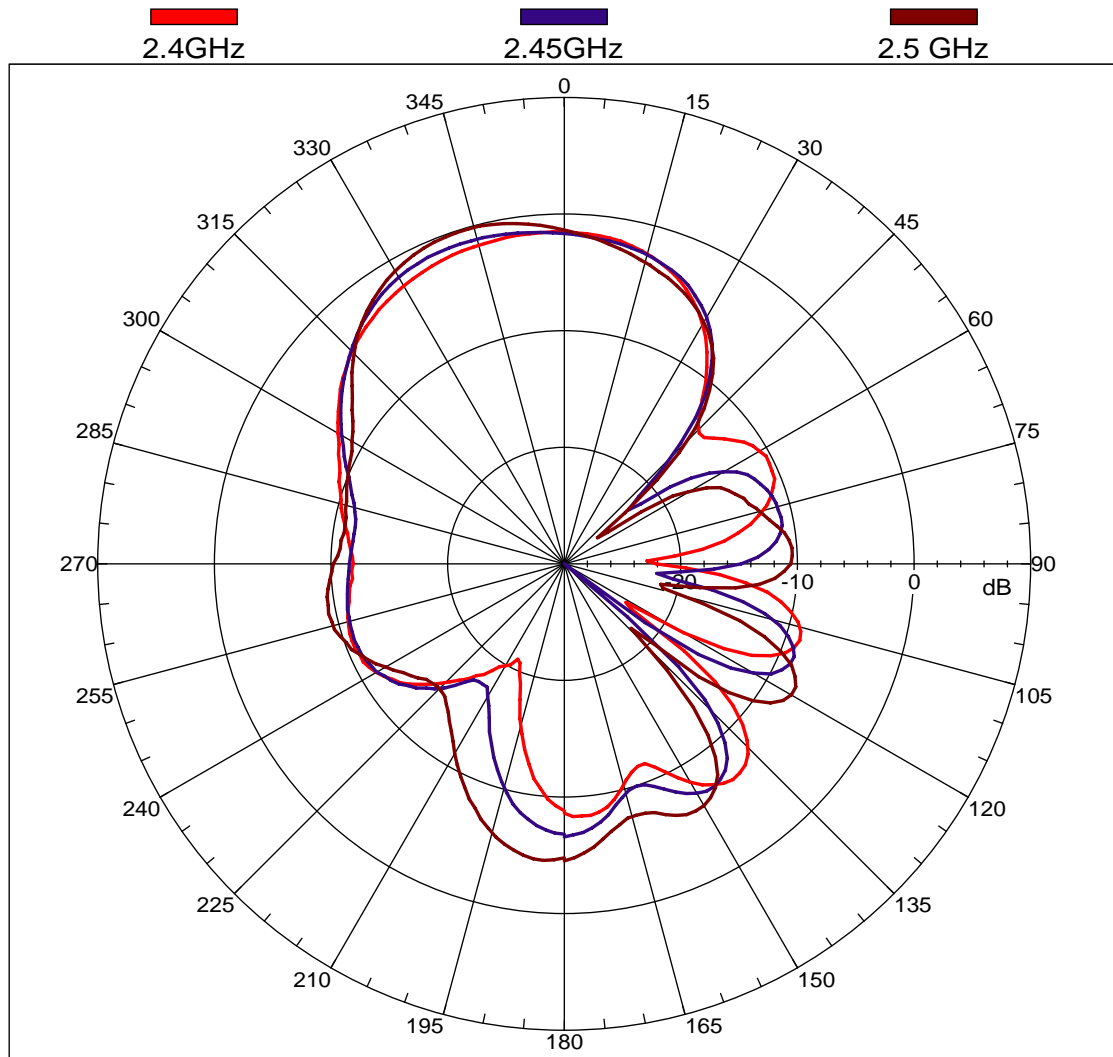



EVERNEW WIRE & CABLE CO.,LTD.

6,Shang Shing Rd.,Shang Jeau Industrial District,
Chang An Town,Dongguan,Guangdong,China

Tel:86-769-5411045

Fax:86-769-5540257

APPROVED	CHECKED	ENGINEER
ELI	QF	ZQY

APPROVED BY CUSTOMER:_____

DOCUMENT NO. RF


REVISION NO. B/0

Product Specifications

DATE: 07-10-2009

Construction & Material		Guests Part No.	
Item		Unit	Specification
Product			RF
Conductor	Size	mm	32
	Number	C	1
	Material		Silver-Gilt Copper
	Construction	pcs / mm	7/0.084±0.005
	Diameter	mm	0.26
Insulation	Material		FEP
	Nom.thickness	mm	0.22
	Overall Diameter	mm	0.68±0.05
	Color		Transparent
Braiding	Material		Stranded Tinned Copper
	Construction	mm	4/0.05/16
Jacket	Material		FEP
	Nom.thickness	mm	0.12
	Overall Diameter	mm	1.13+0.1/-0.06
	Color		By Order
Marking	None Marking		

Cross - Section View :

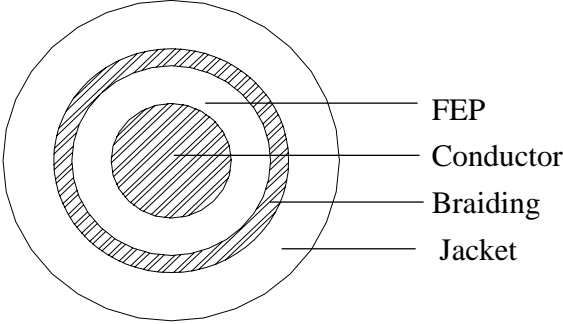

NOTE : Please confirmed in two days , Or we will take it as confirmed.

FORM NO. EW-FOR-009C,C/1

電 氣 性 能		
特性阻抗	50±2(TDR,250ps &500ps)	Ω
耐電壓 A.C	0.5/1	KV/min
最小絕緣電阻	1000(650V D.C)	M Ω -km
Attenuation(min)	Frequency(GHZ)	dB/m
	1.0	-2.2
	2.0	-3.0
	2.4~2.5	-3.3
	3.0	-3.9
	4.0	-4.8
	4.8~6.0	-5.3
反射損失(max)	2.4G~2.5G	-20dB/m
	4.8G~6.0G	-15.5dB/m



AVLV2.E138922 Appliance Wiring Material - Component

[Page Bottom](#)

Appliance Wiring Material - Component

[See General Information for Appliance Wiring Material - Component](#)

EVERNEW WIRE & CABLE CO LTD
5TH FL
111 KEELUNG RD, SEC 2
TAIPEI, TAIWAN

E138922

Table of Recognized Styles					
Single-conductor, thermoplastic insulation.					
1007	1185	1208	1365	1533	1792
1061	1195	1354	1503	1777	
Multiple-conductor, thermoplastic insulation.					
2464	2725	2854	2960	20276	
2562	2835	2919	2990		

Marking: Company name, voltage rating, temperature rating, conductor size, conductor material if other than copper, and use.
[Last Updated](#) on 2008-10-23

[Questions?](#)

[Notice of Disclaimer](#)

[Page Top](#)

Copyright ?2009 Underwriters Laboratories Inc.®

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "Copyright © 2009 Underwriters Laboratories Inc.®"

An independent organization working for a safer world with integrity, precision and knowledge.



[Click here to go to UL's iQ™ for Appliance Wiring Materials Database](#)

UNDERWRITERS LABORATORIES

APPLIANCE WIRING MATERIAL

Subj.758 Section 1 Page 1354

Issued:1964-02-19

Revised:2009-04-30

Style 1354 Coaxial Cable.

Rating 60, 80 deg C, 30 Vac, Horizontal flame.

Conductor 44 AWG min., material not specified.

Insulation 2 mils minimum at any point, 125 mils maximum. The insulation may be: Extruded solid or cellular PE, FRPE, PP, PFA, FEP, ECTFE, PTFE, ETFE, or combination thereof with or without irradiation; or tape wrapped solid or cellular PTFE, PFA, or FEP. Applied as a spiral wrapped thread (5 mils minimum, 40 mils maximum) and enclosed in a tube of insulation.

Assembly Insulated conductor with optional inner covering, optional inner shield, optional middle covering, required outer shield and required outer covering.

Shield Optional. Outer Shield required.

Covering Optional Inner Covering - Extruded PVC, PFA, Polyamide, Polyester, PVDF, FEP, PTFE, ECTFE, ETFE, PE, XLPE, XLFRPE or FRPE; lacquered braids; heat sealed PTFE, PFA or FEP tape; Polyester or Polyester-Polyethylene film. Thicknesses not specified. Optional Middle Covering - Extruded PVC, PFA, PP, Polyamide, Polyester, PVDF, FEP, PTFE, ECTFE, ETFE, PE, XLPE, XLFRPE or FRPE; lacquered braids; heat sealed PTFE, PFA or FEP tape; Polyester or Polyester-Polyethylene film. Thicknesses not specified. Required Outer Covering - Extruded Irradiated PE, Irradiated PVC, Polyurethane, PVC, PFA, PP, Polyamide, Polyester, PVDF, FEP, PTFE, ECTFE, ETFE, PE, XLPE, XLFRPE or FRPE; lacquered braids; heat sealed PTFE, PVC, PFA or FEP tape; Polyester or Polyester-Polyethylene film. Thicknesses not specified.

Standard	Appliance Wiring Material UL 758.
Marking	General.
Use	Internal wiring of Class 2 circuits of electronic equipment or as insulated single in jacketed multiconductor cables.



謹裕料號 Whyu P/N		Z101-02110002-B1		產品名稱 Product Name		MHF Plug for φ 1.13 Coaxial Cable		
Structural Drawing								
<p>The drawing includes a top view at the top center showing a circular connector with four mounting tabs. Below it are two side views and two cross-sectional views. Dimensions are provided in millimeters: overall length (11.4), mounting tab width (3), outer diameter (2.69), and various internal and external diameters and lengths for the shell and crimp pin. The cross-sections are labeled with circled numbers 1, 2, and 3. The bottom view shows the connector end with a notch and dimensions (6.96), (4.25), and 0.2.</p>								
Material							Surface	
1	Isolation	PBT	Polybutylene Terephthalate(UL 94V-0)					Black
2	Shell	Phosphor Bronze	Cu	Sn	P	Zn	Pb	Gold Plated 0.05 μ m
3	Crimp Pin	Phosphor Bronze	Cu	Sn	P	Zn	Pb	Gold Plated 0.1 μ m
Remark：插拔次數 30 次								

MICRO COAXIAL CONNECTOR

Applicable for

IEEE802.11a/b/g/n, UWB, WiMAX, Bluetooth, iBurst,
ZigBee and MIMO(Multiple Input and multiple output)


RoHS Compliance

Halogen - Free *1

MHF SERIES

Easy Cable termination by "i-Fit[®]" Technology

MHF SERIES MICRO COAXIAL CONNECTOR

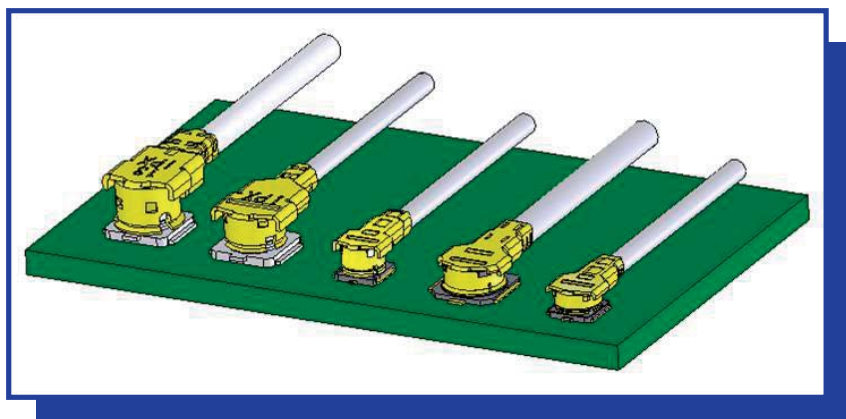

【Major Application】

- Wireless LAN Antenna
- Cellular Phone
- Note Book Computer
- Game Equipment
- Digital Appliance
- Access Point

【Key Features】

- SMT Receptacle and Mating Plug Cable Connector
- Small form factor and low profile : 1.2mm to 2.5mm MAX. Mating Height
- Applicable Cable :
O.D.0.64mm / 0.81mm / 0.98mm / 1.13mm / 1.32mm / 1.37mm and 1.8mm Coaxial Cable
- High productivity : Easy Cable termination by “i-Fit[®]” without soldering
- Applicable Technology :
IEEE802.11 a/b/g/n, UWB, WiMAX, iBurst, Zigbee, Bluetooth Wireless and MIMO

【Specifications】

- Frequency Range : DC up to 6GHz (V.S.W.R. : 1.3MAX at 0.1~3GHz, 1.4MAX at 3~6GHz)
- Characteristic Impedance : 50 ohm (Nominal)
- Temperature : -40°C to +90°C
- Rated Voltage : AC 60V
- Contact Resistance : 20m ohm MAX. (Signal) and 10m ohm MAX. (Ground)
- Withstand Voltage : AC 200V
- Insulation Resistance : 500M ohm MIN. / DC 100V


【Product Overview】

MHF type Plating (Center/ Ground)	MHF Receptacle				MHF III Receptacle		MHF-A Receptacle		MHF 4 Receptacle		
		MHF Receptacle		MHF II Plug	MHF III Plug		MHF-A13 Plug			MHF 4 Plug	MHF 4 SMT Plug
		MHF Plug	MHF II Plug								
Mating Height		2.5mm (MAX.)	2.1mm (MAX.)		1.6mm (MAX.)		1.45mm (MAX.)			1.2mm (MAX.)	1.2mm (MAX.)
Gold/ Gold	20279-001E-01 (3pads)										
	20441-001E-01 (4pads)	20278-1*2R-**	20351-1*2R-37	20311-011R-08	20369-001E	20367-001R	20429-001E	20428-001R	20407-001E	20448-001R-081	20462-001E
Gold/ Silver	20314-001E-01 (3pads)	20308-1*2R-13 20308-1*2R-32	N/A	20312-011R-08 20312-011R-10	N/A	N/A	N/A	N/A	N/A	N/A	N/A


◆All Center contact are Gold Plated

Easy and Speedy Cable Connection of Center Conductor (i-Fit[®]) and Outer Conductor at **Only one operation** by our special assembling tool

< i-Fit[®] Connection mechanism >

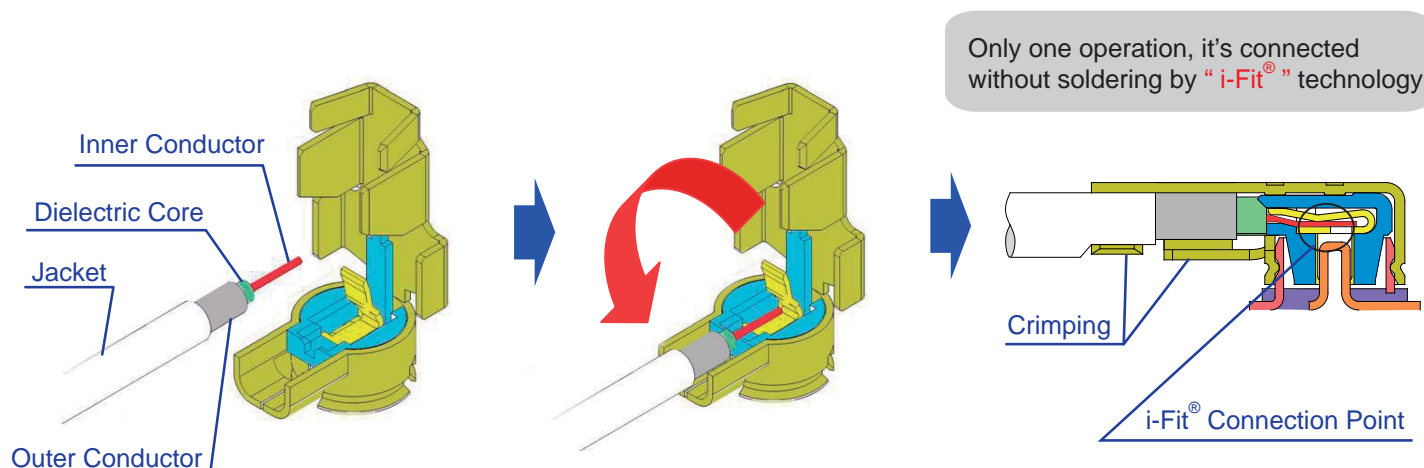


i-Fit[®] PATENT NO.
U.S.A. PAT.6,790,082
JAPAN PAT.4148339

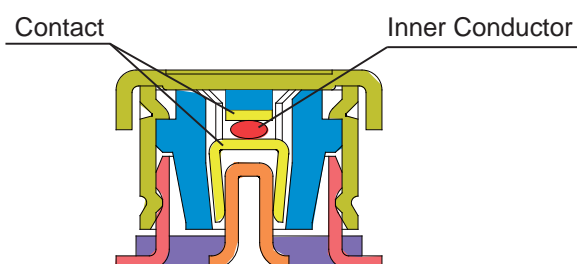

i-Fit[®] Cross-section

< Product Mechanism >

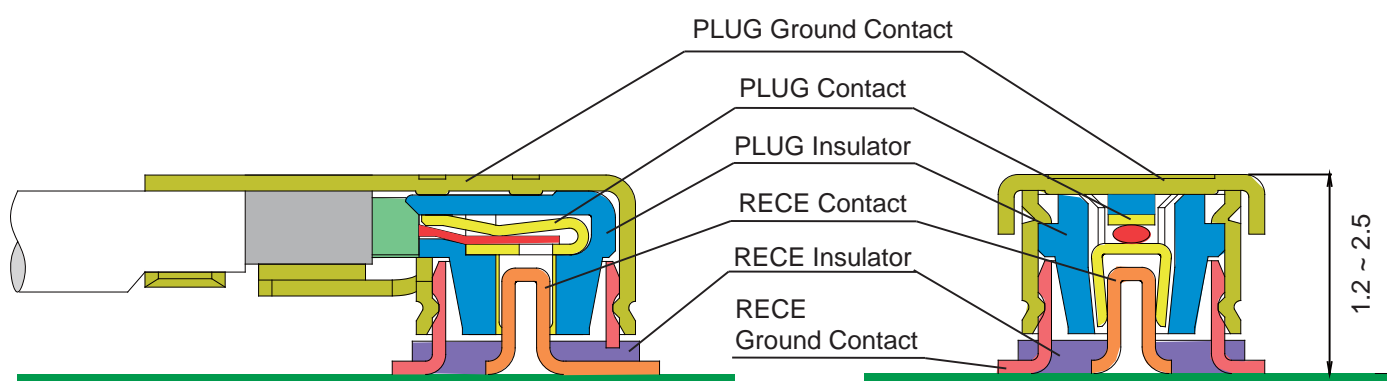

MHF Receptacle

3pads type

【Part Number】

Ground Contact : **Au** Plating




20279-001 E- 01

Packing : Emboss Tape
1reel : 2,500pcs

Ground Contact : **Ag** Plating

20314-001 E- 01

Packing : Emboss Tape
1reel : 2,500pcs

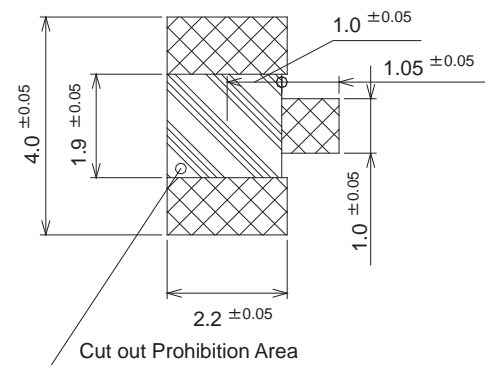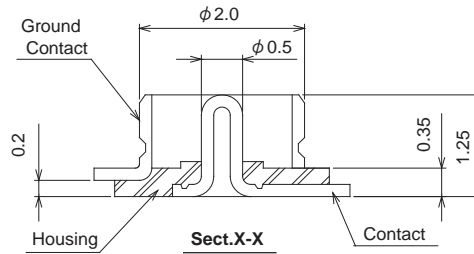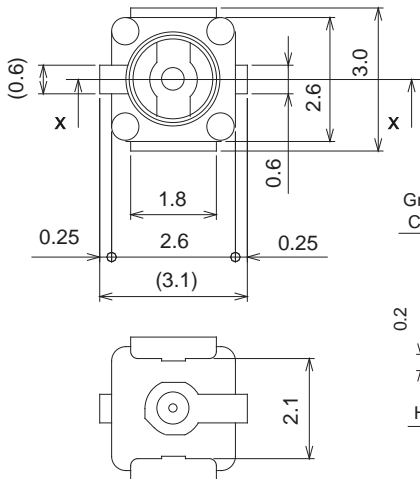

RECOMMENDED FOOTPRINT PATTERN




4pads type

【Part Number】

Ground Contact : **Au** Plating

20441-001 E- 01

※ Packing : Emboss Tape
1reel : 5,000pcs

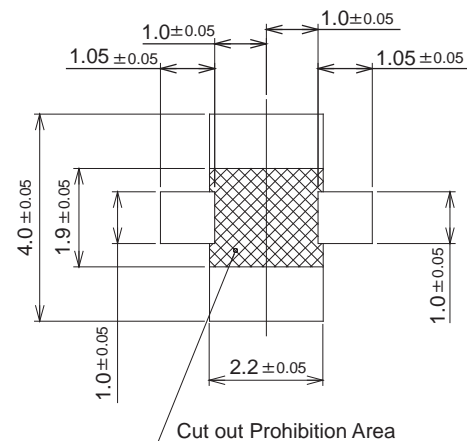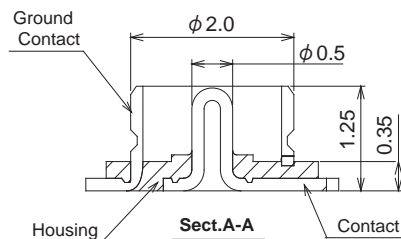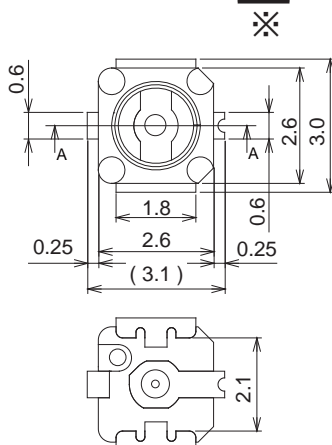

RECOMMENDED FOOTPRINT PATTERN

【Material and Finish】

Parts	Material	Plating / Color (3pads)	Plating / Color (4pads)
HOUSING	LCP UL94V-0	NATURAL	BLACK
CONTACT	COPPER ALLOY	Au	Au
GROUND CONTACT	COPPER ALLOY	Au or Ag	Au

MHF Plug Cable Assembly

Mating Height : 2.5mm MAX

Applicable for Four kinds of Cable Size

【Part Number】

Ground Contact : **Au** Plating

20278-1 * 2 R- * *

① ② ③






Ground Contact : **Ag** Plating





20308-1 * 2 R- * *

① ② ③


①	TOOL	0	for Hand Tool (with Notch)
		1	for Semi-Auto (without Notch)
②	Packing	R	Reel 1reel : 2,000pcs
③	Applicable Cable Size	-	P/N 20278 : 08, 13, 32, 18 P/N 20308 : 13, 32

【Applicable Cable Size】

Part No. (Au)	20278-1**R-08	20278-1**R-13	20278-1**R-32	20278-1**R-18
Part No. (Ag)	-	20308-1**R-13	20308-1**R-32	-
	for AWG#36	for AWG#32	for AWG#32	for AWG#30
				
Braided Shield of Outer Conductor	Single Braided Shield	Single Braided Shield	Double Braided Shield	Single Braided Shield

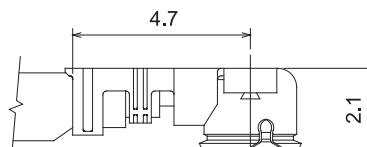

Plug
P/N 20278-1*2R-08
P/N 20278-1*2R-13 P/N 20308-1*2R-13
P/N 20278-1*2R-32 P/N 20308-1*2R-32



Receptacle
P/N 20279-001E-01 P/N 20314-001E-01
P/N 20411-001E-01

【Material and Finish】

MATED VIEW

Parts	Material	Plating / Color	Note
HOUSING	PBT UL94V-0	NATURAL or BLACK	Only Au 08, Au 18 is NATURAL
CONTACT	COPPER ALLOY	Au	
GROUND CONTACT	COPPER ALLOY	Au or Ag	

No.06027-1
Feb / 26/'08

材料証明書
MATERIAL CERTIFICATE

当社製品には下記の材料が使われている事を証明致します。

WE HEREBY CERTIFY THAT THE FOLLOWING MATERIALS ARE USED IN OUR PRODUCT.

PRODUCT NAME : MHF series micro coaxial connector PLUG & RECEPTACLE VERTICAL

Plug, Non halogen free type

Part No.	Contents	Housing	Contact	Ground contact
20278-101R-08	材質名/ Material	PBT	Phosphor bronze	Phosphor bronze
20278-111R-08				
20278-101R-13	型名/ Cat No.	DURANEX 3116	C5210R-H	C5191R-1/2H
20278-111R-13				
20278-101R-32	材料メーカー	WINTECH POLYMER LTD.	Nippon Mining &	HARADA METAL
20278-111R-32	Manufacturer		Metals Co.,Ltd.	INDUSTRY Co.,Ltd.
20278-101R-18				
20278-111R-18	UL94難燃性	V-0	-----	-----
20308-101R-13	UL94 flame			
20308-111R-13	class			
20308-101R-32				
20308-111R-32	UL file No.	E213445	-----	-----
20351-101R-37				
20351-111R-37				

添付資料 : ULカード写し / UL CARD COPY

APPROVAL	CHECK	ORIGINATOR
T.Harada Feb/26/'08	T.Tagawa Feb/26/'08	K.Ohbayashi Feb/26/'08

FORM REV.0

Plug, Halogen free type

Part No.	Contents	Housing	Contact	Ground contact
20278-102R-08	材質名/ Material	PBT	Phosphor bronze	Phosphor bronze
20278-112R-08	型名/ Cat No.	XFR4840 GF10	C5210R-H	C5191R-1/2H
20278-102R-13	材料メーカー	WINTech POLYMER LTD.	Nippon Mining & Metals Co.,Ltd.	HARADA METAL INDUSTRY Co.,Ltd.
20278-112R-13	Manufacturer			
20278-102R-32	UL94難燃性	V-0	-----	-----
20278-112R-32	UL94 flame			
20278-102R-18	class			
20278-112R-18	UL file No.	E213445	-----	-----
20351-102R-37				
20351-112R-37				

添付資料：ULカード写し / UL CARD COPY

Receptacle

Part No.	Contents	Housing	Contact	Ground contact
20279-001E-01	材質名/ Material	LCP	Brass	Phosphor bronze
20314-001E-01	型名/ Cat No.	VECTRA E130i	C2680R-o	C5191R-1/2H
	材料メーカー	Polyplastics Co.,Ltd	Nippon Mining & Metals Co.,Ltd.	HARADA METAL INDUSTRY Co.,Ltd.
	Manufacturer			
	UL94難燃性	V-0	-----	-----
	UL94 flame			
	class			
	UL file No.	E 106764	-----	-----

添付資料：ULカード写し / UL CARD COPY

WINTech POLYMER LTD

18-1 KONAN 2-CHOME MINATO-KU TOKYO 108-8280 JP

Material Designation: **3116(e)**

Product Description: Polybutylene Terephthalate (PBT), designated "Duranex" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.75	V-0	4	0	130	-	130	-	-
	1.5	V-0	3	0	130	120	130	-	-
NC, BK	3	5VA	2	0	130	120	130	-	-
CTI: 2	IEC CTI (V): -	HVTR: 3			D495: 6			IEC Ball Pressure (° C): -	
Dielectric Strength (kV/mm): 23		Volume Resistivity (10 ⁹ ohm-cm): 16						Dimensional Stability(%):0.0	
ISO Tensile Strength (MPa): -		ISO Flexural Strength (MPa): -						ISO Heat Deflection (C): -	
ISO Tensile Impact (kJ/m ²): -		ISO Izod Impact (kJ/m ²): -						ISO Charpy Impact(kJ/m ²): -	

(e) Virgin and regrind from 1 to 50 by weight incl. have the same basic material characteristics (at a minimum thickness of 0.75 mm), except for 310EP which has a lower as received Tensile Impact value from 26 to 50 percent regrind.

Report Date: 11/15/2000

Underwriters Laboratories IncR

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.

SHIPPER: GUANGZHOU PACIFIC TEMPLATE CO., LTD

REFERENCE NO. : R84-705

CONTRACT NO. : R84-405

COMMODITY: ELECTROLYTIC TITANIUM

SPECIFICATION: SPTU MR DRU-0-R1

[Handwritten signature]

INSPECTION CERTIFICATE

CUSTOMER: 上海外灘國際有限公司

CUSTOMER'S CONTROL NO.

广州太平洋马口铁有限公司

GUANGZHOU PACIFIC TEMPLATE CO., LTD

广东省广州市经济技术开发区友谊路

YUJIAN ROAD, GUANGZHOU ECONOMIC & TECHNICAL

DEVELOPMENT DISTRICT, GUANGZHOU, 610730, CHINA

CERTIFICATE NO. : PAT-P-8-1216

DATE OF ISSUE: 2008/04/27 PAGE: 16

NOTE:

41

SIZE: 0.155 X 791 W X 6

CONTING: 62.8/2.8

[illegible]

SONY

強力高性能両面接着テープ

G4000

★G4000は従来品であるT4000の特徴を継承しつつ、無溶剤型に発展させた次世代の基材入り両面接着テープです。

□従来品に比べ接着力が強力な基材入りの両面接着テープです。「ULNo.MH15431取得」

□初期接着性に優れています

□ウレタンフォームの凹凸に粘着剤が追従しよく接着します。

□環境劣化に強く高度な実用特性を有します

□従来のように、塗工時に有機溶剤を使用しないため、地球環境への影響が少ない次世代の接着テープです

名称	厚み
アクリル粘着剤	(約 55 μ m)
不織布	(約 40 μ m)
アクリル粘着剤	(約 55 μ m)
剥離紙	(約 120 μ m)

粘着剤主成分	アクリル系樹脂	粘着剤厚み (基材含む)	0.15mm
色	無色透明	形状	抜き加工品 ロール品
基 材	不織布		

□自動車・家電製品・コンピューターから携帯情報機器などにおける金属・プラスチックの銘板やアクリル窓等の各種材料の恒久接着テープとしてご使用頂けます。


G4000

SONY


特性

1. 剥離強度 (180度ピール)

- ・テープ幅: 20mm
- ・圧着条件: 2kgローラー1往復
- ・常温1日放置後
- ・測定雰囲気: $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$ $65\% \pm 10\%$
- ・引張り速度: 300mm/min
- ・バックング材: 25 μ mPET

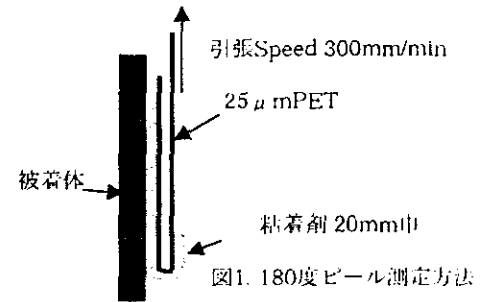


	(N/2cm)			
被着体	SUS	ABS	PS	PP
剥離強度	16.8	14.1	13.0	9.93

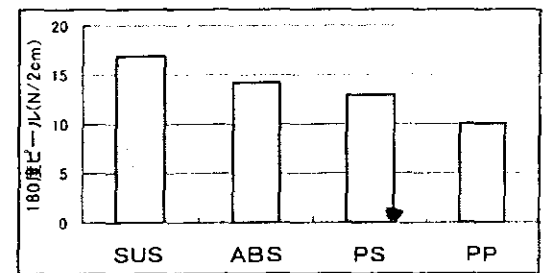

2. 保持力

- ・テープ貼付け面積: 25 × 25mm
- ・被着体: SUS304
- ・圧着条件: 2kgローラー1往復
- ・荷重: 1kg
- ・1時間後のズレ (mm) を測定

測定温度	40°C	60°C	80°C
ズレ (mm)	0.3	0.4	0.6

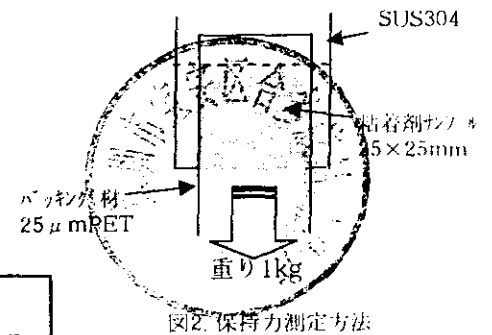

3. ボールタック (J. Dow法)

ボールタック (ボールNo.)	7~8
-----------------	-----

SONY

4. ウレタンフォームとの接着性：耐反発（180度折り曲げ接着）

- ・ 接着幅：20mm
- ・ 接着長さ：5mm、10mm
- ・ 試験温度：RT、50℃
- ・ 接着条件：80%圧縮
- ・ 被着体（支持体）：0.5mm厚AL板
- ・ 被着体：ウレタンフォーム5mm厚（エーテル、エステル）

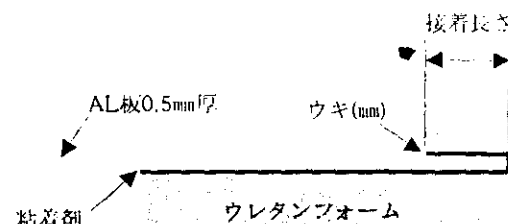


図3. ウレタンフォーム耐反発測定方法

ウキ高さ(mm) ○:0.5mm未満			常温放置	50℃放置
接着長さ 5mm	エーテル	3日後	○	○
		7日後	○	○
	エステル	3日後	○	0.5mm
		7日後	0.5mm	0.5mm
接着長さ 10mm	エーテル	3日後	○	○
		7日後	○	○
	エステル	3日後	○	○
		7日後	○	○

上記のレポートは当社の信頼できる実験に基づいたものですが、記載内容通りの性能が保証されることを意味するものではありません。使用目的や使用条件において、当製品の使用目的、使用条件を充分ご検討の上、ご使用くださいますようお願いいたします。

ソニーケミカル株式会社

<http://www.scc.sony.co.jp/>

本社 〒141-0032 東京都品川区大崎1-11-2
ゲートシティ大崎イーストタワー8F

Tel.03-5435-3946 (代)


鹿沼工場 〒322-8502 栃木県鹿沼市さつき町12-3

Tel.0289-76-0211 (代)

2004年04月作成

G4000

SPECIFICATION

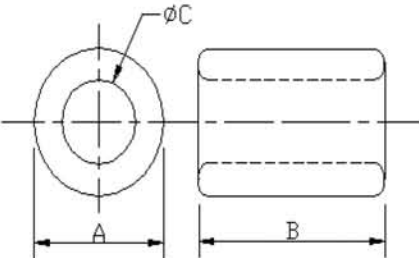CUSTOMER:		CUST.P/N:	
ITEM:	K5B RH 4x10x2	K.C.P/N:	PS0404IA
(1) SHAPE : 		A	4±0.2 m/m
		B	10±0.4 m/m
		C	2±0.15 m/m
		D	m/m
		E	m/m
		F	m/m
		G	m/m
		(2) ELECTRICAL REQUIREMENTS: $Z_1 = 37^{-0}$ OHM AT 25 MHz $Z_2 = 63^{-0}$ OHM AT 100 MHz	
(4) PACKING <input checked="" type="checkbox"/> IN BULK <input type="checkbox"/> VACUUM <input type="checkbox"/> INSERTION 2000 PCS/BAGS* 4 BAG/INNER BOX* 4 BOXES/CARTON = 32000 PCS PCS/PLATE* PLATES/CARTON= PCS PCS/TRAY* TRAYS/CARTON= PCS		(5) APPEARANCE (1) AREA OF BREAK : <2 m/m ² (2) SUM OF BREAKING AREA : <3 m/m ² (3) DEPTH OF BREAK : <1 m/m	
(6) REMARK:		Approved by	
		Checked by	
		Drawn by	
		DWG.NO.	




King Core Electronics Inc.
 Tel: 886-3-4782511 (Rep.)
 Fax: 886-3-4759923
 E-mail : kc@mail.kingcore.com.tw

ER011B

K5B RH 4x10x2

PS0404IA

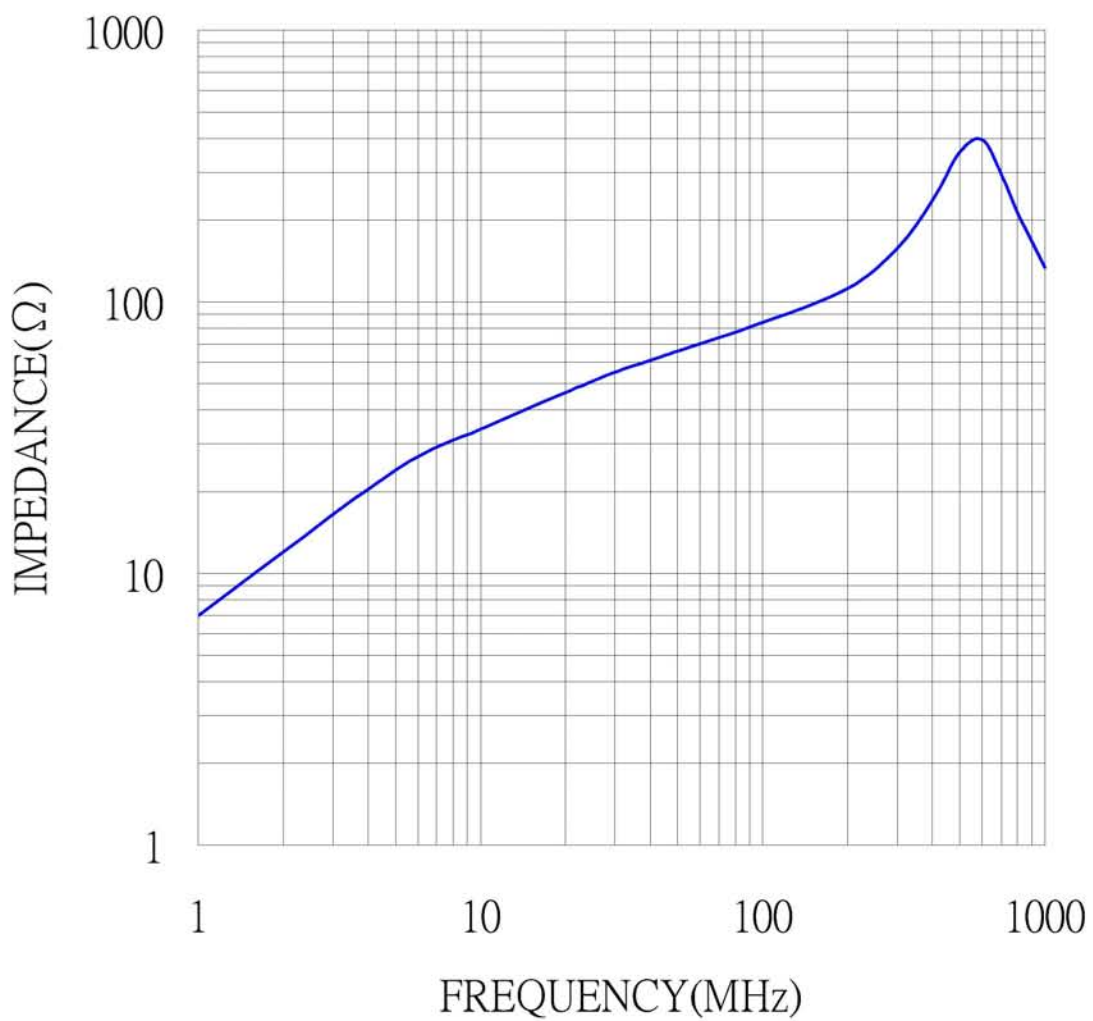

King Core Electronics Inc.

Tel: 886-3-4782511 (Rep.)

Fax: 886-3-4759923

E-mail: kc@mail.kingcore.com.tw



PRODUCT SPECIFICATION

HAMBURG H-2(CB) 環保阻燃熱收縮套管(薄品)

Environmentally friendly, flexible, ultra thin-wall, flame-retardant polyolefin tubing

應用

HAMBURG H-2(CB)系柔軟、阻燃、輻照交聯聚烯烴復合物制成之環保超薄型熱收縮套管，通過 UL 及 CSA 認證。H-2(CB)系超薄設計，快速收縮，特別適用於空間緊張和對溫度敏感的場合。例如，高密度連接器的應力解除，輕、薄、小、熱敏元件的絕緣保護等。H-2(CB)不含 PCBs、PCPs、PBBs、PBBOs、PBBEs、PBDEs 等對環境有害的物質、符合環保要求。

特點

收縮比 2 : 1
低溫收縮、快速收縮
柔軟、高阻燃
優異的物理、化學及電學性能
不含 PCBs、PCPs、PBBs、PBBOs、PBBEs、PBDEs 等對環境有害的物質，符合歐洲 RoHS 環保指令及 SONY SS00259 標準的要求。
可提供多種規格及顏色

溫度範圍

連續使用溫度：-55 ~125
最低起始收縮溫度：60
最低完全收縮溫度：100

認證 / 符合標準

UL224 E255394 125 300V VW-1
CSA C22.2 229705 125 150V VW-1

Application

HAMBURG H-2(CB) is environmentally friendly, flexible, ultra thin-wall, flexible, flame-retardant, irradiated crosslinking heat-shrinkable modified polyolefin tubing. It is designed for applications that require an ultra thin wall for rapid shrinking and space saving. Low shrink temperature further reduces installation time and the risk of damage to temperature-sensitive components.

Features/Benefits

Shrink ration:2:1
Low shrink temperature
Ultra thin-wall, rapid shrinking.
Very flexible, flame-retardant
Free of PCBs, PCPs, polybrominated biphenyls (PBBs), polybrominated biphenyl oxides and others (PBBOs, PBBEs, and PBDEs) and toxic heavy metal (Pb, Cd, Hg, Cr6+) compounds, which are classified as environmentally hazardous substances. Conforms to European RoHS environmental directive.
Wide range of sizes and colors

Operation Temperature Range

Operating temperature range: -55 ~125
Minimum shrink temperature: 60
Minimum full recovery temperature: 100

Standards/Approvals

UL224 E255394 125 300V VW-1
CSA C22.2 229705 125 150V VW-1

HAMBURG H-2 (CB)



HAMBURG INDUSTRIES CO.,LTD

6FL, No.12, Lane 270, Sec.3, Pei Shen Rd., Shen Keng Hsiang, Taipei Hsien, Taiwan 222

性能指標 Specification values

特性	項目 Property	指標要求 Requirement	測試方法 Test method	曲型值 Typical data
物理特性 Physical	軸向收縮率	5%max	ASTM D 2671	5%
	同心度 Concentricity	70%min	ASTM D 2671	70%
	抗張強度 Tensile strength	10.4Mpa min	ASTM D 638	14.0MPa
	斷裂伸長率 Elongation	200%min	ASTM D 638	400%
	熱沖擊 Heat shock	無裂痕 No cracking	ASTM D 2671	通過 Pass
	低溫柔軟性(-55 ,4 小時) Low temperature flexibility-55 ,4hrs	無裂痕 No cracking	ASTM D 2671	通過 Pass
	熱老化 158 ,168 小時			通過 Pass
	老化后抗張強度 Tensile strength after aging	初始值的 70%以上 70% of original min	ASTM D 638	90%
	老化后斷裂伸長率 Elongation after aging	100%min	ASTM D 638	300%
電學特性 Electrical	絕緣耐壓和擊穿 Dielectric voltage withstand	2500V,60sec,不擊穿 No Breakdown	UL224	通過 Pass
	絕緣強度 Dielectric strength	19.7KV/mm min	ASTM D 2671	25KV/mm
	體積電阻率 Volume resistivity	10^{14} .cm min	ASTM D 876	10^{14} .cm
化學特性 Chemical	銅腐蝕 Corrosion	無裂痕 No cracking	ASTM D 2671	通過 Pass
	銅穩定性	伸長率 100%	ASTM D 2671	通過
	阻燃性 Flammability	VW-1	UL224	通過 Pass

HAMBURG H-2 (CB)

For further information, please contact:

Tel: 886 2 2662 8882 Fax: 886 2 2662 7201~2 E-mail: Taipei@hamburg.com.tw URL: <http://www.hamburg.com.tw>



HAMBURG INDUSTRIES CO.,LTD

6FL, No.12, Lane 270, Sec.3, Pei Shen Rd., Shen Keng Hsiang, Taipei Hsien, Taiwan 222

規格尺寸 Product sizes

規格 Size(mm)	收縮前(mm) As supplied		收縮后(mm) After recovery		包裝 Standard length (M/卷)
	內徑 Inside diameter	壁厚 Wall thickness	內徑 Inside diameter (max.)	壁厚 Wall thickness (min.)	
0.8	1.0 ± 0.2	0.10 ± 0.03	0.5	0.20	200
1.0	1.4 ± 0.2	0.10 ± 0.03	0.6	0.20	200
1.5	1.9 ± 0.2	0.10 ± 0.03	0.75	0.20	200
2.0	2.4 ± 0.2	0.12 ± 0.03	1.0	0.20	200
2.5	2.8 ± 0.3	0.13 ± 0.05	1.25	0.25	200
3.0	3.4 ± 0.3	0.13 ± 0.05	1.5	0.25	200
3.5	3.9 ± 0.3	0.13 ± 0.05	1.75	0.25	200
4.0	4.4 ± 0.3	0.15 ± 0.05	2.0	0.25	200
5.0	5.5 ± 0.3	0.15 ± 0.05	2.5	0.25	100
6.0	6.5 ± 0.3	0.15 ± 0.05	3.0	0.28	100
7.0	7.5 ± 0.3	0.15 ± 0.05	3.5	0.28	100
8.0	8.6 ± 0.4	0.15 ± 0.05	4.0	0.28	100
9.0	9.6 ± 0.4	0.15 ± 0.05	4.5	0.28	100
10.0	10.6 ± 0.4	0.15 ± 0.05	5.0	0.28	100
11.0	11.6 ± 0.4	0.18 ± 0.05	5.5	0.28	100
12.0	12.6 ± 0.4	0.20 ± 0.05	6.0	0.28	100
13.0	13.6 ± 0.4	0.20 ± 0.05	6.5	0.30	100
14.0	14.6 ± 0.4	0.20 ± 0.05	7.0	0.30	100
15.0	15.6 ± 0.5	0.20 ± 0.05	7.5	0.32	100
16.0	16.6 ± 0.5	0.20 ± 0.05	8.0	0.36	100
18.0	18.6 ± 0.5	0.22 ± 0.05	9.0	0.36	100
20.0	21.0 ± 1.0	0.25 ± 0.05	10.0	0.36	50
22.0	23.0 ± 1.0	0.25 ± 0.05	11.0	0.40	50
25.0	26.0 ± 1.0	0.25 ± 0.05	12.5	0.40	50

HAMBURG H-2 (CB)

Ordering Information

Color

Standard: Black (-BK), White(-WH), Red(-RD), Blue(-BL), Yellow(-YL), Green(-GR),

Nonstandard: Available upon request.

Nonstandard size: Special sizes are available upon request.

Standard packaging: On spools, Cut pieces are available upon request.

Ordering description: Specify product type, size(mm or inch)and color.

For further information, please contact:

Tel: 886 2 2662 8882 Fax: 886 2 2662 7201~2 E-mail: Taipei@hamburg.com.tw URL: <http://www.hamburg.com.tw>

UL Online Certifications Directory

YDPU2.E255394 Tubing, Extruded Insulating - Component

[Page Bottom](#)

Tubing, Extruded Insulating - Component

[See General Information for Tubing, Extruded Insulating - Component](#)

HAMBURG INDUSTRIES CO LTD

E255394

6TH FL

12 LANE 270 PEI SHEN RD, SEC 3

SHEN KENG HSIANG, TAIPEI HSIEN 222 TAIWAN

Cat. No.	Max V	Max Oper Temp	Shrinkdown Class	Col Recognized	Max Temp Rated Oil Resistance * C	VW-1 Rated #
Flexible Heat Shrinkable Polyolefin tubing.						
H-2(+)	600	125	I	All except CL	None	Yes##
H-2 (CB)	150	125	I	Black and White	None	Yes

#Tubing is considered to comply with the optional VW-1 flammability requirements only if it is so marked.

VW-1 flammability rating limited to Black color only.

+ in the designation represents CTMS/TMS.

(CB) - Indicates 150V rated thin-walled tubing with a wall thickness in accordance with UL 224.

Marking: Company name Recognized Component Mark, the catalog designation, temperature rating in degrees C, and voltage rating appear on tags attached to both ends of the tubing or on the shipping spool label or smallest unit container.

[Last Updated](#) on 2006-06-30

[Questions?](#)

[Notice of Disclaimer](#)

[Page Top](#)

Copyright © 2006 Underwriters Laboratories Inc.®

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "Copyright © 2006 Underwriters Laboratories Inc.®"

An independent organization working for a safer world with integrity, precision and knowledge





Certificate of Compliance

Certificate: 229705

Project: 1661899M

Date Issued: April 28, 2005

Issued to: Hamburg Industries Co., Ltd.
6F., No. 12, Lane 270, Sec. 3,
Pei Shen Rd., Shen Keng Hsiang,
Taipei Hsien, Taiwan

The products listed below are eligible to bear the CSA Mark shown



Authorized by: 
Director, Far East Operation


PRODUCTS

CLASS 9032 01 - INSULATING DEVICES AND MATERIALS Insulating Tubing and Sleeving

- Flexible, heat-shrinkable, Cross-linked polyolefin tubing:

Cat No	Voltage Rating (V)	Temp Rating (C)	Trade Size (mm)	Notes
HAMBURG H-2	600	125	1.0-30	1

Note: In all colours except clear or translucent.

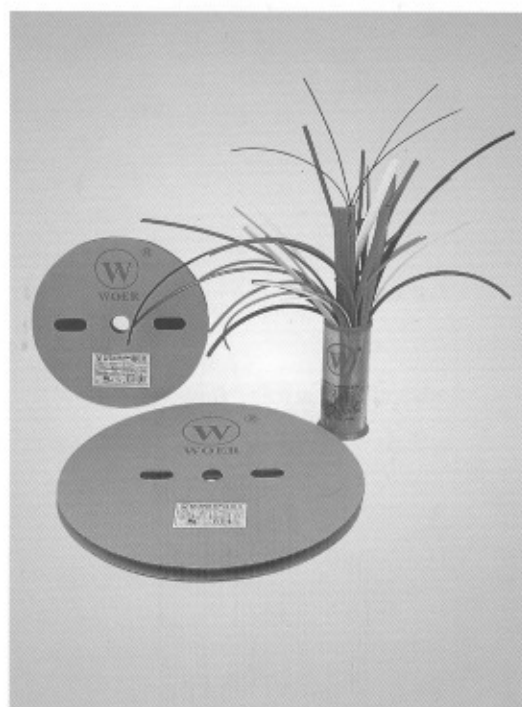

安规标准: UL224 VW-1
C-UL CSA C 22.2 OFT

WOER RSFR (H) 系列 H无卤环保阻燃热缩套管采用优质高聚物, 经科学配方、机械共混成高聚合物合金, 产品成型后经电子加速器辐照交联、连续扩张而成。产品具有环保、柔软、阻燃、收缩快、性能稳定等优点。广泛应用于电线连接、焊点保护、电线端部、线束及电子元器件的防护和绝缘处理; 健身器材零部件和钢结构表面防护; 相关产品的防锈、防腐处理; 电线和其它产品的标识等。

特点:

- ①八大元素、卤素元素通过SGS检测;
- ②不含有机锡化合物(三丁基锡类/三苯基锡类)、石棉(Asbestos)、烟雾剂(AzoCompounds)及限制其释放的物质-甲醛;
- ③适用范围: $-55^{\circ}\text{C} \sim 125^{\circ}\text{C}$;
- ④起始收缩温度 70°C , 超薄型完全收缩温度 110°C , 普通型完全收缩温度 120°C , 轴向收缩率 $\leq 5\%$;
- ⑤柔软、阻燃;
- ⑥规格齐全, $\phi 0.6 \sim \phi 180$, 并可定制特殊规格;
- ⑦使用方便, 用烘箱和热风枪加热即可收缩。
- ⑧环保性能符合Sony与欧盟RoHS等环保标准。

标准颜色: 见标准颜色表, 其中“+”表示比色卡颜色偏深, “-”表示比色卡颜色偏浅。黑、白、红、黄、绿、蓝色为基本颜色, 常备库存, 其它颜色不备库存, 需定做。

H管标准颜色

标准颜色	黑色	白色	红色	黄色	绿色	蓝色	紫色	灰色	棕色	铁红
产品颜色标识			186U	114U	3288U	646U	2735U	427U	483U ⁻	484U ⁻
H管彩色颜色色标										

性能特性

性能		测试方法	性能指标
物理特性	拉伸强度 (MPa)	GB/T1040	≥ 10.4
	断裂伸长率 (%)	GB/T1040	≥ 200
	热老化后拉伸强度 (MPa)	UL 224 158°C x 168hr	≥ 7.3
	热老化后断裂伸长率 (%)	UL 224 158°C x 168hr	≥ 100
	耐热冲击	UL 224 250°C x 4hr	不发粘 不龟裂
	抗冷弯曲	UL 224 -30°C x 4hr	不龟裂
电气特性	击穿强度 (kv/mm)	GB/T1408	≥ 15
	耐压	150V 600V	UL 224 1500V不击穿
			UL 224 2500V不击穿
化学特性	体积电阻率 ($\Omega \cdot \text{cm}$)	GB/T1410	$\geq 1 \times 10^{14}$
	抗腐蚀性	UL 224 158°C x 168hr	PASS
	铜安定性	UL 224 158°C x 168hr	PASS
	阻燃性	UL 224	VW-1

环保特性

有害元素名称	测试方法	指标(mg/kg)	有害元素名称	测试方法	指标(mg/kg)
镉 (Cd)	EN1122:2001Method B	≤ 5	硒 (Se)	EPA 3052	≤ 25
铅 (Pb)	EPA 3050 B	≤ 90	氟 (F)	EN 14582 Method B	≤ 200
锑 (Sb)	EPA 3050 B	≤ 60	氯 (Cl)	EN 14582 Method B	≤ 800
钡 (Ba)	EPA 3050 B	≤ 1000	溴 (Br)	EN 14582 Method B	≤ 800
铬 (Cr)	EPA 3050 B	≤ 5	碘 (I)	EN 14582 Method B	≤ 200
汞 (Hg)	EPA 3052	≤ 5	其中多溴联苯 (PBB)	EPA3540C或3550C	禁用
砷 (As)	EPA 3052	≤ 50	多溴联苯醚 (PBDE)	EPA3540C或3550C	禁用

H管(无卤环保阻燃热缩套管)产品规格

规格 (mm)	收缩前尺寸 (mm)		收缩后尺寸 (mm)		标准包装			适用范围 (mm)
	内径	壁厚	内径	壁厚	米/盘	盘/箱	包装箱规格(cm)	
Φ0.6	0.9±0.2	0.15±0.05	≤0.40	0.22±0.10	200	23	31×31×44.5	0.5~0.7
Φ0.8	1.1±0.2	0.15±0.05	≤0.50	0.22±0.10	200	23	31×31×44.5	0.6~0.8
Φ1.0	1.5±0.2	0.15±0.05	≤0.65	0.28±0.10	200	16	31×31×44.5	0.75~0.9
Φ1.5	2.0±0.2	0.18±0.05	≤0.85	0.32±0.10	200	12	31×31×44.5	0.95~1.4
Φ2.0	2.5±0.2	0.18±0.05	≤1.00	0.35±0.10	200	15	46×46×44.5	1.1~1.8
Φ2.5	3.0±0.2	0.18±0.05	≤1.30	0.38±0.10	200	13	46×46×44.5	1.4~2.3
Φ3.0	3.5±0.2	0.18±0.05	≤1.50	0.40±0.10	200	11	46×46×44.5	1.6~2.7
Φ3.5	4.0±0.2	0.22±0.05	≤1.80	0.42±0.10	200	9	46×46×44.5	1.9~3.2
Φ4.0	4.5±0.2	0.25±0.05	≤2.00	0.45±0.10	200	7	46×46×44.5	2.1~3.6
Φ4.5	5.0±0.2	0.25±0.05	≤2.30	0.50±0.10	100	10	46×46×44.5	2.4~4.0
Φ5.0	5.5±0.2	0.25±0.05	≤2.5	0.55±0.10	100	9	46×46×44.5	2.6~4.5
Φ5.5	6.0±0.2	0.25±0.05	≤2.75	0.55±0.10	100	8	46×46×44.5	2.85~5.0
Φ6.0	6.5±0.2	0.28±0.05	≤3.0	0.55±0.10	100	7	46×46×44.5	3.1~5.4
Φ7.0	7.5±0.3	0.28±0.05	≤3.5	0.55±0.10	100	14	46×46×31	3.7~6.3
Φ8.0	8.5±0.3	0.28±0.05	≤4.0	0.60±0.10	100	13	46×46×31	4.2~7.2
Φ9.0	9.5±0.3	0.30±0.08	≤4.5	0.60±0.10	100	12	46×46×31	4.7~8.0
Φ10	10.5±0.3	0.30±0.08	≤5.0	0.60±0.10	100	11	46×46×31	5.2~9.0
Φ11	11.5±0.3	0.30±0.08	≤5.5	0.60±0.10	100	11	46×46×31	5.7~10
Φ12	12.5±0.3	0.30±0.08	≤6.0	0.60±0.10	100	10	46×46×31	6.2~11
Φ13	13.5±0.3	0.35±0.10	≤6.5	0.65±0.10	100	9	46×46×29.5	6.7~12
Φ14	14.5±0.3	0.35±0.10	≤7.0	0.65±0.10	100	9	46×46×31	7.3~13
Φ15	15.5±0.4	0.40±0.12	≤7.5	0.70±0.10	100	8	46×46×29.5	7.8~14
Φ16	16.5±0.4	0.40±0.12	≤8.0	0.70±0.10	100	8	46×46×31	8.3~15
Φ17	17.5±0.4	0.40±0.12	≤8.5	0.70±0.10	100	7	46×46×29.5	8.8~16
Φ18	19.0±0.5	0.40±0.15	≤9.0	0.80±0.15	100	7	46×46×29.5	9.3~17
Φ20	21.0±0.5	0.40±0.15	≤10.0	0.80±0.15	100	6	46×46×29.5	10.4~19
Φ22	23.0±0.5	0.40±0.15	≤11.0	0.80±0.15	100	6	46×46×31	11.4~21
Φ25	26.0±0.5	0.50±0.15	≤12.5	0.90±0.15	50	6	46×46×31	12.9~24
Φ28	29.0±0.5	0.50±0.15	≤14.0	0.90±0.15	50	5	46×46×29.5	14.4~27
Φ30	31.5±1.0	0.50±0.15	≤15.0	0.95±0.15	50	5	46×46×31	16~29
Φ35	36.5±1.0	0.50±0.15	≤17.5	1.00±0.15	50	4	46×46×29.5	18~34
Φ40	41.5±1.0	0.55±0.15	≤20.0	1.00±0.15	50	4	46×46×31	21~39
Φ45	46.5±1.0	0.55±0.15	≤22.5	1.00±0.15	25	5	31×31×40.5	23.5~44
Φ50	≥50	0.55±0.15	≤25.0	1.00±0.15	25	5	31×31×44.5	26~49
Φ60	≥60	0.60±0.15	≤31.0	1.30±0.20	25	4	31×31×42	35~55
Φ70	≥70	0.65±0.15	≤36.0	1.30±0.20	25	3	31×31×37	40~65
Φ80	≥80	0.65±0.15	≤41.0	1.46±0.20	25	3	31×31×42	45~75
Φ90	≥90	0.65±0.15	≤46.0	1.46±0.20	25	2	31×31×32	50~85
Φ100	≥100	0.65±0.20	≤51.0	1.46±0.20	25	2	31×31×34.5	55~95
Φ120	≥120	0.65±0.20	≤61.0	1.56±0.20	15	2	31×31×40.5	65~115
Φ150	≥150	0.65±0.20	≤76.0	1.56±0.20	15	2	31×31×49.5	80~145
Φ180	≥180	0.65±0.30	≤91.0	1.56±0.20	15	1	31×31×31	95~175

H管(无卤环保阻燃热缩套管)产品规格(英制)

英寸 Inch	规格 (mm)	收缩前尺寸 (mm)		收缩后尺寸 (mm)		标准包装			适用范围 (mm)
		内径	壁厚	内径	壁厚	米/盘	盘/箱	包装箱规格(cm)	
3/64	Φ0.8	1.1±0.2	0.15±0.05	≤0.50	0.22±0.10	200	23	31×31×44.5	0.6~0.8
1/16	Φ1.0	1.5±0.2	0.15±0.05	≤0.65	0.28±0.10	200	16	31×31×44.5	0.75~0.9
3/32	Φ2.0	2.5±0.2	0.18±0.05	≤1.00	0.35±0.10	200	15	46×46×44.5	1.1~1.8
1/8	Φ3.0	3.5±0.2	0.18±0.05	≤1.50	0.40±0.10	200	11	46×46×44.5	1.6~2.7
3/16	Φ4.5	5.0±0.2	0.25±0.05	≤2.30	0.50±0.10	100	10	46×46×44.5	2.4~4.0
1/4	Φ6.0	6.5±0.2	0.28±0.05	≤3.0	0.55±0.10	100	7	46×46×44.5	3.1~5.4
3/8	Φ9.0	9.5±0.3	0.30±0.08	≤4.5	0.60±0.10	100	12	46×46×31	4.7~8.0
1/2	Φ12	12.5±0.3	0.30±0.08	≤6.0	0.60±0.10	100	10	46×46×31	6.2~11
3/4	Φ18	19.0±0.5	0.40±0.15	≤9.0	0.80±0.15	100	7	46×46×29.5	9.3~17
1	Φ25	26.0±0.5	0.50±0.15	≤12.5	0.90±0.15	50	6	46×46×31	12.9~24
1-1/4	Φ28	29.0±0.5	0.50±0.15	≤14.0	0.90±0.15	50	5	46×46×29.5	14.4~27
1-1/2	Φ40	41.5±1.0	0.55±0.15	≤20.0	1.00±0.15	50	4	46×46×31	21~39
2	Φ50	≥50	0.55±0.15	≤25.0	1.00±0.15	25	5	46×46×44.5	26~49
3	Φ80	≥80	0.65±0.15	≤41.0	1.46±0.20	25	3	31×31×42	45~75
4	Φ100	≥100	0.65±0.20	≤51.0	1.46±0.20	25	2	31×31×34.5	55~95
5	Φ120	≥120	0.65±0.20	≤61.0	1.56±0.20	15	2	31×31×40.5	65~115

H-CB管(无卤环保阻燃超薄型热缩套管)产品规格

规格 (mm)	收缩前尺寸 (mm)		收缩后尺寸 (mm)		标准包装			适用范围 (mm)
	内径	平均壁厚	最大内径	平均壁厚	米/盘	盘/箱	包装箱规格(cm)	
Φ1.0CB	1.40±0.2	0.13±0.05	≤0.65	0.20±0.10	200	19	31×31×44.5	0.7~1.0
Φ1.5CB	1.90±0.2	0.13±0.05	≤0.85	0.20±0.10	200	13	31×31×44.5	0.9~1.4
Φ2.0CB	2.40±0.2	0.13±0.05	≤1.00	0.22±0.10	200	18	46×46×44.5	1.1~1.8
Φ2.5CB	2.90±0.2	0.13±0.05	≤1.30	0.25±0.10	200	15	46×46×44.5	1.4~2.3
Φ3.0CB	3.40±0.2	0.13±0.05	≤1.50	0.28±0.10	200	13	46×46×44.5	1.6~2.7
Φ3.5CB	3.90±0.2	0.13±0.05	≤1.80	0.28±0.10	200	10	46×46×44.5	1.9~3.2
Φ4.0CB	4.40±0.2	0.15±0.05	≤2.00	0.30±0.10	200	8	46×46×44.5	2.1~3.6
Φ4.5CB	4.90±0.2	0.15±0.05	≤2.30	0.30±0.10	100	10	46×46×44.5	2.4~4.0
Φ5.0CB	5.50±0.2	0.15±0.05	≤2.5	0.32±0.10	100	10	46×46×44.5	2.6~4.5
Φ6.0CB	6.50±0.2	0.15±0.05	≤3.0	0.32±0.10	100	8	46×46×44.5	3.1~5.4
Φ7.0CB	7.5±0.3	0.15±0.05	≤3.5	0.32±0.10	100	20	31×31×44.5	3.7~6.3
Φ8.0CB	8.5±0.3	0.15±0.05	≤4.0	0.32±0.10	100	18	31×31×44.5	4.2~7.2
Φ9.0CB	9.5±0.3	0.15±0.05	≤4.5	0.35±0.10	100	18	31×31×44.5	4.7~8.0
Φ10CB	10.5±0.3	0.15±0.05	≤5.0	0.35±0.10	100	16	31×31×44.5	5.2~9.0
Φ11CB	11.5±0.3	0.18±0.05	≤5.5	0.40±0.10	100	15	31×31×44.5	5.7~10.0
Φ12CB	12.5±0.3	0.20±0.05	≤6.0	0.40±0.10	100	10	46×46×31	6.2~11.0
Φ13CB	13.5±0.3	0.20±0.05	≤6.5	0.40±0.10	100	9	46×46×29.5	6.7~12.0
Φ14CB	14.5±0.3	0.20±0.05	≤7.0	0.40±0.10	100	9	46×46×29.5	7.3~13.0
Φ15CB	15.5±0.4	0.20±0.05	≤7.5	0.40±0.10	100	8	46×46×29.5	7.8~14.0
Φ16CB	16.5±0.4	0.22±0.05	≤8.0	0.40±0.10	100	8	46×46×31	8.3~15.0
Φ17CB	17.5±0.4	0.22±0.05	≤8.5	0.40±0.10	100	8	46×46×29.5	8.8~16.0
Φ18CB	18.5±0.4	0.22±0.05	≤9.0	0.42±0.10	100	7	46×46×29.5	9.3~17.0
Φ20CB	20.5±0.5	0.25±0.05	≤10.0	0.45±0.10	100	6	46×46×29.5	10.5~19.0
Φ22CB	22.5±0.5	0.25±0.05	≤11.0	0.45±0.10	100	6	46×46×29.5	11.5~20.5
Φ25CB	25.5±0.5	0.25±0.05	≤12.5	0.45±0.10	50	6	46×46×31	13.0~24.0

H-CB管(无卤环保阻燃超薄型热缩套管)产品规格(英制)

英寸 Inch	规格 (mm)	收缩前尺寸 (mm)		收缩后尺寸 (mm)		标准包装			适用范围 (mm)
		内径	平均壁厚	内径	平均壁厚	米/盘	盘/箱	包装箱规格(cm)	
1/16	Φ1.0 CB	1.40±0.20	0.13±0.05	≤0.65	0.20±0.10	200	19	31×31×44.5	0.7~1.0
3/32	Φ2.0 CB	2.40±0.20	0.13±0.05	≤1.00	0.22±0.10	200	18	46×46×44.5	1.1~1.8
1/8	Φ3.0 CB	3.40±0.20	0.13±0.05	≤1.50	0.28±0.10	200	13	46×46×44.5	1.6~2.7
3/16	Φ4.5 CB	4.90±0.20	0.15±0.05	≤2.30	0.30±0.10	100	10	46×46×44.5	2.4~4.0
1/4	Φ6.0 CB	6.50±0.20	0.15±0.05	≤3.0	0.32±0.10	100	8	46×46×44.5	3.1~5.4
3/8	Φ9.0 CB	9.50±0.30	0.15±0.05	≤4.5	0.35±0.10	100	18	31×31×44.5	4.7~8.0
1/2	Φ12.0 CB	12.5±0.30	0.20±0.05	≤6.0	0.40±0.10	100	10	46×46×31	6.2~11.0
3/4	Φ18.0 CB	18.5±0.40	0.22±0.05	≤9.0	0.42±0.10	100	7	46×46×29.5	9.3~17.0
1	Φ25.0 CB	25.5±0.50	0.25±0.05	≤12.5	0.45±0.10	50	6	46×46×31	12.5~25.5



YDPU8.E203950 Tubing, Extruded Insulating Certified for Canada - Component

[Page Bottom](#)

Tubing, Extruded Insulating Certified for Canada - Component

[See General Information for Tubing, Extruded Insulating Certified for Canada - Component](#)

SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD

E203950

XINWEI INDUSTRIAL PARK, WOER MANSION

NANSHAN DISTRICT, XILI

SHENZHEN, GUANGDONG 518052 CHINA


Cat. No.	Max V	Max Temp C	Col Recognized	Max Temp Rated Oil Resistance C	VW-1 Rated #
Heat-Shrinkable Polyolefin Tubing					
RSFR-x	600	125	Black	None	Yes
RSFR-x	600	125	White	None	Yes
WKZM-x-yz	600	125	White	None	No
RSFR-H	600	125	All except Clear	None	Yes
RSFR(CB)	300	125	All except Clear	None	Yes
Not Heat-Shrinkable PTFE Tubing					
WF	600	200	Natural	None	Yes
Heat-Shrinkable Polyolefin Tubing with Meltable Liner					
SBRS	600	105	All except Clear	None	Yes
Not Heat-Shrinkable Standard Wall Silicone Tubing					
WST-600	600	150	White	None	@

x - Designated tubing expanded ID. For Black color tubing, x represents expanded ID of 2 mm - 8 mm. For White color tubing, x represents expanded ID of 1mm - 50 mm.

yz - Represents any alpha and/or numeric combination for internal client code.

- Tubing is considered to comply with the optional VW-1 flammability requirements only if it is so marked.

@ - VW-1 rated for internal diameter sizes 6.50 - 15.00 mm only.

Marking: Company name or file number "E203950", catalog number, voltage rating, temperature rating in degrees C, inside diameter (before and after recovery), date of manufacture and the Recognized Component Mark for Canada  on tags attached to both ends of the tubing or on the shipping spool label or smallest unit container.

[Last Updated](#) on 2007-09-25

[Questions?](#)

[Notice of Dislaimer](#)

[Page Top](#)

Copyright © 2007 Underwriters Laboratories Inc.®

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc."

編號:SSR-209370

QE-R/D-0036B

