





ISO/IEC17025Accredited Lab.

Report No: FCC TW1008209-01 File reference No: 2010-09-16

Applicant: Shenzhen Kinstone D&T Develop Co.,Ltd.

Product: Computer

Model No: KS-UMD070VF

Trademark: kinstone

Test Standards: FCC Part 15 Subpart C, Paragraph 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4FCC Part 15 Subpart C, Paragraph 15.247 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: September 16, 2010

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen,CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1008209-01 Page 2 of 64

Date: 2010-09-16



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC-Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.



Report No: 1008209-01

Date: 2010-09-16



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	9
3.1	Summary of Test Results.	9
3.2	Test Standards	9
4.0	EUT Modification.	9
5.0	Power Line Conducted Emission Test.	10
5.1	Schematics of the Test.	10
5.2	Test Method and Test Procedure.	10
5.3	Configuration of the EUT	10
5.4	EUT Operating Condition.	11
5.5	Conducted Emission Limit.	11
5.6	Test Result.	11
6.0	Radiated Emission test	13
5.1	Test Method and Test Procedure.	13
5.2	Configuration of the EUT	13
5.3	EUT Operation Condition.	13
5.4	Radiated Emission Limit.	14
7.0	6dB Bandwidth Measurement	33
8.0	Maximum Peak Output Power	38
9.0	Power Spectral Density Measurement.	40
10.0	Out of Band Measurement.	45
11.0	Antenna Requirement	55
12.0	Maximum Permissible Exposure	56
13.0	FCC ID Label	57
14.0	Photo of Test Setup and EUT View.	58

Report No: 1008209-01 Page 4 of 64

Date: 2010-09-16



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-01

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Shenzhen Kinstone D&T Develop Co.,Ltd.

Address: 5/F A2 Building, XinJianXing Tech Industrial Park, Fengxin Rd., Guangming New Dist,

Bao'an Dist., Shenzhen, China

Telephone: 0755-33699960 Fax: 0755-33699966

1.3 Description of EUT

Product: Computer

Manufacturer: Shenzhen Kinstone D&T Develop Co.,Ltd.

Brand Name: kinstone

Model Number: KS-UMD070VF

Additional Model Number: KS-UMD070RA KS-UMD070RB KS-UMPC070RA KS-UMD102RA

KS-UMD102ZA KS-UMD102ZT KS-UMD070ZA KS-UMPC102ZA KS-UMPC102ZT KS-UMPC070ZA KS-UMD070FA KS-UMPC102FA KS-UMD070VK KS-UMD070VK KS-UMD102VK KS-UMPC070VK

KS-UMPC102VK

Power Adapter Model: SFP0901500P, Input:100-240V~, 50/60Hz, Output: DC9V, 1500mA

Type of Modulation IEEE 802.11b : DSSS (CCK, QPSK, BPSK)

IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g: 2412-2462MHz

Channel Spacing IEEE 802.11b/g: 5MHz

Air Data Rate IEEE 802.11b : 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

Frequency Selection By software

Channel Number IEEE 802.11b/g: 11 Channels

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1008209-01 Page 5 of 64

Date: 2010-09-16



1.4 Submitted Sample:

1 Sample

1.5 Test Duration

2010-08-18 to 2010-09-16

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 64

Report No: 1008209-01 Date: 2010-09-16

Instrument Type							
ESPI Test Receiver	2.0		Test Equipm	ents		<u> </u>	
Absorbing Clamp	Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date	
TWO Line-V-NETW TWO Line-V-NETW ROHDE&SCHWARZ EZH3-Z5 100294 2009-12-05 2010-12-04 TWO Line-V-NETW ROHDE&SCHWARZ EZH3-Z5 100253 2009-12-05 2010-12-04 Ultra Broadband ANT ROHDE&SCHWARZ ESDV 100008 2010-03-29 2011-03-28 ESDV Test Receiver 4-WIRE ISN ROHDE&SCHWARZ ENY 41 830663/044 2010-02-17 2011-02-16 2-Wire ISN ROHDE&SCHWARZ ENY 22 83066/016 2010-02-17 2011-02-16 System Controller CT SC100 - SU10-02-17 2011-02-16 Printer EPSON PHOTO EX3 CFNH234850 2010-02-17 2011-02-16 FM-AM Signal Generator Color TV Pattern Generator Color TV Pattern Generator Computer IBM R434 IS8434KCE99 BLXLO* OScillator KENWOOD AG-203D SWEATS AG-150M SPB-LXLO* OScillator KENWOOD AG-203D SWEATS AG-150M SPB-LXLO* SPECTRUM AND AG-203D SOROW California Instruments SOUTE CODN EM TEST CDN M2/M3 - 2010-02-17 2011-02-16 Resistance EM TEST R100 - 2010-02-17 2011-02-16 Electromagnetic Injection Clamp Inductive Components EM TEST MC2630 - 2010-02-17 2011-02-16	ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2009-12-05	2010-12-04	
Line-V-NETW ROHDE&SCHWARZ EZH3-Z5 100294 2009-12-05 2010-12-04	Absorbing Clamp	ROHDE&SCHWARZ	MDS-21	100126	2009-12-05	2010-12-04	
Line-V-NETW ROHDE&SCHWARZ EZH3-Z5 100253 2009-12-05 2010-12-04		ROHDE&SCHWARZ	EZH3-Z5	100294	2009-12-05	2010-12-04	
ANT		ROHDE&SCHWARZ	EZH3-Z5	100253	2009-12-05	2010-12-04	
ESDV Test Receiver		ROHDE&SCHWARZ	HL562	100157	2009-12-05	2010-12-04	
A-WIRE ISN GG ENY22 Double 2-Wire ISN ROHDE&SCHWARZ ENY22 83066/016 2010-02-17 2011-02-16 Impuls-Begrenzer ROHDE&SCHWARZ ESH3-Z2 100281 2010-02-17 2011-02-16 System Controller CT SC100 - 2010-02-17 2011-02-16 Printer EPSON PHOTO EX3 CFNH234850 2010-02-17 2011-02-16 FM-AM Signal Generator JUNGJIN SG-150M 389911177 2010-02-17 2011-02-16 Color TV Pattern Generator PHILIPS PM5418 LO621747 2010-02-17 2011-02-16 Computer IBM 8434 IS8434KCE99 BLXLO* Spectrum Analyzer HAMEG HM5012 St VA AC Power Source California Instruments S001iX S6060 2010-02-17 2011-02-16 Attenuation EM TEST CDN M2/M3 - 2010-02-17 2011-02-16 Resistance EM TEST R100 - 2010-02-17 2011-02-16 Electromagnetic Injection Clamp Inductive EM TEST MC2630 - 2010-02-17 2011-02-16 Inductive Components EM TEST MC2630 - 2010-02-17 2011-02-16 2011-02-16 Components EM TEST MC2630 - 2010-02-17 2011-02-16 Components EM TEST MC2630 - 2010	ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2010-03-29	2011-03-28	
2-Wire ISN ROHDE&SCHWARZ ENY22 83066/016 2010-02-17 2011-02-16	4-WIRE ISN	ROHDE&SCHWARZ	ENY 41	830663/044	2010-02-17	2011-02-16	
System Controller CT SC100 - 2010-02-17 2011-02-16 Printer EPSON PHOTO EX3 CFNH234850 2010-02-17 2011-02-16 FM-AM Signal Generator JUNGJIN SG-150M 389911177 2010-02-17 2011-02-16 Color TV Pattern Generator PHILIPS PM5418 LO621747 2010-02-17 2011-02-16 Computer IBM 8434 1S8434KCE99 BLXLO* - - - Oscillator KENWOOD AG-203D 3070002 2010-02-17 2011-02-16 Spectrum Analyzer HAMEG HM5012 - - - Power Supply LW APS1502 - - - Source California Instruments 5001iX 56060 2010-02-17 2011-02-16 CDN EM TEST CDN M2/M3 - 2010-02-17 2011-02-16 Resistance EM TEST ATT6/75 - 2010-02-17 2011-02-16 Electromagnetic Injection Clamp LITTHI EM101 <t< td=""><td></td><td>ROHDE&SCHWARZ</td><td>ENY22</td><td>83066/016</td><td>2010-02-17</td><td>2011-02-16</td></t<>		ROHDE&SCHWARZ	ENY22	83066/016	2010-02-17	2011-02-16	
Printer EPSON PHOTO EX3 CFNH234850 2010-02-17 2011-02-16 FM-AM Signal Generator JUNGJIN SG-150M 389911177 2010-02-17 2011-02-16 Color TV Pattern Generator PHILIPS PM5418 LO621747 2010-02-17 2011-02-16 Computer IBM 8434 1S8434KCE99 BLXLO* - - - Oscillator KENWOOD AG-203D 3070002 2010-02-17 2011-02-16 Spectrum Analyzer HAMEG HM5012 - - - Power Supply LW APS1502 - - - Source California Instruments 5001iX 56060 2010-02-17 2011-02-16 CDN EM TEST CDN M2/M3 - 2010-02-17 2011-02-16 Attenuation EM TEST ATT6/75 - 2010-02-17 2011-02-16 Electromagnetic Injection Clamp LITTHI EM101 35708 2010-02-17 2011-02-16 Inductive Components EM TEST MC2630 </td <td>Impuls-Begrenzer</td> <td>ROHDE&SCHWARZ</td> <td>ESH3-Z2</td> <td>100281</td> <td>2010-02-17</td> <td>2011-02-16</td>	Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2010-02-17	2011-02-16	
FM-AM Signal Generator JUNGJIN SG-150M 389911177 2010-02-17 2011-02-16 Color TV Pattern Generator PHILIPS PM5418 LO621747 2010-02-17 2011-02-16 Computer IBM 8434 1S8434KCE99 BLXLO* - - - Oscillator KENWOOD AG-203D 3070002 2010-02-17 2011-02-16 Spectrum Analyzer HAMEG HM5012 - - - Power Supply LW APS1502 - - - Source California Instruments 5001iX 56060 2010-02-17 2011-02-16 CDN EM TEST CDN M2/M3 - 2010-02-17 2011-02-16 Attenuation EM TEST ATT6/75 - 2010-02-17 2011-02-16 Electromagnetic Injection Clamp LITTHI EM101 35708 2010-02-17 2011-02-16 Inductive Components EM TEST MC2630 - 2010-02-17 2011-02-16	System Controller	CT	SC100	-	2010-02-17	2011-02-16	
Generator JUNGJIN SG-150M 38991117/ 2010-02-17 2011-02-16 Color TV Pattern Generator PHILIPS PM5418 LO621747 2010-02-17 2011-02-16 Computer IBM 8434 1S8434KCE99 BLXLO* - - - Oscillator KENWOOD AG-203D 3070002 2010-02-17 2011-02-16 Spectrum Analyzer HAMEG HM5012 - - - - Power Supply LW APS1502 - - - - 5K VA AC Power Source California Instruments 5001iX 56060 2010-02-17 2011-02-16 CDN EM TEST CDN M2/M3 - 2010-02-17 2011-02-16 Attenuation EM TEST ATT6/75 - 2010-02-17 2011-02-16 Resistance EM TEST R100 - 2010-02-17 2011-02-16 Electromagnetic Injection Clamp LITTHI EM101 35708 2010-02-17 2011-02-16 Inductive Components EM	Printer	EPSON	РНОТО ЕХЗ	CFNH234850	2010-02-17	2011-02-16	
PHILIPS	ū	JUNGJIN	SG-150M	389911177	2010-02-17	2011-02-16	
Computer IBM 8434 BLXLO* Oscillator KENWOOD AG-203D 3070002 2010-02-17 2011-02-16 Spectrum Analyzer HAMEG HM5012 - - - - Power Supply LW APS1502 - - - - 5K VA AC Power Source California Instruments 5001iX 56060 2010-02-17 2011-02-16 CDN EM TEST CDN M2/M3 - 2010-02-17 2011-02-16 Attenuation EM TEST ATT6/75 - 2010-02-17 2011-02-16 Resistance EM TEST R100 - 2010-02-17 2011-02-16 Electromagnetic Injection Clamp LITTHI EM101 35708 2010-02-17 2011-02-16 Inductive Components EM TEST MC2630 - 2010-02-17 2011-02-16		PHILIPS	PM5418	LO621747	2010-02-17	2011-02-16	
Spectrum Analyzer HAMEG HM5012 - - - Power Supply LW APS1502 - - - 5K VA AC Power Source California Instruments 5001iX 56060 2010-02-17 2011-02-16 CDN EM TEST CDN M2/M3 - 2010-02-17 2011-02-16 Attenuation EM TEST ATT6/75 - 2010-02-17 2011-02-16 Resistance EM TEST R100 - 2010-02-17 2011-02-16 Electromagnetic Injection Clamp LITTHI EM101 35708 2010-02-17 2011-02-16 Inductive Components EM TEST MC2630 - 2010-02-17 2011-02-16	Computer	IBM	8434		-	-	
Power Supply LW APS1502 - - - 5K VA AC Power Source California Instruments 5001iX 56060 2010-02-17 2011-02-16 CDN EM TEST CDN M2/M3 - 2010-02-17 2011-02-16 Attenuation EM TEST ATT6/75 - 2010-02-17 2011-02-16 Resistance EM TEST R100 - 2010-02-17 2011-02-16 Electromagnetic Injection Clamp LITTHI EM101 35708 2010-02-17 2011-02-16 Inductive Components EM TEST MC2630 - 2010-02-17 2011-02-16	Oscillator	KENWOOD	AG-203D	3070002	2010-02-17	2011-02-16	
5K VA AC Power Source California Instruments 5001iX 56060 2010-02-17 2011-02-16 CDN EM TEST CDN M2/M3 - 2010-02-17 2011-02-16 Attenuation EM TEST ATT6/75 - 2010-02-17 2011-02-16 Resistance EM TEST R100 - 2010-02-17 2011-02-16 Electromagnetic Injection Clamp LITTHI EM101 35708 2010-02-17 2011-02-16 Inductive Components EM TEST MC2630 - 2010-02-17 2011-02-16	Spectrum Analyzer	HAMEG	HM5012	-	-	-	
Source California Instruments 5001iX 56060 2010-02-17 2011-02-16 CDN EM TEST CDN M2/M3 - 2010-02-17 2011-02-16 Attenuation EM TEST ATT6/75 - 2010-02-17 2011-02-16 Resistance EM TEST R100 - 2010-02-17 2011-02-16 Electromagnetic Injection Clamp LITTHI EM101 35708 2010-02-17 2011-02-16 Inductive Components EM TEST MC2630 - 2010-02-17 2011-02-16	Power Supply	LW	APS1502	-	-	-	
Attenuation EM TEST ATT6/75 - 2010-02-17 2011-02-16 Resistance EM TEST R100 - 2010-02-17 2011-02-16 Electromagnetic Injection Clamp LITTHI EM101 35708 2010-02-17 2011-02-16 Inductive Components EM TEST MC2630 - 2010-02-17 2011-02-16		California Instruments	5001iX	56060	2010-02-17	2011-02-16	
Resistance EM TEST R100 - 2010-02-17 2011-02-16 Electromagnetic Injection Clamp LITTHI EM101 35708 2010-02-17 2011-02-16 Inductive Components EM TEST MC2630 - 2010-02-17 2011-02-16	CDN	EM TEST	CDN M2/M3	-	2010-02-17	2011-02-16	
Electromagnetic LITTHI EM101 35708 2010-02-17 2011-02-16 Inductive Inductive EM TEST MC2630 - 2010-02-17 2011-02-16	Attenuation	EM TEST	ATT6/75	-	2010-02-17	2011-02-16	
Injection Clamp	Resistance	EM TEST	R100	-	2010-02-17	2011-02-16	
Components EM TEST MC2630 - 2010-02-17 2011-02-16	•	LITTHI	EM101	35708	2010-02-17	2011-02-16	
Antenna EM TEST MS100 - 2010-02-17 2011-02-16		EM TEST	MC2630	-	2010-02-17	2011-02-16	
	Antenna	EM TEST	MS100	-	2010-02-17	2011-02-16	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd vill not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 64

Report No: 1008209-01 Date: 2010-09-16

			7		
Signal Generator	ROHDE&SCHWARZ	SMT03	100029	2010-02-17	2011-02-16
Power Amplifier	AR	150W1000	300999	2010-02-17	2011-02-16
Field probe	Holaday	HI-6005	105152	2010-02-17	2011-02-16
Bilog Antenna	Chase	CBL6111C	2576	2010-02-17	2011-02-16
Loop Antenna	EMCO	6502	00042960	2010-02-17	2011-02-16
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2010-02-17	2011-02-16
3m OATS			N/A	2010-02-17	2011-02-16
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2010-08-13	2011-08-12
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2010-07-03	2011-07-02
Power meter	Anritsu	ML2487A	6K00003613	2010-02-17	2011-02-16
Power sensor	Anritsu	MA2491A	32263	2010-02-17	2011-02-16
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2010-05-14	2011-05-13
LISN	AFJ	LS16C	10010947251	2010-5-14	2011-05-13
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2010-5-14	2011-05-13
9*6*6 Anechoic			N/A	2010-5-14	2011-05-13

2.1 Auxiliary Equipment

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
				Data cable	
				of 1.5m	
Mouse	OM860XC	HM0509	BIGCOW	length	FCC DOC
U-disk	U208		Netac		FCC DOC
				Data cable	
				of 1.0m	
Earphone				length	
SD			Kingston		
Transfer Box	FT100		Flytouch		

2.2 Ferrite			
Ferrite	UF-90B	 Shengci	

Report No: 1008209-01 Page 8 of 64

Date: 2010-09-16



3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) were chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) were chosen for full testing.

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD and average power across all the data rates, bandwidths, modulations and spatial stream modes.

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2412 MHz.

Report No: 1008209-01

Date: 2010-09-16



3.0 Technical Details

3.1 Summary of test results

The EUT has be	een tested accord	ling to the followi	ng specifications:
----------------	-------------------	---------------------	--------------------

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107	Conducted Emission Test	PASS	Complies
& 15.207			
	Spectrum bandwidth of a		Complies
FCC Part 15 Subpart C	Orthogonal Frequency		
•	Division Multiplex System	PASS	
Paragraph 15.247(a)(2) Limit	Limit: 6dB		
	bandwidth>500kHz		
FCC Part 15, Paragraph	Maximum peak output		
15.247(b)	power	PASS	Complies
13.247(0)	Limit: max. 30dBm		
FCC Part 15, Paragraph	Transmitter Radiated	PASS	Complies
15.109,15.205 & 15.209	Emission		
	Limit: Table 15.209		
FCC Part 15, Paragraph	Power Spectral Density	PASS	Complies
15.247(e)	Limit: max. 8dBm		
FCC Part 15, Paragraph	Out of Band Emission and	PASS	Complies
15.247(d)	Restricted Band		
	Radiation		
	Limit: 20dB less than		
	peak value of fundamental		
	frequency		
	Restricted band limit:		
	Table 15.209		


3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247


4.0 EUT Modification

No modification by Shenzhen Timeway Technology Consulting Co.,Ltd

Page 10 of 64



5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 -2003.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

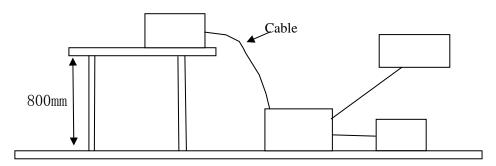

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

EUT A.

Device	Manufacturer	Model	FCC ID
Computer	Shenzhen Kinstone D&T Develop Co.,Ltd.	KS-UMD070VF	XXR UMD070VF

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1008209-01 Page 11 of 64

Date: 2010-09-16



C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequen	су	Class A Limits (dB µ V)		Class B Limits (dB µ V)		
(MHz))	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.5$	50	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.0$	00	73.0	60.0	56.0	46.0	
5.00 ~ 30	.00	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No: 1008209-01

Date: 2010-09-16


A Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Keep WIFI Transmitting, Read USB,SD card and Running EMC test

software and Ping network

Results: Pass

Please refer to following diagram for individual

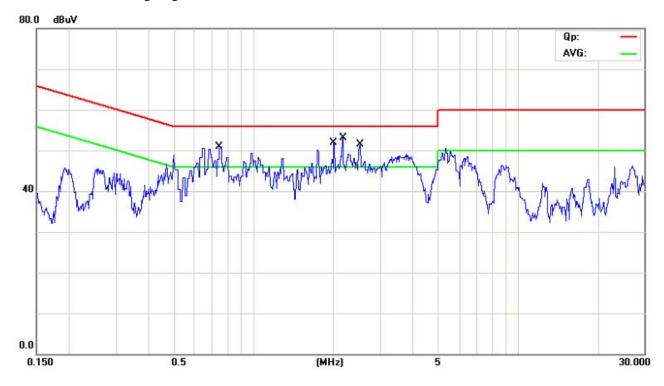

Engguenav	Reading(dB µ V)			Limit		
Frequency (MHz)	Line Neutral		(dB µ V)			
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.7458	41.72	32.82			56.00	46.00
1.9910	44.80	30.60			56.00	46.00
2.1455	44.66	31.86			56.00	46.00
2.5048	47.50	34.70			56.00	46.00

Report No: 1008209-01

Date: 2010-09-16


B Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Keep WIFI Transmitting, Read USB,SD card and Running EMC test

software and Ping network

Results: Pass

Please refer to following diagram for individual

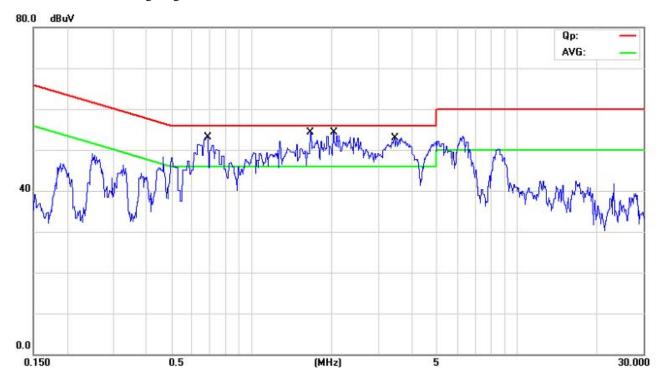

Enaguanav	Reading(dB µ V)			Limit		
Frequency (MHz)	Live	;	Neutral		$(dB \mu V)$	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.6842			41.97	31.57	56.00	46.00
1.6590			45.66	30.25	56.00	46.00
2.0313			47.11	31.91	56.00	46.00
3.4272			47.37	28.17	56.00	46.00

Report No: 1008209-01 Page 14 of 64


Date: 2010-09-16



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

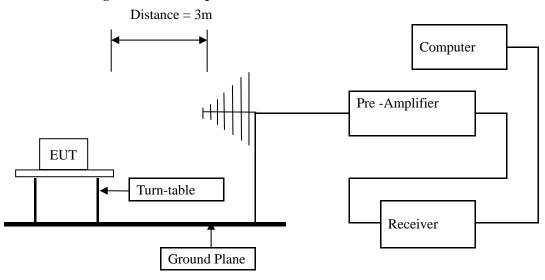

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No: 1008209-01 Page 15 of 64

Date: 2010-09-16



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 16 of 64

Date: 2010-09-16



Test result

Report No: 1008209-01

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep WIFI Transmitting, Read USB,SD card and Running EMC test

software and Ping network

Results: Pass


Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
127.00	37.04	Н	43.50
177.925	39.81	Н	43.50
226.425	40.11	Н	46.00
296.750	42.82	Н	46.00
376.775	42.97	Н	46.00
427.700	42.64	Н	46.00
107.600	40.04	V	43.50
127.000	39.76	V	43.50
153.675	40.08	V	43.50
177.925	39.18	V	43.50
226.425	39.86	V	46.00
325.850	40.83	V	46.00


Report No: 1008209-01

Date: 2010-09-16



Test Figure:

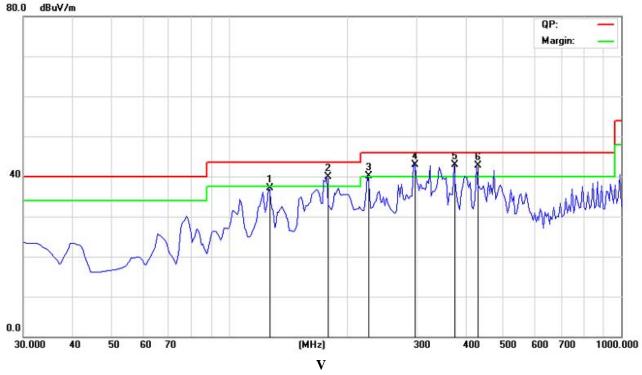

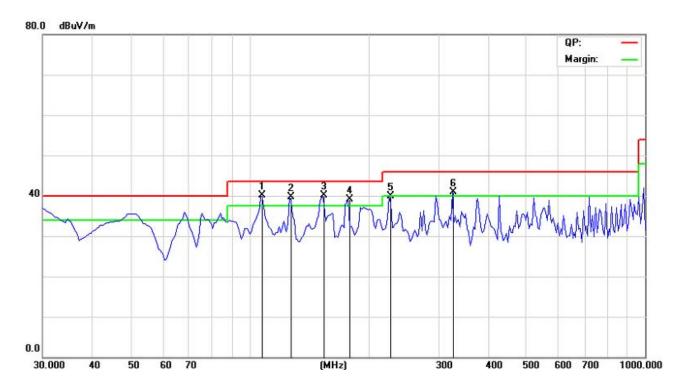

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1008209-01 Page 18 of 64

Date: 2010-09-16

Operation Mode: Transmitting & Receiving under CH01 at 6Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2412.00	96.5 (PK) /83.2 (AV)	Н	Fundamental Frequency
2412.00	94.3 (PK) /80.3 (AV)	V	Tundamental Trequency
4824.00		H/V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16884		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 6Mbps

Report No: 1008209-01 Page 19 of 64

Date: 2010-09-16

Operation Mode: Transmitting & Receiving under CH06 at 6Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
2437.00	97.8 (PK) /84.1 (AV)	Н	Fundamental Frequency
2437.00	95.2 (PK) /81.6 (AV)	V	Fundamental Frequency
4874.00		H/V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 6Mbps

Operation Mode: Transmitting & Receiving under CH11 at 6Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2462.00	98.7 (PK) /86.0 (AV)	Н	Fundamental Frequency
2462.00	95.1 (PK) /82.5 (AV)	V	Tundamental Frequency
4924		H/V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24650		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode at 6Mbps

Report No: 1008209-01

Date: 2010-09-16

Please refer to the following test plots for details

CH01 at 6Mbps: Horizontal

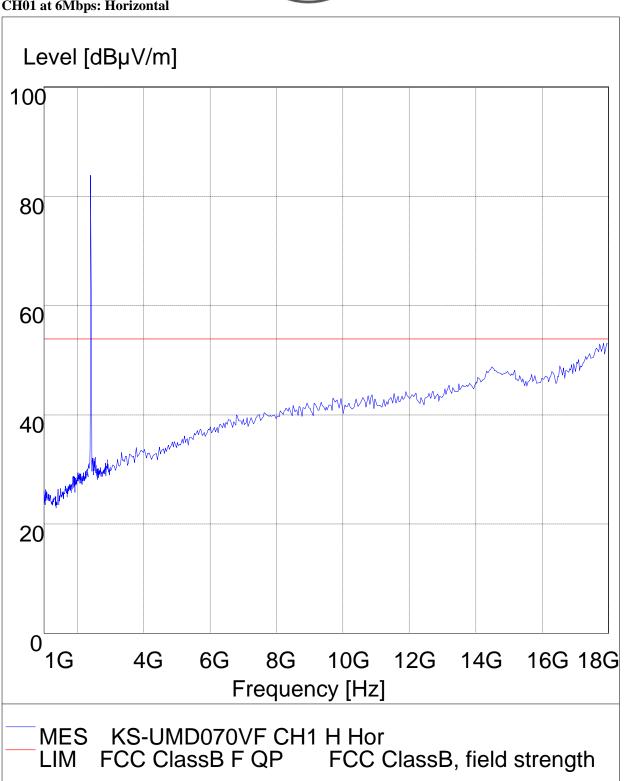

The report refers only to the sample tested and does not apply to the bulk.


Page 21 of 64

Report No: 1008209-01

Date: 2010-09-16



CH01 at 6Mbps: Vertical

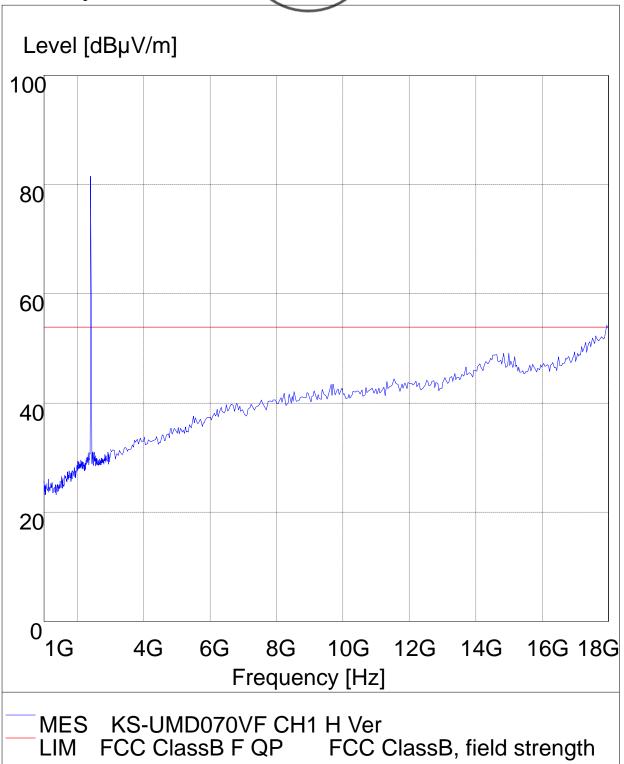


Page 22 of 64

Report No: 1008209-01

Date: 2010-09-16



CH06 at 6Mbps: Vertical

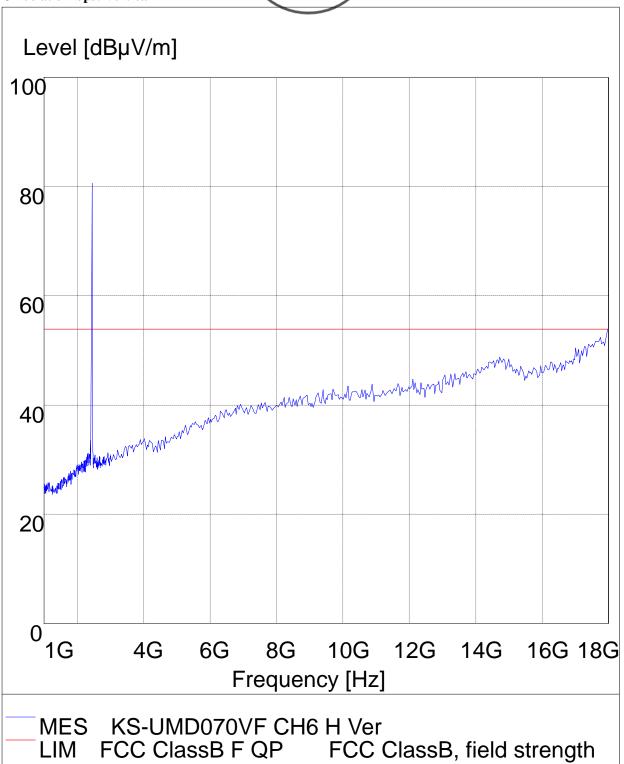

The report refers only to the sample tested and does not apply to the bulk.


Page 23 of 64

Report No: 1008209-01

Date: 2010-09-16



CH06 at 6Mbps: Horizontal

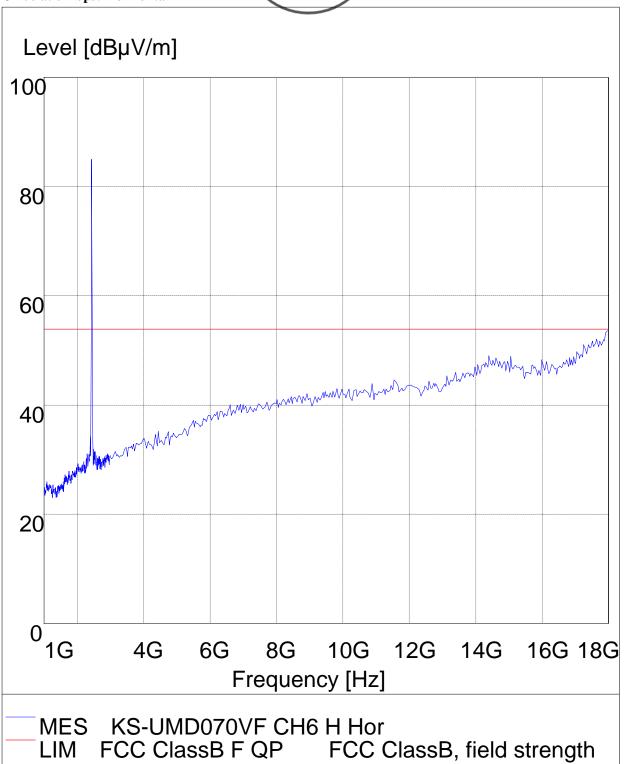

The report refers only to the sample tested and does not apply to the bulk.


Page 24 of 64

Report No: 1008209-01

Date: 2010-09-16



CH11 at 6Mbps: Vertical

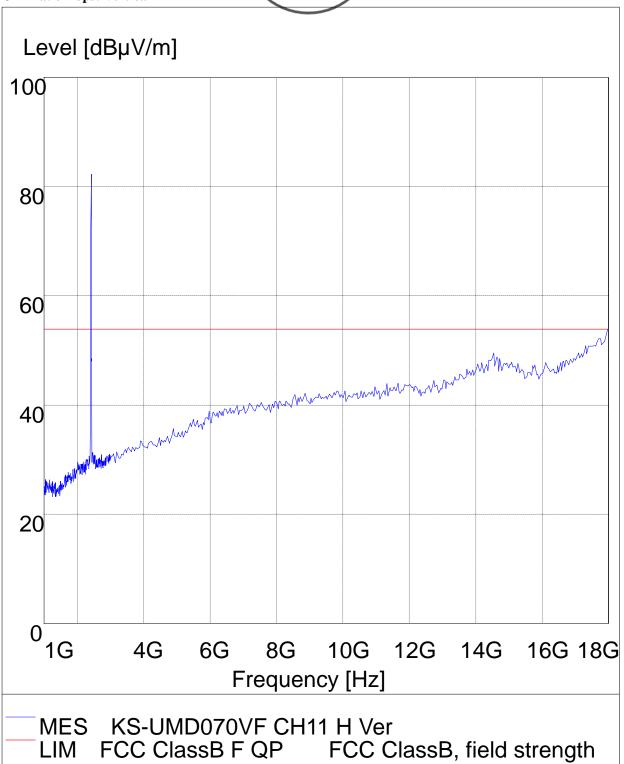

The report refers only to the sample tested and does not apply to the bulk.


Page 25 of 64

Report No: 1008209-01

Date: 2010-09-16



CH11at 6Mbps: Horizontal

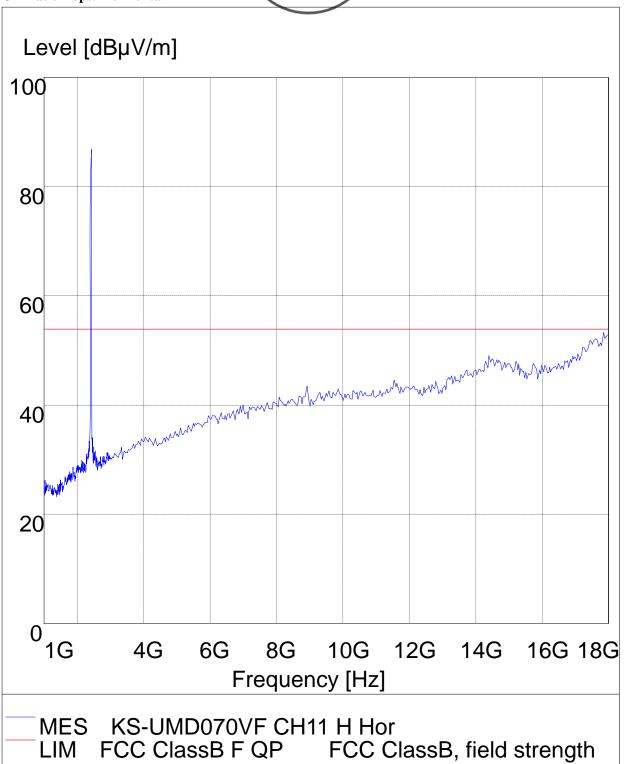


Page 26 of 64

Report No: 1008209-01

Date: 2010-09-16



18-25G CH11 6M Horizontal

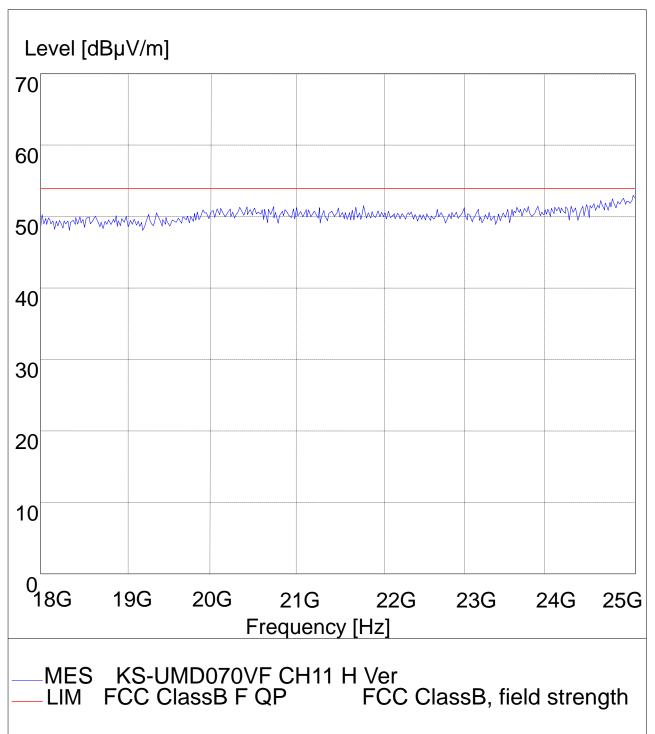


Page 27 of 64

Report No: 1008209-01 Date: 2010-09-16



18-25G CH11 6M Vertical

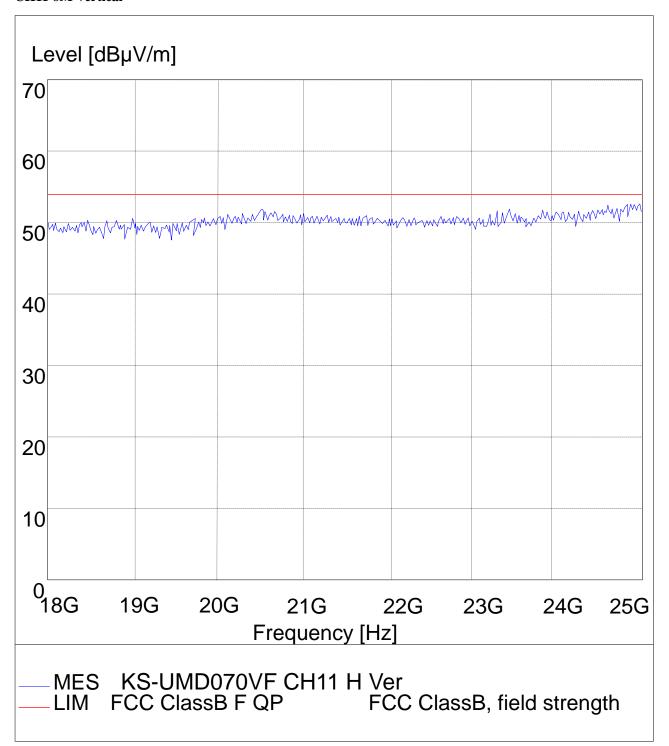

Report No: 1008209-01 Page 28 of 64

Date: 2010-09-16

Operation Mode: Transmitting & Receiving under CH01 at 1Mbps

operation from the first state of the first state o				
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)	
2412.00	98.6 (PK)/ 84.8(AV)	Н	Fundamental Frequency	
2412.00	94.2 (PK)/82.7 (AV)	V	Tundamental Frequency	
4824.00		H/V	74(Peak)/ 54(AV)	
7236.00		H/V	74(Peak)/ 54(AV)	
9648.00		H/V	74(Peak)/ 54(AV)	
12060		H/V	74(Peak)/ 54(AV)	
14472		H/V	74(Peak)/ 54(AV)	
16684		H/V	74(Peak)/ 54(AV)	
19296		H/V	74(Peak)/ 54(AV)	
21708		H/V	74(Peak)/ 54(AV)	
24120		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 1Mbps

Operation Mode: Transmitting & Receiving under CH06 at 1Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2437.00	99.2 (PK)/ 85.6(AV)	Н	Eundomontal Evaguanay
2437.00	95.5(PK)/81.7 (AV)	V	Fundamental Frequency
4874.00	-	H/V	74(Peak)/ 54(AV)
7311.00	-	H/V	74(Peak)/ 54(AV)
9748.00	1	H/V	74(Peak)/ 54(AV)
12185	1	H/V	74(Peak)/ 54(AV)
14622	-	H/V	74(Peak)/ 54(AV)
17059	1	H/V	74(Peak)/ 54(AV)
19496	1	H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 1Mbps

Report No: 1008209-01 Page 29 of 64

Date: 2010-09-16

Operation Mode: Transmitting & Receiving under CH11 at 1Mbps


Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2462.00	100.7 (PK)/ 86.9(AV)	Н	Fundamental Frequency
2462.00	96.8 (PK)/83.2(AV)	V	Tundamental Frequency
4924		H/V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24650		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode at 1Mbps

Report No: 1008209-01

Date: 2010-09-16



CH01 at 1Mbps: Vertical

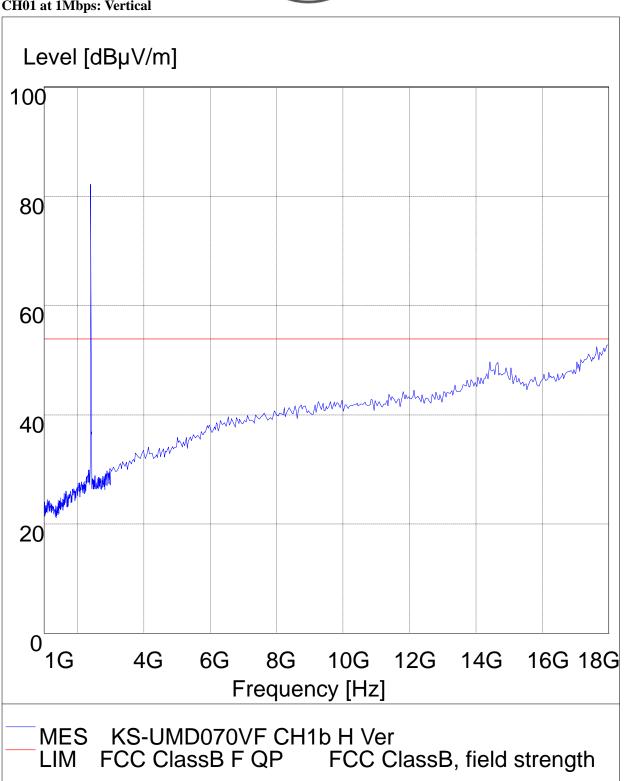

The report refers only to the sample tested and does not apply to the bulk.


Page 31 of 64

Report No: 1008209-01

Date: 2010-09-16



CH01 at 1Mbps: Horizontal

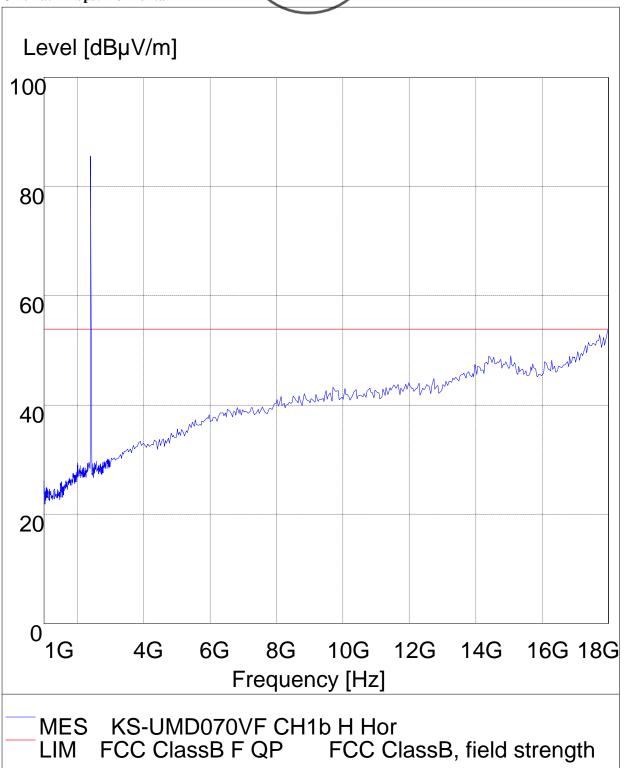

The report refers only to the sample tested and does not apply to the bulk.


Page 32 of 64

Report No: 1008209-01

Date: 2010-09-16



CH06 at 1Mbps: Vertical

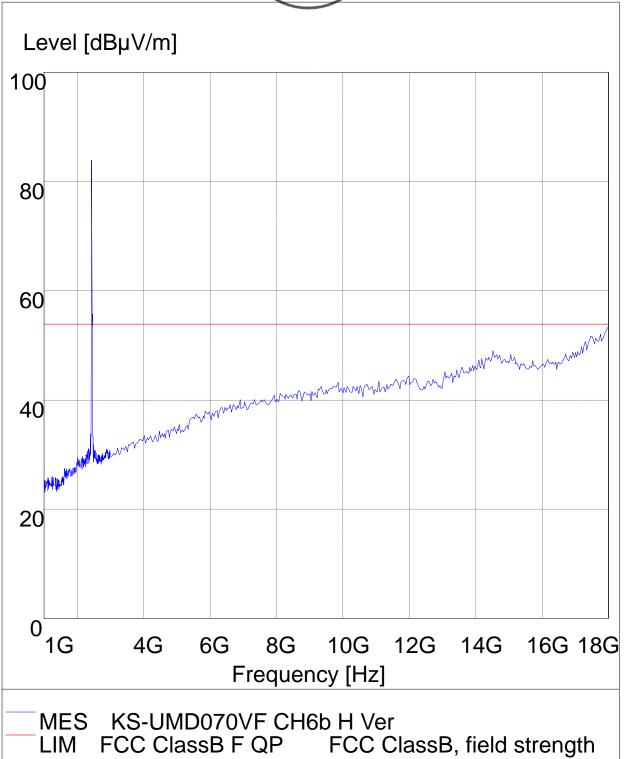


Page 33 of 64

Report No: 1008209-01

Date: 2010-09-16



CH06 at 1Mbps: Horizontal

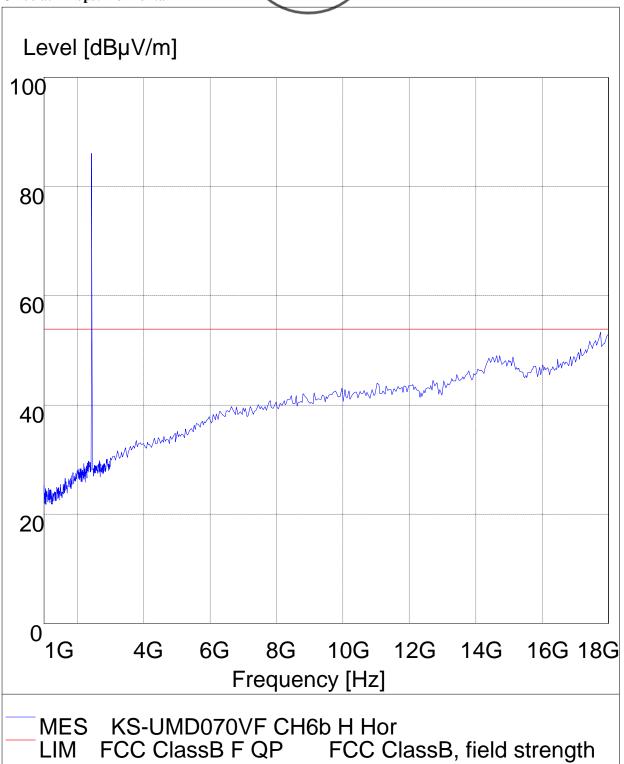

The report refers only to the sample tested and does not apply to the bulk.


Page 34 of 64

Report No: 1008209-01

Date: 2010-09-16



CH11 at 1Mbps: Vertical

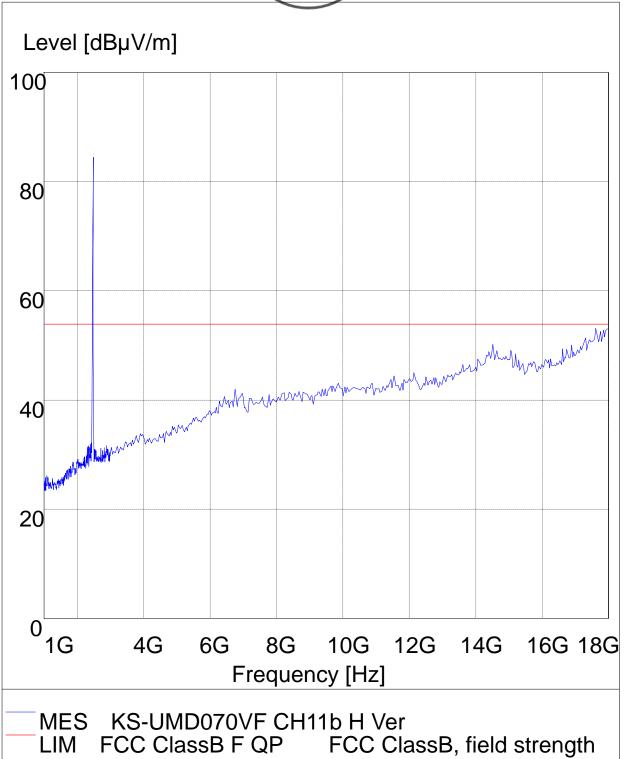


Page 35 of 64

Report No: 1008209-01

Date: 2010-09-16



CH11 at 1Mbps: Horizontal

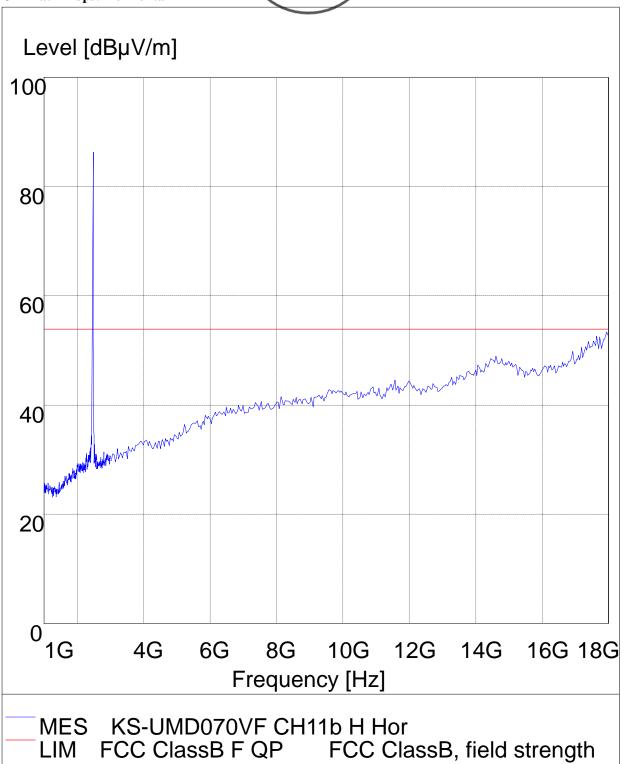


Page 36 of 64

Report No: 1008209-01

Date: 2010-09-16



18-25G CH11 1M Horizontal

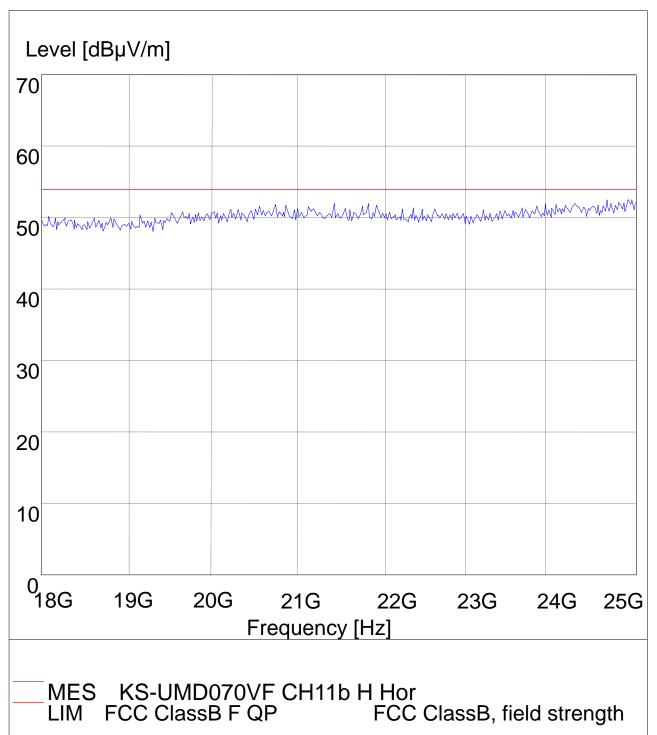


Page 37 of 64

Report No: 1008209-01

Date: 2010-09-16





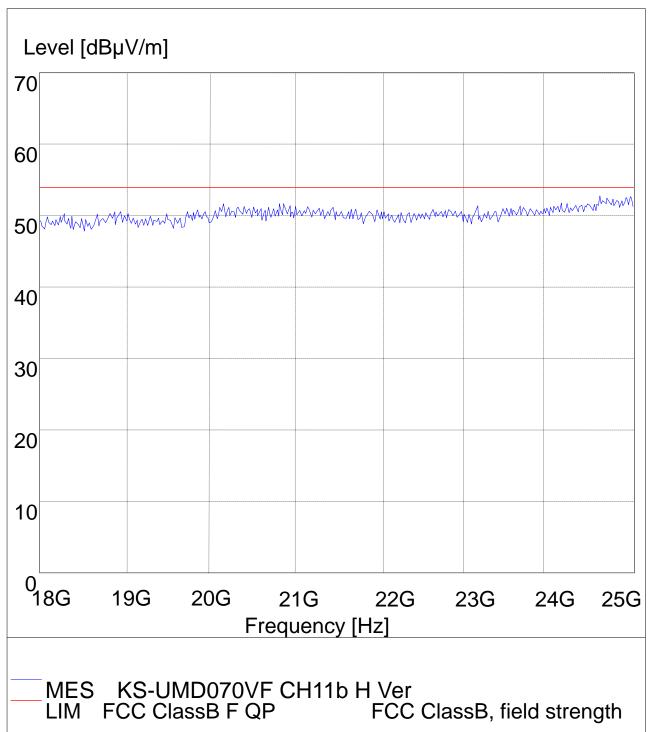

The report refers only to the sample tested and does not apply to the bulk.


Date: 2010-09-16



Page 38 of 64

7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500kHz

7.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator.

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW for 802.11b/g mode; The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

7.4 Test Result

Page 39 of 64


Report No: 1008209-01

Date: 2010-09-16



EUT		Computer Mod		Model		KS-UMD	070VF	
Mode		8	802.11b Input Voltage AC 1		AC 12	0V		
Temperat	ure	24	4 deg. C,		Humidity		56%]	RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		andwidth Hz)		num Limit MHz)	Pass/ Fail
1		2412	1	10	.22		0.5	Pass
6		2437	1	10	.22		0.5	Pass
11		2462	1	10	.22		0.5	Pass

1. 802.11b at 1Mbps of CH01

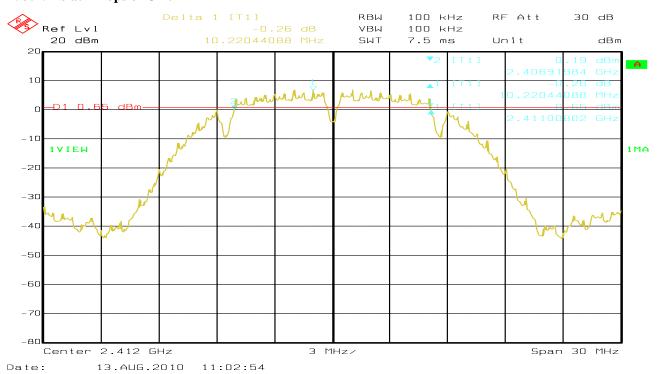


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2010-09-16



2. 802.11b at 1Mbps of CH06

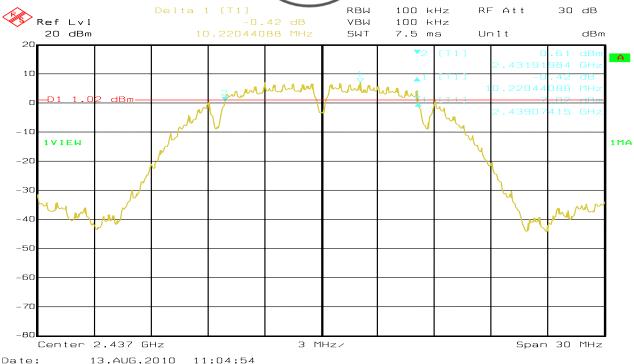

3. 802.11b at 1Mbps of CH11

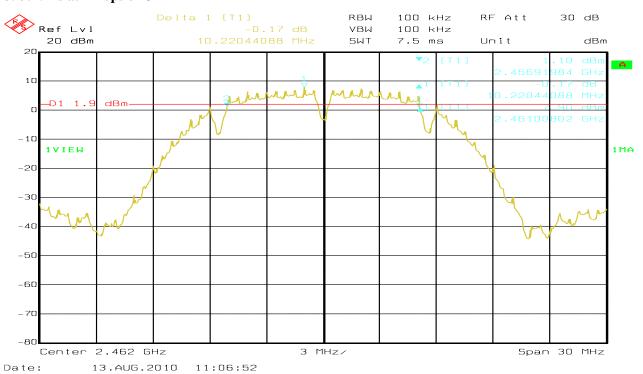

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 41 of 64


Report No: 1008209-01

Date:	2010-09-16
-------	------------

EUT	EUT C		omputer		Model		KS-UMD070VF	
Mode		8	302.11g		Input Voltage		AC 12	0V
Temperat	ure	24	4 deg. C,		Humidity		56%]	RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		indwidth Hz)		num Limit MHz)	Pass/ Fail
1		2412	6	16	.17		0.5	Pass
6		2437	6	16	.35		0.5	Pass
11		2462	6	16	.41		0.5	Pass

Test Plots:

1. 802.11g at 6Mbps of CH01

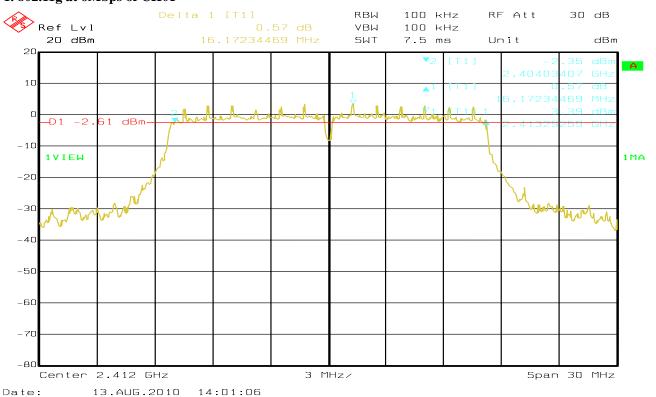


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2010-09-16



2. 802.11g at 6Mbps of CH06

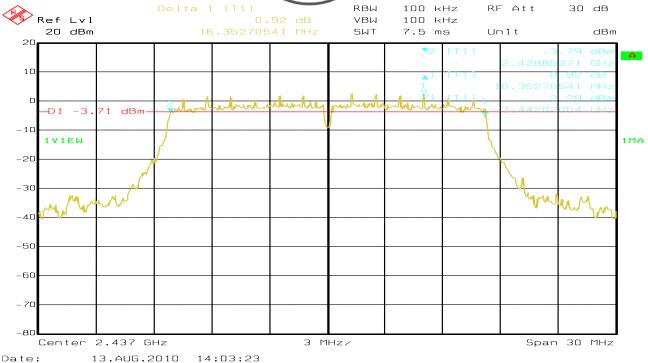

3. 802.11g at 6Mbps of CH11

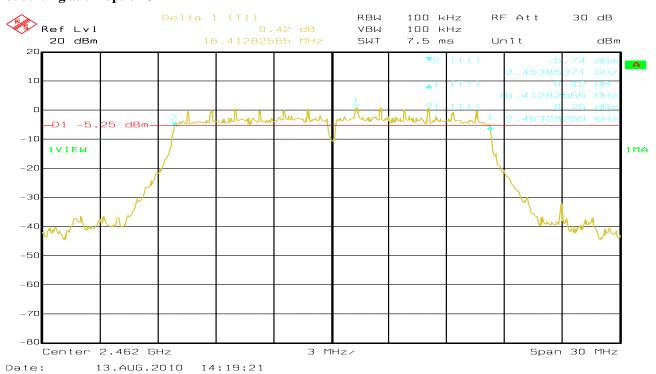

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 43 of 64

Report No: 1008209-01 Date: 2010-09-16



8. Maximum Peak Output Power

8.1 Test Setup



8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the peak power was measured

8.4Test Results

EUT	Γ Computer		uter	Model		KS-UMD070VF		
Mode	802.116		Input Vo		Voltage Se		ee Below	
Temperati	ure	24 deg	g. C,	Hur	nidity	50	5% RH	
Channel	Channel Frequency (MHz)		Peak Power Output (dBm)		Peak Power Limit (dBm)		Pass/ Fail	
			Test Voltage:120	V~				
1		2412	11.10		30		Pass	
6		2437	11.54		30		Pass	
11		2462	11.88		30)	Pass	
			Test Voltage:138	V~				
1		2412	11.32		30)	Pass	
6		2437	11.46		30		Pass	
11	2462		11.75		30)	Pass	
			Test Voltage: 102V~			·		
1	2412		11.20		30)	Pass	
6		2437	11.39		30)	Pass	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 44 of 64

Report No: 1008209-01

Date: 2010-09-16

10 07 10		A LANGE		
11	2462	11.65	30	Pass

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

EUT		Comp	uter	Model		KS-U	MD070VF	
Mode	Mode 802.1		Input V		Voltage Se		ee Below	
Temperat	ure	24 deg	g. C,	Hur	nidity	5	6% RH	
Channel	Channel Frequency (MHz)		Peak Power Output (dBm)		Peak P Lin (dB:	nit	Pass/ Fail	
			Test Voltage:120)V~				
1		2412	11.76		30		Pass	
6		2437	11.76		30		Pass	
11		2462	12.26		30		Pass	
			Test Voltage:138	SV∼				
1		2412	11.54		30)	Pass	
6		2437	11.30		30)	Pass	
11		2462	11.79		30		Pass	
			Test Voltage: 102	!V∼				
1		2412	11.38		30)	Pass	
6		2437	11.49		30)	Pass	
11		2462	12.01	•	30)	Pass	

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11


Peak Power Output = Peak Power Reading + Cable loss + Attenuator

^{2.} The result basic equation calculation as follow:

Report No: 1008209-01 Page 45 of 64

Date: 2010-09-16





9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 10kHz VBW, set sweep time=100s, **PK detector.**

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3 kHz for a full response of the mixer in the spectrum analyzer.

Page 46 of 64

Report No: 1008209-01

Date: 2010-09-16



9.4Test Result

EUT		Comp	uter Model		KS		KS-UMD070VF	
Mode	de 802.11		Ilb Inpu		Input Voltage		C 120V	
Temperati	ture 24 deg. C, Hum		umidity 5		6% RH			
Channel	Cha	annel Frequency (MHz)	Level in 3kHz BW		Maximur (dB		Pass/ Fail	
1		2412	-17.11		8		Pass	
6		2437	-16.76		8		Pass	
11		2462	-16.68		8		Pass	

Note: For 802.11b mode at finial test to get the worst-case emission at 1Mbps for CH11, CH06 and CH01

EUT		Comp	uter Model			KS-U	MD070VF
Mode		802.1	l1g Inpu		Input Voltage		C 120V
Temperati	ture 24 deg. C, H		Hur	Humidity		5% RH	
Channel	Ch	annel Frequency (MHz)	Final RF Power Level in 3kHz BW (dBm)		Maximur (dB		Pass/ Fail
1		2412	-20.83		8		Pass
6		2437	-20.18		8		Pass
11		2462	-20.24		8		Pass


Note: For 802.11g mode at finial test to get the worst-case emission at 6Mbps for CH11, CH06 and CH01

Span 300 kHz

Report No: 1008209-01

Date: 2010-09-16

9.5 Photo of Power Spectral Density Measurement

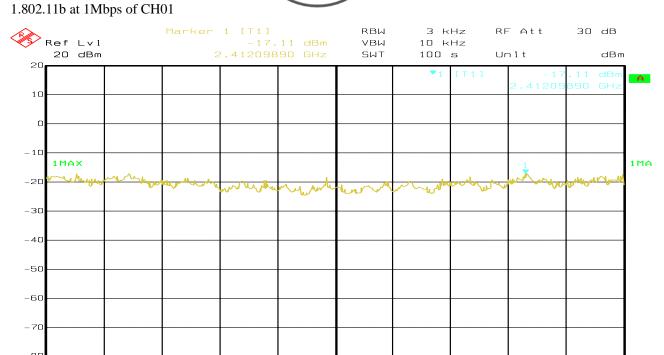


30 kHz/

2. 802.11b at 1Mbps at CH06

Center 2.412 GHz

13.AUG.2010

11:10:49

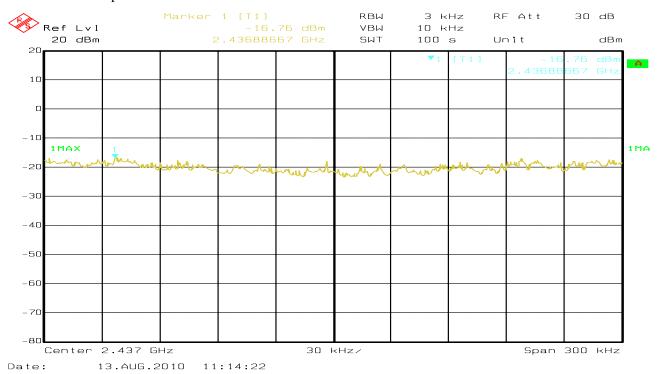


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2010-09-16



3. 802.11b at 1Mbps of CH11

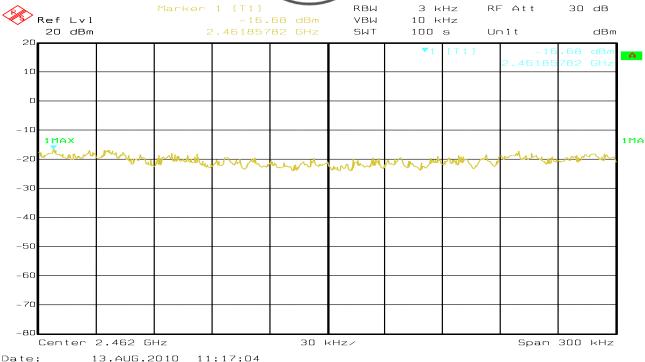

4. 802.11g at 6Mbps of CH01

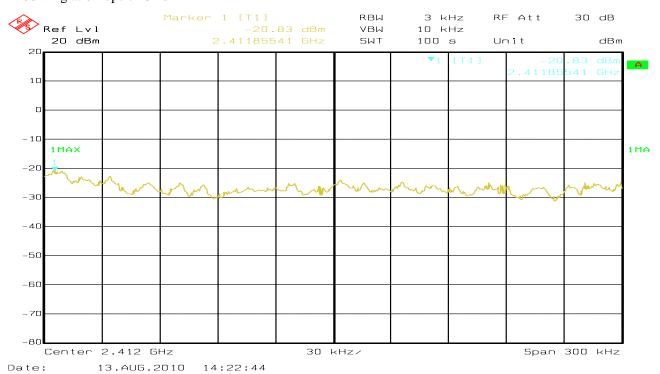


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2010-09-16



5. 802.11g at 6Mbps of CH06

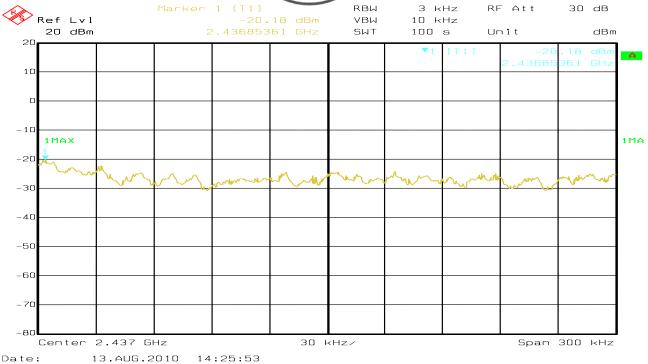

6. 802.11g at 6Mbps of CH11

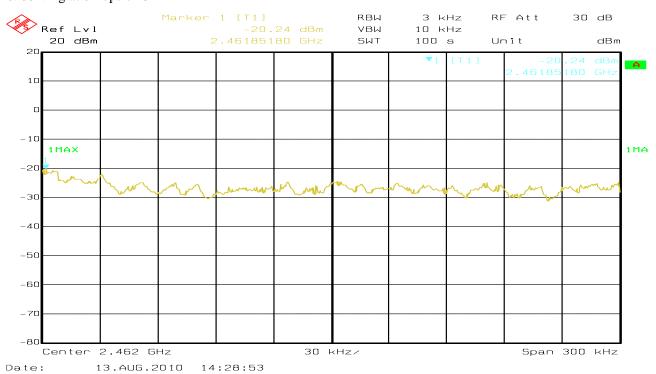

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 50 of 64

Report No: 1008209-01

Date: 2010-09-16



10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=VBW=100 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), after pre-test. It was found that the worse radiated emission was get at the lying position.

Date: 2010-09-16




For 802.11b mode

CH01 at 1Mbps

10.4 Restricted band and bandedge Measurement

Product:	Computer		Test Mode:	CH1
Mode	Keeping	g Transmitting	Input Voltage	AC 120V
Temperature	24	24 deg. C,		56% RH
Test Result:		Pass	Detector	PK
The Max. FS in	PK (dBµV/m)	48.22(V)/51.56(H)	T :!4	$74(dB\mu V/m)$
Restrict Band	AV (dBμV/m)	36.10(V)/37.83(H)	Limit	54(dBµV/m)

Test Figure:

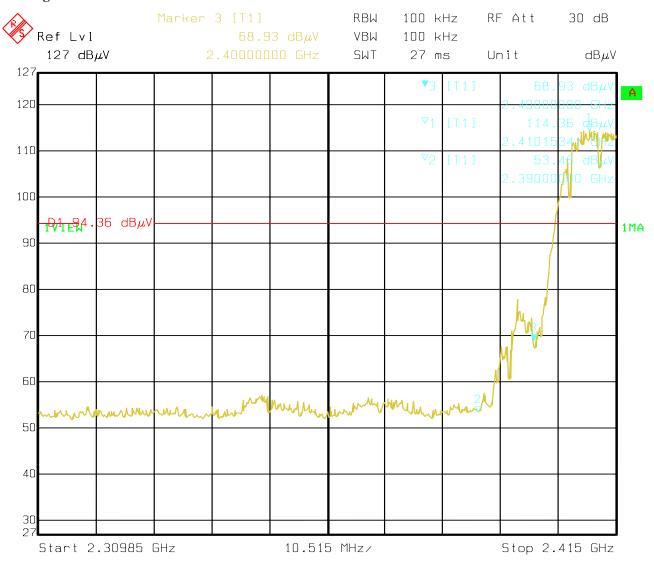

Date: 13.AUG.2010 11:31:13

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 52 of 64

Report No: 1008209-01


Date: 2010-09-16

CH11 at 1Mbps

10.4 Restricted band and bandedge Measurement

Product:	Computer		Test Mode:	CH11
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24	deg. C,	Humidity	56% RH
Test Result:]	Pass	Detector	PK
The Max. FS in	PK ($dB\mu V/m$)	47.10(V)/49.28(H)	T 114	$74(dB\mu V/m)$
Restrict Band	AV ($dB\mu V/m$)	35.26(V)/35.92(H)	Limit	$54(dB\mu V/m)$

Test Figure:

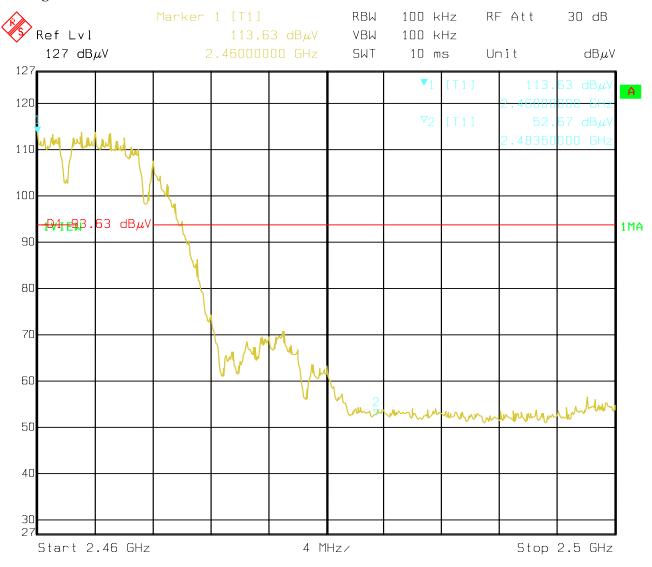

Date: 13.AUG.2010 11:34:12

Note: The Max. FS in Restrict Band are measured in conventional method.

Date: 2010-09-16




For 802.11g mode

CH01 at 6Mbps

10.4 Restricted band and bandedge Measurement

Product:	Computer		Test Mode:	CH1
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass	Detector	PK
The Max. FS in	PK ($dB\mu V/m$)	51.93(V)/53.71(H)	T :!4	$74(dB\mu V/m)$
Restrict Band	AV ($dB\mu V/m$)	38.13(V)/40.52(H)	Limit	$54(dB\mu V/m)$

Test Figure:

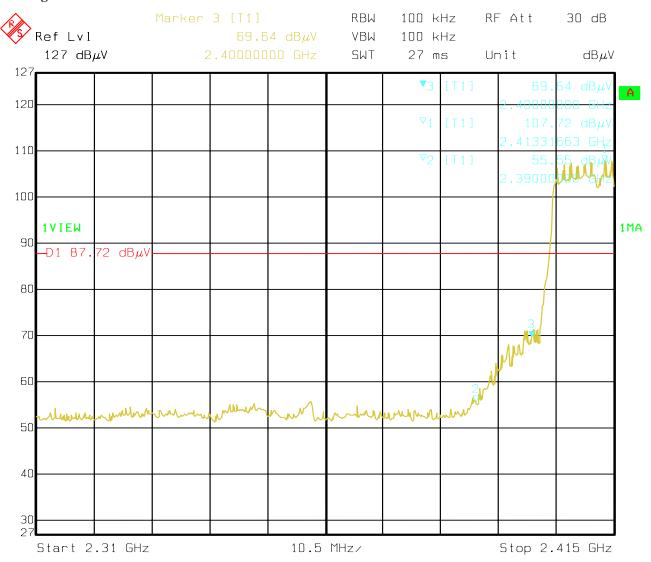

Date: 13.AUG.2010 14:39:24

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 54 of 64

Report No: 1008209-01


Date: 2010-09-16

CH11 at 6Mbps

10.4 Restricted band and bandedge Measurement

Product:	Computer		Test Mode:	CH11
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	I	Pass	Detector	PK
The Max. FS in	PK ($dB\mu V/m$)	50.21(V)/51.83(H)	T ::14	$74(dB\mu V/m)$
Restrict Band	AV ($dB\mu V/m$)	37.33(V)/38.83(H)	Limit	$54(dB\mu V/m)$

Test Figure:

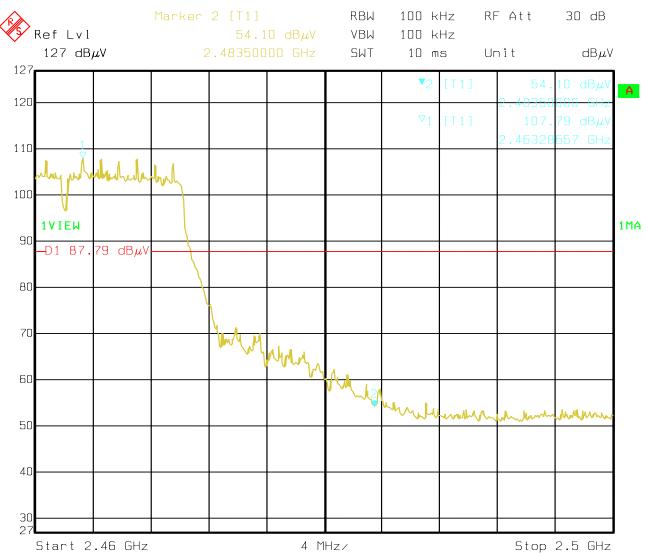

Date: 13.AUG.2010 14:31:55

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1008209-01 Page 55 of 64

Date: 2010-09-16



11.0 Antenna Requirement 11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi

are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

PCB printed antenna used. The maximum Gain of the antennas is 1dBi.

Report No: 1008209-01 Page 56 of 64

Date: 2010-09-16



12.0 Maximum Permissible Exposure

Applicable Standard

According to §1.1307(b)(5), systems operating under the provisions of this section shall be oper-ated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline. This is a Portable device.

According to §1.1310 and §2.1093 RF exposure is calculated.

Measurement Result

This is a portable device and the Max peak output power is 12.26dBm (16.827mW), so the EIRP is 16.827*1.259=21.185mW which is lower than low threshold 60/fGHz mW (24.62mW), d<2.5cm in general population category;

The SAR measurement is not necessary.

Report No: 1008209-01 Page 57 of 64

Date: 2010-09-16




13.0 FCC ID Label

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

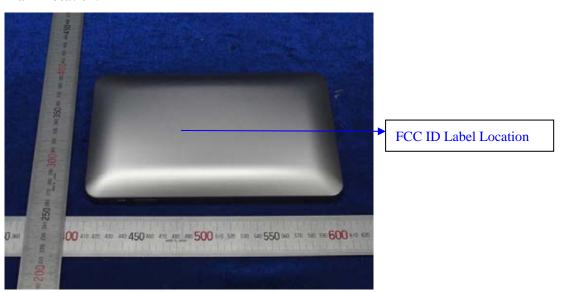

Page 58 of 64

Report No: 1008209-01

Date: 2010-09-16




14.0 Photo of testing



Date: 2010-09-16



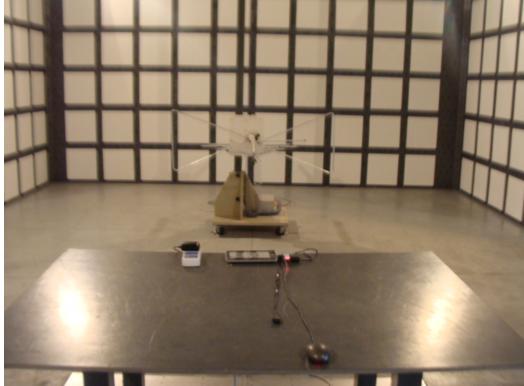



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2010-09-16

14.3 Photo for the EUT







The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2010-09-16







The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 62 of 64

Report No: 1008209-01 Date: 2010-09-16









The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd vill not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.





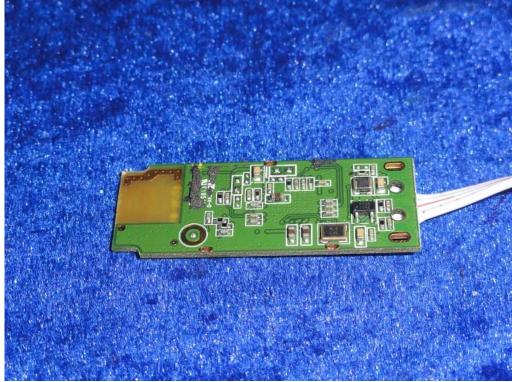

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2010-09-16







End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd vill not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.