
Dielectric Chip Antenna



■ P/N; ODBTPTR7020

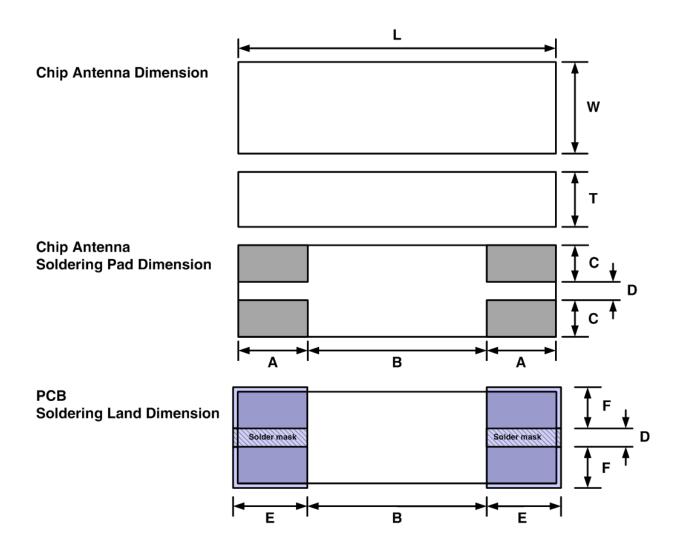

Parameter	L	W	Т	Α	В	С	D	E	F
Value[mm]	7.0 ± 0.1	2.0 ± 0.1	1.2 ± 0.1	1.5	4	0.8	0.4	1.6	0.9


Unless Specified tolerances are ± 0.05 mm

Dielectric Chip Antenna



■ Test Result for ARAMO SMART

3D	Peak gain (dBi)	Average gain (dBi)	Efficiency (%)		
2400 [MHz]	1.79	-2.96	50.73		
2425 [MHz]	2.40	-2.43	57.25		
2445 [MHz]	2.26	-2.46	56.91		
2465 [MHz]	2.53	-2.23	60.00		
2485 [MHz]	2.41	-2.21	60.23		



■ Radiation Pattern 3D

