





ISO/IEC17025 Accredited Lab.

Report No: FCC0911250 File reference No: 2009-12-20

Applicant: Joysway Hobby Co., Ltd

Product: Radio control speed boat

Model No: 8101

Brand Name: Joysway Hobby

Test Standards: FCC Part 15 Subpart C, Paragraph 15.227

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.227 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: Nov 26,2009

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0911250 Page 2 of 23

Date: 2009-12-20



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205.



Report No: 0911250 Date: 2009-12-20



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	5
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test	8
5.2	Test Method and Test Procedure	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result	9
6.0	Radiated Emission test	10
6.1	Test Method and Test Procedure	10
6.2	Configuration of the EUT	11
6.3	EUT Operation Condition.	11
6.4	Radiated Emission Limit	11
6.5	Test Result	13
7.0	Band Edge	15
7.1	Test Method and Test Procedure	15
7.2	Radiated Test Setup.	15
7.3	Configuration of the EUT	15
7.4	EUT Operating Condition.	15
7.5	Band Edge Limit	15
7.6	Band Edge Test Result.	16
8.0	20dB bandwidth measurement	17
9.0	FCC ID Label.	18
10.0	Photo of Test Setup and EUT View.	19

Date: 2009-12-20



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Joysway Hobby Co., Ltd

Address: No.141 Guang Hui Road, Wan Jiang, Dongguan, China

Telephone: +86-769-23296899/88735025

Fax: +86-769-88735015

1.3 Description of EUT

Product: Radio control speed boat Manufacturer: Joysway Hobby Co., Ltd

Brand Name: Joysway Hobby

Model Number: 8101

Additional Model Name 8102, 8106, 8108, 8201, 8202, 8206, 8208, 8601, 8602, 8608, 8801, 8802, 8808

Additional Trade Name N/A

Rating: 9V DC (1pcs batteries)

Operation Frequency 27.145MHz

Number of Channel 1

Antenna Designation A permanent fixed diapole dipole antenna, designed as an indispensable part of

the EUT.

1.4 Submitted Sample

1 Sample

1.5 Test Duration

2009-11-26 to 2009-12-14

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0911250 Page 5 of 23

Date: 2009-12-20



1.6 Test Uncertainty

Conducted Emissions Uncertainty = ± 3.0 dB Radiated Emissions Uncertainty = $\pm 6.0 dB$

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

2.0	Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date	
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2009-12-01	2010-11-30	
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2009-03-31	2010-03-31	
Loop Antenna	EMCO	6502	00042960	2009-02-06	2010-02-05	
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2009-02-06	2010-02-05	
966 Chamber			N/A	2009-02-06	2010-02-05	

Page 6 of 23

Report No: 0911250 Date: 2009-12-20



3.0 **Technical Details**

3.1 **Summary of test results**

The FIIT has l	heen tested	according to	the following	specifications:
THE LUI HAS	neen testeu	according to	ան լարտայլջ	specifications.

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted	N/A	
	Emission Test		
FCC Part 15 Subpart C Paragraph 15.227	Field Strength of	PASS	Compiles
Limit	Fundamental		-
FCC Part 15, Paragraph 15.209	Radiated Emission Test	PASS	Compiles
Attenuation below the general limits specified	Band Edge	PASS	Compiles
in Section 15.209(a) is not required. In	Test		
addition, Radiated emissions which fall in the			
restricted bands, as defined in Section			
15.205(a), must also comply with the Radiated			
emission limits specified in Section 15.209(a)			
(see Section 15.205(c)).			

3.2 **Test Standards**

FCC Part 15 Subpart C, Paragraph 15.227

4.0 **EUT Modification**


No modification by Shenzhen Timeway Technology Consulting Co.,Ltd

Report No: 0911250 Date: 2009-12-20



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Block diagram of Test setup

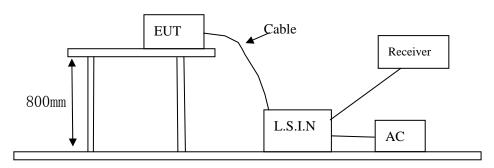

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
Radio control	Joysway Hobby Co., Ltd	8101	XYIJH80001
speed boat			

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 8 of 23

Report No: 0911250 Date: 2009-12-20



C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

	Eraguanay (MHz)	Class A Limits (dB µ V)		Class B Limits (dB µ V)	
Frequency(MHz)		Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
	$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
	$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
	5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: EUT powered by 1pcs 9V batteries, this test item not applicant

Page 9 of 23


Report No: 0911250 Date: 2009-12-20



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup for frequency 30-1000MHz

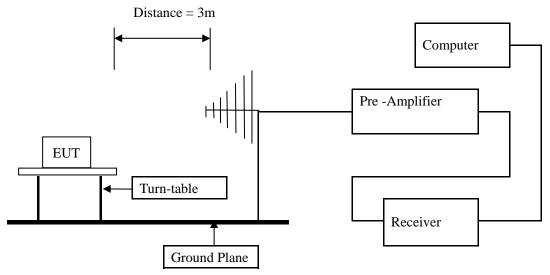


Page 10 of 23

Report No: 0911250 Date: 2009-12-20



Block diagram of Test setup for frequency below 30MHz

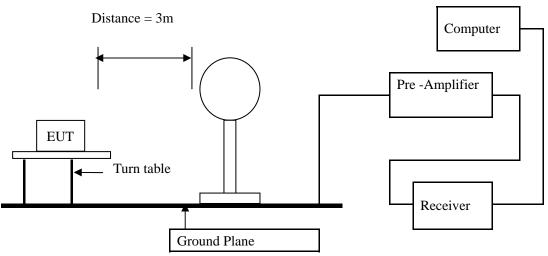

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Page 11 of 23

Report No: 0911250 Date: 2009-12-20



A FCC Part 15 Subpart C Paragraph 15.227 Limit

Fundamental Frequency (MHz)	Field Strength of Fundamental (3m)		
	uV/m dBuV/m		
26.96-27.28	10000	80	

Note:

- 1. RF Field Strength $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
0.009 - 0.490	3	20log 2400/F (kHz) + 80
0.490 – 1.705	3	20log 24000/F (kHz) + 40
1.705 – 30.00	3	20log 30 + 40
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula $Ld1 = Ld2 * (d2/d1)^2$
- 5. New batteries were installed in the equipment under test for radiated emission testing.

Report No: 0911250 Page 12 of 23

Date: 2009-12-20



6.5 Test result

A Fundamental Radiated Emission Data

Product:	Radio control speed boat	Test Mode:	Keep Tx transmitting
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	2.4VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
27.145	52.1/50.8	Horizontal	100/80	-47.9 /-29.2
27.145	65.9/64.7	Vertical	100/80	-34.1/-15.3

Note: (1) PK= Peak, AV= Average

(2) Emission Level = Reading Level + Probe Factor + Cable Loss.

(3)Margin=Emission-Limits

(4)According to section 15.35(b), the peak limit is 20dB higher than the average limit


Report No: 0911250 Date: 2009-12-20


3. General Radiated Emission Data and Harmonics Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual



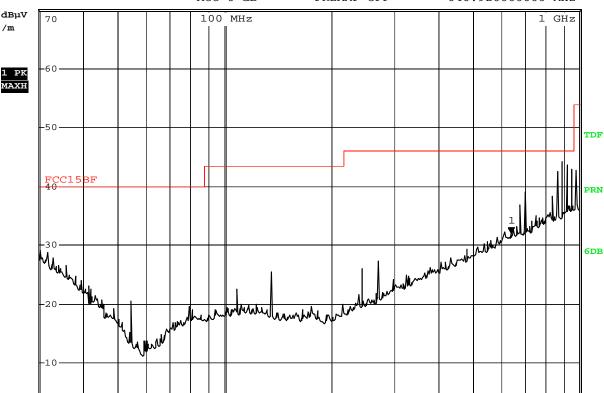


Date: 14.DEC.2009 18:51:50

0 30 MHz

Frequency (MHz)	Level@3m (dB \u03bc V/m)	Antenna Polarity	Limit@3m (dB µ V/m)		
54.28	20.55	Н	40.00		
868.64	42.60	Н	46.00		
895.80 44.17		Н	46.00		
922.92	43.57	Н	46.00		
950.08	42.82	Н	46.00		
977.20	42.63	Н	46.00		

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



Date: 2009-12-20




Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

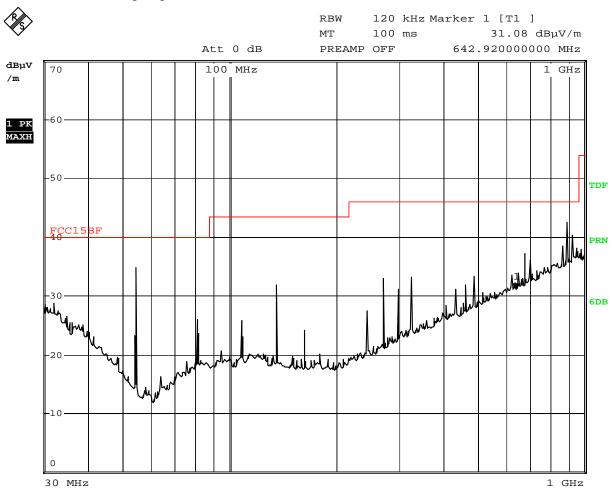

Date: 14.DEC.2009 18:49:52

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)		
54.24 34.82		V	40.00		
135.72 31.80		V	43.50		
895.80	42.54	V	46.00		

Report No: 0911250 Date: 2009-12-20




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (5) The antenna polarization : Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

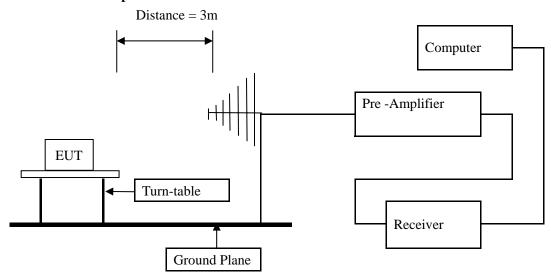

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of The EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.3 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Page 16 of 23

Report No: 0911250 Date: 2009-12-20




7.5 Band Edge Limit

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.

7.6 Band Edge Test Result

Product:	Radio control speed boat	Test Mode:	Keep Tx transmitting
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	2.4V DC	Humidity:	56%
Test Result:	Pass		

Test Figure:

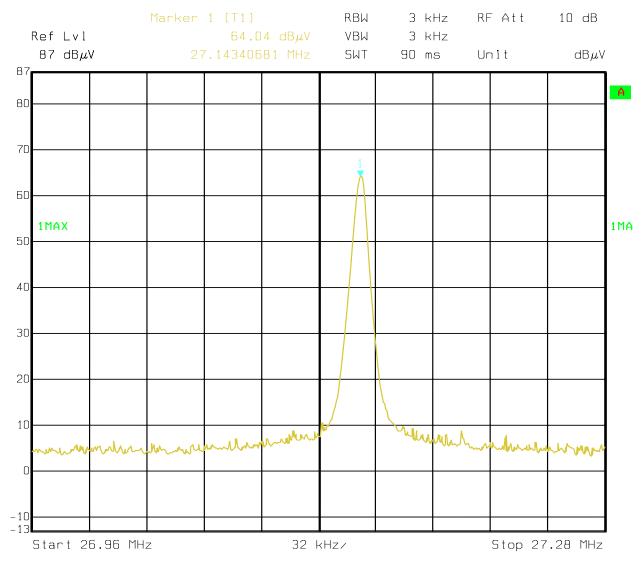

Date: 06.DEC.2009 15:23:11

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0911250 Page 17 of 23

Date: 2009-12-20



8.0 20dB Bandwidth Measurement

Product:	Radio cor	itrol spee	d boat	Tes	Test Mode:		Keeping Transmitting			
Detector	PK			Test V	Test Voltage Humidity		DC9.0V			
		4 deg. C,		Humie			56% RH			
Test Result: Pass			2	20dB		33.667kHz				
				Bai	ndwidth					
	Marker	1 [T1 r	ndB]	RBW	10 k	Hz RI	Att	0 dB		
Ref Lvl	ndB 20.00 dB			VBW	10 k					
87 dB μ V	BW 33	3.667334	167 kHz	SWT	15 m	s Ur	nit	dB μ V		
87										
80									Α	
70										
			1							
CO										
60										
1MAX									1 M	
50		T 1/		\ \	2					
		7		\	7					
40										
30										
20						\				
	,,,					V				
10 White	WW					~~\	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	Morris		
								\ \ \		
0										
-10										
-13	45									
Center 27.1	45 MHz		15 k	Hz/			Span	150 kHz		

Page 18 of 23

Report No: 0911250 Date: 2009-12-20



9.0 FCC ID Label

FCC ID: XYIJH80001

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 19 of 23

Report No: 0911250 Date: 2009-12-20



10.0 **Photo of testing**

10.1 Conducted test View--

N/A

10.2 Radiated emission test view




Page 20 of 23

Report No: 0911250 Date: 2009-12-20



Photo for the EUT

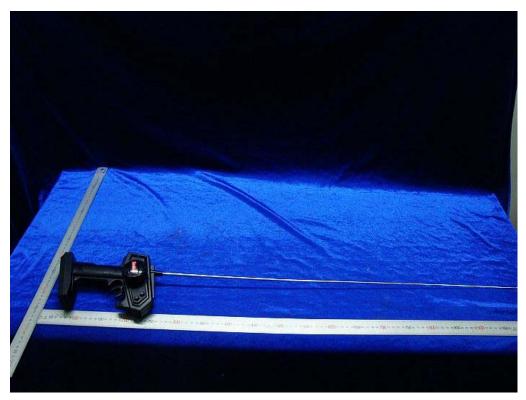



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 21 of 23

Report No: 0911250 Date: 2009-12-20






Page 22 of 23

Report No: 0911250 Date: 2009-12-20





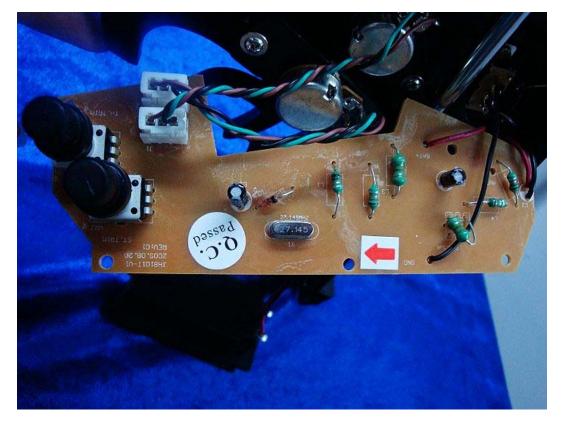

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 23 of 23

Report No: 0911250 Date: 2009-12-20



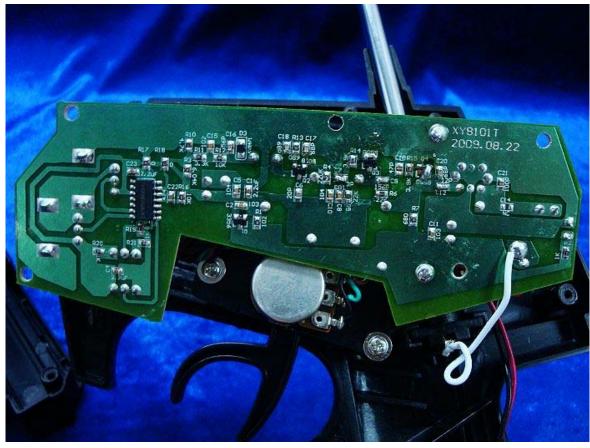

-End of the report-