



Independent Testing Laboratory
CMC Centro Misure Compatibilità S.r.l.

Via dell'Elettronica, 12/C
36016 Thiene (VI) - ITALY
Tel./Fax +39 0445 367702
www.cmclab.it - info@cmclab.it

Accredited by Ministry of Communications - Notified Body EMC Directive 2004/108/EC n° NB 2044

TEST REPORT nr. R11127901
Federal Communication Commission (FCC)

Test item

Description.....: MONITOR LCD 15"
Trademark.....: GLOBAL DISPLAY SOLUTIONS
Model/Type: G1500194 type CD15270TBX/24

Test Specification

Standard: FCC Rules & Regulations, Title 47 - Part 15.107 and Part 15.109 (2010)

Client's name: GLOBAL DIPLAY SOLUTIONS S.p.a.
Address: Via Tezze, 20/A - 36073 Cornedo Vicentino (VI) - ITALY

Manufacturer's name : Same as client
Address: --

Report

Tested by: A. Bertezzo - Technician

Approved by: R. Beghetto - Laboratory Manager

Date of issue: 05.10.11

Contents.....: 22 pages

This test report shall not be reproduced except in full without the written approval of CMC.
The test results presented in this report relate only to the item tested.



Index

1. SUMMARY	3
2. DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	4
2.1 TEST SITE	4
3. TESTING AND SAMPLING	4
4. OPERATIVE CONDITIONS	5
5. PHOTOGRAPH(S) OF EUT	6
5.1 PHOTOGRAPH(S) OF EUT	6
5.2 PHOTOGRAPH(S) OF SETUP	7
6. EQUIPMENT LIST	8
7. MEASUREMENT UNCERTAINTY	9
8. REFERENCE DOCUMENTS	10
9. DEVIATION FROM TEST SPECIFICATION	11
10. TEST CASE VERDICTS	11
11. RESULTS	11
11.1 CONTINUOUS DISTURBANCE VOLTAGE TEST (150 kHz – 30 MHz)	12
11.2 RADIATED DISTURBANCE TEST (30 – 2000 MHz)	16



1. Summary

Emission Test:

FCC Rules & Regulations, Title 47

Test specifications	Environmental Phenomena	Port	Tests sequence	Result
Part 15.107	Continuous disturbance voltage	Mains terminal	1	Complies
Part 15.109	Radiated disturbance	Enclosure	2	Complies

The Test Report was given to the Client representatives for necessary documentation of ratification of the tested equipment and it is valid for the FCC certification.



2. Description of Equipment under test (EUT)

Power supply : 110 Vac 50Hz single-phase + earth

Power cable : Unshielded

Serial Number : --

2.1 Test Site

Company : CMC Centro Misure Compatibilità S.r.l.

Address : Via dell'Elettronica, 12/C
36016 Thiene (VI) - ITALY

3. Testing and sampling

Date of receipt of test item : 07.09.11

Testing start date : 07.09.11

Testing end date : 19.09.11

Samples tested nr. : 1

Sampling procedure. : Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion

Internal identification : adhesive label with the product number
P110877



4. Operative conditions

EUT exercising	: Steady condition Patern H 1024x768 60 Hz
Auxiliary equipment	: - N.1 24Vdc power supply TDK-LAMBDA LS150-24 - N.1 PC NCR PIVAT Core 01 Intel P4 2.80 GHz, Graphic controller 82845G - N.1 USB keyboard Logitech M/N Y-U/S76A - N.1 USB optical mouse M/N M-BT58 - N.1 USB Key Kingston Datatraveler 1 GB - N.1 Printer Samsung ML-1750 - N.1 24Vdc Power 3Mt Cable - N.1 VGA 5 Mt cable - N.1 USB A-MiniB M-M 5 Mt cable - N.1 USB A-B - N.4 USB A-A M-F
Performance check for immunity test	: --



5. Photograph(s) of EUT


5.1 Photograph(s) of EUT





CMC
Centro Misure Compatibilità S.r.l.
Via dell'Elettronica, 12/C
36016 Thiene (VI)

5.2 Photograph(s) of setup

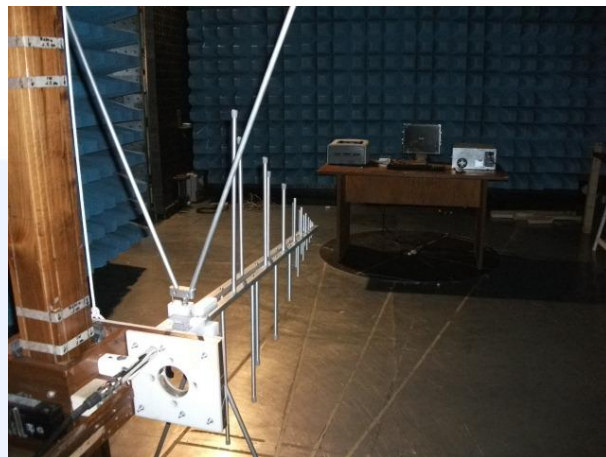



6. Equipment list

<i>Id. number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>	<i>Serial number</i>	<i>Last calibration</i>	<i>Due date calibration</i>
CMC S001	Rohde & Schwarz	ESHS30	EMC interference receiver	862024/003	January '11	January '12
CMC S009	Rohde & Schwarz	ESH2-Z5	Artificial network	839497/007	January '11	January '12
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses limiting device	---	January '11	January '12
CMC S136	Schwarzbeck	VULB 9136	Broadband Antenna	9136-205	May '10	May '13
CMC S164	Rohde & Schwarz	ESU26	EMC interference receiver	100052	January '11	January '12
CMC A013	CMC	TR01	Rotary motorized table	---	---	---
CMC A014	CMC	PM01	Antenna positioning Mast	---	---	---



7. Measurement uncertainty

Test	Expanded Uncertainty	note
Conducted Emission		
(50Ω/50μH AMN) - (9 kHz – 150 kHz)	±3.0 dB	1
(50Ω/50μH AMN) - (150 kHz – 30 MHz)	±2.6 dB	1
(Voltage probe) - (150 kHz – 30 MHz)	±3.1 dB	1
(50Ω/5μH AMN) - (150 kHz – 108 MHz)	±2.6 dB	1
Discontinuous Conducted Emission		
Conducted Emission (50Ω/50μH AMN) - (150 kHz – 30 MHz)	±2.9 dB	1
Disturbance Power (30 MHz – 300 MHz)		
	±3.1 dB	1
Radiated Emission		
(0,150 MHz – 30 MHz)	±4.3 dB	1
(30 MHz – 1000 MHz)	±4.6 dB	1
(1 GHz – 6 GHz)	±4.3 dB	1
Electromagnetic field EMF		
	±18.8 %	1
Harmonic current emissions test		
	±2.5 %	1
Voltage fluctuation and flicker test		
	±5.3 %	1
Insertion loss test		
	±2.2 dB	1
Radiated electromagnetic disturbance test (loop antenna)		
	±2.4 dB	1
Radiated electromagnetic field immunity test		
	0.8 V/m at 3V/m	1
Pulse modulated radiated electromagnetic field immunity test		
	0.8 V/m at 3V/m	1
Injected currents immunity test		
	0.6 V at 3V	1
Bulk current		
	8.4 mA at 60 mA	1
Power frequency magnetic field immunity test		
	0.4 A/m at 3 A/m	1
Electrostatic discharge immunity test		
		2
Electrical fast transients / burst immunity test		
		2
Surge immunity test		
		2
Short interruption immunity test		
		2
Voltage transient emission test		
	±4 %	1
Transient immunity test		
		2

Notes

Note 1:

The expanded uncertainty reported according to EN55016-4-2(2004-10) is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of p = 95%

Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor k = 2.



8. Reference documents

Reference no.	Description
FCC Rules and Regulation Title 47 part 15 (2010)	--
Internal Procedure PM001 rev. 2.0 (Quality Manual)	Measure procedure
Internal procedure INC_M rev. 8.0 (Quality Manual)	Measurement uncertainty calculation





9. Deviation from test specification

In agreement with the client, emission tests were performed with peak detector .

At the frequencies where the measures exceed the limit or within 6dB from it, the test was repeated with quasi-peak detector and/or average detector.

10. Test case verdicts

Test case does not apply to the test object : N / N.A.

Test item does meet the requirement : P / Pass / Complies

Test item does not meet the requirement : F / Fail / Does not comply

Test not performed : NE / Not Executed

11. Results

In this clause tests results are reported.

Measurement uncertainty is in accordance with document CMC INC_M rev. 8.0.



11.1 Continuous disturbance voltage test (150 kHz – 30 MHz)

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part. 15.107
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Shielded chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S001, CMC S009, CMC S010

Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Mains terminal
Frequency range: 150 kHz – 30 MHz


Acceptance limits

Limits for class A equipment		
Frequency range (MHz)	dB(μV) Quasi-peak	dB(μV) Average
0,15 to 0,50	79	66
0,5 to 5	73	60
5 to 30	73	60

Limits for class B equipment		
Frequency range (MHz)	dB(μV) Quasi-peak	dB(μV) Average
0,15 to 0,50	66 to 56	56 to 46
0,5 to 5	56	46
5 to 30	60	50



Setup

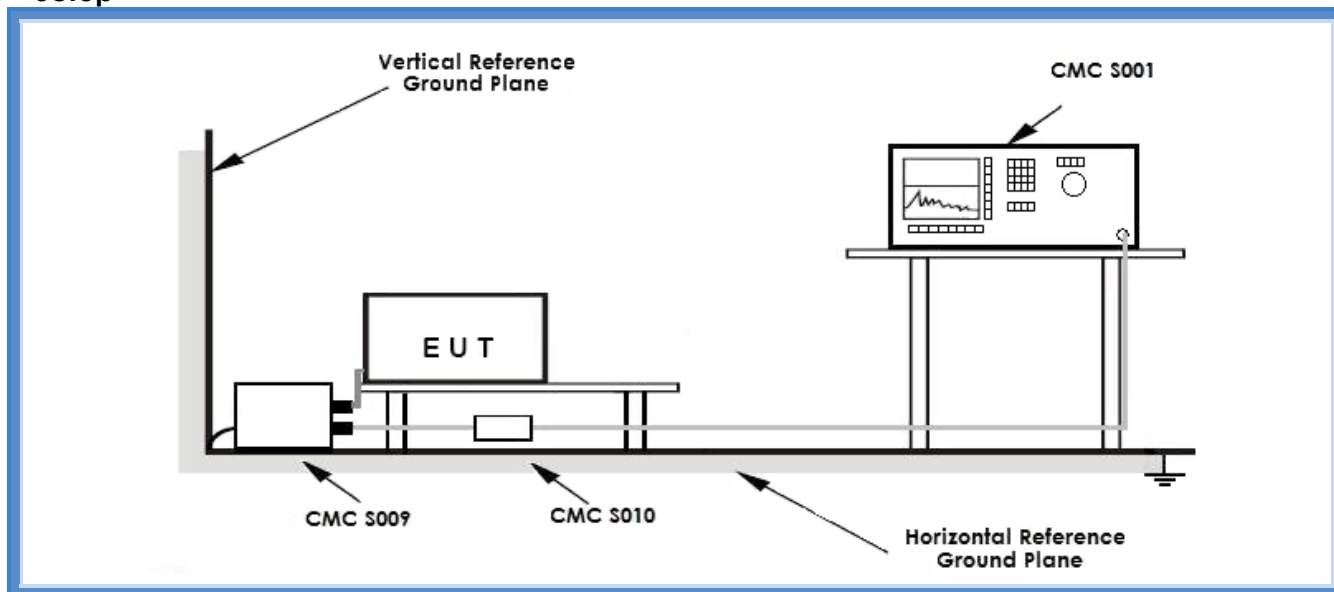

Result

Line	Graphs	Remarks	Result
N	G11127905	Class B	Complies
L1	G11127906	Class B	Complies
Remarks:	--		

Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a X

AV: Average; AV [1s] (average at 1 second) values are marked with a +




Graphs

CMC Centro misure compatibilita srl

Emission 0.15-30MHz

Op Cond: In funzione-Pattern H 1024x768 60Hz
Operator: Gandini 11127905
Test Spec: Line N

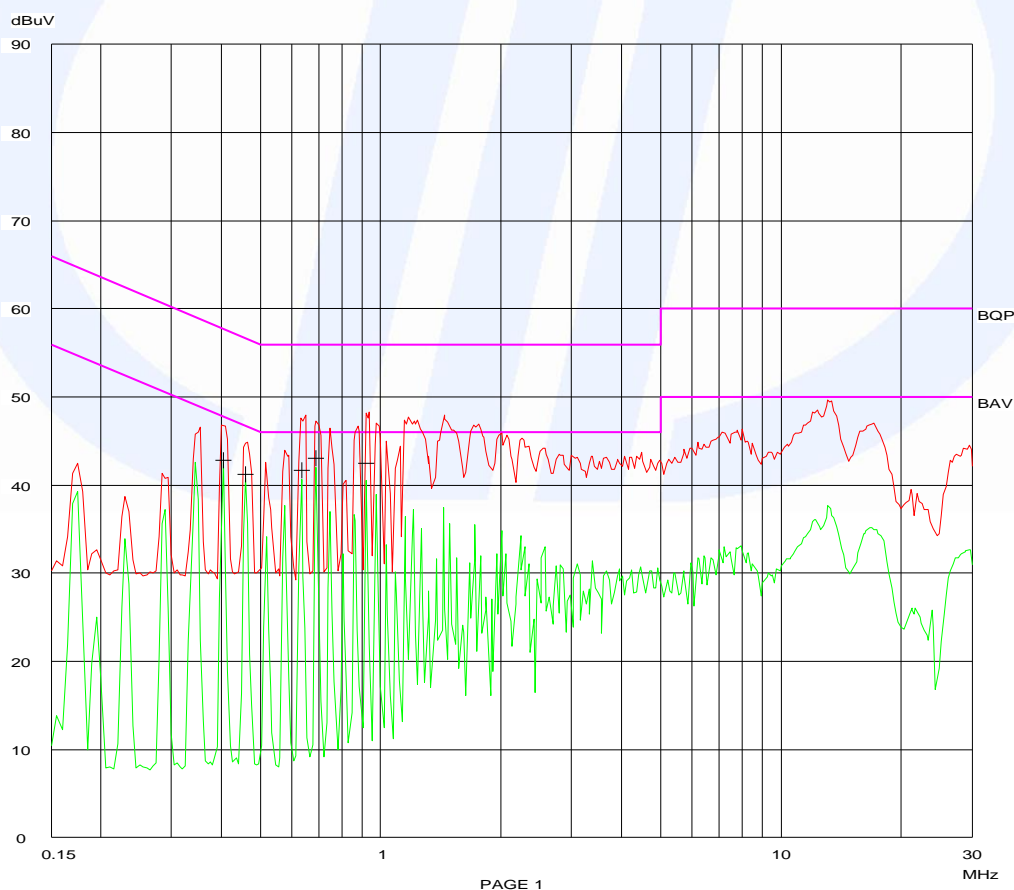


PAGE 1



CMC Centro misure compatibilita srl

Emission 0.15-30MHz

Op Cond: In funzione-Pattern H 1024x768 60Hz
Operator: Gandini 11127906
Test Spec: Line L

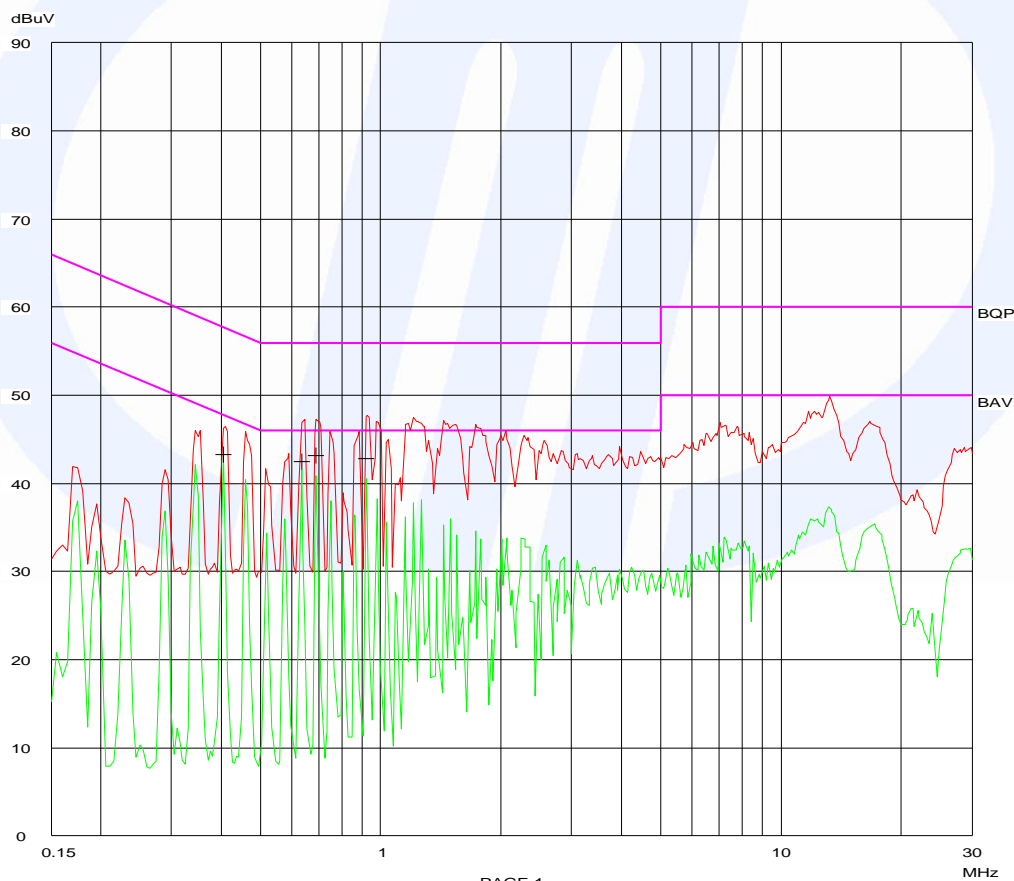

Result: The requirements are met



11.2 Radiated disturbance test (30 – 2000 MHz)

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part. 15.109
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Semi-anechoic chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S136, CMC S164, CMC A013, CMC A014

Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Enclosure
Frequency range: 30 MHz – 2000 MHz
Antenna polarization: Horizontal (H) – Vertical (V)
EUT – Antenna distance: 3m



Acceptance limits


Limits for class A equipment	
Frequency range (MHz)	Limits [dB(μV/m)]
30 to 88	49,08
88 to 216	53,52
216 to 960	56,44
960 to 1000	59,54

Limits for class B equipment	
Frequency range (MHz)	Limits [dB(μV/m)]
30 to 88	40
88 to 216	43,52
216 to 960	46,02
960 to 1000	53,98

Limits for class B equipment		
Frequency range (GHz)	Limits [dB(μV/m)] (~)	
	Average Limit	Peak Limit
1 to 2	54	74



Setup

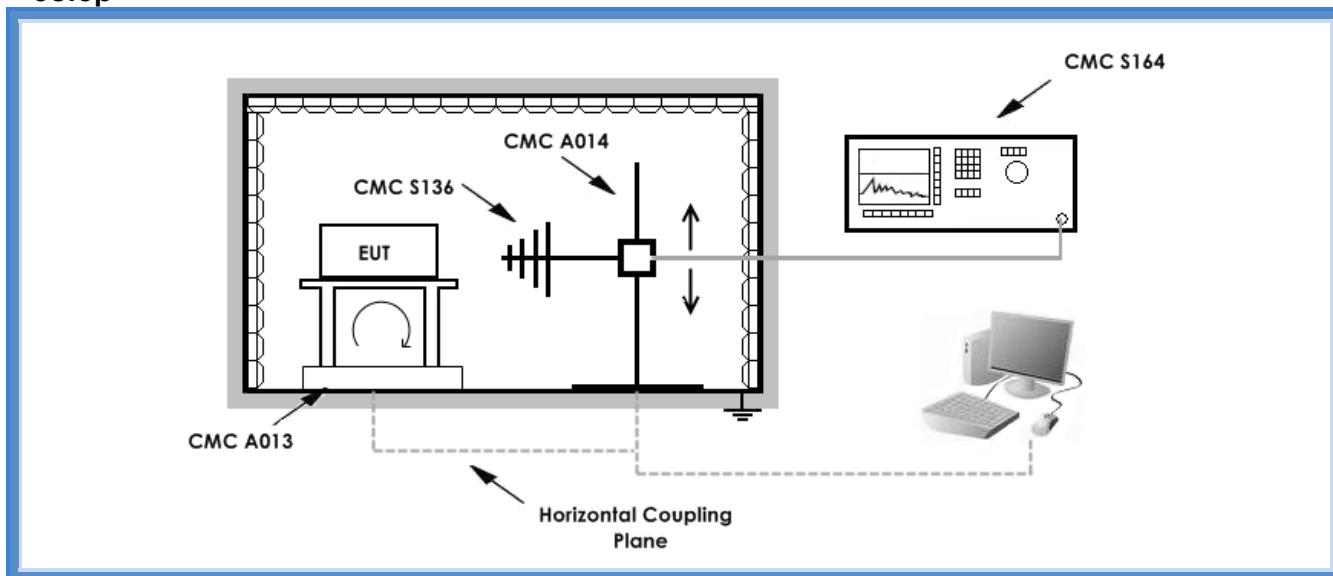

Result

Polarization	Frequency Range (MHz)	Graphs	Remarks	Result
V	30 – 1000	G11127901	Class B	Complies
H	30 – 1000	G11127902	Class B	Complies
H	1000 – 2000	G11127903	Class B	Complies
V	1000 – 2000	G11127904	Class B	Complies
Remarks:	--			

Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +


AV: Average; AV [1s] (average at 1 second) values are marked with a x



Graphs

G11127901

Meas Type Emission 30-1000MHz
Equipment under Test
Manufacturer
OP Condition In funzione-Pattern H 1024x768 60Hz
Operator Gandini 11127901
Test Spec
Vert

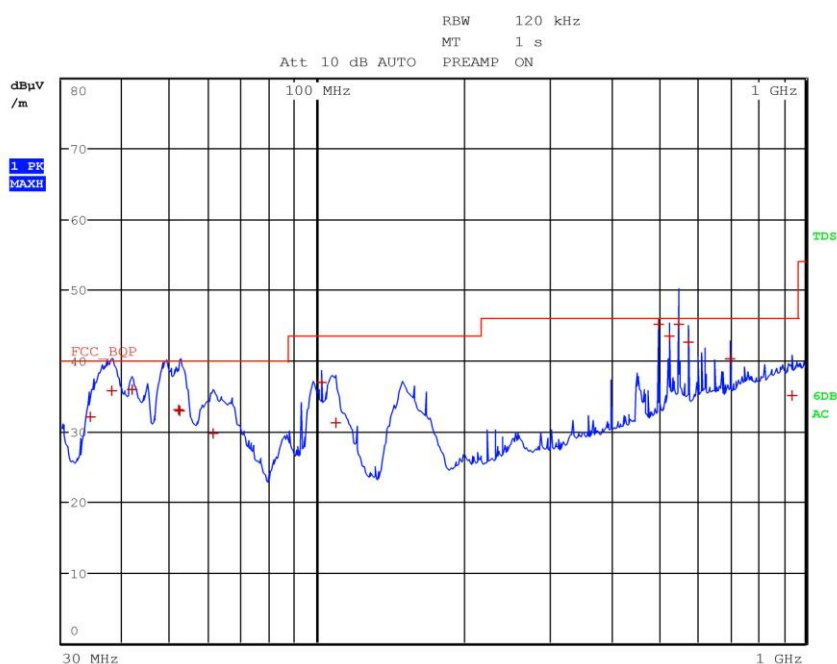

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Subranges: 14

Trace	Frequency	Level (dBμV/m)	Detector	Delta Limit/dB
1	34.310192308 MHz	31.98	Quasi Peak	-8.02
1	37.905576923 MHz	35.68	Quasi Peak	-4.32
1	41.843269231 MHz	35.85	Quasi Peak	-4.15
1	52.225320513 MHz	33.11	Quasi Peak	-6.89
1	52.532564103 MHz	32.82	Quasi Peak	-7.18
1	61.014294872 MHz	29.72	Quasi Peak	-10.28
1	102.153589744 MHz	36.91	Quasi Peak	-6.61
1	109.150769231 MHz	31.15	Quasi Peak	-12.38
1	501.223974359 MHz	45.06	Quasi Peak	-0.96
1	526.586025641 MHz	43.43	Quasi Peak	-2.59
1	551.360064103 MHz	45.15	Quasi Peak	-0.87
1	576.123205128 MHz	42.54	Quasi Peak	-3.48
1	701.710384615 MHz	40.25	Quasi Peak	-5.77
1	938.094423077 MHz	34.96	Quasi Peak	-11.06



G11127902

Meas Type Emission 30-1000MHz
Equipment under Test
Manufacturer
OP Condition In funzione-Pattern H 1024x768 60Hz
Operator Gandini 11127902
Test Spec
Horiz

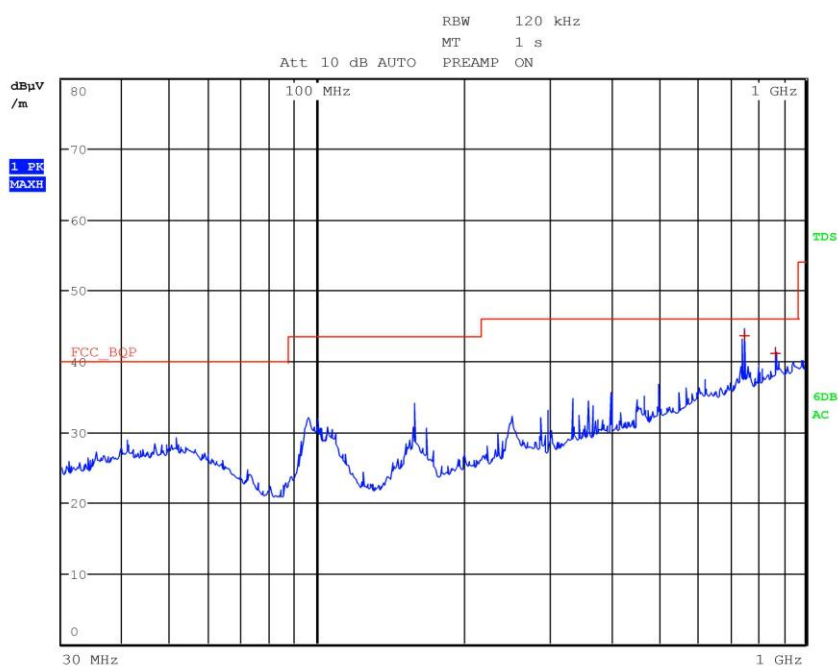

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Subranges: 2

Trace	Frequency	Level (dBμV/m)	Detector	Delta Limit/dB
1	752.216025641 MHz	43.65	Quasi Peak	-2.37
1	871.086410256 MHz	41.11	Quasi Peak	-4.91



G11127903

Meas Type Emission 1000-2000MHz
Equipment under Test
Manufacturer
OP Condition In funzione-Pattern H 1024x768 60Hz
Operator Gandini 11127903
Test Spec
Horiz

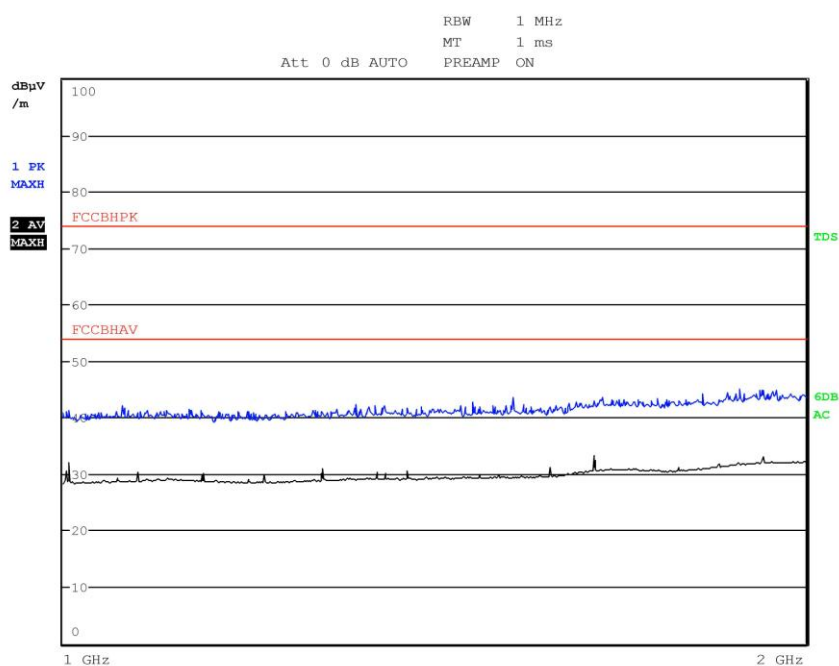


Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 0



G11127904

Meas Type Emission 1000-2000MHz
Equipment under Test
Manufacturer
OP Condition In funzione-Pattern H 1024x768 60Hz
Operator Gandini 11127904
Test Spec
Vert

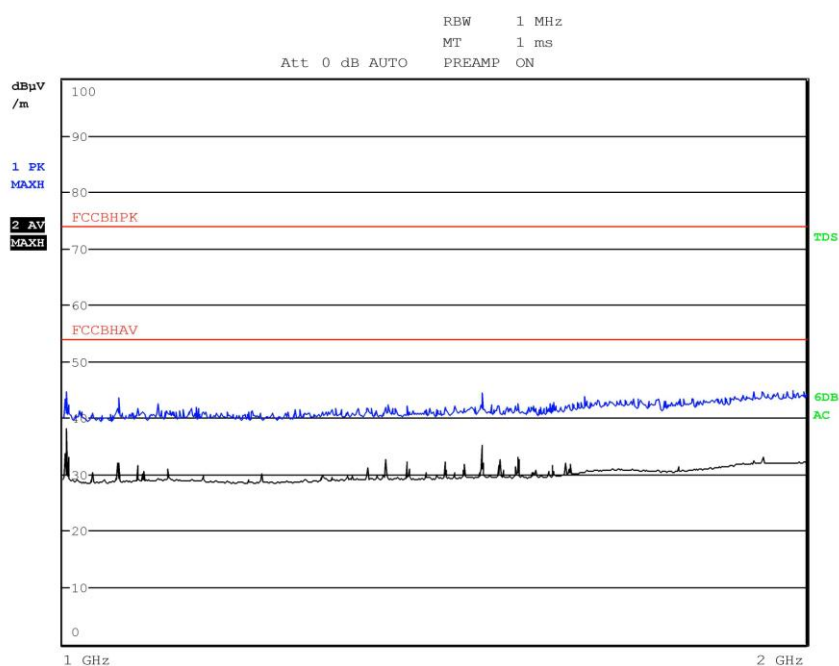

Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 0

Result: The requirements are met