





ISO/IEC17025 Accredited Lab.

Report No: FCC1310142-02 File reference No: 2013-12-04

Applicant: Invent-Tech Electronics Manufactory Limited

Product: RC EYE ONELINK

Model No: 89036RC

Brand Name: N/A

Test Standards: FCC Part 15 Subpart C, Paragraph 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: December 04, 2013

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1310142-01 Page 2 of 41

Date: 2013-12-04



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.



Report No: 1310142-01

Date: 2013-12-04



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT.	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	10
6.1	Test Method and Test Procedure	10
5.2	Configuration of the EUT.	11
6.3	EUT Operation Condition.	11
6.4	Radiated Emission Limit.	11
6.5	Test Result.	12
7.0	Band Edge	26
7.1	Test Method and Test Procedure	26
7.2	Radiated Test Setup.	26
7.3	Configuration of the EUT	26
7.4	EUT Operating Condition.	26
7.5	Band Edge Limit.	26
7.6	Band Edge Test Result.	27
8.0	Antenna Requirement.	31
9.0	20dB bandwidth measurement.	32
10.0	FCC ID Label	35
11.0	Photo of Test Setup and EUT View.	36

Report No: 1310142-01

Date: 2013-12-04



Page 4 of 41

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Invent-Tech Electronics Manufactory Limited

Address: Flat E, 2/F, Wah Lik Ind. Ctr, 459-469 Castle Peak Road, Tsuen Wan, N.T.,

Telephone: 0852-2490 7816 Fax: 0852-2412 3691

1.3 Description of EUT

Product: RC EYE ONELINK

Manufacturer: Invent-Tech Electronics Manufactory Limited

Brand Name: N/A
Model Number: 89036RC
Additional Model Name N/A
Additional Trade Name N/A

Rating: DC3.0V, 2 pcs AAA batteries

Modulation Type: FHSS

Operation Frequency 911.63-919.23MHz

Antenna Designation Reverse polarity antenna connector. Dipole antenna with gain 2.5dBi

1.4 Submitted Sample

1 Sample

1.5 Test Duration

2013-10-29 to 2013-12-04

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1310142-01 Page 5 of 41

Date: 2013-12-04



Test Uncertainty

Conducted Emissions Uncertainty =3.6Db Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Page 6 of 41

Report No: 1310142-01



2.0		Test Equip	ments		
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2013-08-23	2014-08-22
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2013-08-23	2014-08-22
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2013-08-23	2014-08-22
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2013-08-25	2014-08-24
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2013-08-23	2014-08-22
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2013-08-24	2014-08-23
System Controller	CT	SC100	-		
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		
Computer	IBM	8434	1S8434KCE99BLXL O*	-	-
Loop Antenna	EMCO	6502	00042960	2013-08-23	2014-08-22
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2013-08-23	2014-08-22
3m OATS			N/A	2013-08-22	2014-08-21
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2013-08-24	2014-08-23
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2013-08-24	2014-08-23
Power meter	Anritsu	ML2487A	6K00003613	2013-08-24	2014-08-23
Power sensor	Anritsu	MA2491A	32263	2013-08-24	2014-08-23
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2013-08-24	2014-08-23
LISN	AFJ	LS16C	10010947251	2013-08-23	2014-08-22
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2013-08-23	2014-08-22
9*6*6 Anechoic			N/A	2013-08-22	2014-08-21
EMI Test Receiver	RS	ESCS30	100139	2013-08-23	2014-08-22
LISN	AFJ	LS16C	10010947251	2013-08-23	2014-08-22
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2013-08-23	2014-08-22

Report No: 1310142-01 Page 7 of 41

Date: 2013-12-04



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted Emission Test	N/A	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	PASS	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249

4.0 EUT Modification

No modification by Shenzhen Timeway Technology Consulting Co.,Ltd


Report No: 1310142-01

Date: 2013-12-04



5. Power Line Conducted Emission Test

5.1 Schematics of the test

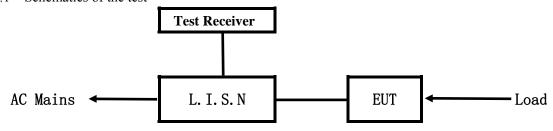


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 500hm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Block diagram of Test setup

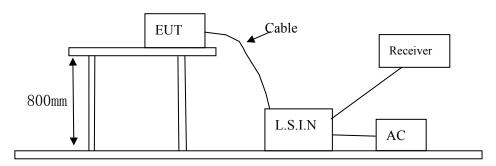

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
RC EYE ONELINK	Invent-Tech Electronics Manufactory	89036RC	Y2H-89036RC
RC ETE ONELINK	Limited	87030KC	1211-07030KC

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1310142-01 Page 9 of 41

Date: 2013-12-04



C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Eraguanay (MHz)	Class A Lir	nits (dB µ V)	Class B Limits (dB µ V)	
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Due to Battery operation, this test item not applicable

Report No: 1310142-01


Date: 2013-12-04




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

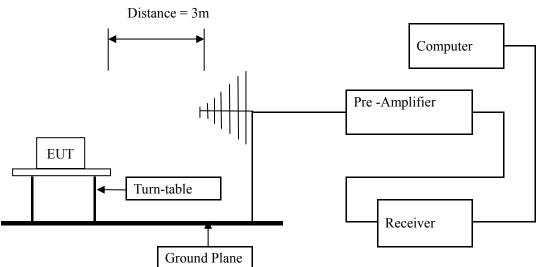

Block diagram of Test setup for frequency below 30MHz

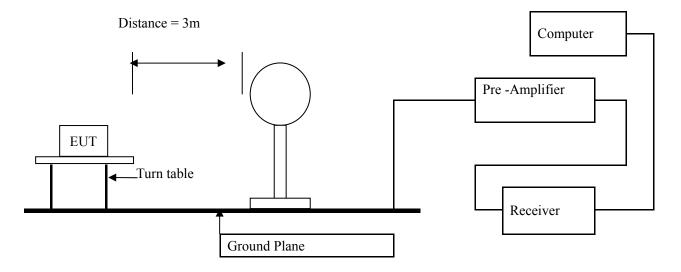

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 11 of 41

Report No: 1310142-01

Date: 2013-12-04



6.2 Configuration of The EUT Same as section 5.3 of this report

6.3 EUT Operating Condition Same as section 5.4 of this report.

6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Stre	Field Strength of Fundamental (3m)			trength of Harmo	onics (3m)
(MHz)	mV/m	dBuV/m		uV/m	dBu	V/m
902-928	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. New batteries were installed in the equipment under test for radiated emission testing.
- 5. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-10G, the final emission level got using PK and AV detector.
- 6. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No: 1310142-01 Page 12 of 41

Date: 2013-12-04



6.5 Test result

Fundamental & Harmonics Radiated Emission Data \mathbf{A}

Product:	RC EYE ONELINK	Test Mode:	Low Channel- keep transmitting
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	3.0VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
911.63	70.74(PK)	Н	114/94	-23.26
911.63	80.98(PK)	V	114/94	-13.02
1823.26		H/V	74/54	
2734.89		H/V	74/54	
3646.52		H/V	74/54	
4558.15		H/V	74/54	
5469.78		H/V	74/54	
6381.41		H/V	74/54	
7293.04		H/V	74/54	
8204.67		H/V	74/54	
9116.3		H/V	74/54	

Report No: 1310142-01 Page 13 of 41

Report No: 1310142-01 Date: 2013-12-04



Product:	RC EYE ONELINK	Test Mode:	Middle Channel- keep transmitting
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	3.0VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
915.43	69.65(PK)	Н	114/94	-24.35
915.43	81.05(PK)	V	114/94	-12.95
1830.86		Н	74/54	
2746.29		V	74/54	
3661.72		H/V	74/54	
4577.15		H/V	74/54	
5492.58		H/V	74/54	
6408.01		H/V	74/54	
7323.44		H/V	74/54	
8238.87		H/V	74/54	
9154.3		H/V	74/54	

Report No: 1310142-01 Page 14 of 41

TIMEWAY

Product:	RC EYE ONELINK	Test Mode:	High Channel- keep transmitting
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	3.0VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
919.23	80.55(PK)	V	114/94	-13.45
919.23	70.44(PK)	Н	114/94	-23.56
1838.46		H/V	74/54	
2757.69		H/V	74/54	
3676.92		H/V	74/54	
4596.15		H/V	74/54	
5515.38		H/V	74/54	
6434.61		H/V	74/54	
7353.84		H/V	74/54	
8273.07		H/V	74/54	
9192.3		H/V	74/54	

Note: (1) PK= Peak, AV= Average

- (2) Emission Level = Reading Level + Antenna Factor + Cable Loss.
- (3)Margin=Emission-Limits
- (4)According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) The measured PK value less than the AV limit.


Report No: 1310142-01

Date: 2013-12-04




Please refer to the following test plots for details:

Low Channel: Horizontal

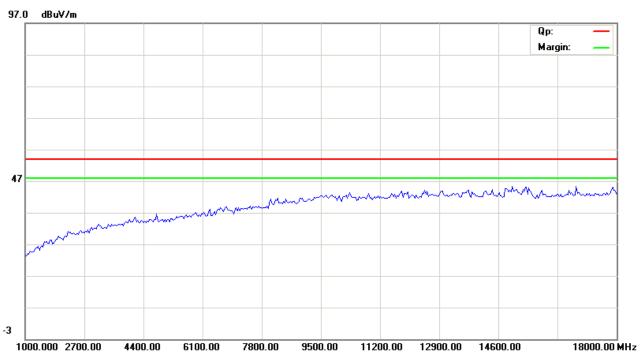

Low Channel: Vertical

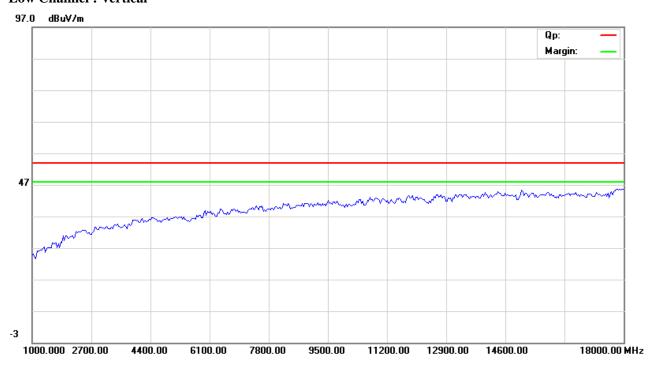

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 16 of 41

Report No: 1310142-01


Date: 2013-12-04



Middle Channel: Horizontal

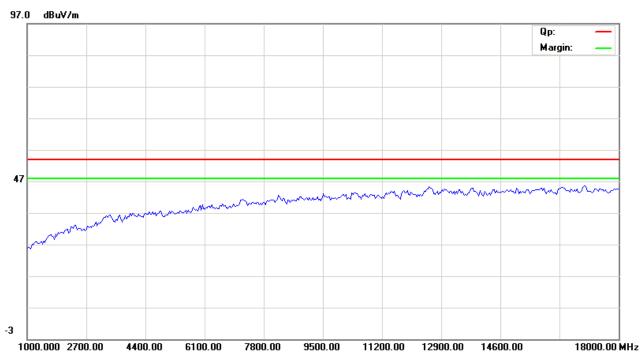

Middle Channel: Vertical

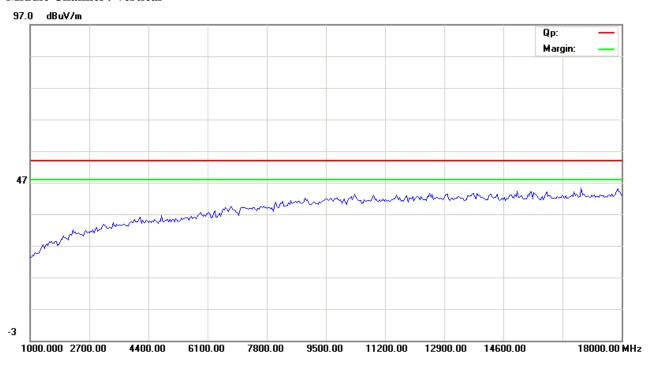

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 17 of 41

Report No: 1310142-01


Date: 2013-12-04



High Channel: Horizontal

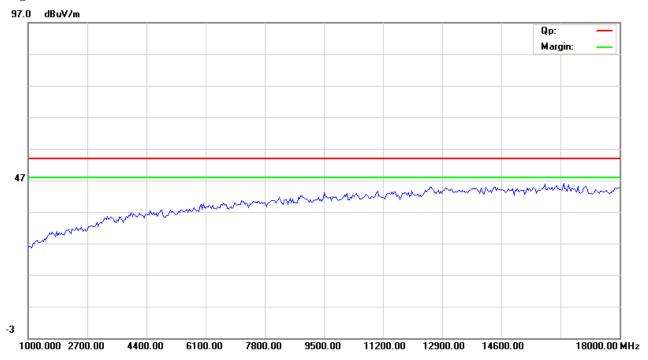

High Channel: Vertical

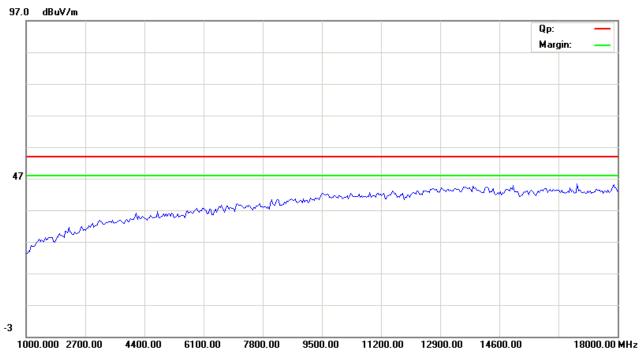

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1310142-01 Page 18 of 41

Date: 2013-12-04




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Mode: Low Channel

Results: Pass

Please refer to following diagram for individual

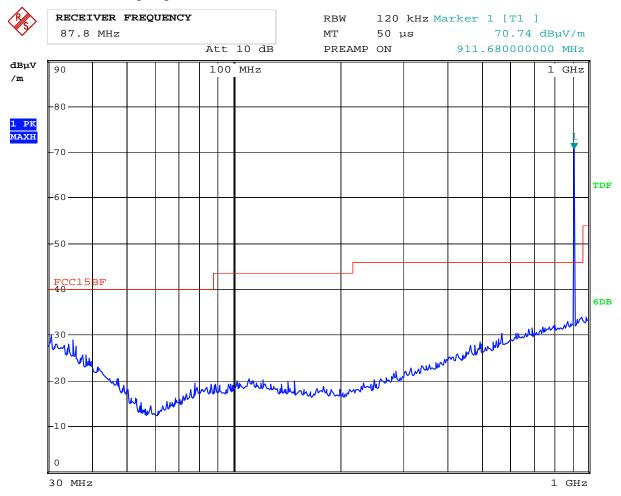

Date: 4.DEC.2013 14:48:50

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
	1	Н	

Report No: 1310142-01 Page 19 of 41

Date: 2013-12-04




Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Mode: Low Channel

Results: Pass

Please refer to following diagram for individual

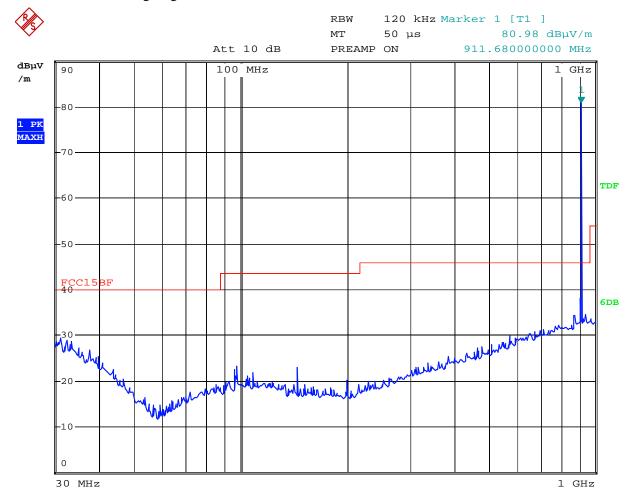

Date: 4.DEC.2013 14:48:04

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
		V	

Report No: 1310142-01 Page 20 of 41

Date: 2013-12-04




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Mode: Low Channel

Results: Pass

Please refer to following diagram for individual

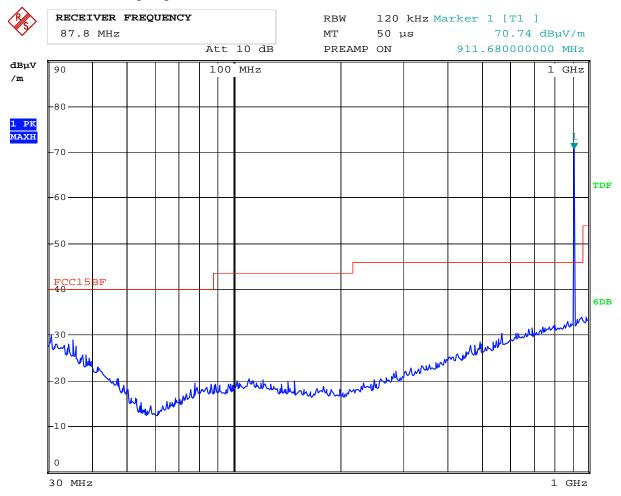

Date: 4.DEC.2013 14:48:50

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
	-	Н	

Report No: 1310142-01 Page 21 of 41

Date: 2013-12-04




General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting Mode: Middle Channel

Results: Pass

Please refer to following diagram for individual

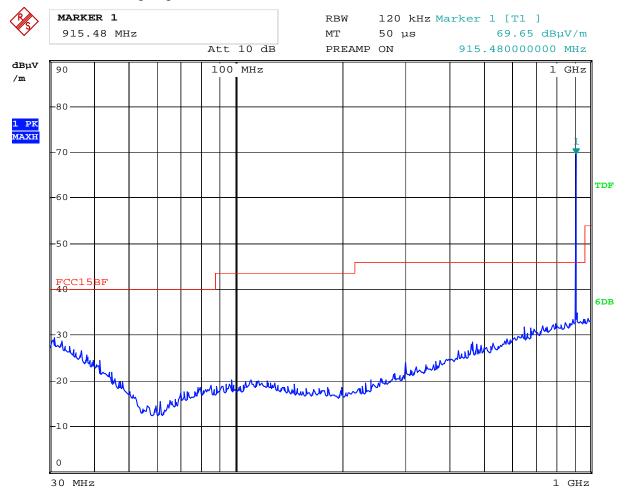

Date: 4.DEC.2013 18:27:57

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
	-	Н	

Report No: 1310142-01 Page 22 of 41

Date: 2013-12-04




General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting Mode: Middle Channel

Results: Pass

Please refer to following diagram for individual

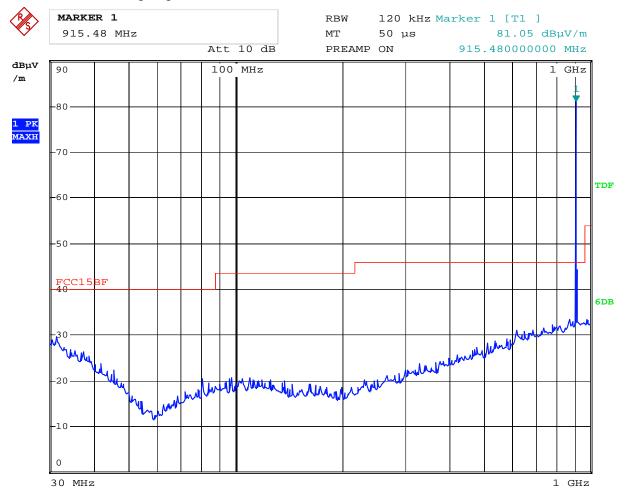

Date: 4.DEC.2013 18:25:44

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
		V	

Report No: 1310142-01 Page 23 of 41

Date: 2013-12-04




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Mode: High Channel

Results: Pass

Please refer to following diagram for individual

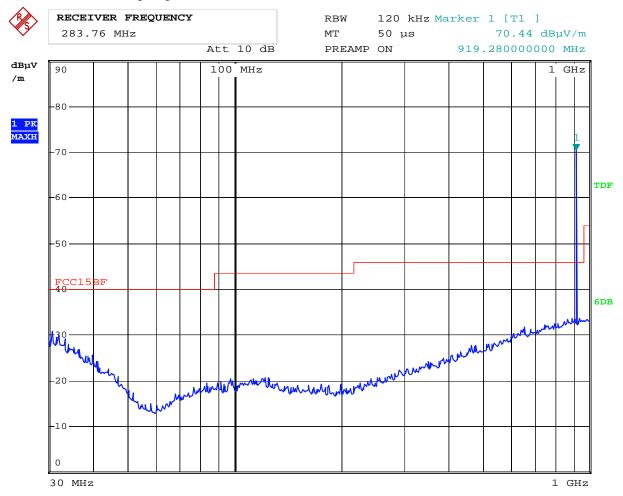

Date: 4.DEC.2013 14:52:06

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
	1	Н	

Report No: 1310142-01 Page 24 of 41

Date: 2013-12-04




Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Mode: High Channel

Results: Pass

Please refer to following diagram for individual

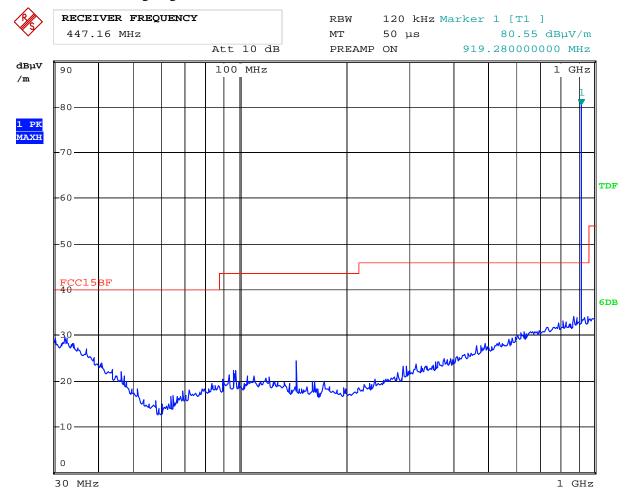

Date: 4.DEC.2013 14:54:49

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
		V	

Report No: 1310142-01 Page 25 of 41

Date: 2013-12-04




C. General Radiated Emission Data Radiated Emission (0.009MHz----30MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

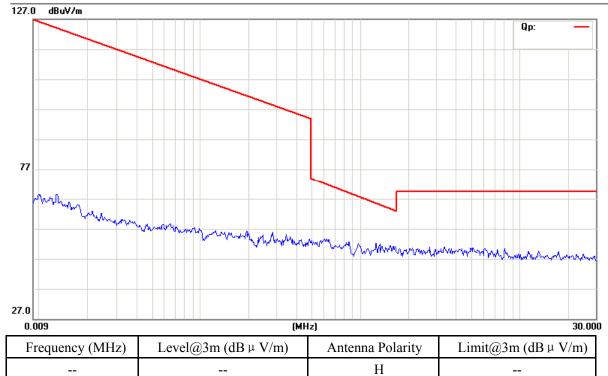

Report No: 1310142-01

Date: 2013-12-04




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) Set Spectrum as RBW=100kHz,VBW=300kHz and Peak detector used
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

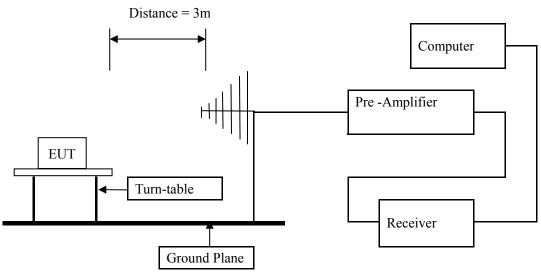

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of The EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Remark: low, mid and high channel all have been tested; only worse case is reported.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Report No: 1310142-01 Page 27 of 41

Date: 2013-12-04



7.6 Test Result

Product:	RC EYE ONELINK		Test Mode:	Low Channel- keep transmitting
Mode	Keeping Transmitting		Test Voltage	DC3V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
002MHz	PK (dBμV/m)	38.57	Limit	$74(dB\mu V/m)$
902MHz	AV(dBμV/m)			54(dBμV/m)

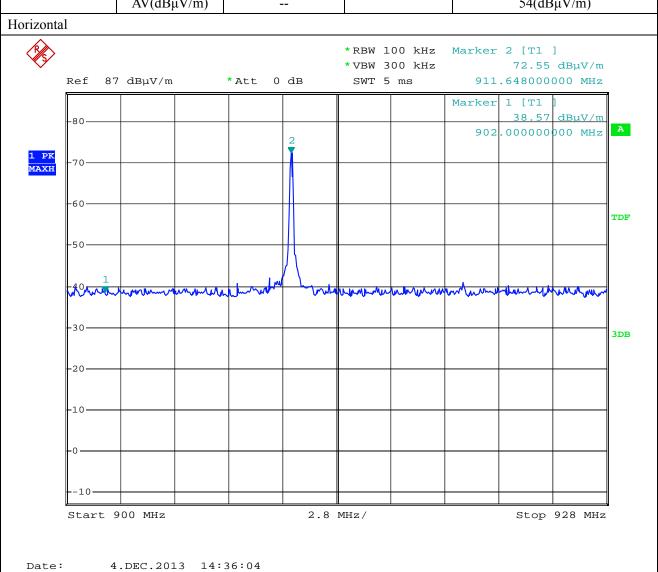

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 28 of 41

Report No: 1310142-01

Date: 2013-12-04



Product:	RC EYE ONELINK		Test Mode:	High Channel- keep transmitting
Mode	Keeping Transmitting		Test Voltage	DC3V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
002MH-	PK (dBμV/m)	39.17	T ''	74(dBμV/m)
902MHZ	902MHz $AV(dB\mu V/m)$	Limit	54(dBμV/m)	

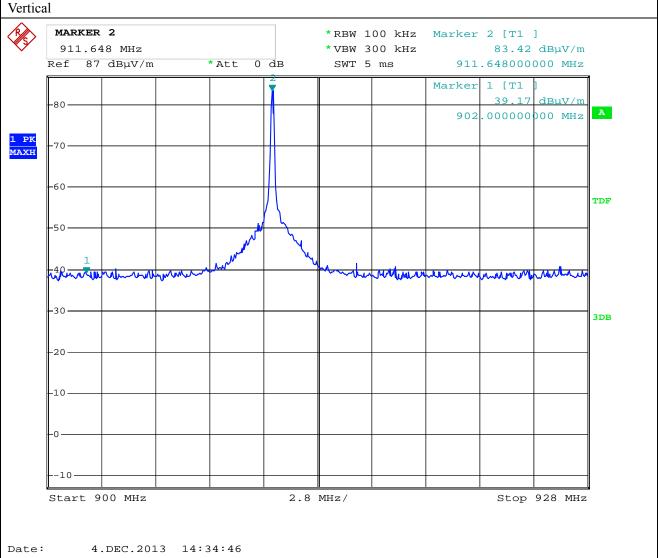

The report refers only to the sample tested and does not apply to the bulk.

Page 29 of 41

Report No: 1310142-01



Prod	uct:	F	RC EYE	ONELIN	ζ	Test	Mode	:	High (Channel- l	keep trans	mitting	
Mod	de	K	leeping T	Γransmittir	ng	Test	Voltag	e,e	DC3V				
Temperature Test Result:		24 deg. C,				Hu	Humidity Detector			56% RH PK			
			De										
		PK (dBµ	38	38.36		Limit			74(dB	μV/m)			
92810	928MHz		AV(dBμV/m)						54(dB	μV/m)			
Horizonta	ıl												
%	MARKER 928 M Ref 8			*Att 0	dВ	*RBW 100 kHz *VBW 300 kHz SWT 5 ms				3 [T1 38.36	dBµV/m		
1 PK	-80-						2		Marker	1 [T1 38.45 .000000 2 [T1] _dBuV/m)00 MHz]	A	
1 PK MAXH	-70 -60								919	70.74	dBµV/m 000 MHz		
	-50											TDF	
		- North-Vil	<u>/W~l~W\</u>	when the same	whypeh	hemma		wh.	viu/w	mulum	3 M		
	-30											3DB	
	-20												
	-10												
	10												
	Start !	Start 900 MHz 3 M					<u> </u>			Stop	930 MHz	<u>U</u>	
Date:	4	.DEC.201	3 14:	38:44									


Page 30 of 41

Report No: 1310142-01

Date: 2013-12-04



Product:	RC EYE	ONELINK	Test Mode:	High Channel- keep transmitting		
Mode	Keeping T	ransmitting	Test Voltage	DC3V		
Temperature	24 d	eg. C,	Humidity	56% RH		
Test Result:	P	ass	Detector	PK		
020MH-	PK (dBμV/m)	38.03	Limit	$74(dB\mu V/m)$		
928MHz	AV(dBμV/m)		Limit	54(dBμV/m)		

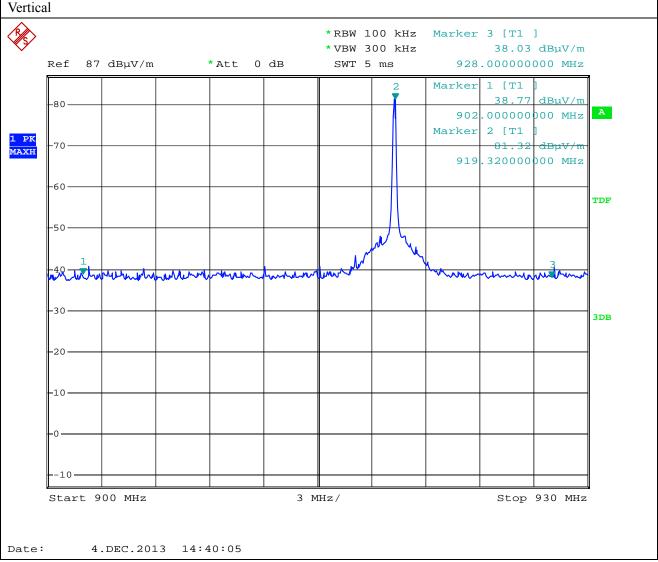

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1310142-01 Page 31 of 41

Date: 2013-12-04



8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a dipole antenna with reverse polarity SMA antenna connector. The antenna gain is 2.5dBi. It fulfill the requirement of this section.

Test Result: Pass

Page 32 of 41

Report No: 1310142-01



Product	t:		RC EYE	ONELIN	IK	Te	st Mode:	Low C	Low Channel- keep transmitting			
Mode		Keeping Transmitting 24 deg. C, Pass					Test Voltage Humidity Detector		DC3.0V 56% RH			
Temperat	ure											
Test Resu	alt:								Pk	ζ.		
OdB Bandy	width		82	kHz								
4 \$/	MARKER 1 911.668 MHz Ref 20 dBm *Att 30					* VBW	30 kHz 100 kHz 2.5 ms	Marker 1 [T1] -3.66 dBm 911.668000000 MHz				
-1	20								.0000000 [Tl ndB		A	
1 PK MAXH	-10				7			Temp Ž	.6240000 [Tl ndB -22. .7060000] 98 dBm		
	-20				71	<u> </u>						
	-30 	M-1	~~ ~ ^	www	~	h	Manage	man	why	~~~~~~	3DB	
_	-50											
	-60 											
<u>L</u>	-80 enter	911.668	MHz		100	kHz/			Span	ı 1 MHz		

Page 33 of 41

Report No: 1310142-01



Prou	uct:		RC EYE	ONELIN	ΙK	Tes	t Mode:	Middle Channel-keep transmitting				
Mo	de	Keeping Transmitting 24 deg. C, Pass 84kHz					Voltage	DC3.0V				
Temper	rature						ımidity	56% RH				
Test Re	esult:						etector		PK			
0dB Baı	ndwidth											
\$	MARKER 915.4	. 1 68 MHz					30 kHz 100 kHz	Marker	1 [T1] -4.	60 dBm		
	Ref 20	dBm	1	Att 3	0 dB	SWT 2	2.5 ms	915	.4680000	00 MHz	_	
1 PK MAXH	20								1] 20. .0000000 [T1 ndB		A	
	-0								-24. .4240000			
	10									12 dBm		
	20				7/1	Г2						
	30			_								
				$\mathcal{M}_{\mathcal{M}}$	W	\ <u>\</u>	\~\^\\	Mrs.			3DB	
	50-	Market	N · v					1.424	www	www.		
	60											
	70											
	-80											
	Center	915.468	MHz		100	kHz/	•	•	Span	ı 1 MHz	1	

Page 34 of 41

Report No: 1310142-01



Prod	uct:		RC EYE	ONELI	NK	To	est Mode:	High Channel- keep transmitt				
Mo	de	Keeping Transmitting 24 deg. C,					Test Voltage Humidity		DC3.0V 56% RH			
Temper	rature											
Test Re	esult:		Pass				Detector		PK			
20dB Bandwidth 84kHZ												
P	MARKER 1 919.268 MHz Ref 20 dBm *Att 30 dB						30 kHz 100 kHz 2.5 ms		1 [T1] -5.	.56 dBm		
	20								.0000000 [Tl nd]		A	
1 PK MAXH	-0							Temp 2	. 2240000 [TI ndi -25 . 3080000	3] .85 dBm		
	20				7/1	T2						
	30	MM		www			Many	A			3DB	
	50	M	,~ ~						~~	annwy	-	
	60										-	
	-80	212 25							_	4		
Date:		919.268 .DEC.201		16.66	100	kHz/			Spa	n 1 MHz		

Report No: 1310142-01 Page 35 of 41

Date: 2013-12-04




10.0 FCC ID Label

FCC ID: Y2H-89036RC

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

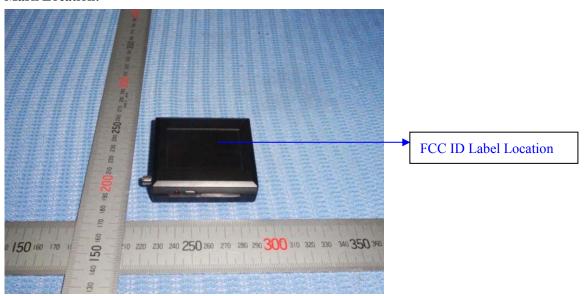

Report No: 1310142-01

Date: 2013-12-04




11.0 Photo of testing

11.1 Conducted test View--

N/A

11.2 Radiated emission test view



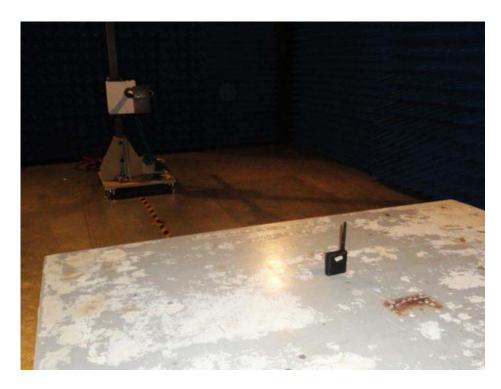

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 37 of 41

Report No: 1310142-01

Date: 2013-12-04



11.3 Photographs - EUT

Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 38 of 41

Report No: 1310142-01



Outside View





Page 39 of 41

Date: 2013-12-04

Report No: 1310142-01



Outside View







Page 40 of 41 Report No: 1310142-01

Date: 2013-12-04



Interior View

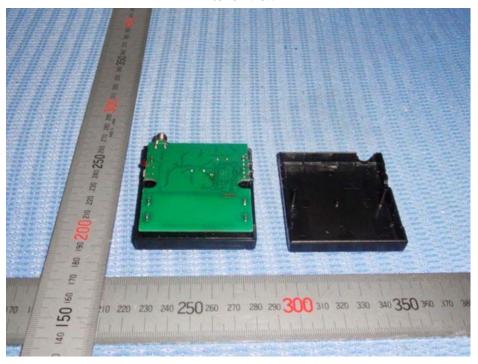

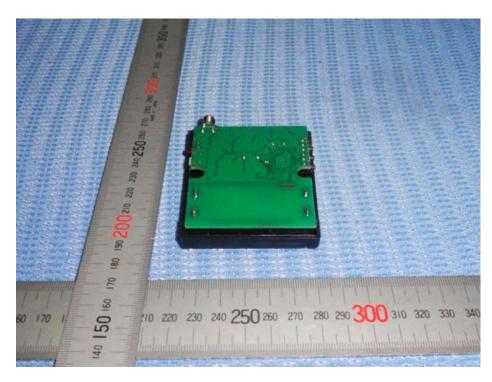

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to


Page 41 of 41

Report No: 1310142-01

Date: 2013-12-04



Interior View

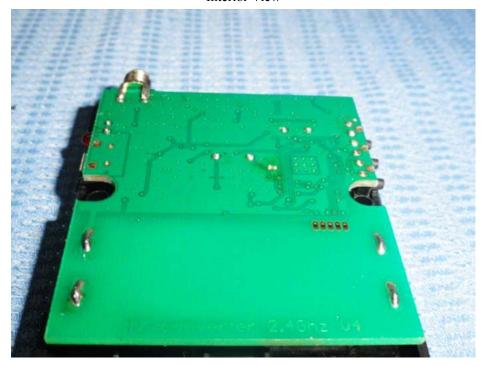



-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.