

# Test report

**374507-4TRFWL**

Date of issue: 2019-05-30

Applicant: Inpeco Spa a socio unico Via Givoletto 15 10040 Val della Torre TO Italy

Product: RFID Device

Model: CAN Antenna 1 coil

FCC ID:Y2K-CAB1C001

IC: 11394A-CAB1C001

Specifications:

- ◆ **FCC 47 CFR Part 15 Subpart C**  
Intentional radiators
- ◆ **RSS-210, Issue 9, August 2016, Section 2.5**  
General field strength limits

This test report may not be partially reproduced, except with the prior written permission of Nemko Spa

The test report merely corresponds to the tested sample.

The phase of sampling / collection of equipment under test is carried out by the customer

#### Test location

---

Company name:	Nemko Spa
Address:	Via del Carroccio, 4
City:	Biassono
Province:	MB
Postal code:	20853
Country:	Italy
Site number:	FCC test site registration number: 682159

Tested by:	Daniele Guarnone
Reviewed by:	Paolo Barbieri
Date:	2019-05-30
Signature:	

#### Limits of responsibility

---

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report. This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

#### Copyright notification

---

Nemko Spa authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

## Table of contents

<b>Table of contents .....</b>	<b>3</b>
<b>Section 1. Report summary .....</b>	<b>4</b>
1.1 Applicant and manufacturer .....	4
1.2 Test specifications .....	4
1.3 Test methods.....	4
1.4 Statement of compliance .....	4
1.5 Exclusions.....	4
1.6 Test report revision history .....	4
<b>Section 2. Summary of test results.....</b>	<b>5</b>
2.1 FCC Part 15 Subpart C, general requirements test results.....	5
2.2 IC RSS-GEN, Issue 3, test results .....	5
2.3 IC RSS-210, Issue 8, test results .....	5
<b>Section 3. Equipment under test (EUT) details .....</b>	<b>6</b>
3.1 Sample information.....	6
3.2 EUT information .....	6
3.3 Technical information .....	6
3.4 Product description and theory of operation .....	6
3.5 EUT exercise details.....	6
3.6 EUT setup diagram .....	7
3.7 EUT sub assemblies .....	7
<b>Section 4. Engineering considerations.....</b>	<b>8</b>
4.1 Modifications incorporated in the EUT.....	8
4.2 Technical judgment .....	8
4.3 Deviations from laboratory tests procedures.....	8
<b>Section 5. Test conditions .....</b>	<b>9</b>
5.1 Atmospheric conditions .....	9
5.2 Power supply range.....	9
<b>Section 6. Measurement uncertainty .....</b>	<b>10</b>
6.1 Uncertainty of measurement .....	10
<b>Section 7. Test equipment .....</b>	<b>11</b>
7.1 Test equipment list.....	11
<b>Section 8. Testing data .....</b>	<b>12</b>
8.1 FCC 15.207(a) and RSS-Gen 7.2.4 AC power line conducted emissions limits .....	12
8.2 RSS-Gen 4.6.1 Occupied bandwidth .....	16
8.3 FCC 15.209(a) and RSS-210, 2.5 Radiated emissions limits.....	19
<b>Section 9. Block diagrams of test set-ups .....</b>	<b>25</b>
9.1 Radiated emissions set-up.....	25
9.2 Conducted emissions set-up .....	26

## Section 1. Report summary

---

### 1.1 Applicant and manufacturer

---

Company name:	Inpeco Spa a socio unico Via Givoletto 15 10040 Val della Torre TO Italy
Address:	Via Givoletto 15
City:	Val della Torre
Province/State:	TO I
Postal/Zip code:	10040
Country:	Italy

### 1.2 Test specifications

---

FCC 47 CFR Part 15, Subpart C	Intentional radiators
RSS-210, Issue 9, Section 2.5	General field strength limits

### 1.3 Test methods

---

ANSI C64.3 v 2003	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
-------------------	--

### 1.4 Statement of compliance

---

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

### 1.5 Exclusions

---

None

### 1.6 Test report revision history

---

Revision #	Details of changes made to test report
TRF	Original report issued

## Section 2. Summary of test results

### 2.1 FCC Part 15 Subpart C, general requirements test results

Part	Test description	Verdict
§15.207(a)	Conducted limits	Pass
§15.31(e)	Variation of power source	Pass <sup>1</sup>
§15.203	Antenna requirement	Pass <sup>2</sup>
§15.209	Radiated emission limits; general requirements.	Pass

Notes: <sup>1</sup> Measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, was performed with the supply voltage varied between 85 % and 115 % of the nominal rated supply voltage. No noticeable output power variation was observed

<sup>2</sup> The Antennas are located within the enclosure of EUT and not user accessible.

### 2.2 IC RSS-GEN, Issue 5, test results

Part	Test description	Verdict
4.6.1	Occupied bandwidth	Pass
4.7	Transmitter frequency stability	Pass
6.1	Receiver spurious emissions limits (radiated)	Pass
6.2	Receiver spurious emissions limits (antenna conducted)	Pass
7.2.4	AC power lines conducted emission limits	Pass

Notes: <sup>1</sup> According to Notice 2012-DRS0126 (from January 2012) section 2.2 of RSS-Gen, Issue 3 has been revised. The EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

### 2.3 IC RSS-210, Issue 9, test results

Part	Test description	Verdict
2.5	General field strength limits	
2.5.1	Transmitters with Wanted Emissions that are Within the General Field Strength Limits	Pass

Notes: None

## Section 3. Equipment under test (EUT) details

### 3.1 Sample information

Receipt date	May 20, 2019
Nemko sample ID number	374507-3

### 3.2 EUT information

Product name	RFID Device
Model	CAN Antenna 1 coil
Model variant	--
Serial number	--

### 3.3 Technical information

Operating band	125 KHz
Operating frequency	125 kHz
Modulation type	FSK
Occupied bandwidth (99 %)	240 Hz
Emission designator	240HD1D
Power requirements	24 VDC
Antenna information	The EUT uses a unique antenna coupling/ non-detachable antenna to the intentional radiator.


### 3.4 Product description and theory of operation

The E.U.T is a RFID device operating at 125 KHz used for detect the sample in a medical analysis system



### 3.5 EUT exercise details

E.U.T. has been tested supplied and connected to PC with a USB CAN BUS adaptor.  
A dedicated software has been used to monitor the antenna status

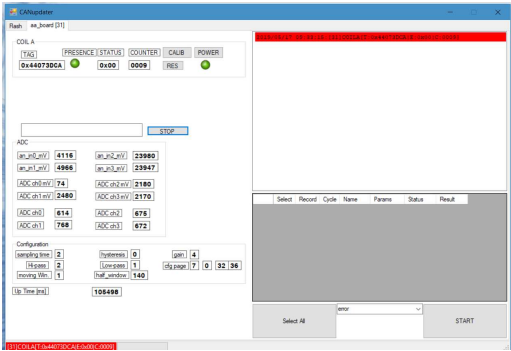

3.6 EUT setup diagram

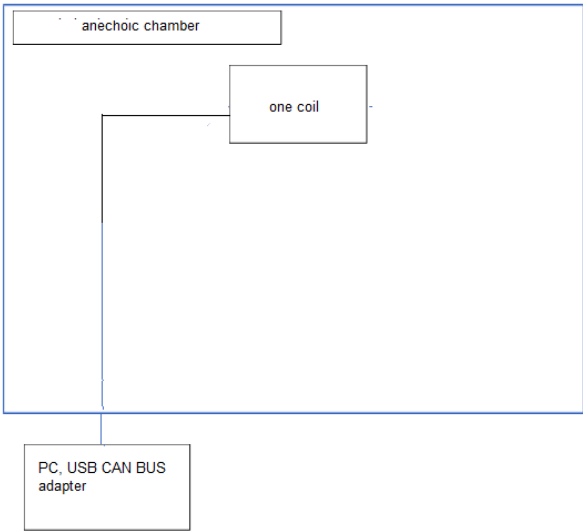


Figure 3.6-1: Setup diagram

3.7 EUT sub assemblies

Table 3.7-1: EUT sub assemblies

Description	Brand name	Model/Part number	Serial number
PC	--	--	--
USB CAN BUS	--	--	--

## Section 4. Engineering considerations

---

### 4.1 Modifications incorporated in the EUT

---

There were no modifications performed to the EUT during this assessment.

### 4.2 Technical judgment

---

None

### 4.3 Deviations from laboratory tests procedures

---

No deviations were made from laboratory procedures.



# Section 5. Test conditions

---

## 5.1 Atmospheric conditions

---

Temperature	18–33 °C
Relative humidity	30–60 %
Air pressure	980–1060 hPa

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

## 5.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 5\%$ , for which the equipment was designed.

## Section 6. Measurement uncertainty

### 6.1 Uncertainty of measurement

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k = 2$  which has been derived from the assumed normal probability distribution with infinite degrees of freedom and for a coverage probability of 95 %.

EUT	Type	Test	Range and Setup features	Measurement Uncertainty	Notes
Transmitter	Conducted	Frequency error	0.001MHz ÷ 18 GHz	0.08 ppm	(1)
		Carrier power RF Output Power	1MHz ÷ 18 GHz With power meter	1.6 dB	(1)
			1MHz ÷ 18 GHz With spectrum/receiver	3.0 dB	(1)
		Adjacent channel power	1MHz ÷ 18 GHz	1.6 dB	(1)
		Conducted spurious emissions	1MHz ÷ 18 GHz	4.2 dB	(1)
		Intermodulation attenuation	1MHz ÷ 18 GHz	2.2 dB	(1)
		Attack time – frequency behaviour	1MHz ÷ 18 GHz	2.0 ms	(1)
		Attack time – power behaviour	1MHz ÷ 18 GHz	2.5 ms	(1)
		Release time – frequency behaviour	1MHz ÷ 18 GHz	2.0 ms	(1)
		Release time – power behaviour	1MHz ÷ 18 GHz	2.5 ms	(1)
		Transient behaviour of the transmitter– Transient frequency behaviour	1MHz ÷ 18 GHz	0.2 kHz	(1)
		Transient behaviour of the transmitter – Power level slope	1MHz ÷ 18 GHz	9%	(1)
		Frequency deviation - Maximum permissible frequency deviation	0.001MHz ÷ 18 GHz	1.3%	(1)
		Frequency deviation - Response of the transmitter to modulation frequencies above 3 kHz	0.001MHz ÷ 18 GHz	0.5 dB	(1)
		Dwell time	-	3%	(1)
		Hopping Frequency Separation	0.01MHz ÷ 18 GHz	1%	(1)
		Occupied Channel Bandwidth	0.01MHz ÷ 18 GHz	2%	(1)
		Modulation Bandwidth	0.01MHz ÷ 18 GHz	2%	(1)
	Radiated	Radiated spurious emissions	30MHz ÷ 18 GHz	6.0 dB	(1)
		Effective radiated power transmitter	30MHz ÷ 18 GHz	6.0 dB	(1)
Receiver	Radiated	Radiated spurious emissions	30MHz ÷ 18 GHz	6.0 dB	(1)
		Sensitivity measurement	1MHz ÷ 18 GHz	6.0 dB	(1)
	Conducted	Conducted spurious emissions	1MHz ÷ 18 GHz	4.2 dB	(1)

## Section 7. Test equipment

### 7.1 Test equipment list

**Table 7.1-1: Equipment list**

Equipment	Manufacturer	Model	Serial N°	Due date
EMI receiver 2Hz ÷ 44 GHz	R&S	ESW44	101620	05/2019
EMI receiver 20 Hz ÷ 8 GHz	R&S	ESU8	100202	01/2020
Trilog Broad Band Antenna 25 MHz÷2 GHz	Schwarzbeck	VULB 9162	9162-025	07/2021
Bilog antenna 1 ÷18 GHz	Schwarzbeck	STLP 9148	9148-123	07/2021
Broadband preamplifier 1 ÷18 GHz	Schwarzbeck	BBV 9718	9718-137	08/2019
Loop antenna	TESEQ	HLA 6121	45749	07/2020
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	530	09/2021
Shielded room	Siemens	10m control room	1947	NCR
Trilog Broad Band Antenna 25 MHz÷2 GHz	Schwarzbeck	VULB 9162	9162-025	07/2021
Bilog antenna 1 ÷18 GHz	Schwarzbeck	STLP 9148	9148-123	07/2021
Broadband preamplifier 1 ÷18 GHz	Schwarzbeck	BBV 9718	9718-137	08/2019
EMI receiver 2Hz ÷ 44 GHz	R&S	ESW44	101620	05/2019
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	530	09/2021
Shielded room	Siemens	10m control room	1947	NCR
Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use				

## Section 8. Testing data

### 8.1 FCC 15.207(a) and RSS-Gen 7.2.4 AC power line conducted emissions limits

#### 8.1.1 Definitions and limits

**FCC:**  
Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

**IC:**  
The purpose of this test is to measure unwanted radio frequency currents induced in any AC conductor external to the equipment which could conduct interference to other equipment via the AC electrical network.

Except when the requirements applicable to a given device state otherwise, for any licence-exempt radiocommunication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in Table 2. The tighter limit applies at the frequency range boundaries.

The conducted emissions shall be measured with a 50  $\Omega$ /50  $\mu$ H line impedance stabilization network (LISN).

**Table 8.1-1: Conducted emissions limit**

Frequency of emission, MHz	Conducted limit, dB $\mu$ V	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

Note: \* - Decreases with the logarithm of the frequency.

#### 8.1.2 Test summary

Test date:	May 27, 2019	Temperature:	21 °C
Test engineer:	Daniele Guarnone	Air pressure:	1005 mbar
Verdict:	Pass	Relative humidity:	35 %

### 8.1.3 Observations, settings and special notes

---

The EUT was set up as tabletop configuration.

The spectral scan has been corrected with transducer factors (i.e. cable loss, LISN factors, and attenuators) for determination of compliance.

A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.


Receiver settings for preview measurements:

Resolution bandwidth:	9 kHz
Video bandwidth:	30 kHz
Detector mode:	Peak and Average
Trace mode:	Max Hold
Measurement time:	1000 ms

Receiver settings for final measurements:

Resolution bandwidth:	9 kHz
Video bandwidth:	30 kHz
Detector mode:	Quasi-Peak and Average
Trace mode:	Max Hold
Measurement time:	1000 ms

8.1.4 Test data

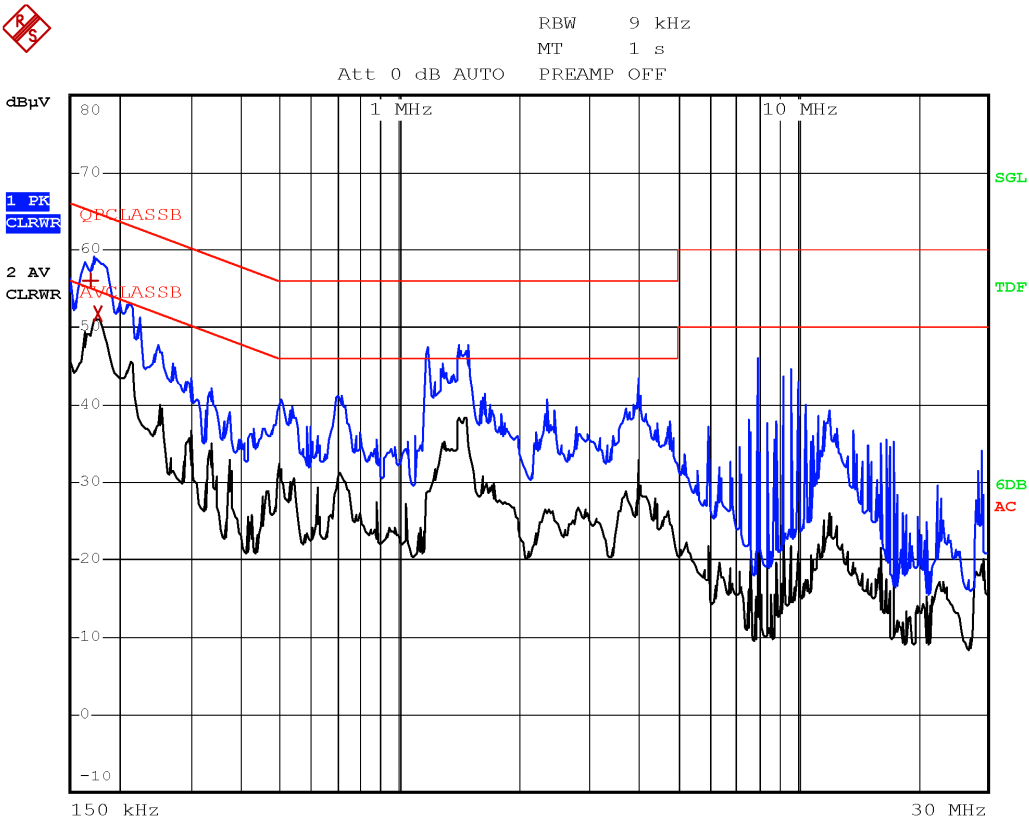


Date: 27.MAY.2019 19:02:15

Plot 8.1-1: Conducted emissions on phase line

Frequency (MHz)	Level (dBµV)	Limit (dBµV)	Margin (dB)	Detector
0.1700	56.1	65.0	-8.8	QP
0.1780	51.7	54.6	-2.9	AV

Table 8.1-2: Quasi-Peak conducted emissions results on phase line

8.1.4 Test data, continued

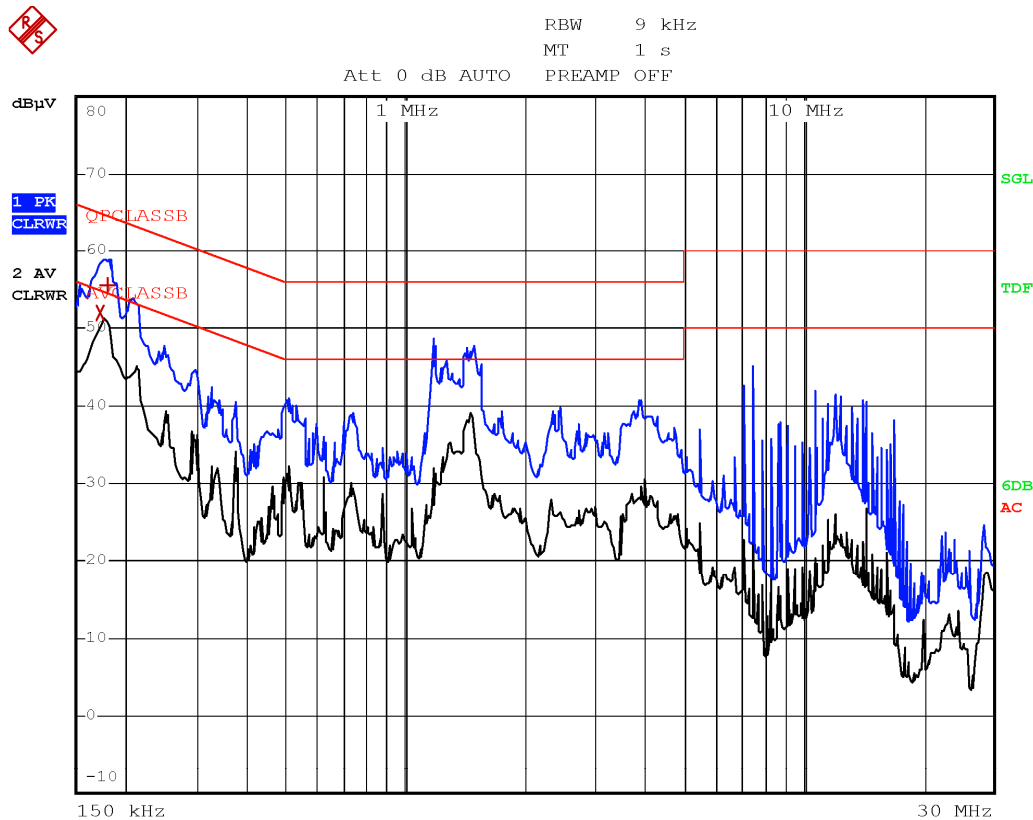

Date: 27.MAY.2019 18:59:32

Plot 8.1-2: Conducted emissions on neutral line

Frequency (MHz)	Level (dBµV)	Limit (dBµV)	Margin (dB)	Detector
0.1740	51.9	54.8	-2.8	AV
0.1820	55.6	64.4	-8.8	QP

Table 8.1-3: Quasi-Peak conducted emissions results on neutral line

## 8.2 RSS-Gen 4.6.1 Occupied bandwidth

### 8.2.1 Definitions and limits

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99 percent emission bandwidth, as calculated or measured.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

The span between the two recorded frequencies is the occupied bandwidth.

### 8.2.2 Test summary

Test date:	May 27, 2019	Temperature:	21 °C
Test engineer:	Daniele Guarnone	Air pressure:	1005 mbar
Verdict:	Pass	Relative humidity:	35 %

### 8.2.3 Observations, settings and special notes

Spectrum analyser settings:

Resolution bandwidth:	≥1 % of span
Video bandwidth:	≥3 × RBW
Detector mode:	Peak
Trace mode:	Max Hold


### 8.2.4 Test data

*Table 8.2-1: 99 % bandwidth results*

Modulation	99 % bandwidth, Hz
FSK	240




8.2.4 Test data, continued

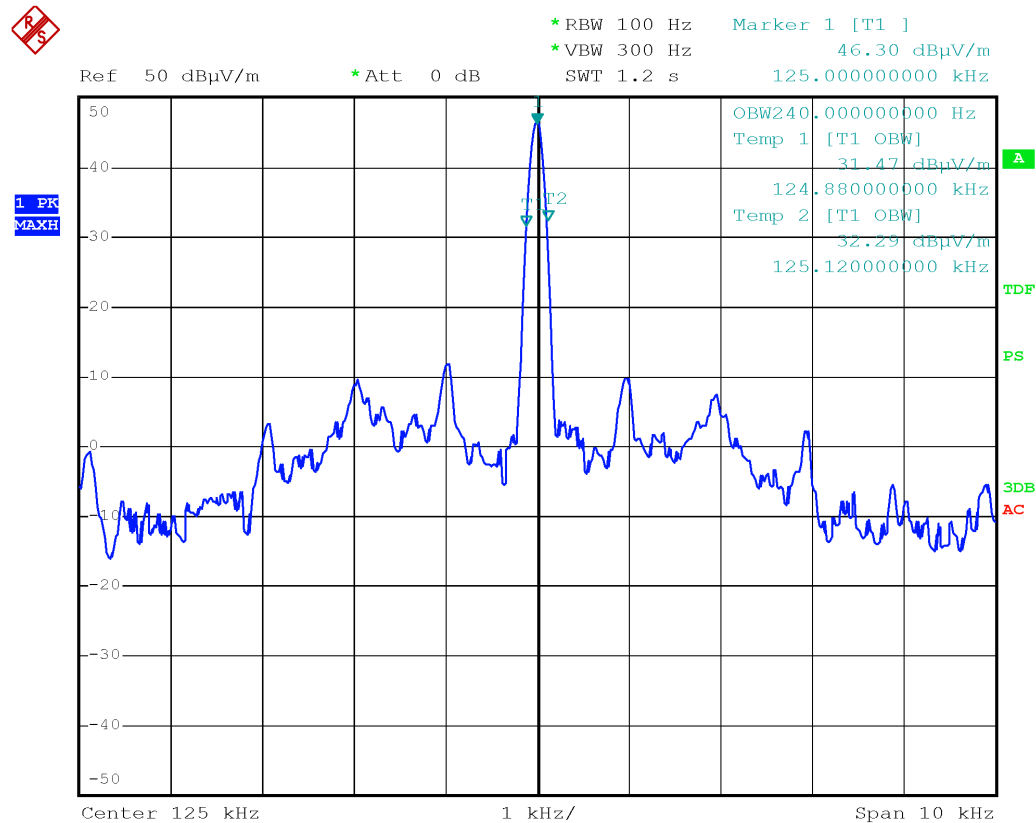

Date: 27.MAY.2019 19:10:19

Figure 8.2-1: 99 % bandwidth

8.2.5 Test data, continued

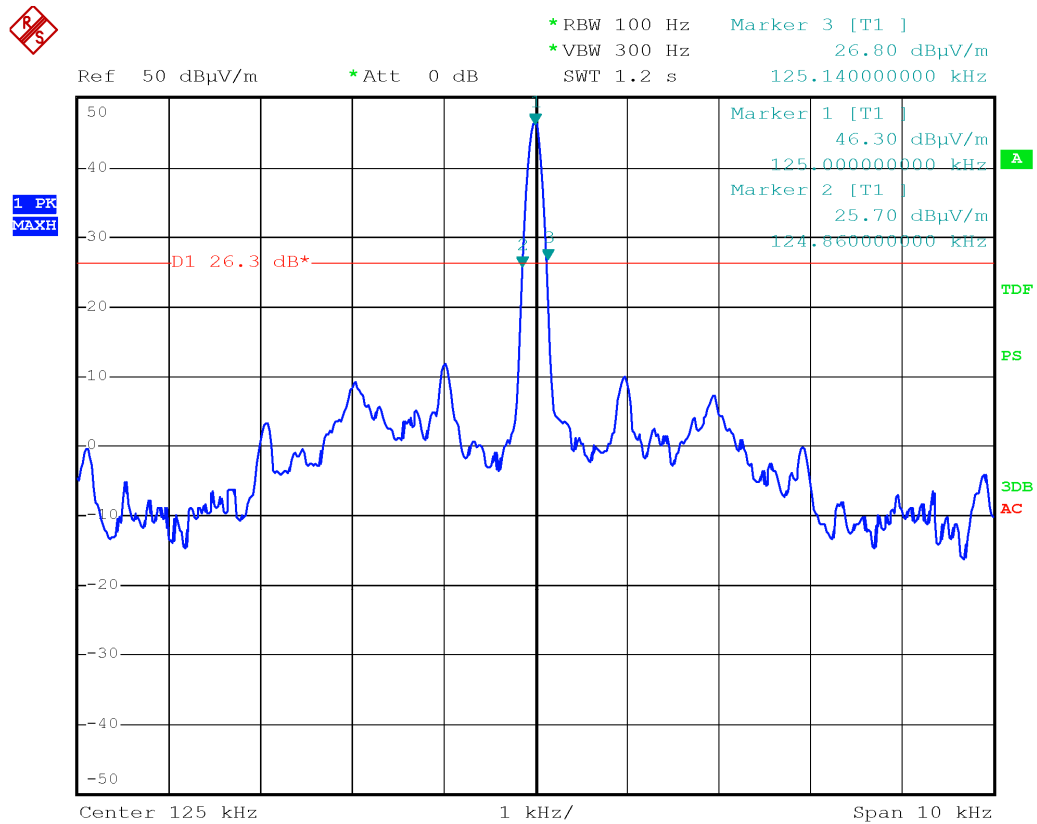

Date: 27.MAY.2019 19:11:38

Figure 8.2-2: 20 dB bandwidth :280 Hz

## 8.3 FCC 15.209(a) and RSS-210, 2.5 Radiated emissions limits

### 8.3.1 Definitions and limits

#### FCC:

- (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the Table 8.3-1 below.
- (c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
- (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

#### IC:

RSS-Gen includes the general field strength limits of unwanted emissions, where applicable, for transmitters and receivers operating in accordance with the provisions specified in this standard.

Unwanted emissions of transmitters and receivers are permitted to fall within the restricted bands listed in RSS-Gen, and including the TV bands, but fundamental emissions are prohibited in the restricted bands bands.

Whether or not their operation is addressed by published RSS standards, transmitters whose wanted and unwanted emissions are within the general field strength limits shown in RSS-Gen, they may operate in any of the frequency bands, other than the restricted bands listed in RSS-Gen and including the TV bands, and shall be certified under RSS-210. Under no conditions may the level of any unwanted emissions exceed the level of the fundamental emission.

Note: Devices operating below 490 kHz in which all emissions are at least 40 dB below the limit listed in RSS-Gen (General Field Strength Limits for Transmitters at Frequencies below 30 MHz) are Category II devices and are subject to RSS-310.

**Table 8.3-1: FCC §15.209 and RSS-Gen – Radiated emission limits**

Frequency, MHz	Field strength of emissions		Measurement distance, m
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	
0.009–0.490	2400/F	$67.6 - 20 \times \log_{10}(F)$	300
0.490–1.705	24000/F	$87.6 - 20 \times \log_{10}(F)$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

### 8.3.1 Definitions and limits, continued

**Table 8.3-2: IC restricted frequency bands**

MHz	MHz	MHz	GHz
0.090–0.110	12.51975–12.52025	399.9–410	5.35–5.46
2.1735–2.1905	12.57675–12.57725	608–614	7.25–7.75
3.020–3.026	13.36–13.41	960–1427	8.025–8.5
4.125–4.128	16.42–16.423	1435–1626.5	9.0–9.2
4.17725–4.17775	16.69475–16.69525	1645.5–1646.5	9.3–9.5
4.20725–4.20775	16.80425–16.80475	1660–1710	10.6–12.7
5.677–5.683	25.5–25.67	1718.8–1722.2	13.25–13.4
6.215–6.218	37.5–38.25	2200–2300	14.47–14.5
6.26775–6.26825	73–74.6	2310–2390	15.35–16.2
6.31175–6.31225	74.8–75.2	2655–2900	17.7–21.4
8.291–8.294	108–138	3260–3267	22.01–23.12
8.362–8.366	156.52475–156.52525	3332–3339	23.6–24.0
8.37625–8.38675	156.7–156.9	3345.8–3358	31.2–31.8
8.41425–8.41475	240–285	3500–4400	36.43–36.5
12.29–12.293	322–335.4	4500–5150	Above 38.6

Note: Certain frequency bands listed in Table 8.3-2 and above 38.6 GHz are designated for low-power licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard

### 8.3.2 Definitions and limits, continued

**Table 8.3-3: FCC restricted frequency bands**

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

### 8.3.3 Test summary

Test date:	2019-05-20	Temperature:	21 °C
Test engineer:	Daniele Guarnone	Air pressure:	1005 mbar
Verdict:	pass	Relative humidity:	35 %

### 8.3.4 Observations, settings and special notes

---

The spectrum was searched from 30 MHz to the 10<sup>th</sup> harmonic.  
EUT was set to transmit with 100 % duty cycle.  
Radiated measurements were performed at a distance of 3 m

Spectrum analyser settings for radiated measurements within restricted bands below 1 GHz:

Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyser settings for peak radiated measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyser settings for average radiated measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	10 Hz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyser settings for conducted spurious emissions measurements:


Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Detector mode:	Peak
Trace mode:	Max Hold

### 8.3.4 Test data

---

Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.

8.3.4
Test data, continued

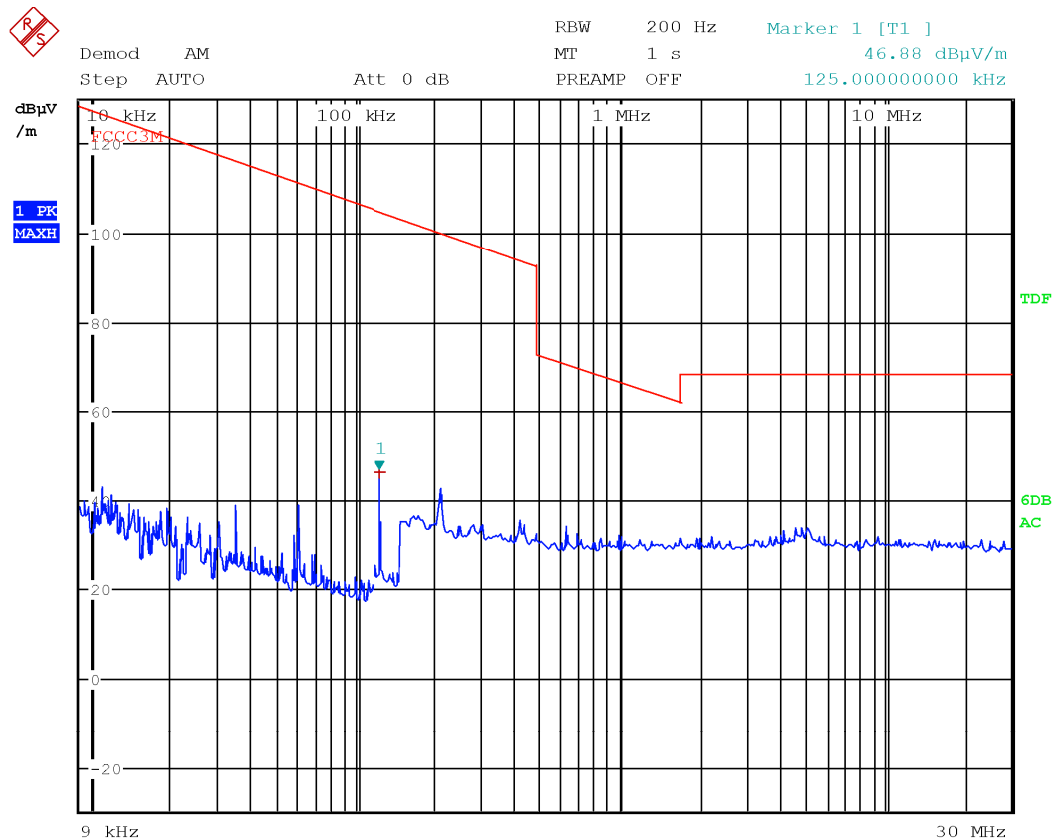


Date: 20.MAY.2019 18:57:07

Figure 8.3-1: Radiated emissions

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
0.1250	40.9	105.1	-64.2	QP

8.3.4 Test data, continued

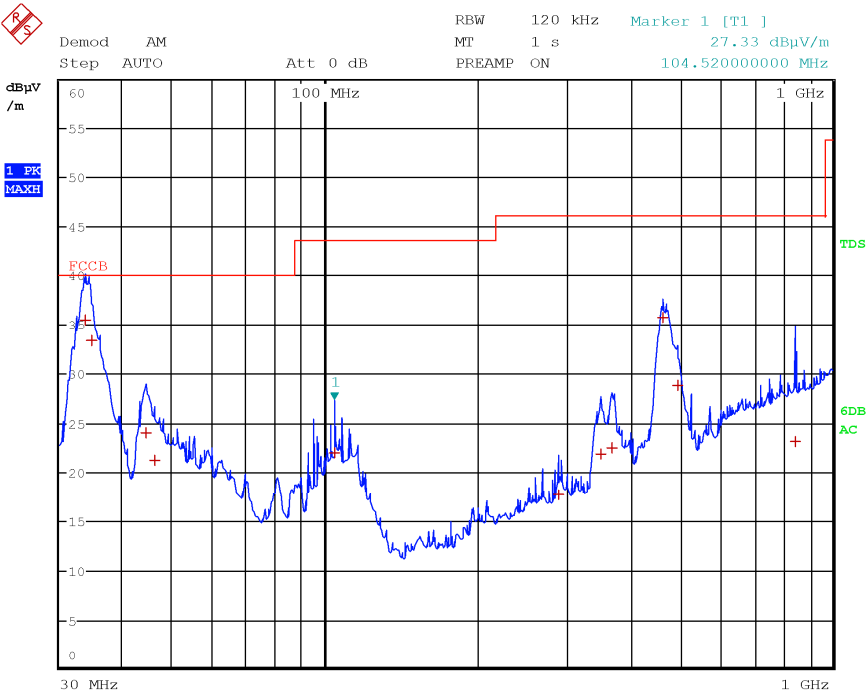


Date: 20.MAY.2019 17:53:59

Antenna in vertical polarization @ 3 m

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
33.8000	35.5	40.0	-4.5	QP
34.7200	33.3	40.0	-6.7	QP
44.4400	24.0	40.0	-16.0	QP
46.0800	21.2	40.0	-18.8	QP
104.5200	21.9	43.5	-21.6	QP
288.0400	17.7	46.0	-28.3	QP
349.4800	21.9	46.0	-24.1	QP
368.3600	22.5	46.0	-23.5	QP
464.0000	35.7	46.0	-10.3	QP
496.0000	28.9	46.0	-17.1	QP
846.8800	23.1	46.0	-22.9	QP

8.3.4 Test data, continued

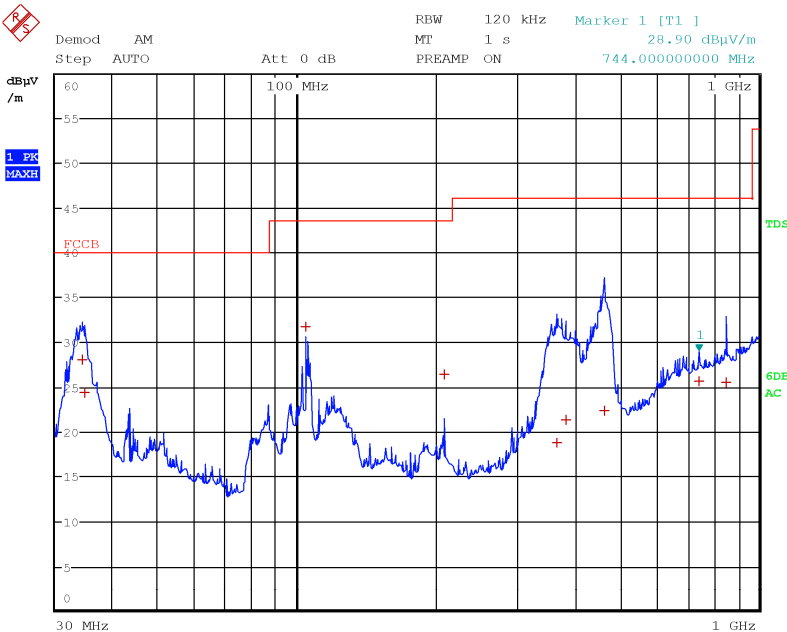

Date: 20.MAY.2019 18:01:29


Antenna in horizontal polarization @ 3 m

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
34.2000	28.1	40.0	-11.9	QP
34.6000	24.4	40.0	-15.6	QP
104.5200	31.8	43.5	-11.7	QP
208.0000	26.3	43.5	-17.2	QP
365.9200	18.7	46.0	-27.3	QP
382.6800	21.3	46.0	-24.7	QP
464.0000	22.3	46.0	-23.7	QP
744.0000	25.7	46.0	-20.3	QP
851.0400	25.5	46.0	-20.5	QP



Section 9. Block diagrams of test set-ups

9.1 Radiated emissions set-up

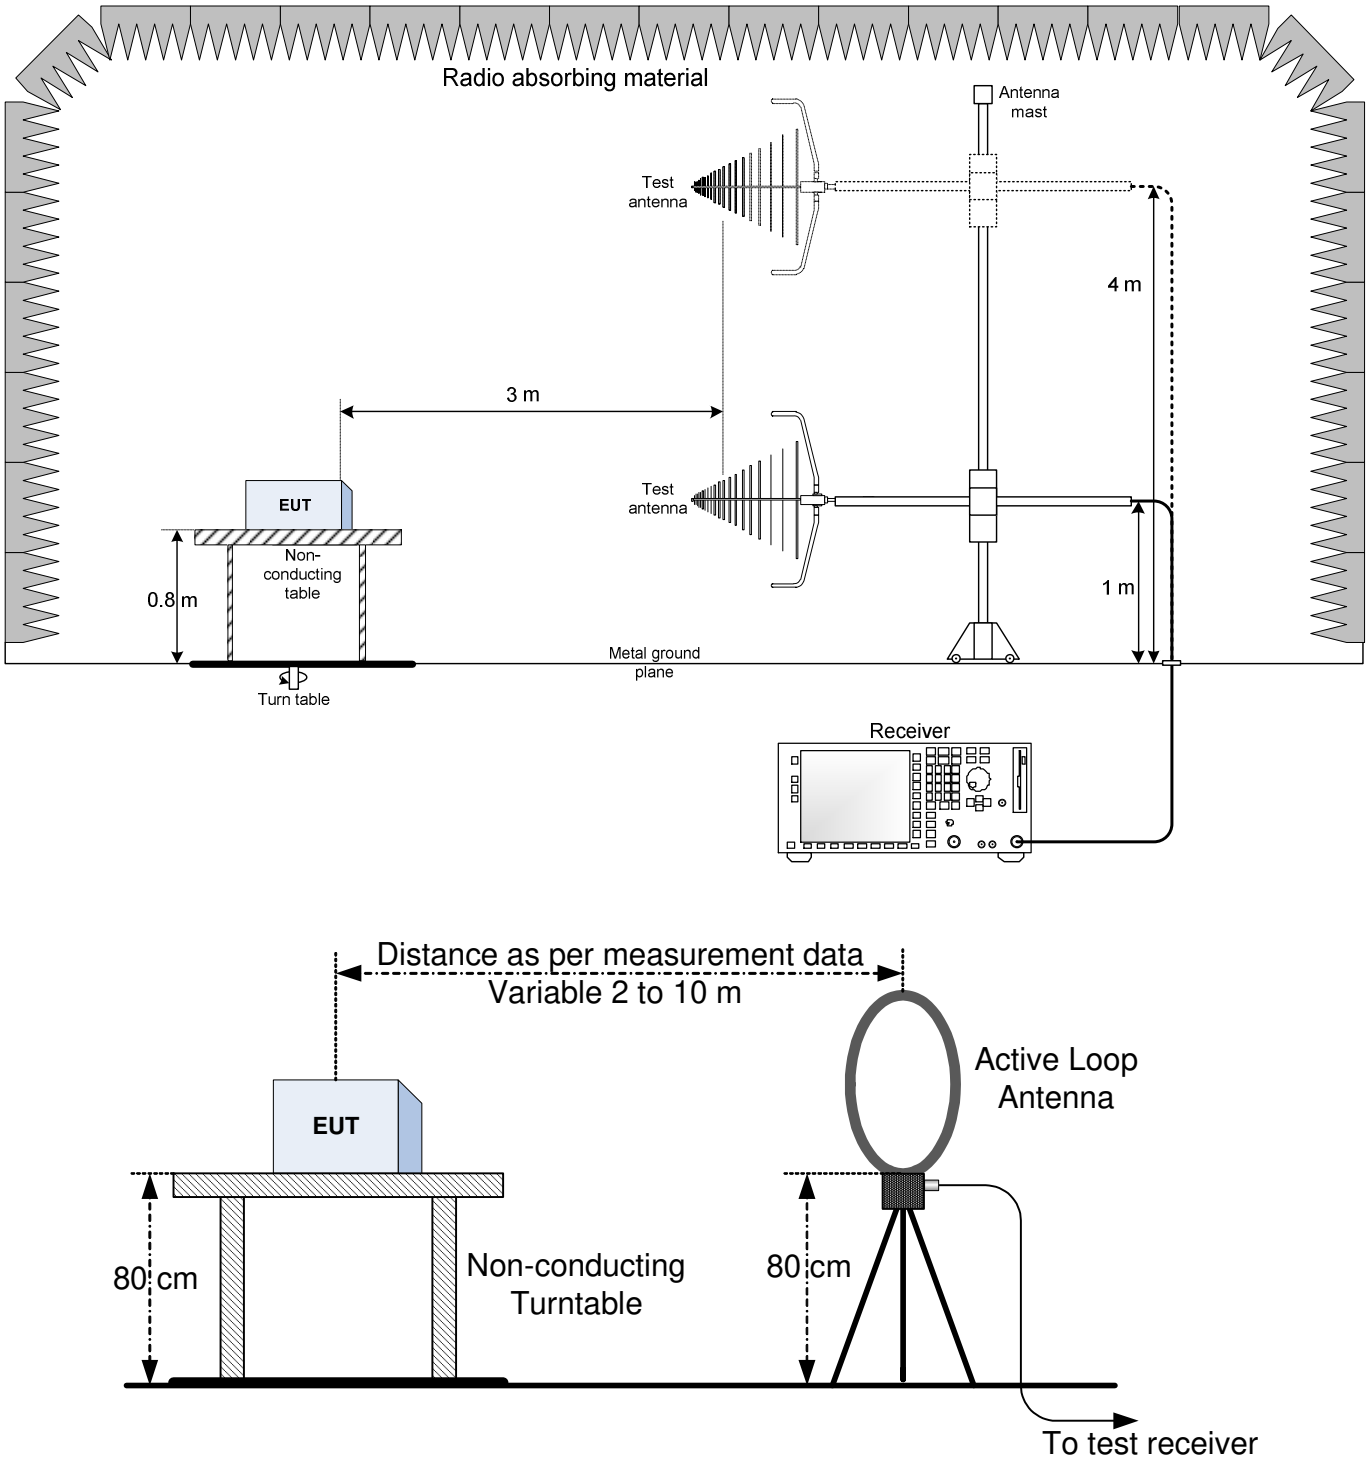

9.2 Conducted emissions set-up

