## FCC PART 15 SUBPART C TEST REPORT

for

modlet BN WiFi 2

**Model No.: TE5020** 

**FCC ID: Y38TE5020** 

of

Applicant: ThinkEco, Inc.

Address: 335 Madison Ave, 4th floor, New York, NY 10017, USA

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1477, TW0020, TW1072

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

A2LA Accredited No.: 2732.01





Report No.: W6M21803-17891-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C. TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com

FCC ID: Y38TE5020

## **TABLE OF CONTENTS**

1	GE	NERAL INFORMATION	2
	1.1	Notes	2
	1.2	TESTING LABORATORY	3
	1.2.	1 Location	3
	1.2.	2 Details of accreditation status	
	1.3	DETAILS OF APPROVAL HOLDER	3
	1.4	APPLICATION DETAILS	4
	1.5	GENERAL INFORMATION OF TEST ITEM	4
	1.6	TEST STANDARDS.	6
2	TE	CHNICAL TEST	7
	2.1	SUMMARY OF TEST RESULTS	7
	2.2	TEST ENVIRONMENT	7
	2.3	TEST EQUIPMENT LIST	8
	2.4	GENERAL TEST PROCEDURE	11
3	TE	ST RESULTS (ENCLOSURE)	13
	3.1	PEAK OUTPUT POWER (TRANSMITTER)	14
	3.2	EQUIVALENT ISOTROPIC RADIATED POWER	23
	3.3	RF Exposure Compliance Requirements	23
	3.4	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS	24
	3.5	Spurious Emissions (TX)	25
	3.6	RADIATED EMISSION ON THE BAND EDGE	27
	3.7	MINIMUM 6 dB BANDWIDTH.	33
	3.8	PEAK POWER SPECTRAL DENSITY	41
	3.9	RADIATED EMISSION FROM DIGITAL PART	49
	3.10	POWER LINE CONDUCTED EMISSION	50
A	PPENI	DIX	53

FCC ID: Y38TE5020

### 1 General Information

#### 1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that is performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

### Specific Conditions:

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.

The test sample is able to work according IEEE 802.11 b/g/n, Bluetooth Low Energy and Zigbee.

This report is related to FCC Part 15 C (DSSS, OFDM, GFSK and OQPSK device).

**Tester:** 

March 28, 2018 Spencer Yang Pencer Yang

Date WTS-Lab. Name Signature

#### Technical responsibility for area of testing:

March 28, 2018 Kevin Wang

Date WTS Name Signature

FCC ID: Y38TE5020

### 1.2 Testing laboratory

#### 1.2.1 Location

**OATS** 

No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207,

Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228 FAX:886-2-2791-5046

#### Company

Worldwide Testing Services(Taiwan) Co., Ltd. 6F, NO. 58, LANE 188, RUEY-KUANG RD. NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877 Fax : 886-2-66068879

#### 1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. TW1477, TW0020, TW1072

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

#### Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd.:

Name:	./.
Accredited number:	./.
Street:	./.
Town:	./.
Country:	./.
Telephone:	./.
Fax:	./.

#### 1.3 Details of approval holder

Name: ThinkEco, Inc.

Street: 335 Madison Ave, 4th floor, Town: New York, NY 10017,

Country: USA

Telephone: +1 212 684 2085

Fax: ./.

FCC ID: Y38TE5020

### 1.4 Application details

Date of receipt of test item: March 12, 2018

Date of test: from March 13, 2018 to March 28, 2018

#### 1.5 General information of Test item

Type of test item: modlet BN WiFi 2

Model Number: TE5020

Brand Name: ThinkEco, Inc.

Multi-listing model number: TE5021, TE5023

Photos: see Appendix

Technical data

Frequency band: 2.4 GHz – 2.4835 GHz

**WLAN** 

11b, 11g, 11n 20MHz

Frequency (ch 1 or A): 2.412 GHz Frequency (ch 6 or B): 2.437 GHz Frequency (ch 11 or C): 2.462 GHz

**Bluetooth Low Energy** 

Frequency ( ch 0 or A): 2402 MHz
Frequency ( ch 19 or B): 2440 MHz
Frequency ( ch 39 or C): 2480 MHz

**Zigbee** 

Frequency (ch 11 or A): 2405 MHz
Frequency (ch 18 or B): 2440 MHz
Frequency (ch 26 or C): 2480 MHz

Number of Channels: WLAN: 11

Bluetooth Low Energy: 40

Zigbee: 16

Operation modes: Duplex

Modulation Type: DSSS, OFDM, GFSK, OQPSK

Fixed point-to-point operation:  $\square$  Yes  $/ \boxtimes$  No



Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

Type of Antenna: PCB antenna

Antenna gain: -2 dBi
Power supply: 120 VAC
Emission designator: WLAN:

11b: DSSS: 16M4G1D 11g: OFDM: 16M8D1D

11n 20MHz: OFDM: 17M8D1D Bluetooth Low Energy: 729KG1D

Zigbee: 1M67G1D

Host device: none

Classification

Fixed Device	
Mobile Device (Human Body distance > 20cm)	
Portable Device (Human Body distance < 20cm)	
Modular Radio Device	

### <u>Transmitter</u> <u>Unom</u>

**WLAN** 

Mode A (DSSS)

Power ( ch 1 or A): Conducted: 11.64 dBm Power ( ch 6 or B): Conducted: 11.98 dBm Power ( ch 11 or C): Conducted: 11.97 dBm

Mode B (OFDM)

Power (ch 1 or A): Conducted: -7.95 dBm Power (ch 6 or B): Conducted: -4.17 dBm Power (ch 11 or C): Conducted: -8.75 dBm

Mode C (OFDM)

Power (ch 1 or A): Conducted: -7.70 dBm Power (ch 6 or B): Conducted: -4.52 dBm Power (ch 11 or C): Conducted: -8.81 dBm

**Bluetooth Low Energy:** 

Mode D (GFSK)

Power (ch 0 or A): Conducted: 4.13 dBm Power (ch 19 or B): Conducted: 3.98 dBm Power (ch 39 or C): Conducted: 3.70 dBm

Zigbee:

Mode E (OQPSK)

Power (ch 1 or A): Conducted: 4.16 dBm Power (ch 18 or B): Conducted: 4.00 dBm Power (ch 26 or C): Conducted: 3.77 dBm

FCC ID: Y38TE5020

Manufacturer: (if applicable)

Name: VVDN Technologies Pvt. Ltd Street: B-22,Infocity Sector-34, Town: Gurgaon-122001, Haryana,

Country: India

### 1.6 Test standards

Technical standard: FCC RULES PART 15 SUBPART C § 15.247 (2017-10)

FCC ID: Y38TE5020 **2** Technical test

## 2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course	×
of the tests performed.	

or

The deviations as specified in 2.5 were ascertained in the course of the tests  $\Box$  performed.

#### 2.2 Test environment

Temperature: 23 °C

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Power supply: 120 VAC

Extreme conditions parameters: ./.

Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Emission	Expanded Uncertainty: 1.54 dB
Estimation Result of Uncertainty of Radiated Emission(3M)	Expanded Uncertainty: 0.009-30 MHz: 2.17 dB 30-1000 MHz: 3.57 dB 1-18 GHz: 2.60 dB 18-40 GHz: 2.58 dB
Estimation Result of Uncertainty of Bandwidth Measurement 20 dB Bandwidth, Occupied bandwidth, Channel bandwidth, Necessary Bandwidth	Expanded Uncertainty: 0.45 kHz
Estimation Result of Uncertainty of Conducted Output Power Measurement Output power	Expanded Uncertainty: 1.01 dB
Estimation Result of Uncertainty of Power Density Measurement Power density	Expanded Uncertainty: 1.73 dB
Estimation Result of Uncertainty of Band Edge Measurement	Expanded Uncertainty: 0.98 dBc



Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

## 2.3 Test Equipment List

No.	Test equipment	Туре	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2017/5/26	2018/5/25
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function	on Test
ETSTW-CE 004	ZWEILEITER-V- NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2017/10/26	2018/10/25
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2017/8/22	2018/8/21
ETSTW-CE 008	HF-EICHLEITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function	on Test
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2017/7/14	2018/7/13
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2017/8/31	2018/8/30
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2017/7/11	2018/7/10
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2017/5/26	2018/5/25
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2017/5/17	2018/5/16
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2017/8/25	2018/8/24
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function	on Test
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function	on Test
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2017/7/4	2018/7/3
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2017/7/3	2018/7/2
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2018/3/21	2019/3/20
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2018/1/23	2019/1/22
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2017/4/10	2018/4/9
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2017/4/27	2018/4/26
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-te	st Use
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2018/3/1	2019/2/28
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2018/3/1	2019/2/28
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2018/3/1	2019/2/28
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2018/2/21	2019/2/20
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2018/3/1	2019/2/28
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2017/4/12	2018/4/11
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function	on Test
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function	on Test
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	НР	2017/9/11	2018/9/10
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2017/9/19	2018/9/18
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2017/4/6	2018/4/5
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2018/2/23	2019/2/22



Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

FCC ID: Y381	E3020		1	*		
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Functi	on test
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2018/1/15	2019/1/14
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Functi	on test
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2017/5/26	2018/5/25
ETSTW-RE 125	5GHz Notch filter	5NSL11- 5200/E221.3-O/O	1	K&L Microwave	2017/8/9	2018/8/8
ETSTW-RE 126	5GHz Notch filter	5NSL12- 5800/E221.3-O/O	1	K&L Microwave	2017/8/9	2018/8/8
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2018/2/27	2019/2/26
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2017/8/9	2018/8/8
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2017/8/9	2018/8/8
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-te	st Use
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2017/4/12	2018/4/11
ETSTW-RE 147	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04005	ETC	2018/3/21	2019/3/20
ETSTW-RE 151	Thermohygrometer	608-h1	45104376	TESTO	2017/8/30	2018/8/29
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2017/5/10	2018/5/9
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2018/2/27	2019/2/26
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2018/3/2	2019/3/1
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2017/10/16	2018/10/15
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849- 822/851-40 /12+9SS	3	WI	2018/1/11	2019/1/10
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748- 1743/1752-32/5SS	1	WI	2018/1/11	2019/1/10
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5 -1875.5/1884.5- 32/5SS	3	WI	2018/1/11	2019/1/10
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1- 904.25-50/8SS	1	WI	2018/1/11	2019/1/10
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2017/9/13	2018/9/12
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test U	Jse NCR
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2018/2/22	2019/2/21
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2018/2/22	2019/2/21
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2018/2/22	2019/2/21
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2018/2/22	2019/2/21
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2017/7/3	2018/7/2
ETSTW-Cable 022	N TYPE Cable	5006	0002	JYE BAO CO.,LTD.	2017/4/6	2018/4/5
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2018/2/27	2019/2/26
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2017/5/12	2018/5/11
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2017/9/7	2018/9/6
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2017/9/7	2018/9/6
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2018/2/27	2019/2/26
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S_Cable 10)	238092	HUBER+SUHNER	2017/4/12	2018/4/11
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2017/4/12	2018/4/11
ETSTW-Cable 048	Microwave Cable	SUCOFLEX 104	325519	HUBER+SUHNER	2017/4/12	2018/4/11



Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2018/2/21	2019/2/20
ETSTW-Cable 064	-Cable 064 Microwave Cable SUCOFLEX 104		MY28891	HUBER+SUHNER	2017/4/12	2018/4/11
ETSTW-Cable 066	SMA type cable	32022	None	ASTROLAB	2017/8/31	2018/8/30
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM- NM-25000	170239	EMCI	2018/2/21	2019/2/20
WTSTW-SW 002	EMI TEST SOFTWARE	E EZ_EMC None Farad Version ETS-032		ETS-03A1		
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version	9.161014
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version	2.0.0.1

FCC ID: Y38TE5020

#### 2.4 General Test Procedure

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.10-2013 6.2 using a 50μH LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of  $dB\mu V$ ) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz) METER READING + ACF + CABLE LOSS (to the receiver) = FS

33  $20 \text{ dB}\mu\text{V} + 10.36 \text{ dB} + 6 \text{ dB} = 36.36 \text{ dB}\mu\text{V/m} \text{ (a)3m}$ 

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 6.2.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



FCC ID: Y38TE5020

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:

Average = Peak + Duty Factor

Duty Factor = 20 log (dwell time/T)

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

## 3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)	×	×	
Equivalent isotropically radiated Power	15.247(b)	×	×	
Spurious Emissions radiated – Transmitter	15.247(c):	×	×	
operating	15.209			
Band Edge Measurement	15.247(d)	×	×	
Minimum 6 dB Bandwidth	15.247(a)(2)	×	×	
Peak Power Spectral Density	15.247(e)	×	×	
Radiated Emission from Digital Part	15.109			
Power Line Conducted Emission	15.207	×	×	

FCC ID: Y38TE5020


### 3.1 Peak Output Power (transmitter)

FCC Rule: 15.247(b)(3)

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

#### Mode A

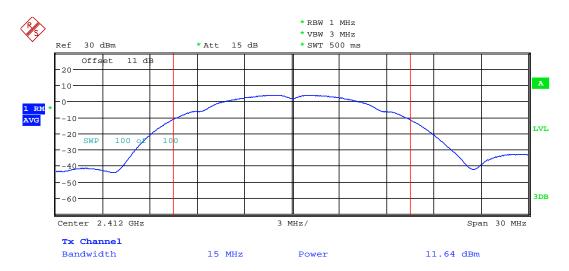

MAX OUTPUT POWER 802.11B CH01 Date: 20.MAR.2018 09:57:09

Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020



MAX OUTPUT POWER 802.11B CH06 Date: 20.MAR.2018 09:59:59




MAX OUTPUT POWER 802.11B CH11 Date: 20.MAR.2018 10:01:25




Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

Mode B

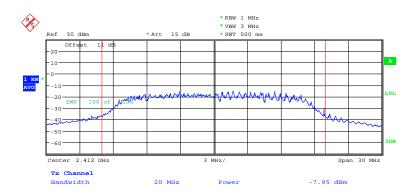

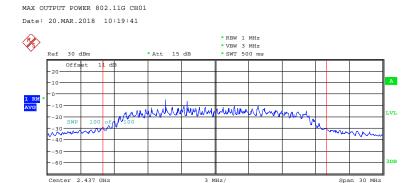

-4.17 dBm

20 MHz


MAX OUTPUT POWER 802.11G CH06 Date: 20.MAR.2018 10:21:35

Tx Channel Bandwidth




Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

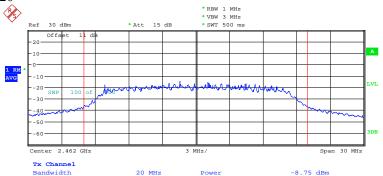

MAX OUTPUT POWER 802.11G CH11 Date: 20.MAR.2018 10:23:52

### Mode C

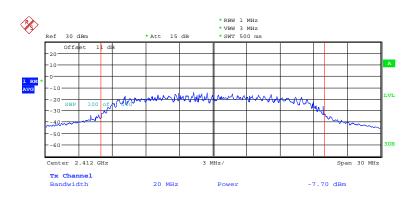


MAX OUTPUT POWER 802.11N 20MHZ CH01 Date: 20.MAR.2018 10:13:55




Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

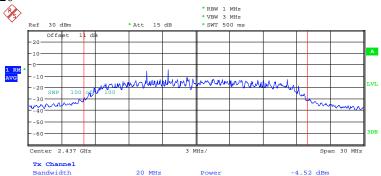

MAX OUTPUT POWER 802.11N 20MHZ CH06 Date: 20.MAR.2018 10:15:46

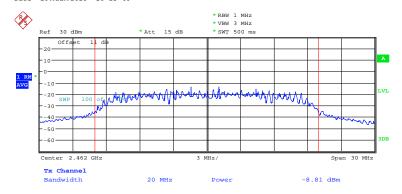


MAX OUTPUT POWER 802.11N 20MHZ CH11 Date: 20.MAR.2018 10:17:44



Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

Mode D

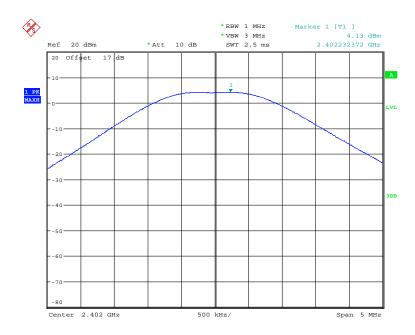


MAX OUTPUT POWER BT4.0 CH00 Date: 15.MAR.2018 14:13:12



MAX OUTPUT POWER BT4.0 CH19 Date: 15.MAR.2018 14:14:06


Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

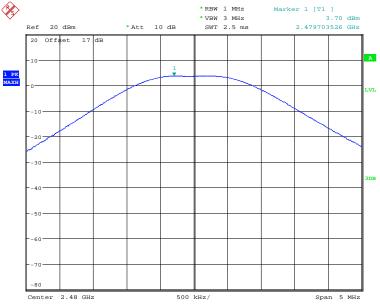

MAX OUTPUT POWER BT4.0 CH39 Date: 15.MAR.2018 14:15:00


### Mode E

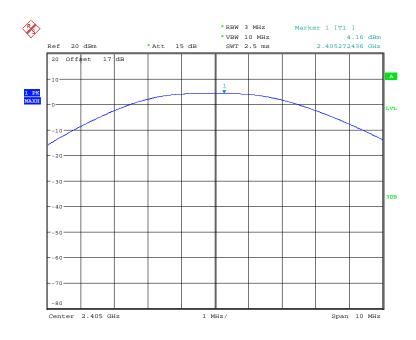

MAX OUTPUT POWER ZIGBEE CH11
Date: 15.MAR.2018 14:27:59

Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

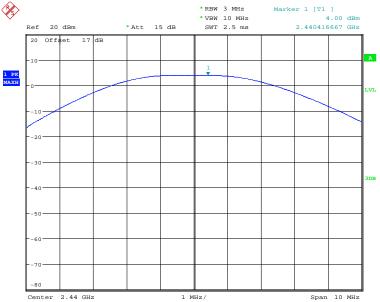

MAX OUTPUT POWER ZIGBEE CH18 Date: 15.MAR.2018 14:27:25



MAX OUTPUT POWER ZIGBEE CH26 Date: 15.MAR.2018 14:27:02



FCC ID: Y38TE5020

### Limits:

Frequency	Power
MHz	dBm
902 - 928	30
2400 – 2483.5	30
5725 – 5850	30

In case of employing transmitter antennas having antenna gain > 6 dBi and using fixed point-to point operation consider \$15.247 (b)(4)

Test equipment used: ETSTW-RE 055, ETSTW-RE 050, ETSTW-RE 064

FCC ID: Y38TE5020

### 3.2 Equivalent isotropic radiated power

FCC Rule: 15.247(b)(3)

EIRP = max. conducted output power

EIRP = 11.98 dBm

Limit: EIRP = +36 dBm for Antenna gain <6 dBi

Test equipment used: ETSTW-RE 055

### 3.3 RF Exposure Compliance Requirements

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits.

The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a "worst case" or conservative prediction.

$$S = \frac{PG}{4 \pi R^2}$$

S – Power Density

P – Output power ERP

R – Distance

D – Cable Loss

AG – Antenna Gain

Item	Unit	Value	Remarks
P	mW	15.7761	Peak value
D	dB		
AG	dBi	-2	
G		0.6310	Calculated Value
R	cm	20	Assumed value
S	mW/cm <sup>2</sup>	0.0020	Calculated value

#### Limits:

Limit for General Population / Uncontrolled Exposure		
Frequency (MHz)	Power Density (mW/cm <sup>2</sup> )	
1500 - 100.000	1.0	

FCC ID: Y38TE5020

### 3.4 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26500 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency ≤ 1 GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements) Frequency > 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements) Frequency > 1 GHz, RBW:1 MHz, VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission	Field strength	Field Strength		
(MHz)	(microvolts/meter)	(dB microvolts/meter)		
30 - 88	100	40.0		
88 - 216	150	43.5		
216 - 960	200	46.0		
Above	500	54.0		

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:

"If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation."

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = 20 log (dwell time/ 100ms)

Note: No duty cycle correction was added to the reading of this EUT.

Explanation: see attached diagrams in Appendix.

FCC ID: Y38TE5020

### 3.5 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(c), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

#### Limits:

For frequencies above 1GHz (Peak measurements).

Modified Limit for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

For frequencies above 1GHz (Average measurements). Max. reading – 20dB

Max. reading – 20 dB

Guidance on Measurement of Digit Transmission Systems:

"If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation."

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction = 20 log (dwell time/100ms)

Note: No duty cycle correction was added to the reading of EUT.

FCC ID: Y38TE5020

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

#### Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Correction Factor".

#### Summary table with radiated data of the test plots

Model:TE5020Date:--Mode:--Temperature:--°CEngineer:--Polarization:--Humidity:--%

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
							-	

Frequency		ding BuV)	Factor (dB)	Res (dBu			mit V/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)

#### Note

- 1. Correction Factor = Antenna factor + Cable loss Preamplifier
- 2. The formula of measured value as: Test Result = Reading + Correction Factor
- 3. Detector function in the form: PK = Peak, QP = Quasi Peak, AV = Average
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.
- 5. Measurement uncertainty for 3m measurement: 30-1000 MHz =  $\pm 3.57$  dB, 1-18 GHz =  $\pm 2.60$  dB, 18-40 GHz=  $\pm 2.58$  dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
- 6. See attached diagrams in appendix.

**TEST RESULT (Transmitter):** The unit DOES meet the FCC requirements.


Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147

FCC ID: Y38TE5020

### 3.6 Radiated Emission on the band edge

According to FCC rules part 15 subpart C §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

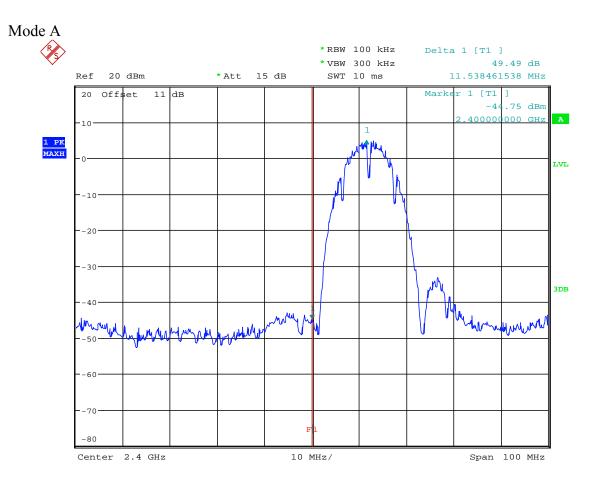


BANDEDGE 802.11B CH01

Date: 15.MAR.2018 14:34:28


Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

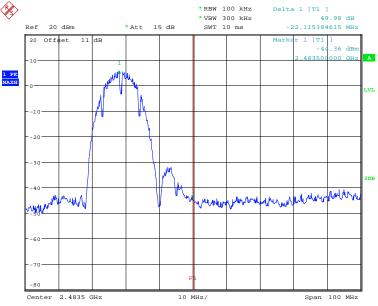

BANDEDGE 802.11B CH11
Date: 15.MAR.2018 14:36:09


### Mode B

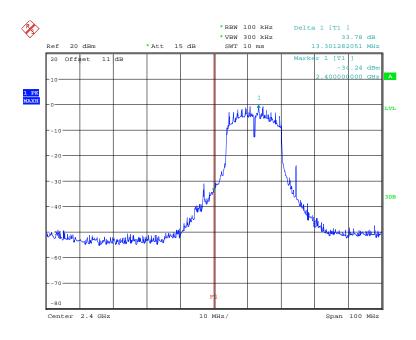

BANDEDGE 802.11G CH01
Date: 15.MAR.2018 14:39:48


Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

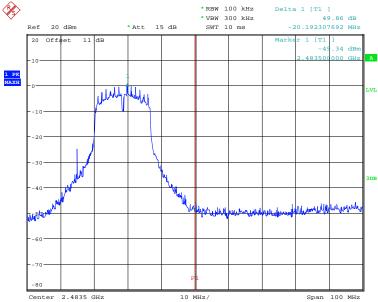

BANDEDGE 802.11G CH11
Date: 15.MAR.2018 14:41:27


### Mode C

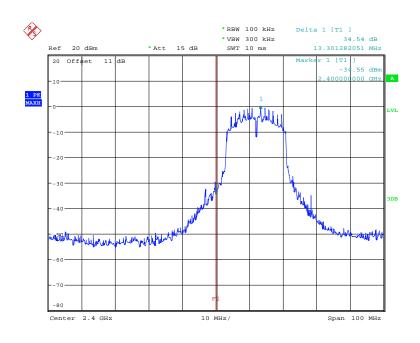

BANDEDGE 802.11N 20MHZ CH01 Date: 15.MAR.2018 14:42:12


Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

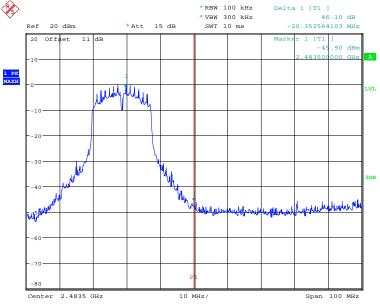

BANDEDGE 802.11N 20MHZ CH11 Date: 15.MAR.2018 14:43:28


### Mode D

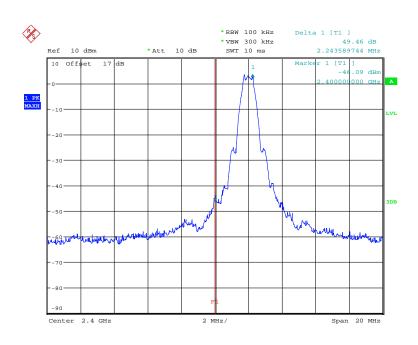

BANDEDGE BT4.0 CH00
Date: 15.MAR.2018 14:13:40


Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

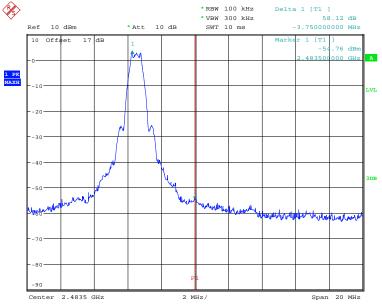

BANDEDGE BT4.0 CH39
Date: 15.MAR.2018 14:15:28

### Mode E

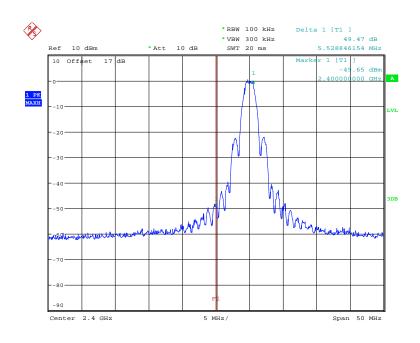


BANDEDGE ZIGBEE CH11
Date: 15.MAR.2018 14:23:25



Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

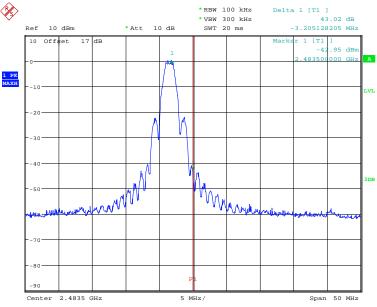

BANDEDGE ZIGBEE CH26
Date: 15.MAR.2018 14:22:43

### Limit:


Frequency Range / MHz	Limit			
902 –928				
2400 – 2483.5	- 20 dB			
5725 - 5850				

Test equipment used: ETSTW-RE 055, ETSTW-RE 050

FCC ID: Y38TE5020

#### 3.7 Minimum 6 dB Bandwidth


The analyzer ResBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission. The 6 dB bandwidth is the frequency difference between the two markers.

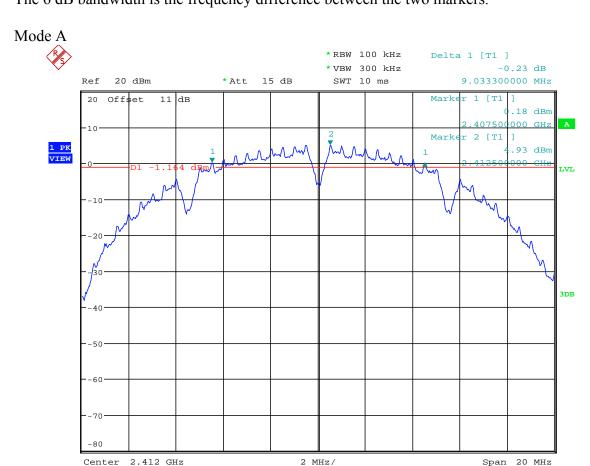


6DB BANDWIDTH 802.11B CH01
Date: 15.MAR.2018 14:34:16

Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

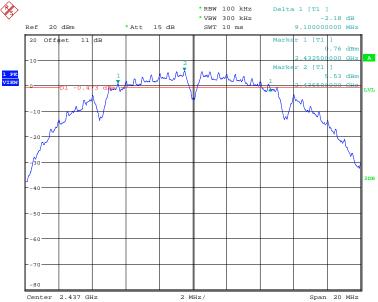

6DB BANDWIDTH 802.11B CH06 Date: 15.MAR.2018 14:35:12

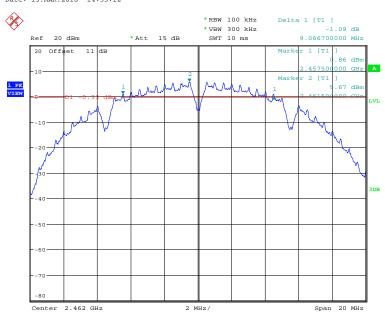


6DB BANDWIDTH 802.11B CH11 Date: 15.MAR.2018 14:35:57




Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

Mode B

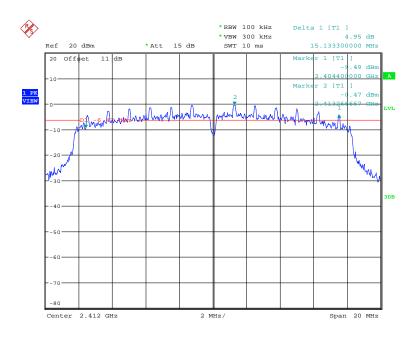


6DB BANDWIDTH 802.11G CH01 Date: 15.MAR.2018 14:39:35

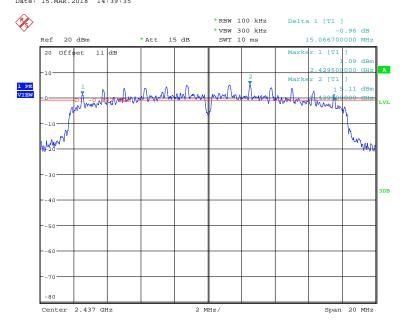

6DB BANDWIDTH 802.11G CH06 Date: 15.MAR.2018 14:40:16


Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

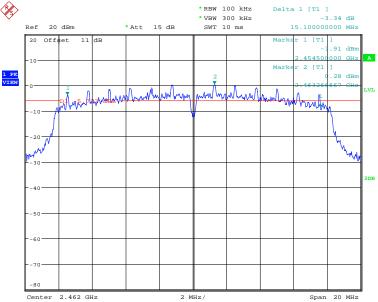

6DB BANDWIDTH 802.11G CH11 Date: 15.MAR.2018 14:41:14


#### Mode C

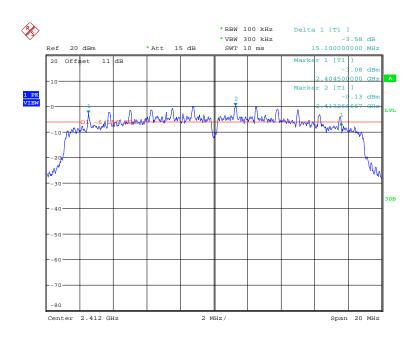


6DB BANDWIDTH 802.11N 20MHZ CH1 Date: 15.MAR.2018 14:41:59

Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

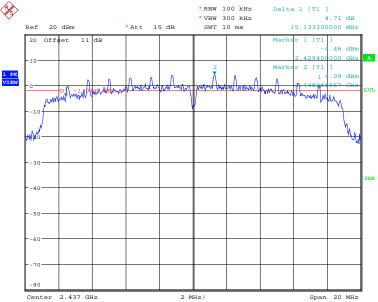

6DB BANDWIDTH 802.11N 20MHZ CH6 Date: 15.MAR.2018 14:42:40

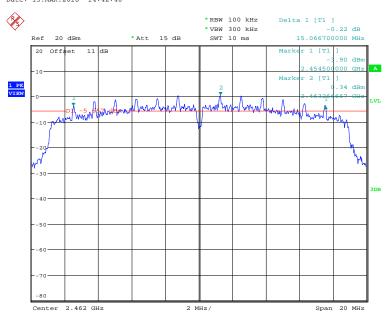


6DB BANDWIDTH 802.11N 20MHZ CH11 Date: 15.MAR.2018 14:43:15




Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

Mode D

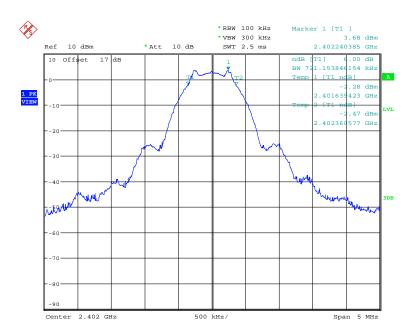


6DB BANDWIDTH BT4.0 CH00 Date: 15.MAR.2018 14:13:22

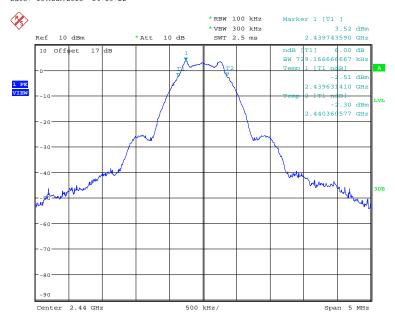

6DB BANDWIDTH BT4.0 CH19 Date: 15.MAR.2018 14:14:16


Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

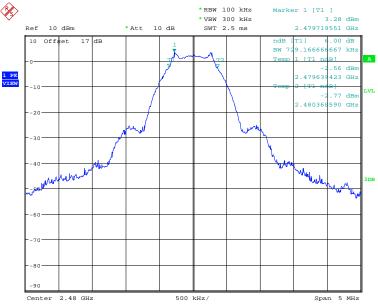

6DB BANDWIDTH BT4.0 CH39 Date: 15.MAR.2018 14:15:10

#### Mode E

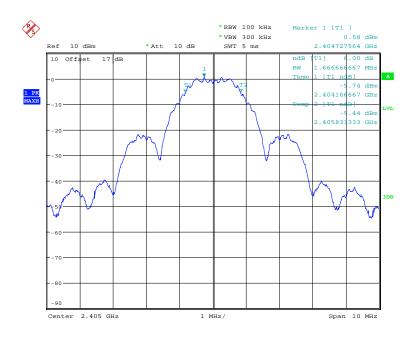

6DB BANDWIDTH ZIGBEE CH11
Date: 15.MAR.2018 14:20:29




Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020





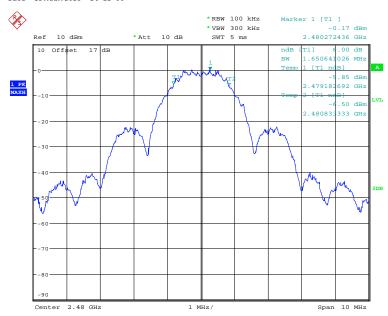

6DB BANDWIDTH ZIGBEE CH26
Date: 15.MAR.2018 14:21:26

#### **Limits:**

Frequency Range MHz	Limits
902-928	min 500 kHz
2400-2483.5	min 500 kHz
5725-5850	min 500 kHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 050


Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

#### 3.8 Peak Power Spectral Density

Peak Power Spectral density is a measured at low, middle and high channel.

The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.

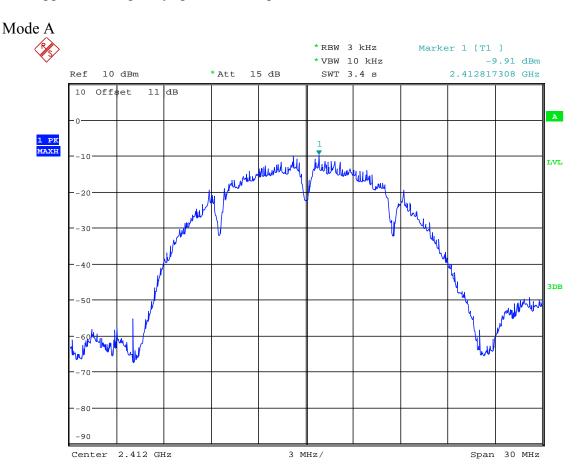


POWER DENSITY 802.11B CH01
Date: 15.MAR.2018 14:34:23

Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020



POWER DENSITY 802.11B CH06
Date: 15.MAR.2018 14:35:19

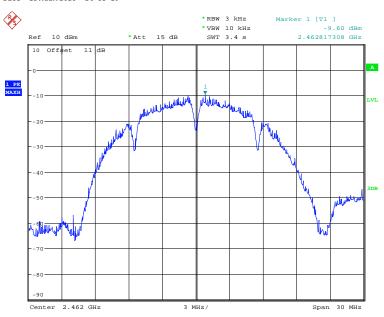


POWER DENSITY 802.11B CH11 Date: 15.MAR.2018 14:36:04




Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

Mode B

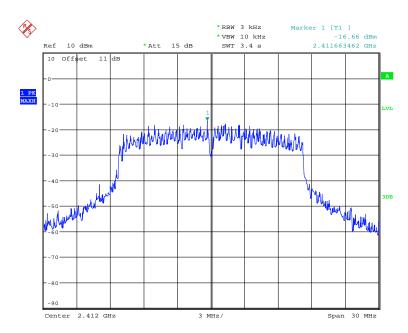


POWER DENSITY 802.11G CH01 Date: 15.MAR.2018 14:39:42

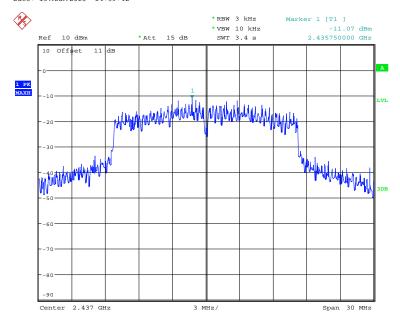

POWER DENSITY 802.11G CH06
Date: 15.MAR.2018 14:40:23


Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

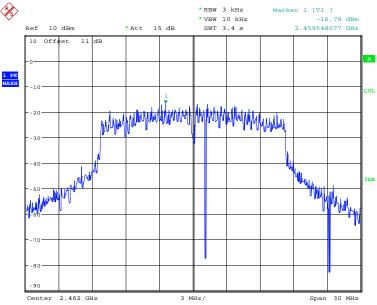

POWER DENSITY 802.11G CH11 Date: 15.MAR.2018 14:41:21


#### Mode C

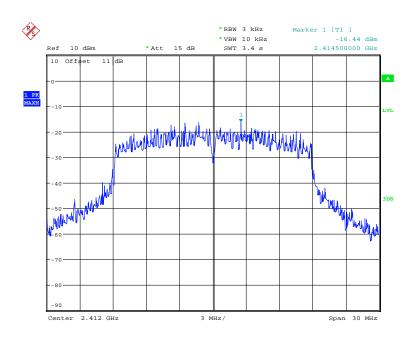


POWER DENSITY 802.11N 20MHZ CH1
Date: 15.MAR.2018 14:42:06

Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

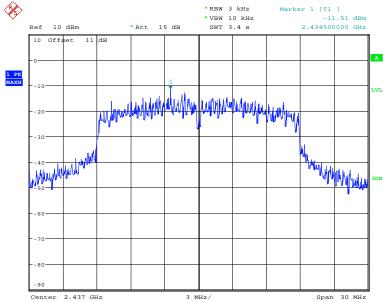

POWER DENSITY 802.11N 20MHZ CH6
Date: 15.MAR.2018 14:42:47

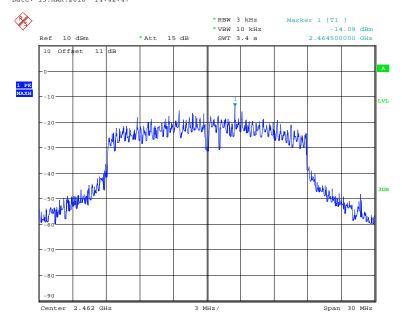


POWER DENSITY 802.11N 20MHZ CH11 Date: 15.MAR.2018 14:43:22




Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

Mode D

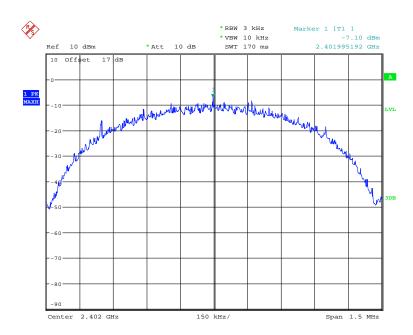


POWER DENSITY BT4.0 CH00 Date: 15.MAR.2018 14:13:32

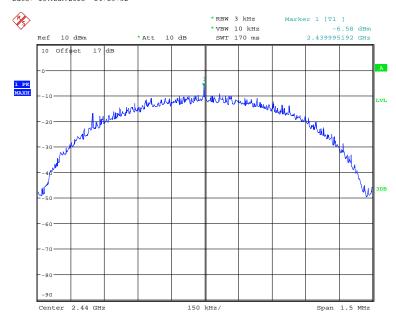

POWER DENSITY BT4.0 CH19
Date: 15.MAR.2018 14:14:26


Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

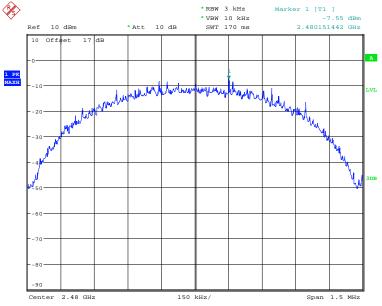

POWER DENSITY BT4.0 CH39
Date: 15.MAR.2018 14:15:20

#### Mode E

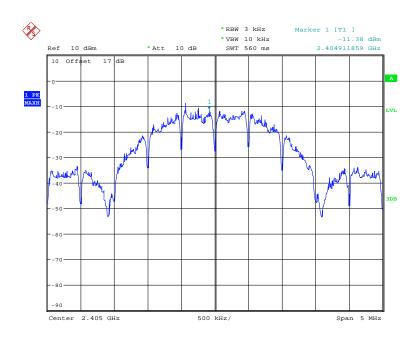


POWER DENSITY ZIGBEE CH11
Date: 15.MAR.2018 14:24:47



Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

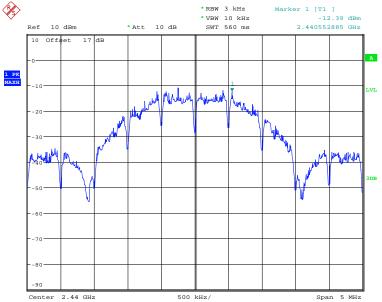





POWER DENSITY ZIGBEE CH26
Date: 15.MAR.2018 14:25:47

#### **Limits:**

Frequency Range MHz	dBm
902-928	8
2400-2483.5	8
5725-5850	8

Test equipment used: ETSTW-RE 055, ETSTW-RE 050

Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

#### 3.9 Radiated Emission from Digital Part

FCC Rule: 15.109

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission	Field Strength	Field Strength
(MHz)	(microvolts/meter)	(dBmicrovolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 142,

ETSTW-RE 147

Explanation: The test results are listed in the separated test report no.: W6M21803-17891-P-15B.



Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

#### 3.10 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.



Site: Chamber\_03

Condition: FCC Part 15 Class B Conduction (QP)

Phase: A Power: 120 Va.c.

EUT: W6M21803-17891

M/N:


Test Mode:

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	C omment
	0.2037	39.28	QP	9.73	49.01	63.46	-14.45	
	0.2037	35.04	AVG	9.73	44.77	53.46	-8.69	
	0.2625	37.78	QP	9.73	47.51	61.35	-13.84	
	0.2625	33.19	AVG	9.73	42.92	51.35	-8.43	
- 4	0.3327	36.42	QP	9.74	46.16	59.38	-13.22	
	0.3327	32.04	AVG	9.74	41.78	49.38	-7.60	
	0.4040	34.76	QP	9.74	44.50	57.77	-13.27	
*	0.4040	30.71	AVG	9.74	40.45	47.77	-7.32	
	0.4531	31.17	QP	9.74	40.91	56.82	-15.91	
	0.4531	24.36	AVG	9.74	34.10	46.82	-12.72	
	0.5495	28.50	QP	9.74	38.24	56.00	-17.76	
	0.5495	22.68	AVG	9.74	32.42	46.00	-13.58	



Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

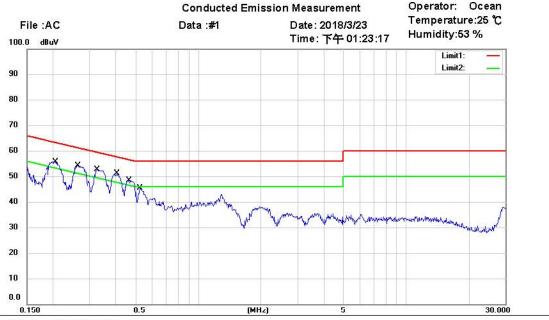

Site: Chamber\_03

Condition: FCC Part 15 Class B Conduction (QP)

Power: 120 Va.c.

L1

Phase:

EUT: W6M21803-17891

M/N: Test Mode: Note:

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	C omm ent
	0.2060	38.84	QP	9.72	48.56	63.37	-14.81	
	0.2060	34.57	AVG	9.72	44.29	53.37	-9.08	
	0.2643	37.68	QP	9.72	47.40	61.30	-13.90	
	0.2643	33.44	AVG	9.72	43.16	51.30	-8.14	
	0.3260	35.68	QP	9.73	45.41	59.55	-14.14	
	0.3260	30.19	AVG	9.73	39.92	49.55	-9.63	
	0.4078	34.40	QP	9.73	44.13	57.69	-13.56	
*	0.4078	30.06	AVG	9.73	39.79	47.69	-7.90	
	0.4660	31.92	QP	9.73	41.65	56.58	-14.93	
	0.4660	27.22	AVG	9.73	36.95	46.58	-9.63	
	0.5247	28.74	QP	9.73	38.47	56.00	-17.53	
	0.5247	22.80	AVG	9.73	32.53	46.00	-13.47	

- 1. The formula of measured value as: Test Result = Reading + Correction Factor
- 2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
- 3. Detector function in the form: PK = Peak, QP = Quasi Peak, AV = Average
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.
- 5. Measurement uncertainty =  $\pm 1.54$  dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
- 6. Up Line: QP Limit Line, Down Line: Ave Limit Line.

Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

#### Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)				
	Quasi Peak	Average			
0.15-0.5	66 to 56	56 to 46			
0.5-5	56	46			
5-30	60	50			

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045.

Registration number: W6M21803-17891-C-1

FCC ID: Y38TE5020

### **Appendix**

#### **Measurement diagrams**

Spurious Emissions radiated \_TX

Registration number: W6M21803-17891-P-15B


## **Appendix**

### **Measurement diagrams**

Spurious Emissions radiated\_TX\_WLAN



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

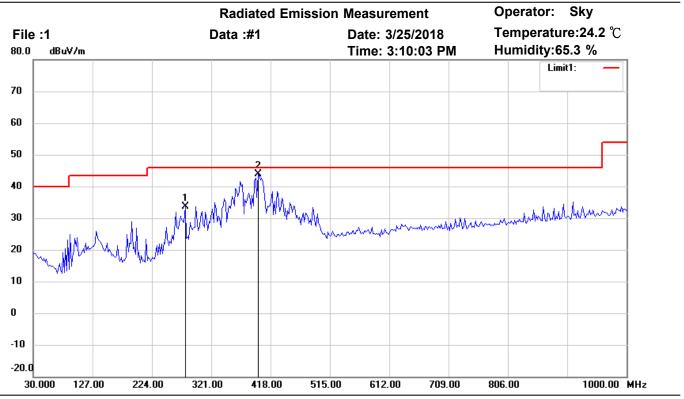

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	278.8176	40.14	peak	-6.40	33.74	46.00	100	10	-12.26	
*	397.3947	47.41	peak	-3.61	43.80	46.00	100	135	-2.20	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

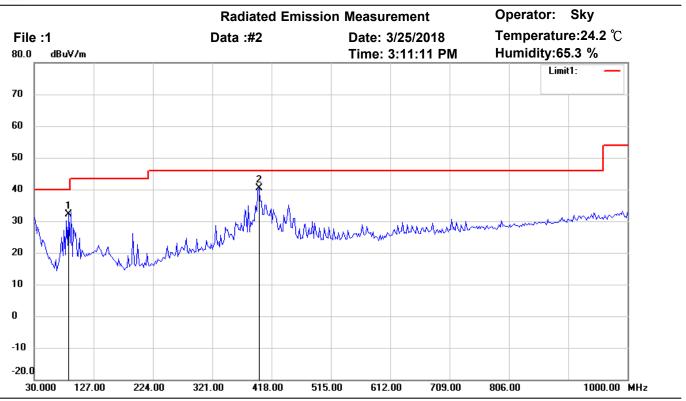

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	86.3726	46.11	peak	-13.95	32.16	40.00	100	60	-7.84	
*	397.3948	43.98	peak	-3.61	40.37	46.00	100	205	-5.63	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

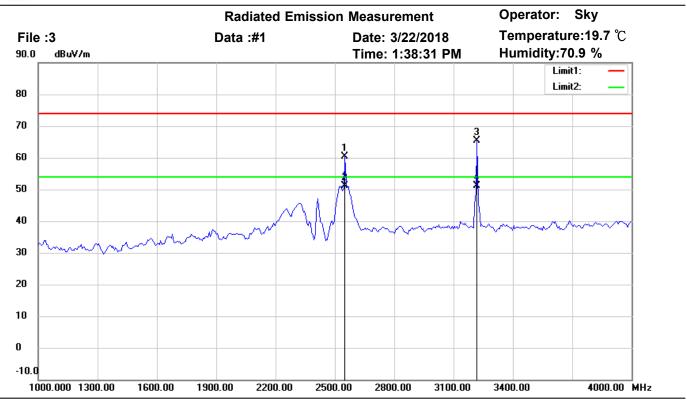

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2548.076	64.30	peak	-4.02	60.28	74.00	205	25	-13.72	
	2548.076	55.10	AVG	-4.02	51.08	54.00	205	25	-2.92	
	3216.032	67.68	peak	-2.19	65.49	74.00	150	20	-8.51	
*	3216.032	53.39	AVG	-2.19	51.20	54.00	150	20	-2.80	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

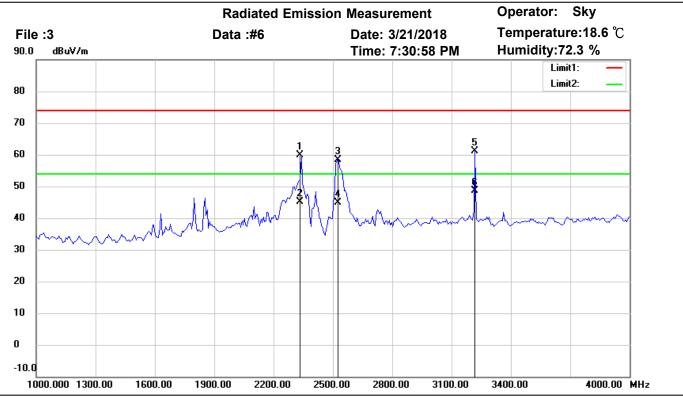

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2331.843	64.45	peak	-4.60	59.85	74.00	150	149	-14.15	
	2331.843	49.70	AVG	-4.60	45.10	54.00	150	149	-8.90	
	2523.106	62.63	peak	-4.15	58.48	74.00	150	149	-15.52	
	2523.106	48.98	AVG	-4.15	44.83	54.00	150	149	-9.17	
	3215.972	63.35	peak	-2.19	61.16	74.00	150	65	-12.84	
*	3215.972	50.86	AVG	-2.19	48.67	54.00	150	65	-5.33	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

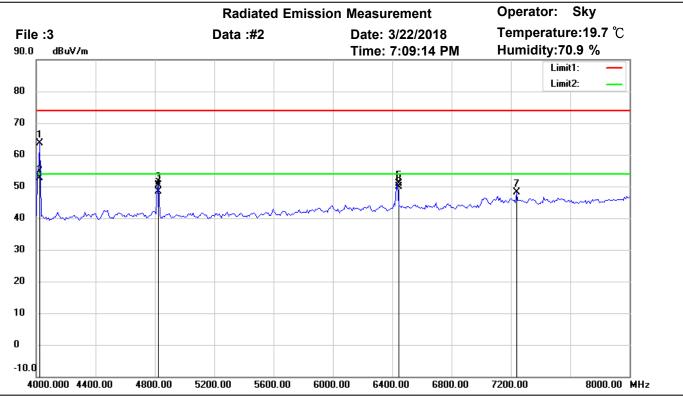

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4020.882	64.48	peak	-0.82	63.66	74.00	150	155	-10.34	
*	4020.882	53.47	AVG	-0.82	52.65	54.00	150	155	-1.35	
	4825.651	50.16	peak	0.11	50.27	74.00	150	20	-23.73	
	4825.651	48.20	AVG	0.11	48.31	54.00	150	20	-5.69	
	6436.874	47.12	peak	3.83	50.95	74.00	150	135	-23.05	
	6436.874	46.11	AVG	3.83	49.94	54.00	150	135	-4.06	
	7238.477	42.94	peak	5.07	48.01	74.00	150	200	-25.99	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

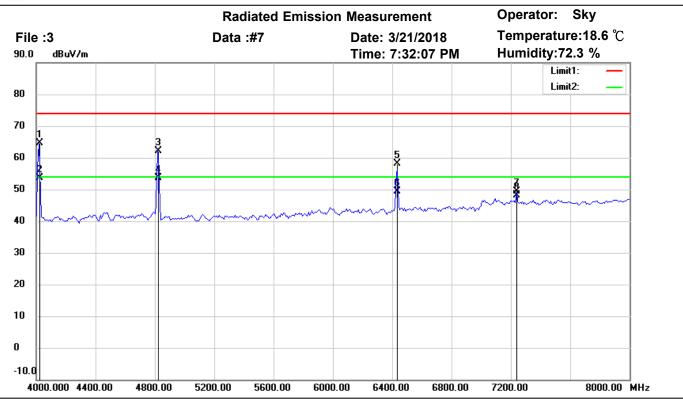

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4021.403	65.39	peak	-0.82	64.57	74.00	150	29	-9.43	
*	4021.403	54.53	AVG	-0.82	53.71	54.00	150	29	-0.29	
	4824.000	62.03	peak	0.11	62.14	74.00	150	350	-11.86	
	4824.000	53.42	AVG	0.11	53.53	54.00	150	350	-0.47	
	6431.924	54.43	peak	3.82	58.25	74.00	150	15	-15.75	
	6431.924	45.67	AVG	3.82	49.49	54.00	150	15	-4.51	
	7236.000	44.39	peak	5.07	49.46	74.00	150	10	-24.54	
	7236.000	43.15	AVG	5.07	48.22	54.00	150	10	-5.78	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

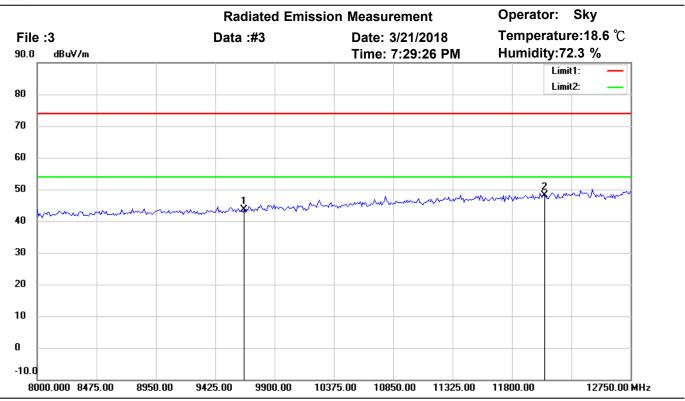

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.71	peak	8.00	43.71	74.00	150	75	-30.29	
*	12060.000	34.78	peak	13.36	48.14	74.00	150	135	-25.86	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

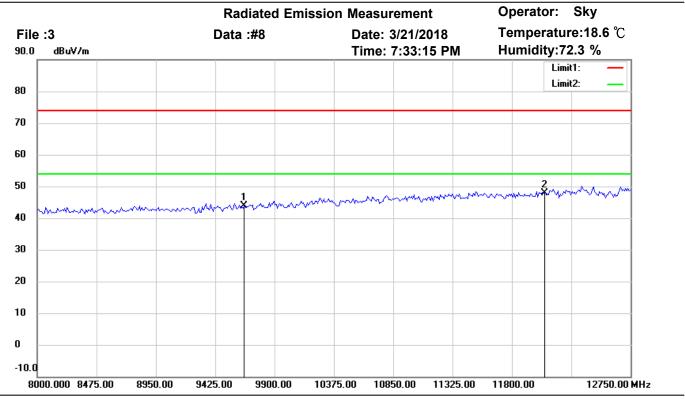

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.91	peak	8.00	43.91	74.00	150	195	-30.09	
*	12060.000	34.62	peak	13.36	47.98	74.00	150	35	-26.02	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

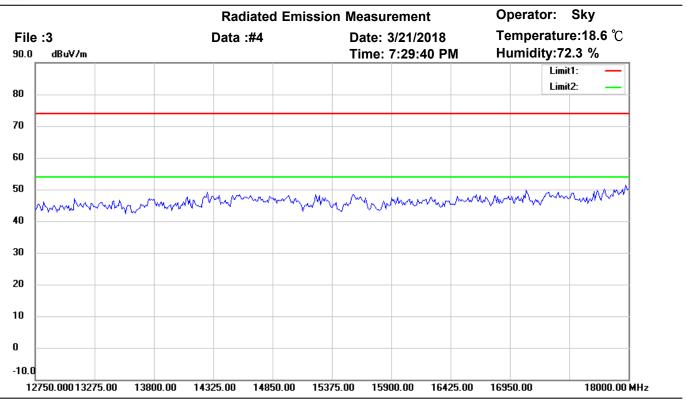

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

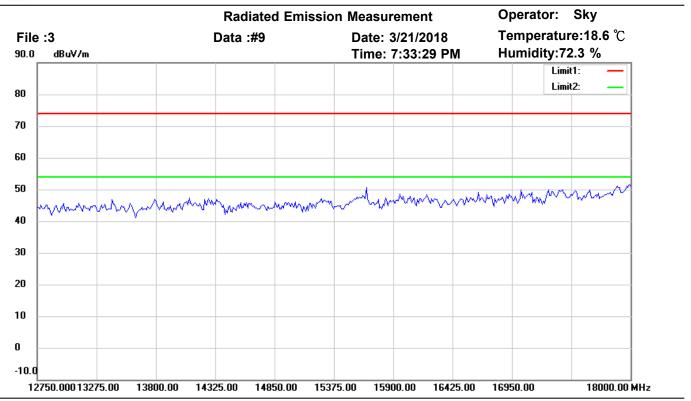

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 802.11b CH1

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

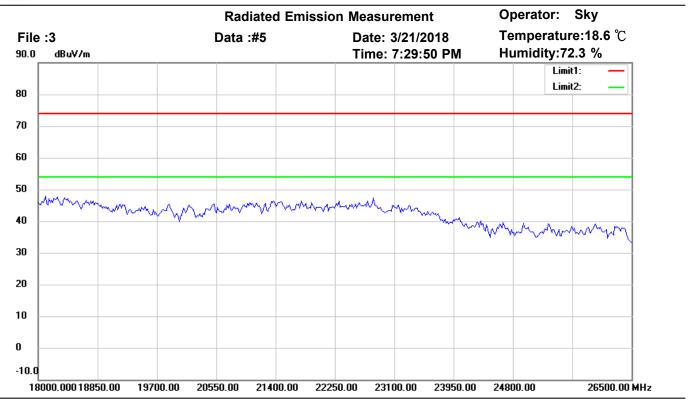

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

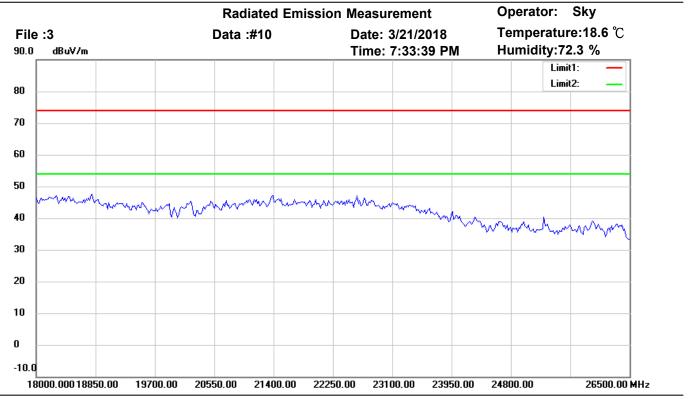

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 802.11b CH1

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

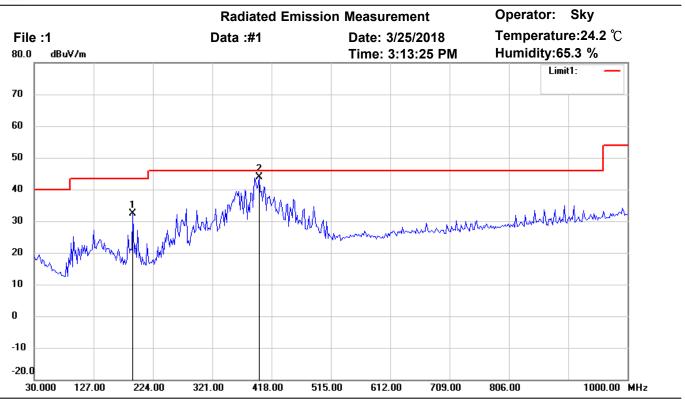

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	191.3427	43.39	peak	-11.12	32.27	43.50	100	165	-11.23	
*	397.3947	47.49	peak	-3.61	43.88	46.00	100	95	-2.12	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

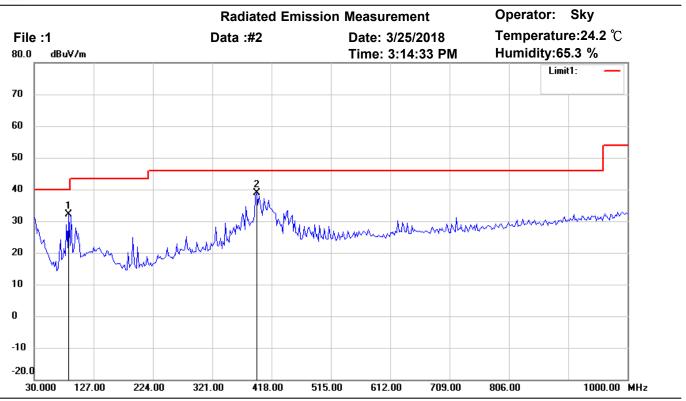

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	86.3726	45.97	peak	-13.95	32.02	40.00	100	95	-7.98	
*	393.5070	42.47	peak	-3.70	38.77	46.00	100	105	-7.23	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

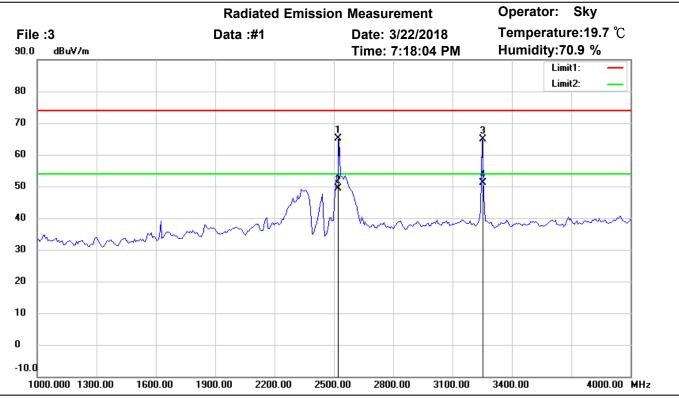

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2518.878	69.21	peak	-4.17	65.04	74.00	150	15	-8.96	
	2518.878	53.55	AVG	-4.17	49.38	54.00	150	15	-4.62	
	3249.354	67.19	peak	-2.29	64.90	74.00	150	359	-9.10	
*	3249.354	53.47	AVG	-2.29	51.18	54.00	150	359	-2.82	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

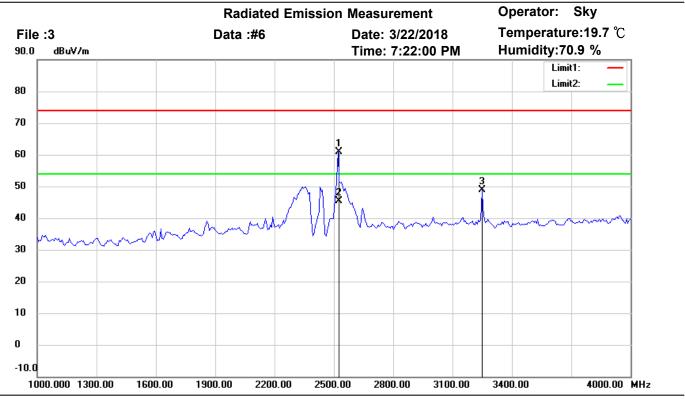

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2521.783	65.10	peak	-4.15	60.95	74.00	150	119	-13.05	
*	2521.783	49.56	AVG	-4.15	45.41	54.00	150	119	-8.59	
	3248.497	51.21	peak	-2.29	48.92	74.00	150	75	-25.08	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

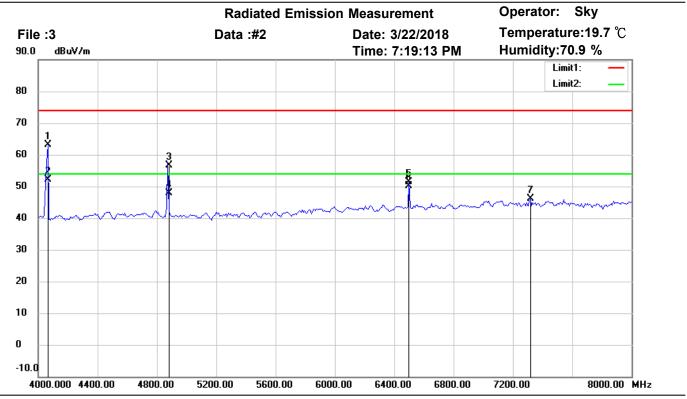

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4062.725	64.08	peak	-0.98	63.10	74.00	150	155	-10.90	
*	4062.725	53.15	AVG	-0.98	52.17	54.00	150	155	-1.83	
	4873.888	56.56	peak	0.16	56.72	74.00	150	199	-17.28	
	4873.888	47.71	AVG	0.16	47.87	54.00	150	199	-6.13	
	6501.002	47.55	peak	3.93	51.48	74.00	150	10	-22.52	
	6501.002	46.15	AVG	3.93	50.08	54.00	150	10	-3.92	
	7311.000	41.15	peak	5.09	46.24	74.00	150	225	-27.76	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

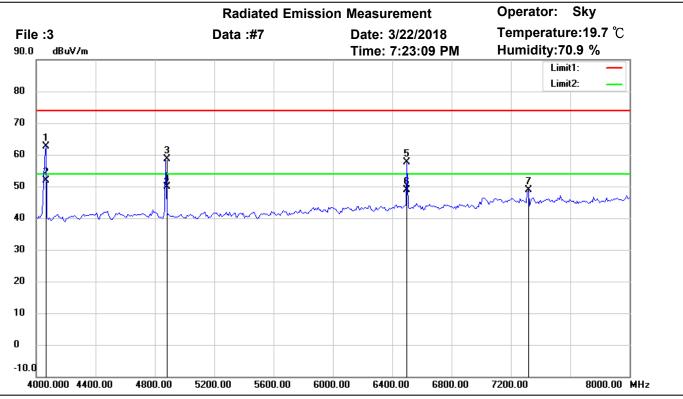

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4062.886	63.69	peak	-0.99	62.70	74.00	170	355	-11.30	
*	4062.886	52.90	AVG	-0.99	51.91	54.00	170	355	-2.09	
	4874.049	58.35	peak	0.16	58.51	74.00	152	339	-15.49	
	4874.049	49.64	AVG	0.16	49.80	54.00	152	339	-4.20	
	6498.742	53.61	peak	3.92	57.53	74.00	132	40	-16.47	
	6498.742	44.98	AVG	3.92	48.90	54.00	132	40	-5.10	
	7318.637	43.73	peak	5.10	48.83	74.00	150	20	-25.17	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

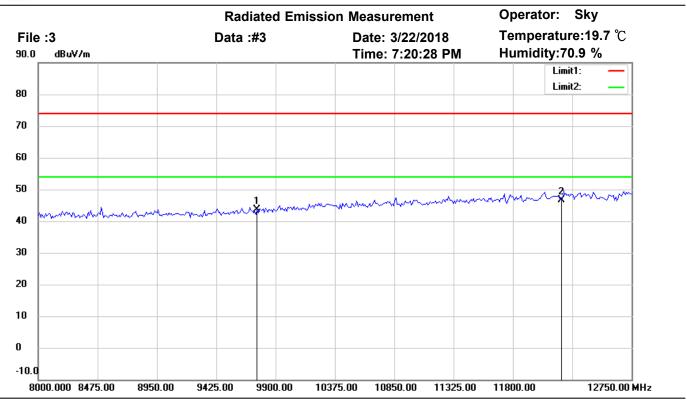

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	35.35	peak	8.18	43.53	74.00	150	65	-30.47	
*	12185.000	32.63	peak	14.03	46.66	74.00	150	270	-27.34	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

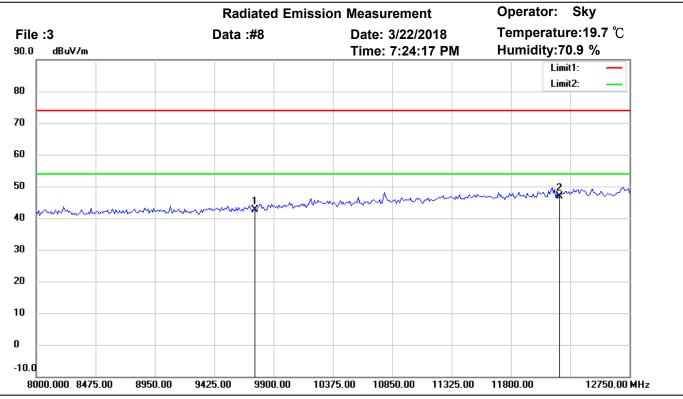

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.41	peak	8.18	42.59	74.00	150	70	-31.41	
*	12185.000	32.73	peak	14.03	46.76	74.00	150	285	-27.24	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

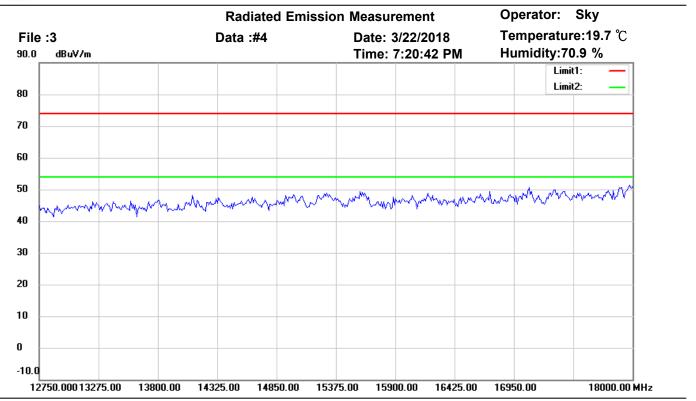

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

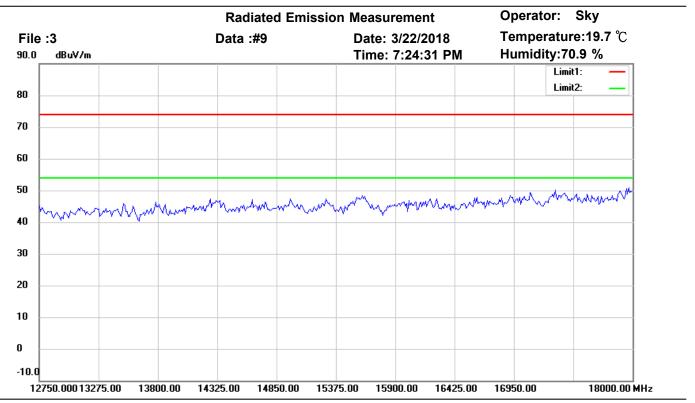

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 802.11b CH6

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

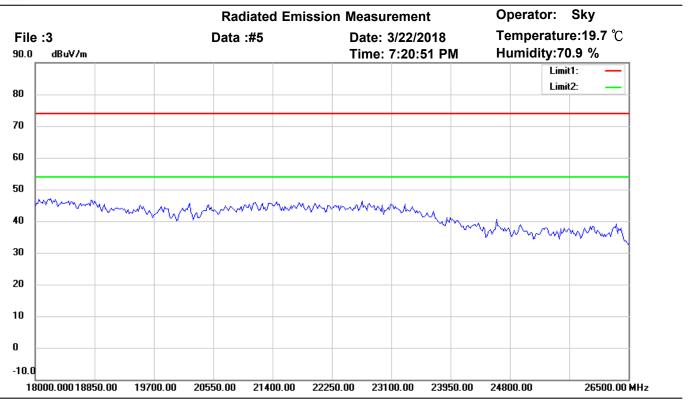

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

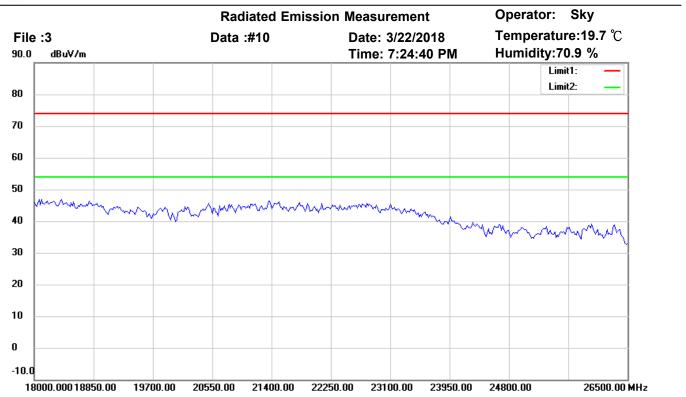

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 802.11b CH6

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

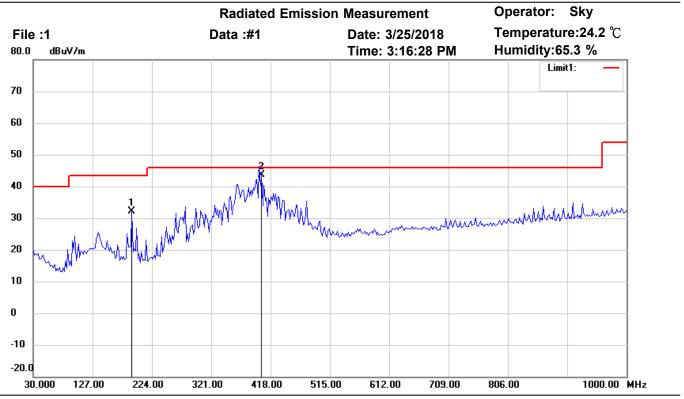

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	191.3427	43.19	peak	-11.12	32.07	43.50	100	160	-11.43	
*	403.2265	47.16	peak	-3.52	43.64	46.00	100	195	-2.36	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

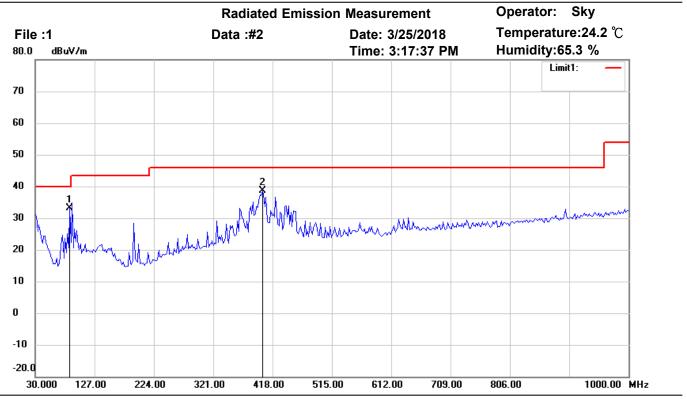

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	86.3726	47.04	peak	-13.95	33.09	40.00	100	60	-6.91	
	401.2826	42.22	peak	-3.55	38.67	46.00	100	225	-7.33	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

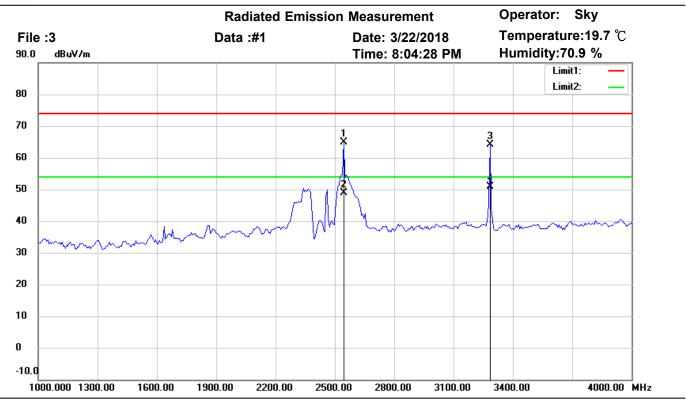

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2540.441	68.98	peak	-4.06	64.92	74.00	150	25	-9.08	
	2540.441	52.88	AVG	-4.06	48.82	54.00	150	25	-5.18	
	3282.710	66.61	peak	-2.38	64.23	74.00	150	359	-9.77	
*	3282.710	53.22	AVG	-2.38	50.84	54.00	150	359	-3.16	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

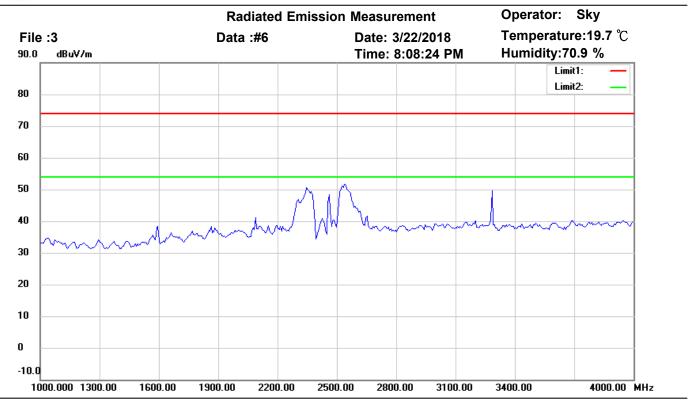

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 802.11b CH11

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

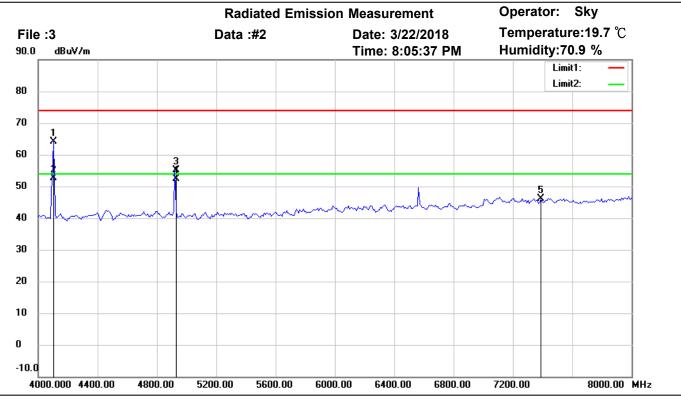

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4102.730	65.28	peak	-1.11	64.17	74.00	150	150	-9.83	
*	4102.730	53.81	AVG	-1.11	52.70	54.00	150	150	-1.30	
	4921.844	55.04	peak	0.20	55.24	74.00	150	20	-18.76	
	4921.844	52.18	AVG	0.20	52.38	54.00	150	20	-1.62	
	7386.000	40.85	peak	5.17	46.02	74.00	150	135	-27.98	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

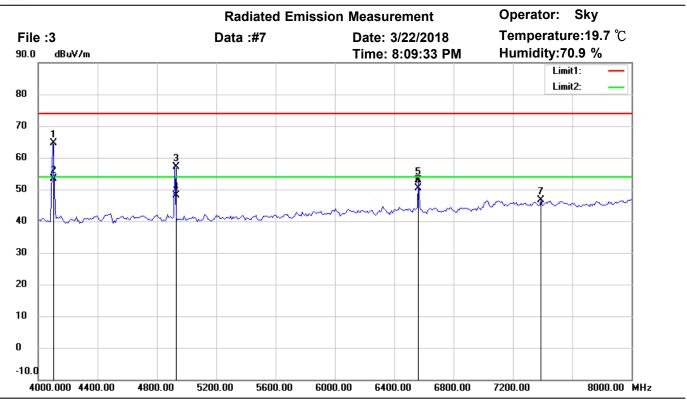

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4102.284	65.73	peak	-1.12	64.61	74.00	150	85	-9.39	
*	4102.284	54.49	AVG	-1.12	53.37	54.00	150	85	-0.63	
	4923.853	56.97	peak	0.20	57.17	74.00	150	99	-16.83	
	4923.853	47.83	AVG	0.20	48.03	54.00	150	99	-5.97	
	6565.130	48.59	peak	4.25	52.84	74.00	150	20	-21.16	
	6565.130	46.10	AVG	4.25	50.35	54.00	150	20	-3.65	
	7386.000	41.43	peak	5.17	46.60	74.00	150	180	-27.40	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

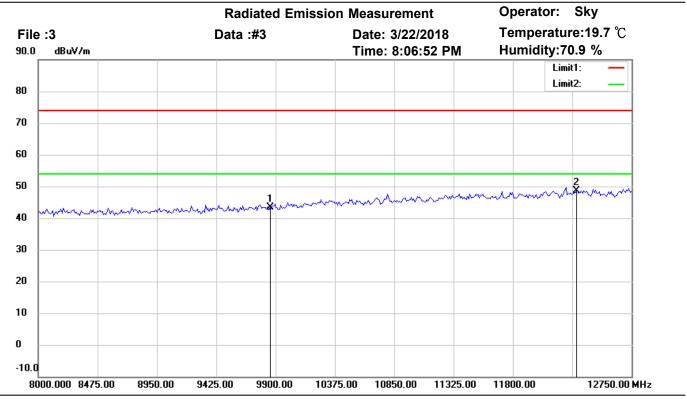

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	34.88	peak	8.44	43.32	74.00	150	20	-30.68	
*	12310.000	34.74	peak	13.92	48.66	74.00	150	115	-25.34	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

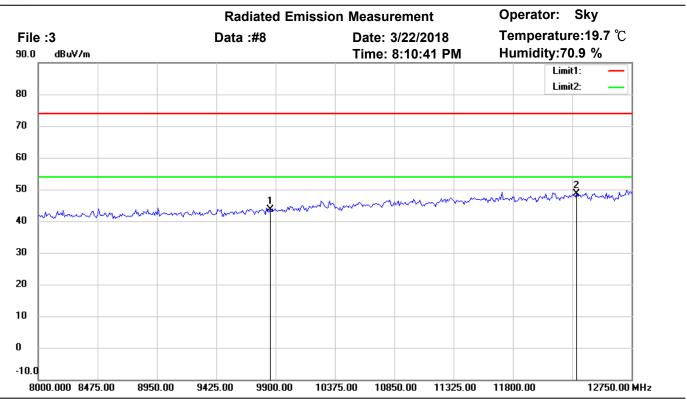

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	35.16	peak	8.44	43.60	74.00	150	75	-30.40	
*	12310.000	34.63	peak	13.92	48.55	74.00	150	240	-25.45	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

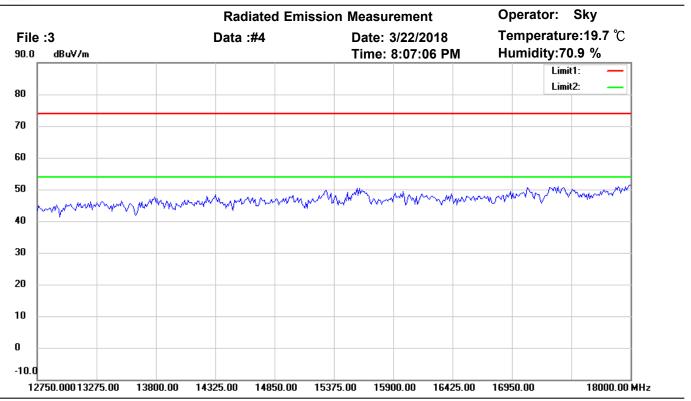

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

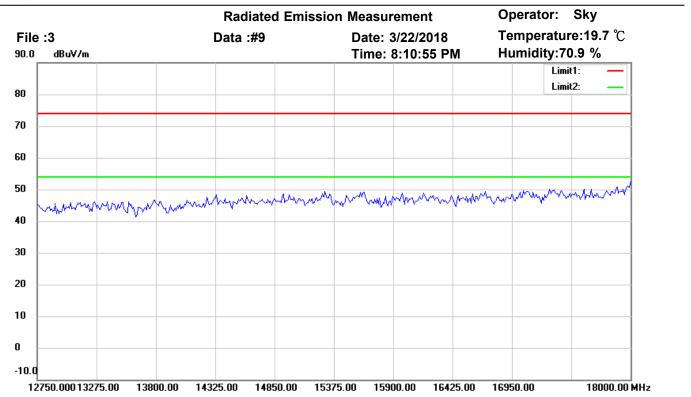

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 802.11b CH11

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

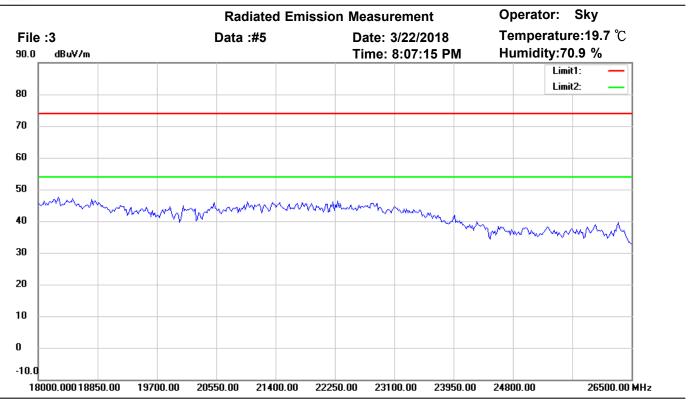

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

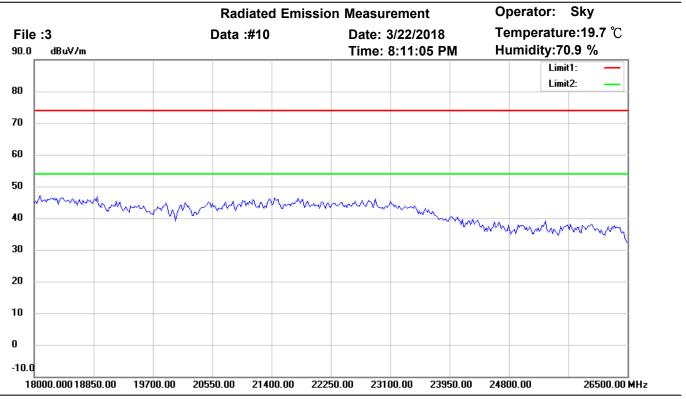

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

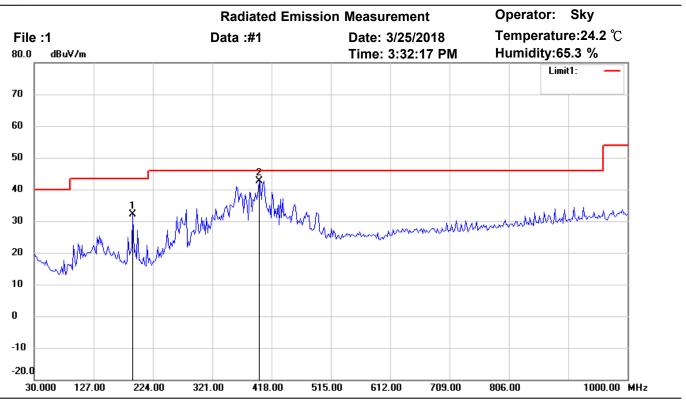

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	191.3427	43.17	peak	-11.12	32.05	43.50	100	60	-11.45	
*	397.3947	46.33	peak	-3.61	42.72	46.00	100	235	-3.28	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

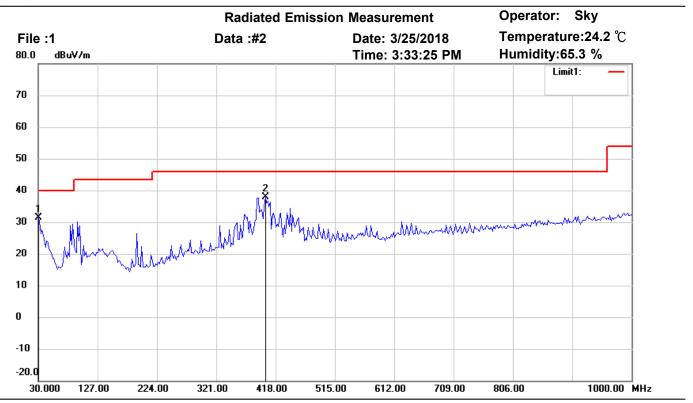

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	30.0000	39.54	peak	-8.14	31.40	40.00	100	125	-8.60	
*	401.2826	41.34	peak	-3.55	37.79	46.00	100	55	-8.21	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

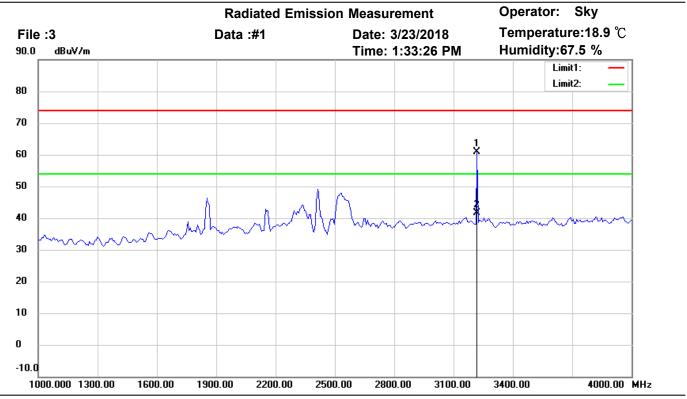

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3215.947	62.98	peak	-2.19	60.79	74.00	110	5	-13.21	
*	3216.047	43.72	AVG	-2.19	41.53	54.00	110	5	-12.47	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

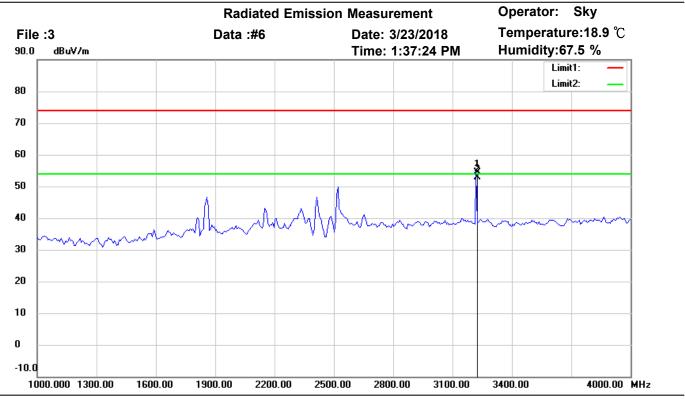

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3218.437	56.59	peak	-2.20	54.39	74.00	150	170	-19.61	
*	3218.437	55.10	AVG	-2.20	52.90	54.00	150	170	-1.10	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

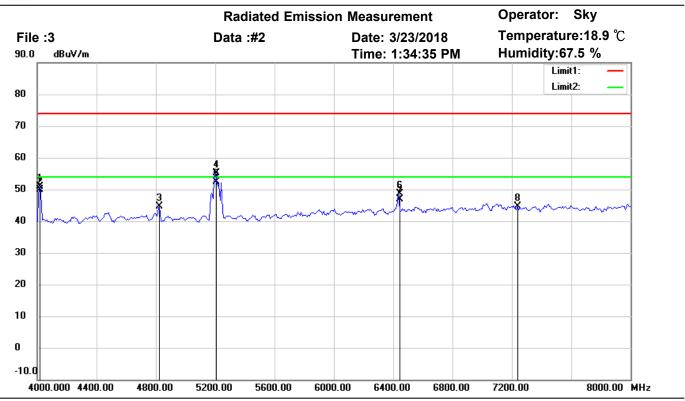

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4016.032	51.74	peak	-0.80	50.94	74.00	150	30	-23.06	
	4016.032	50.70	AVG	-0.80	49.90	54.00	150	30	-4.10	
	4824.000	44.61	peak	0.11	44.72	74.00	150	95	-29.28	
	5202.405	54.09	peak	1.07	55.16	74.00	150	210	-18.84	
*	5202.405	51.35	AVG	1.07	52.42	54.00	150	210	-1.58	
	6436.874	44.71	peak	3.83	48.54	74.00	150	10	-25.46	
	6436.874	43.11	AVG	3.83	46.94	54.00	150	10	-7.06	
	7236.000	39.64	peak	5.07	44.71	74.00	150	110	-29.29	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

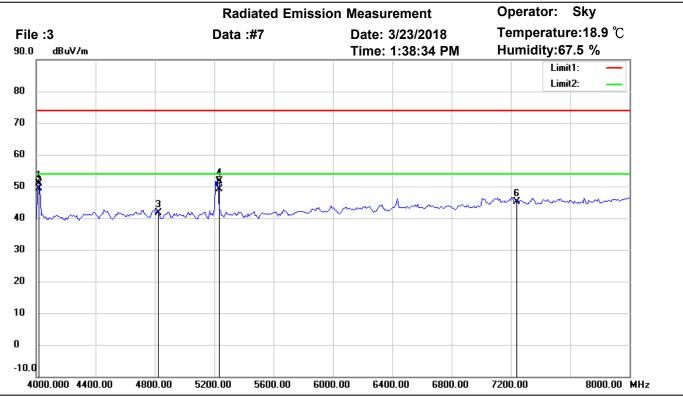

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4016.032	51.78	peak	-0.80	50.98	74.00	150	295	-23.02	
*	4016.032	50.13	AVG	-0.80	49.33	54.00	150	295	-4.67	
	4824.000	41.55	peak	0.11	41.66	74.00	150	35	-32.34	
	5226.453	50.65	peak	1.09	51.74	74.00	150	95	-22.26	
	5226.453	48.11	AVG	1.09	49.20	54.00	150	95	-4.80	
	7236.000	40.05	peak	5.07	45.12	74.00	150	60	-28.88	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

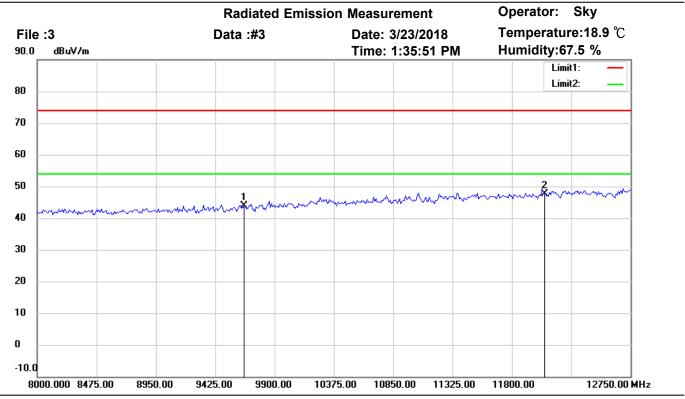

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.81	peak	8.00	43.81	74.00	150	95	-30.19	
*	12060.000	34.31	peak	13.36	47.67	74.00	150	210	-26.33	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

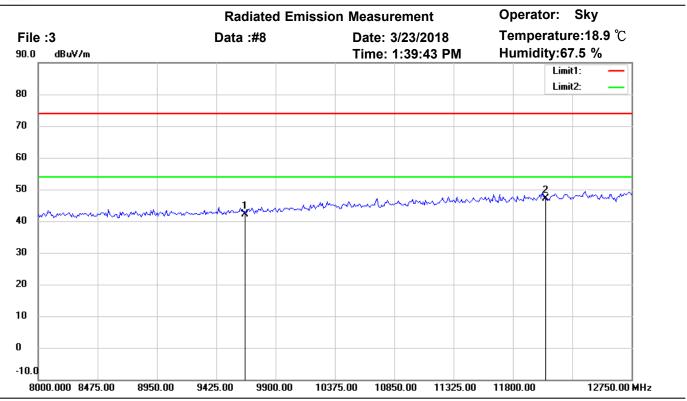

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	34.21	peak	8.00	42.21	74.00	150	75	-31.79	
*	12060.000	33.83	peak	13.36	47.19	74.00	150	15	-26.81	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

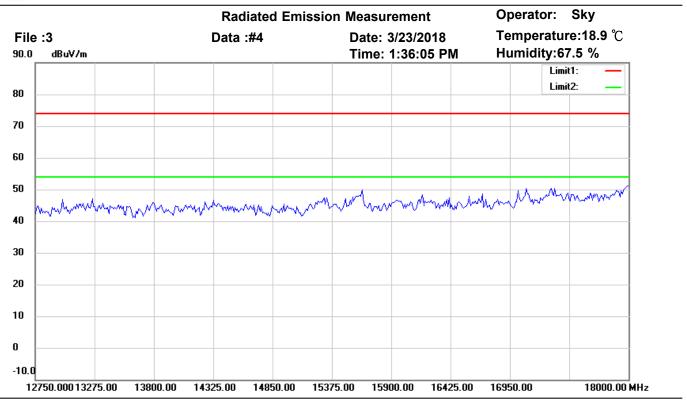

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

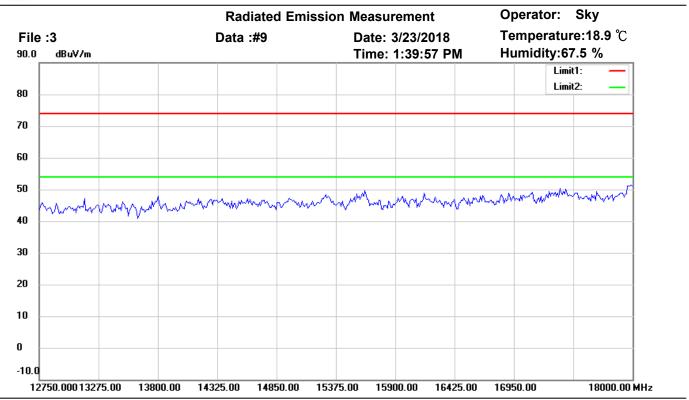

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

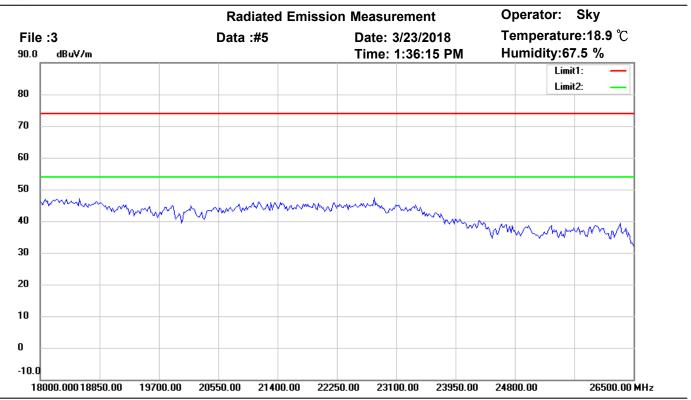

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

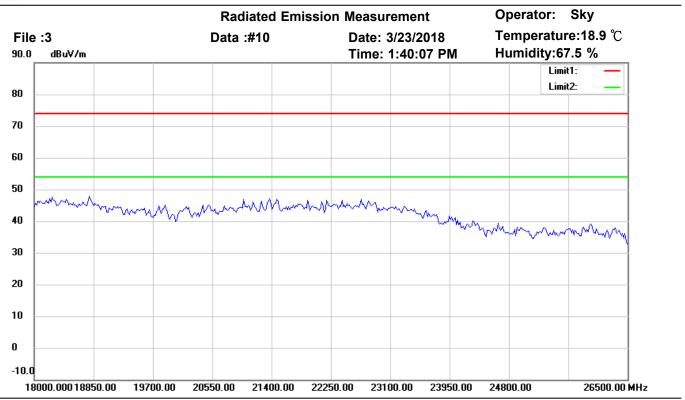

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

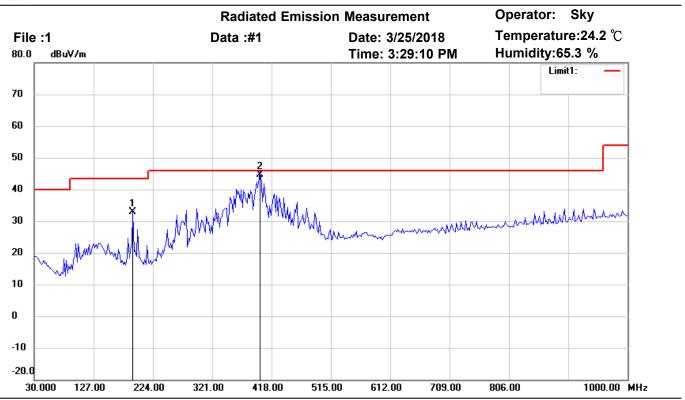

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	191.3427	44.10	peak	-11.12	32.98	43.50	100	253	-10.52	
*	399.3387	48.30	QP	-3.57	44.73	46.00	100	120	-1.27	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

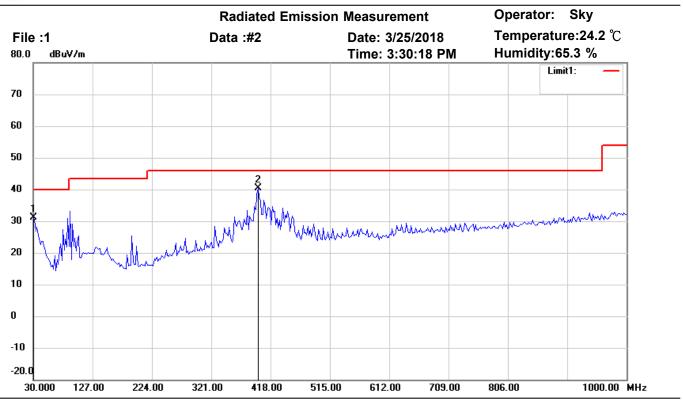

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	30.0058	39.36	peak	-8.14	31.22	40.00	100	60	-8.78	
*	397.3948	43.94	peak	-3.61	40.33	46.00	100	145	-5.67	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

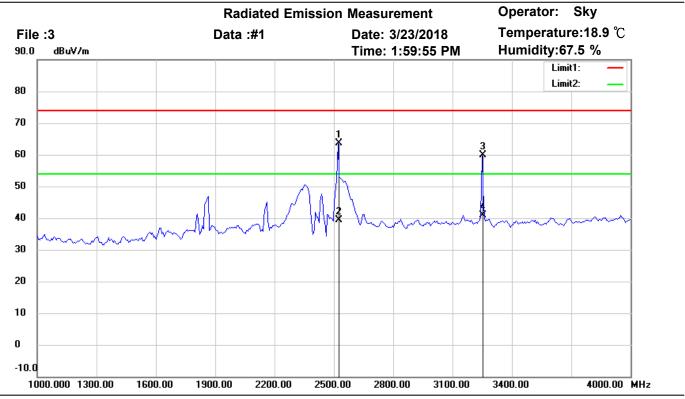

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2525.897	67.73	peak	-4.13	63.60	74.00	200	35	-10.40	
	2525.897	43.62	AVG	-4.13	39.49	54.00	200	35	-14.51	
	3249.265	62.26	peak	-2.29	59.97	74.00	180	359	-14.03	
	3249.265	43.17	AVG	-2.29	40.88	54.00	180	359	-13.12	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

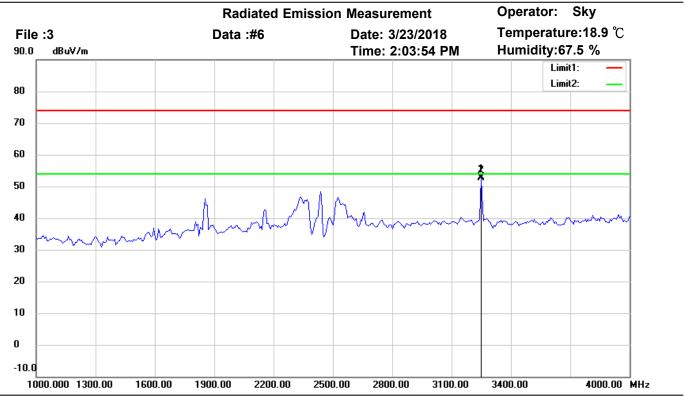

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3248.497	55.14	peak	-2.29	52.85	74.00	150	225	-21.15	
*	3248.497	54.85	AVG	-2.29	52.56	54.00	150	225	-1.44	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

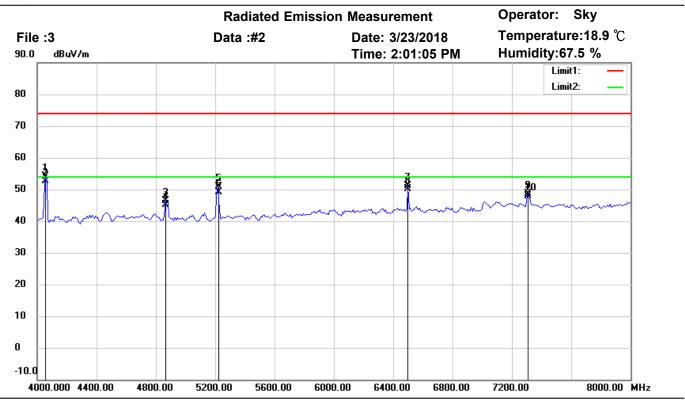

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4056.112	54.98	peak	-0.96	54.02	74.00	150	230	-19.98	
*	4056.112	53.70	AVG	-0.96	52.74	54.00	150	230	-1.26	
	4865.731	46.29	peak	0.15	46.44	74.00	150	20	-27.56	
	4865.731	45.10	AVG	0.15	45.25	54.00	150	20	-8.75	
	5218.437	49.78	peak	1.08	50.86	74.00	150	195	-23.14	
	5218.437	48.10	AVG	1.08	49.18	54.00	150	195	-4.82	
	6501.002	47.28	peak	3.93	51.21	74.00	150	10	-22.79	
	6501.002	46.10	AVG	3.93	50.03	54.00	150	10	-3.97	
	7310.621	43.57	peak	5.09	48.66	74.00	150	115	-25.34	
	7310.621	42.70	AVG	5.09	47.79	54.00	150	115	-6.21	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

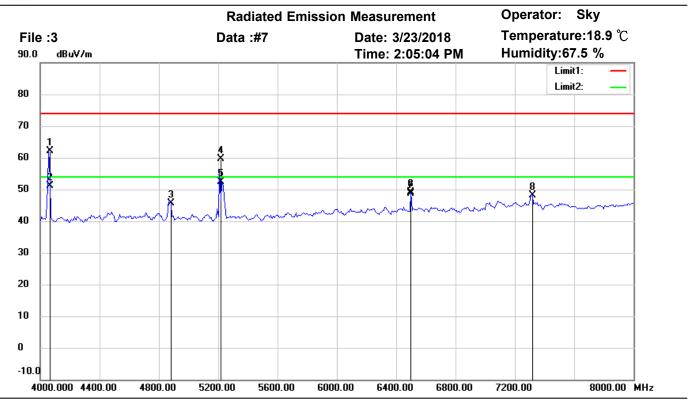

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4057.015	63.08	peak	-0.96	62.12	74.00	150	194	-11.88	
	4057.015	52.11	AVG	-0.96	51.15	54.00	150	194	-2.85	
	4874.000	45.49	peak	0.16	45.65	74.00	150	15	-28.35	
	5212.311	58.60	peak	1.08	59.68	74.00	150	300	-14.32	
*	5212.311	51.25	AVG	1.08	52.33	54.00	150	300	-1.67	
	6501.002	45.26	peak	3.93	49.19	74.00	150	255	-24.81	
	6501.002	44.75	AVG	3.93	48.68	54.00	150	255	-5.32	
	7311.000	43.14	peak	5.09	48.23	74.00	150	75	-25.77	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

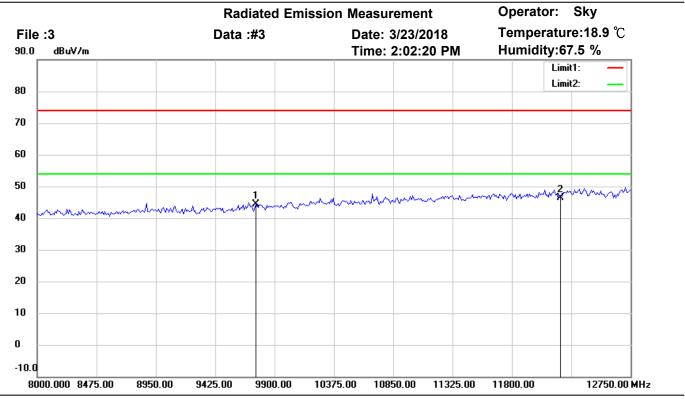

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	36.13	peak	8.18	44.31	74.00	150	240	-29.69	
*	12185.000	32.31	peak	14.03	46.34	74.00	150	90	-27.66	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

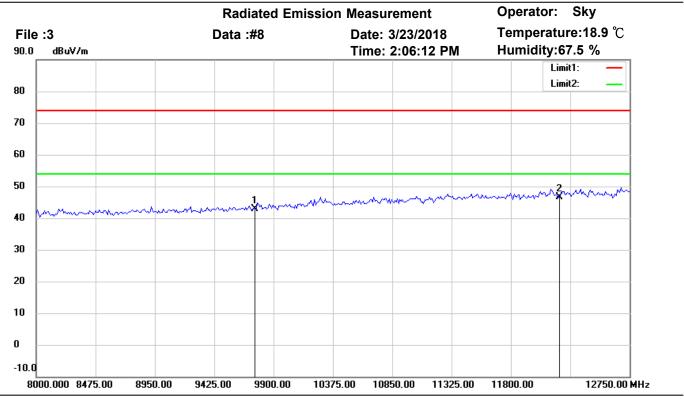

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.71	peak	8.18	42.89	74.00	150	200	-31.11	
*	12185.000	32.50	peak	14.03	46.53	74.00	150	175	-27.47	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

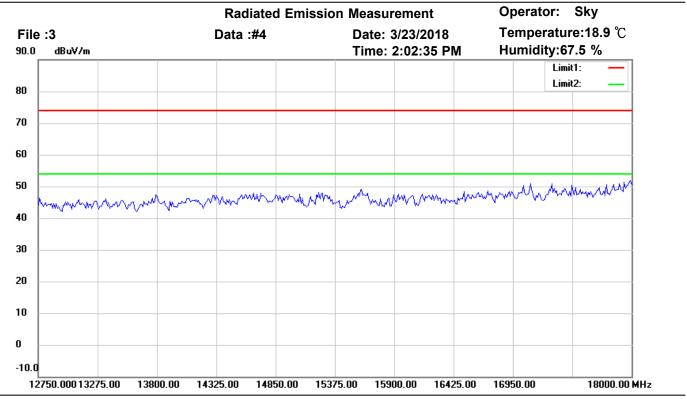

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

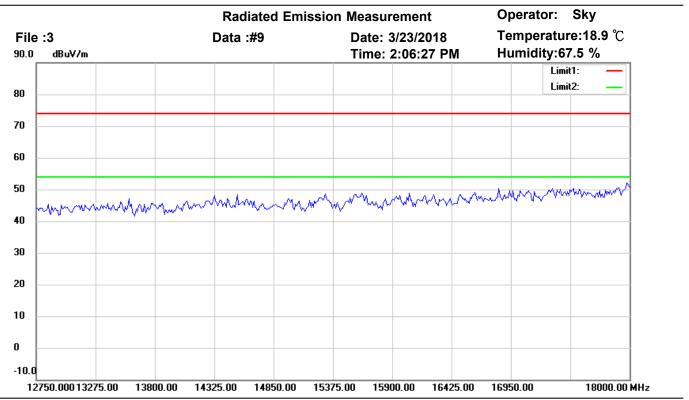

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

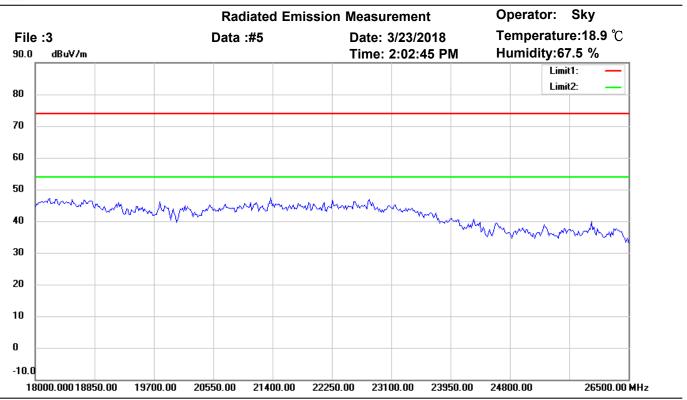

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

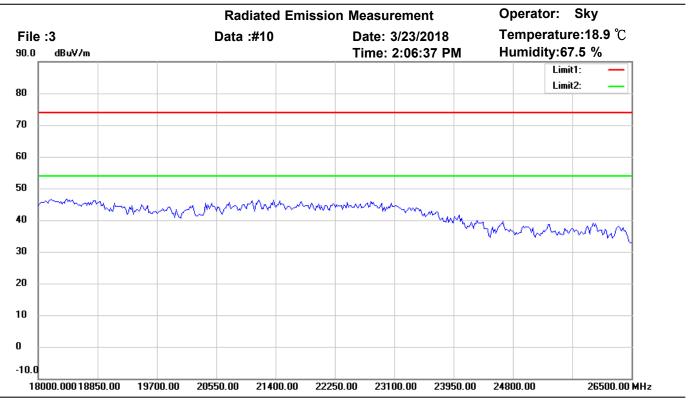

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 802.11g CH6


Note:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

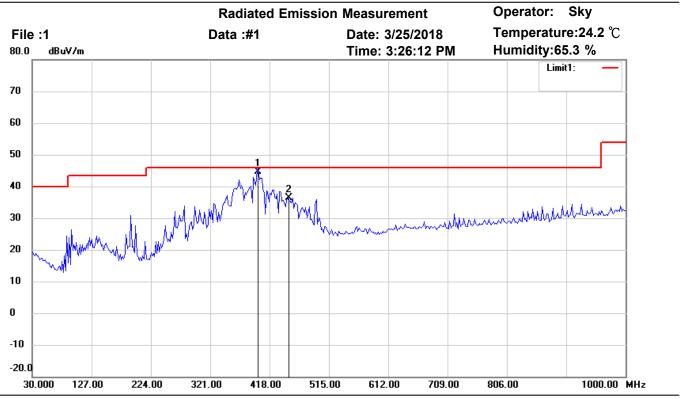

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	399.3387	48.30	peak	-3.57	44.73	46.00	100	75	-1.27	
	447.9360	39.69	peak	-3.21	36.48	46.00	100	110	-9.52	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

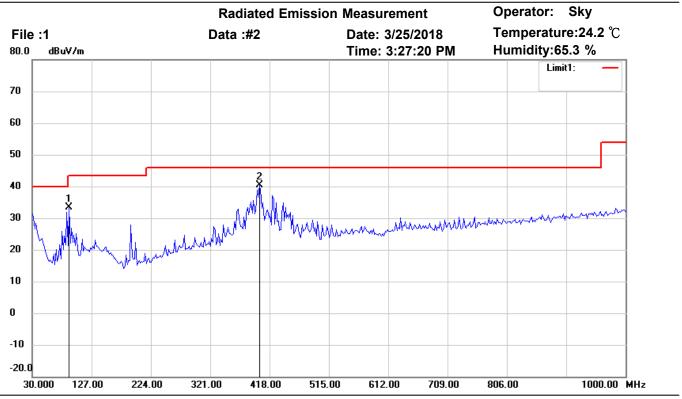

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	90.2605	47.02	peak	-13.69	33.33	43.50	100	245	-10.17	
*	401.2826	44.01	peak	-3.55	40.46	46.00	100	60	-5.54	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

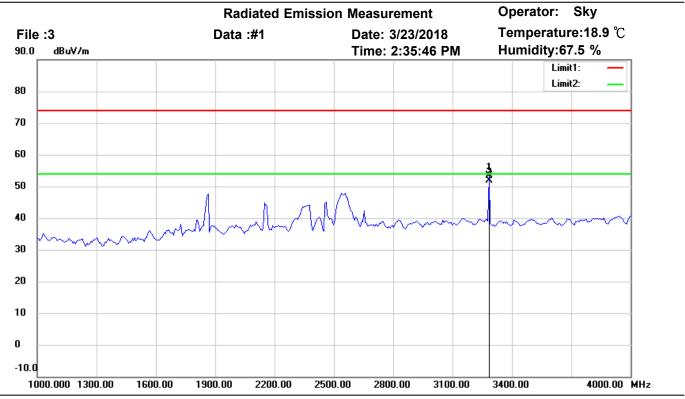

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3284.569	55.88	peak	-2.39	53.49	74.00	150	70	-20.51	
*	3284.569	54.15	AVG	-2.39	51.76	54.00	150	70	-2.24	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

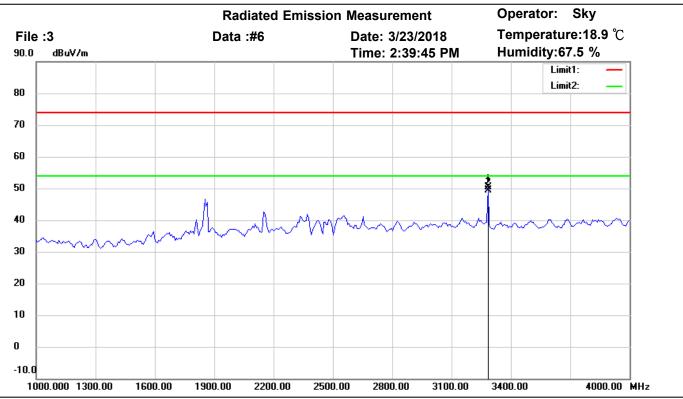

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3284.569	52.89	peak	-2.39	50.50	74.00	150	65	-23.50	
*	3284.569	51.70	AVG	-2.39	49.31	54.00	150	65	-4.69	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

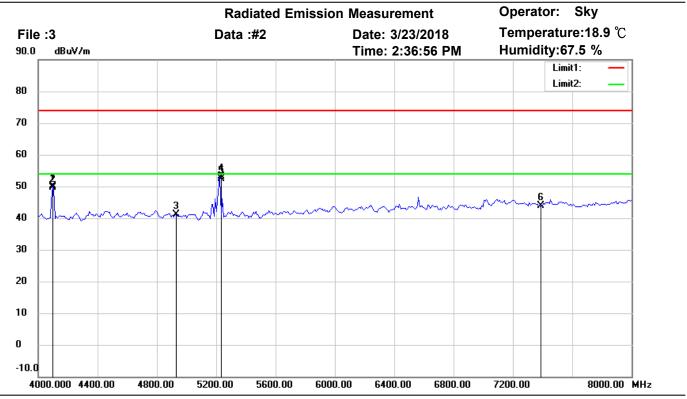

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4096.192	51.22	peak	-1.11	50.11	74.00	150	195	-23.89	
	4096.192	50.79	AVG	-1.11	49.68	54.00	150	195	-4.32	
	4924.000	40.90	peak	0.20	41.10	74.00	150	85	-32.90	
	5226.453	52.00	peak	1.09	53.09	74.00	150	10	-20.91	
*	5226.453	51.20	AVG	1.09	52.29	54.00	150	10	-1.71	
	7386.000	38.74	peak	5.17	43.91	74.00	150	235	-30.09	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

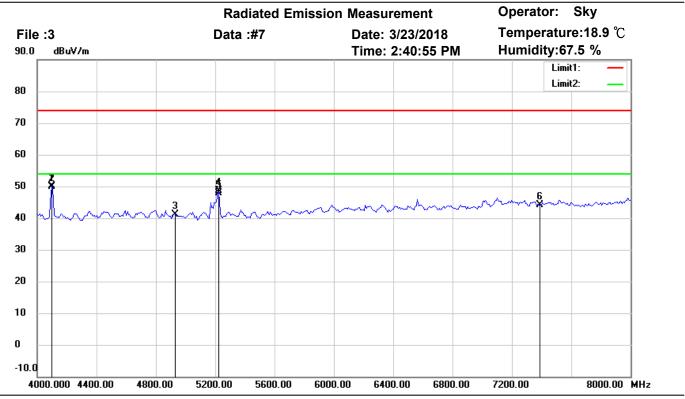

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4096.192	51.27	peak	-1.11	50.16	74.00	150	245	-23.84	
*	4096.192	50.94	AVG	-1.11	49.83	54.00	150	245	-4.17	
	4924.000	41.04	peak	0.20	41.24	74.00	150	85	-32.76	
	5218.437	47.64	peak	1.08	48.72	74.00	150	110	-25.28	
	5218.437	46.75	AVG	1.08	47.83	54.00	150	110	-6.17	
	7386.000	38.85	peak	5.17	44.02	74.00	150	130	-29.98	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

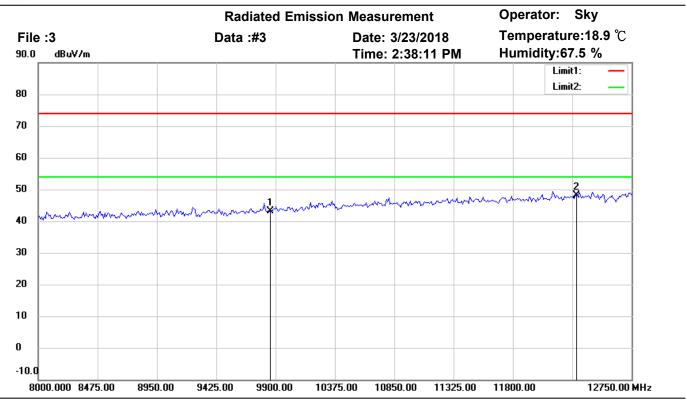

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	34.67	peak	8.44	43.11	74.00	150	75	-30.89	
*	12310.000	34.24	peak	13.92	48.16	74.00	150	25	-25.84	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

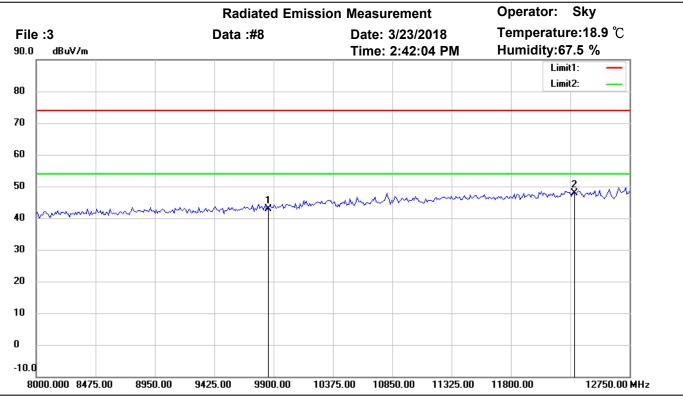

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 802.11g CH11


Note:

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	34.33	peak	8.44	42.77	74.00	150	60	-31.23	
*	12310.000	33.86	peak	13.92	47.78	74.00	150	275	-26.22	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

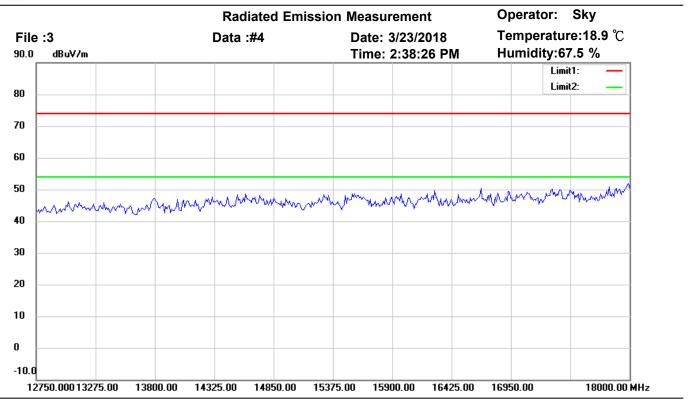

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

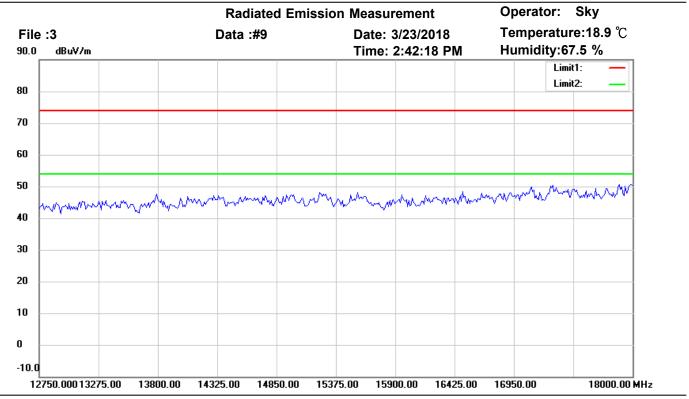

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

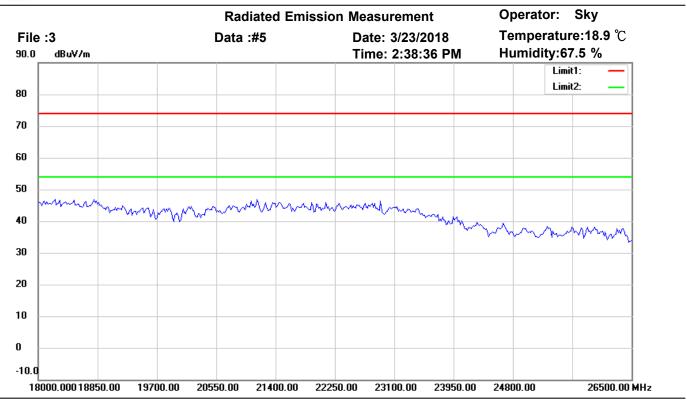

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

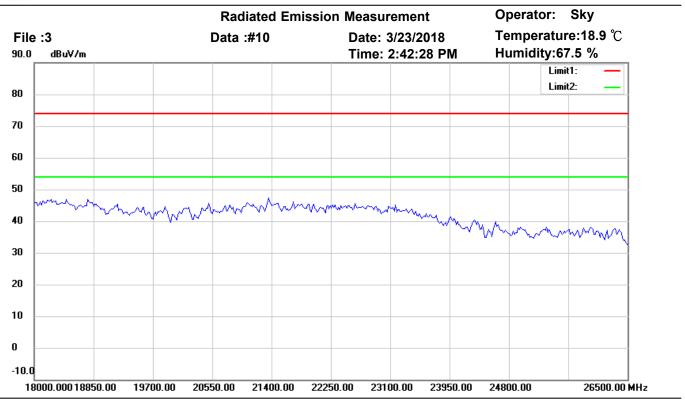

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

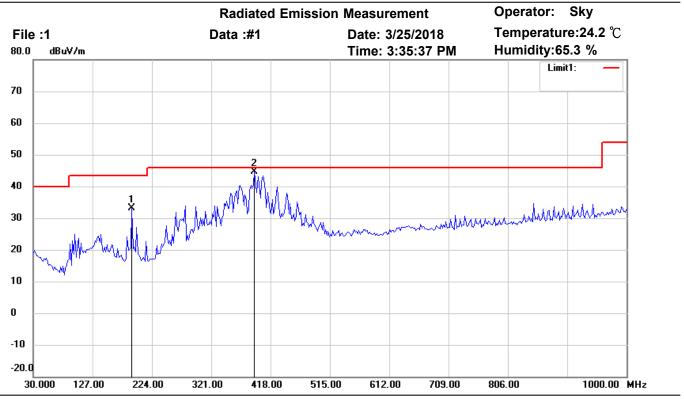

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	191.3427	44.18	peak	-11.12	33.06	43.50	100	25	-10.44	
*	391.5631	48.29	peak	-3.74	44.55	46.00	100	150	-1.45	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

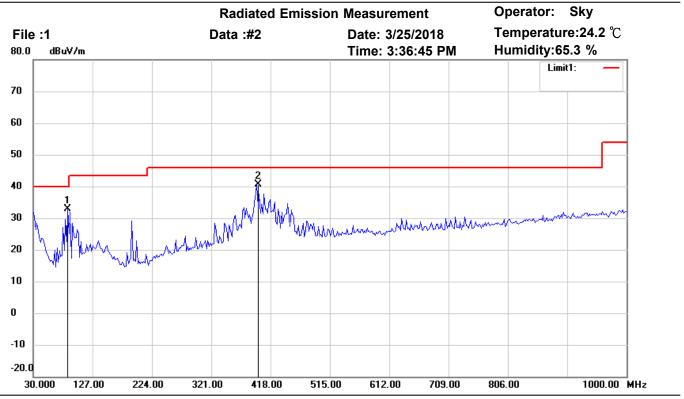

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	86.3726	46.83	peak	-13.95	32.88	40.00	100	55	-7.12	
*	395.4510	44.18	peak	-3.66	40.52	46.00	100	130	-5.48	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

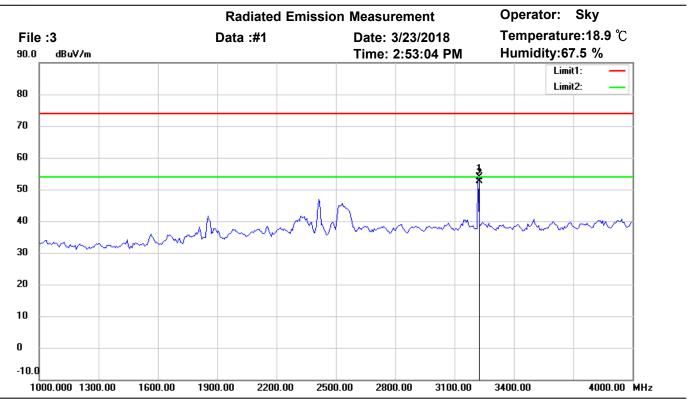

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3218.437	56.16	peak	-2.20	53.96	74.00	150	215	-20.04	
*	3218.437	54.73	AVG	-2.20	52.53	54.00	150	215	-1.47	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

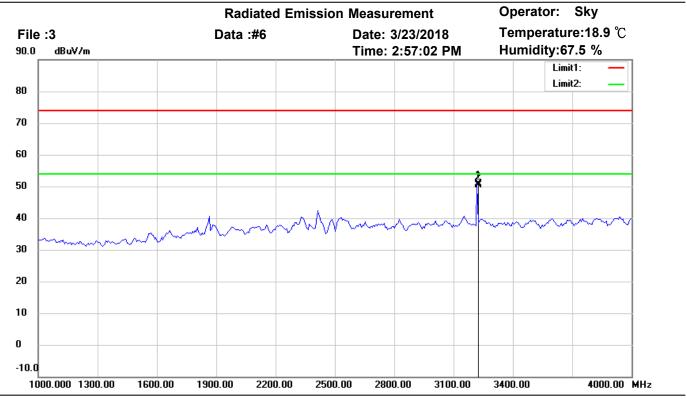

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3218.437	53.18	peak	-2.20	50.98	74.00	150	60	-23.02	
*	3218.437	52.70	AVG	-2.20	50.50	54.00	150	60	-3.50	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

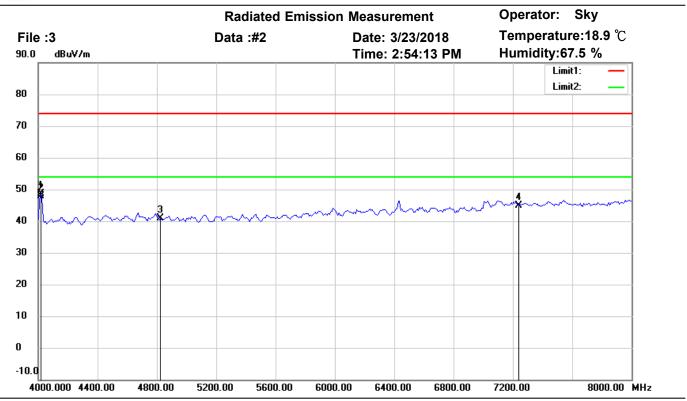

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4016.032	49.31	peak	-0.80	48.51	74.00	150	205	-25.49	
*	4016.032	48.75	AVG	-0.80	47.95	54.00	150	205	-6.05	
	4824.000	40.70	peak	0.11	40.81	74.00	150	10	-33.19	
	7236.000	39.92	peak	5.07	44.99	74.00	150	125	-29.01	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

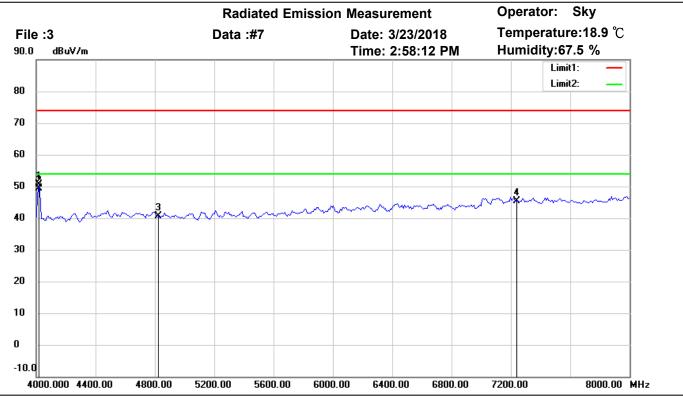

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4016.032	51.46	peak	-0.80	50.66	74.00	150	40	-23.34	
*	4016.032	50.25	AVG	-0.80	49.45	54.00	150	40	-4.55	
	4824.000	40.60	peak	0.11	40.71	74.00	150	110	-33.29	
	7236.000	40.23	peak	5.07	45.30	74.00	150	135	-28.70	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

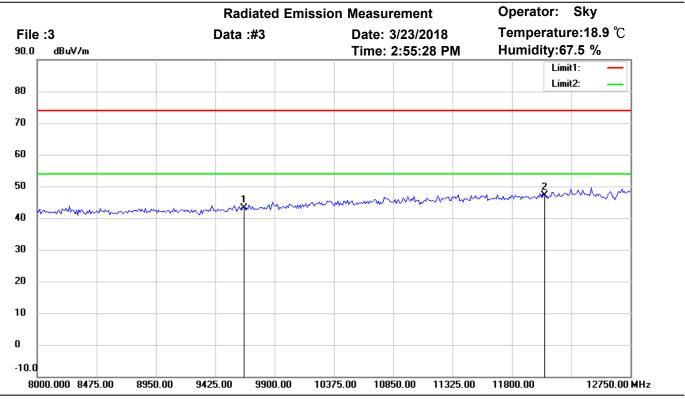

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.06	peak	8.00	43.06	74.00	150	20	-30.94	
*	12060.000	33.71	peak	13.36	47.07	74.00	150	70	-26.93	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

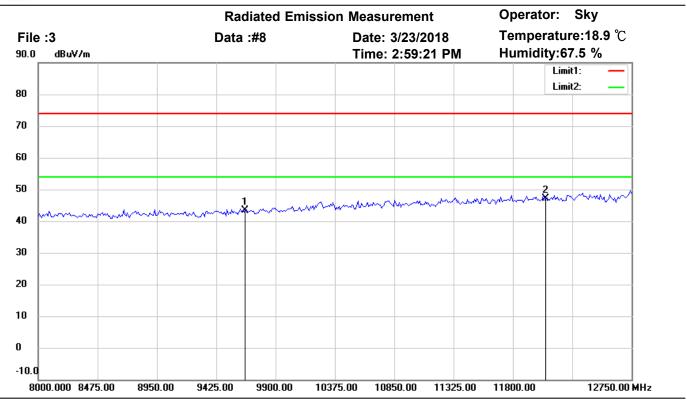

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.44	peak	8.00	43.44	74.00	150	25	-30.56	
*	12060.000	33.70	peak	13.36	47.06	74.00	150	100	-26.94	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

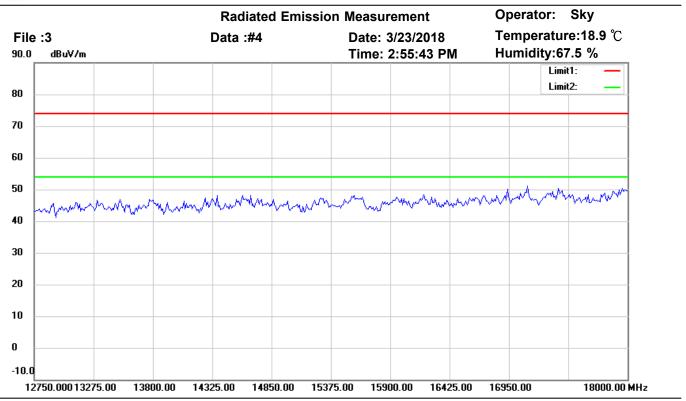

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

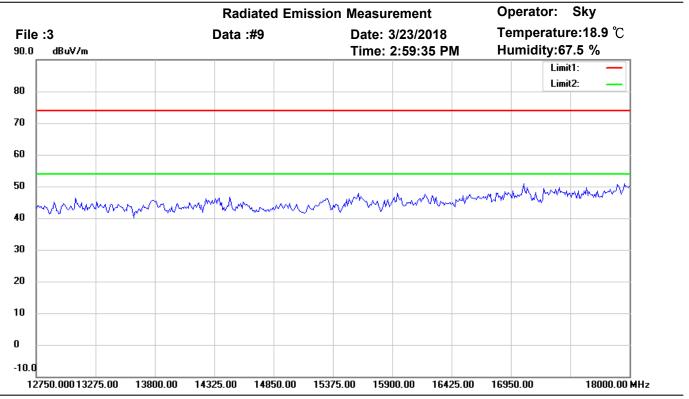

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 802.11n20 CH1

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

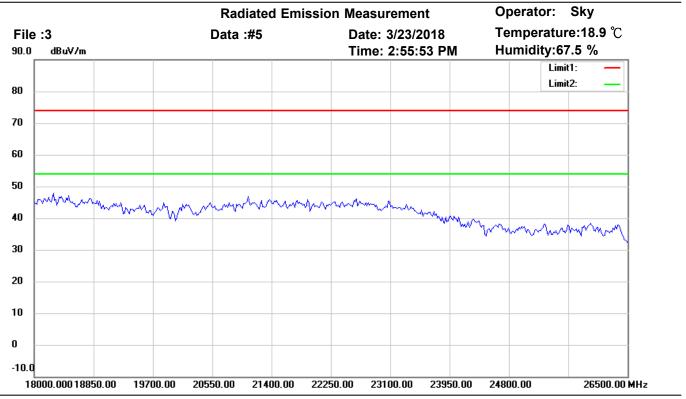

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

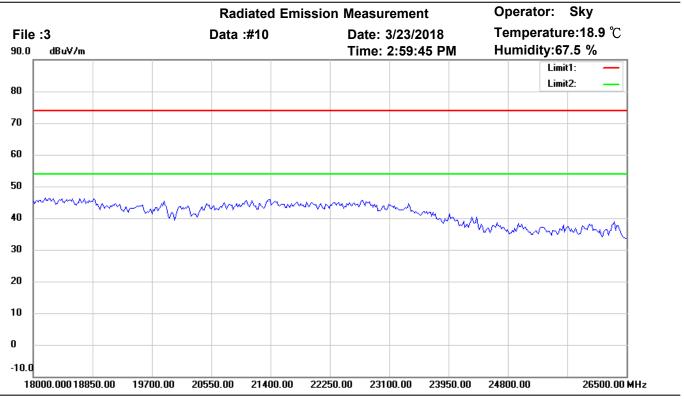

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 802.11n20 CH1

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

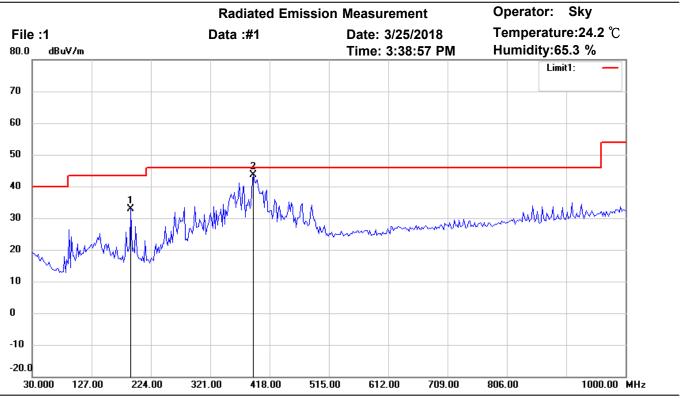

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	191.3427	44.09	peak	-11.12	32.97	43.50	100	210	-10.53	
*	391.5631	47.39	peak	-3.74	43.65	46.00	100	155	-2.35	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

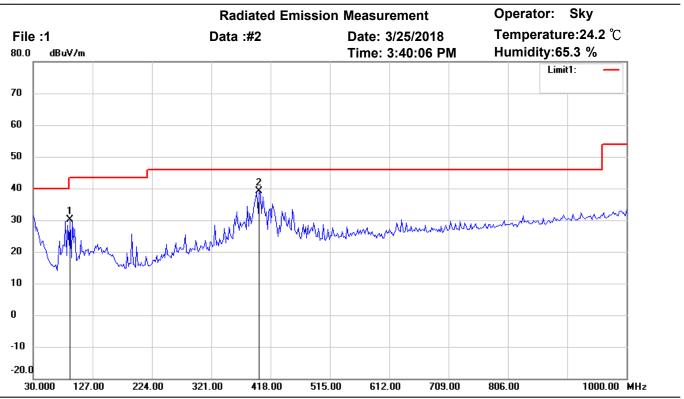

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	90.2605	43.71	peak	-13.69	30.02	43.50	100	75	-13.48	
*	399.3387	42.68	peak	-3.57	39.11	46.00	100	135	-6.89	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

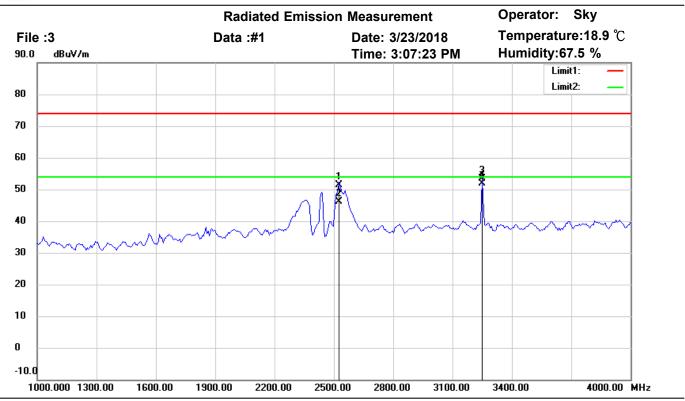

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2527.054	55.55	peak	-4.13	51.42	74.00	150	30	-22.58	
	2527.054	50.15	AVG	-4.13	46.02	54.00	150	30	-7.98	
	3248.497	55.66	peak	-2.29	53.37	74.00	150	290	-20.63	
*	3248.497	54.20	AVG	-2.29	51.91	54.00	150	290	-2.09	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

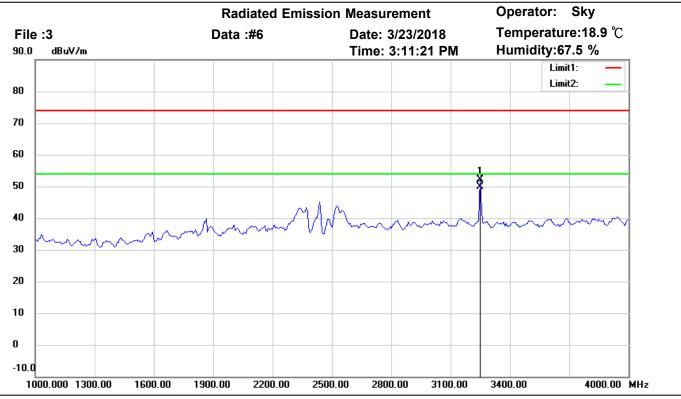

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3248.497	54.49	peak	-2.29	52.20	74.00	150	15	-21.80	
*	3248.497	52.15	AVG	-2.29	49.86	54.00	150	15	-4.14	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

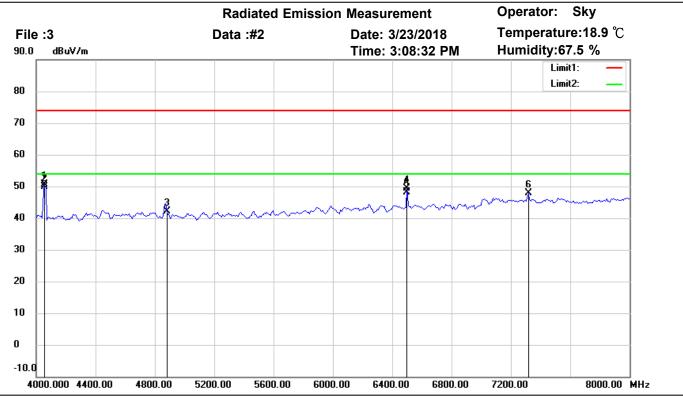

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4056.112	51.51	peak	-0.96	50.55	74.00	150	20	-23.45	
*	4056.112	50.95	AVG	-0.96	49.99	54.00	150	20	-4.01	
	4874.000	41.92	peak	0.16	42.08	74.00	150	165	-31.92	
	6501.002	45.43	peak	3.93	49.36	74.00	150	215	-24.64	
	6501.002	44.15	AVG	3.93	48.08	54.00	150	215	-5.92	
	7311.000	42.85	peak	5.09	47.94	74.00	150	105	-26.06	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

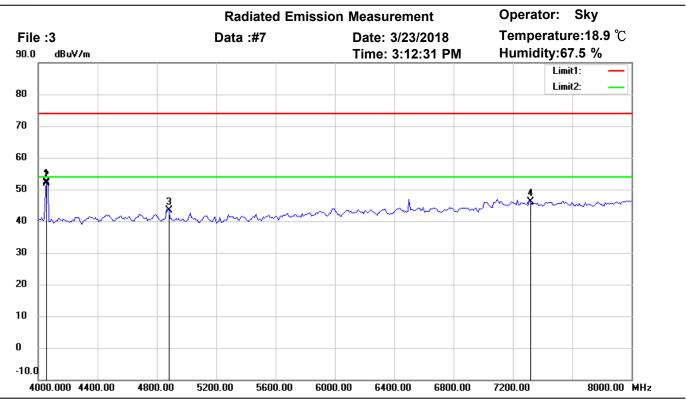

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4056.112	53.37	peak	-0.96	52.41	74.00	150	115	-21.59	
*	4056.112	52.75	AVG	-0.96	51.79	54.00	150	115	-2.21	
	4874.000	43.23	peak	0.16	43.39	74.00	150	210	-30.61	
	7311.000	41.05	peak	5.09	46.14	74.00	150	255	-27.86	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

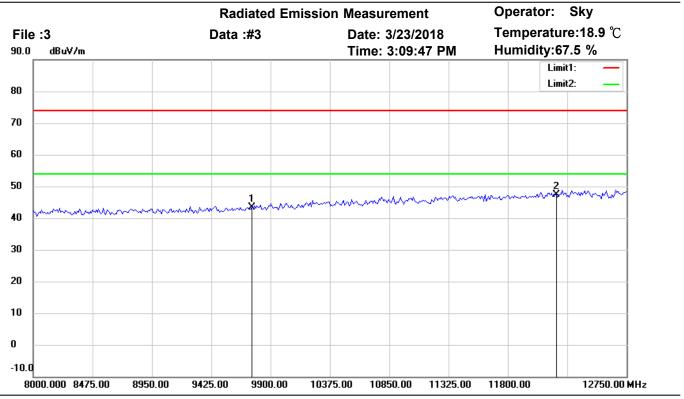

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	35.12	peak	8.18	43.30	74.00	150	35	-30.70	
*	12185.000	33.25	peak	14.03	47.28	74.00	150	285	-26.72	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

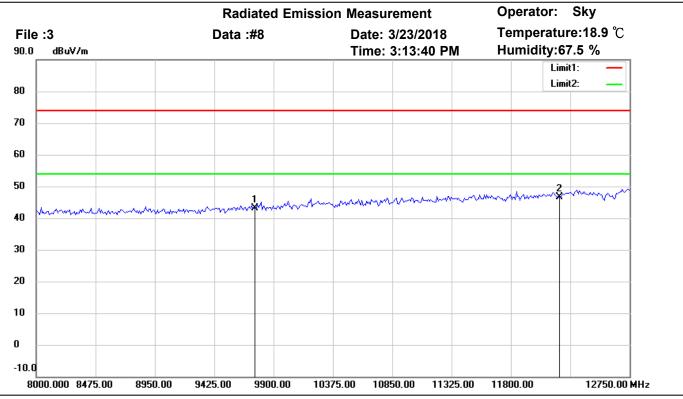

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.99	peak	8.18	43.17	74.00	150	15	-30.83	
*	12185.000	32.64	peak	14.03	46.67	74.00	150	270	-27.33	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

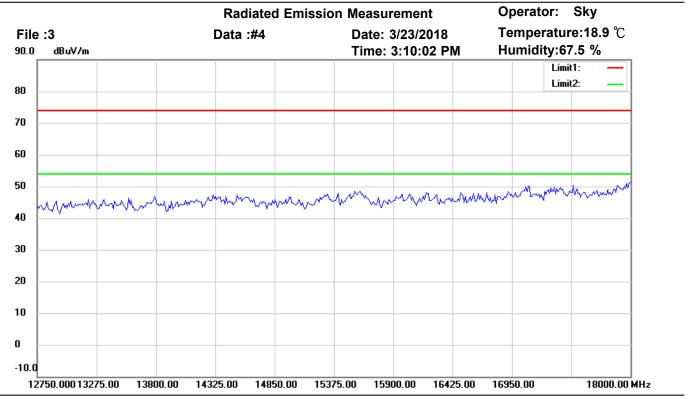

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

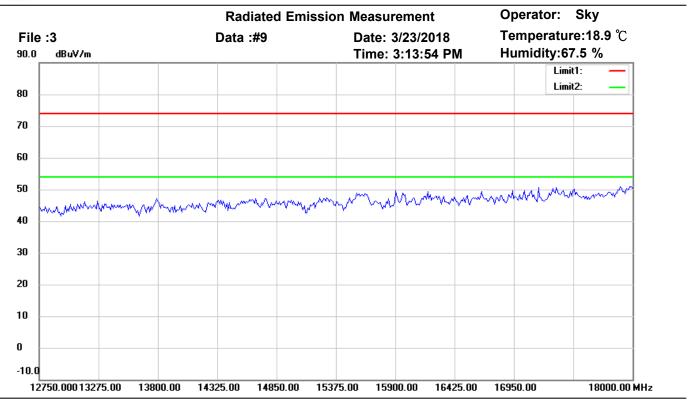

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 802.11n20 CH6

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

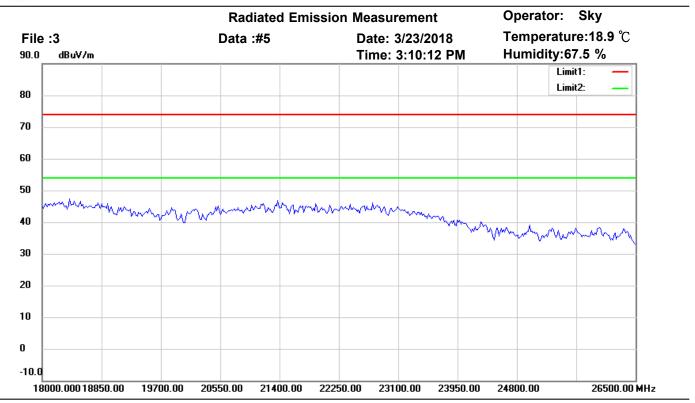

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	l
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

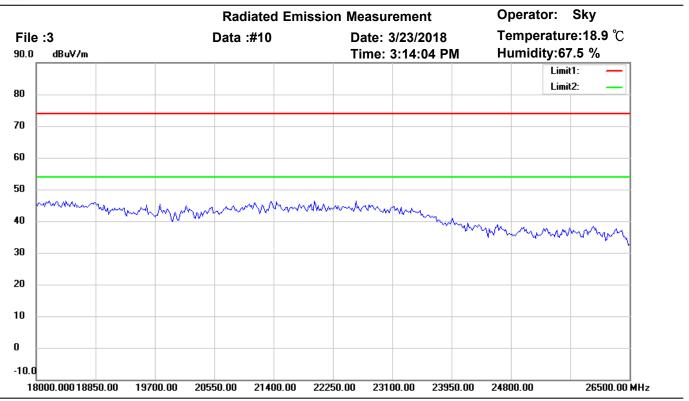

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 802.11n20 CH6

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

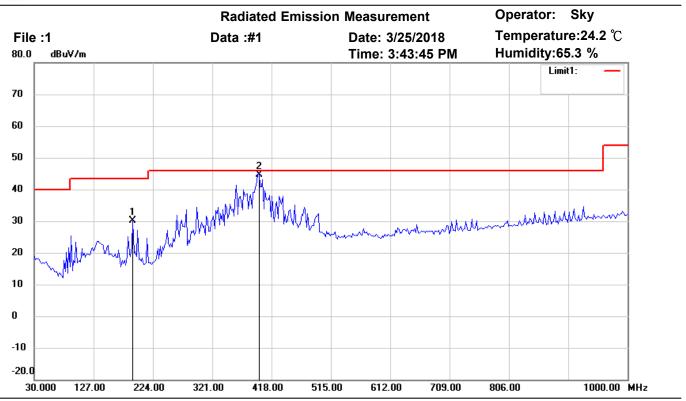

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	191.3427	41.37	peak	-11.12	30.25	43.50	100	110	-13.25	
*	397.3947	48.30	peak	-3.61	44.69	46.00	100	215	-1.31	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

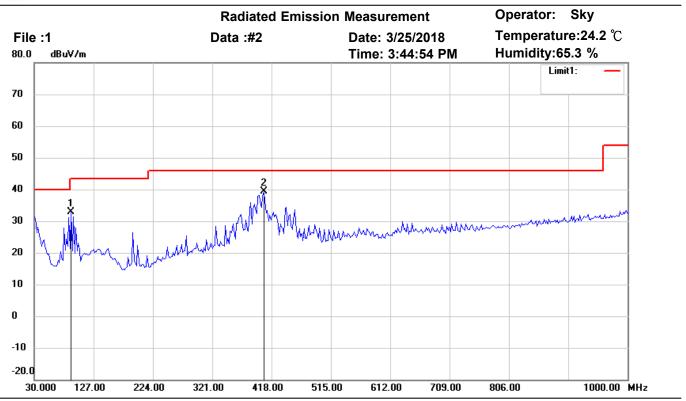

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	90.2605	46.47	peak	-13.69	32.78	43.50	100	275	-10.72	
*	405.1703	42.90	peak	-3.50	39.40	46.00	100	150	-6.60	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

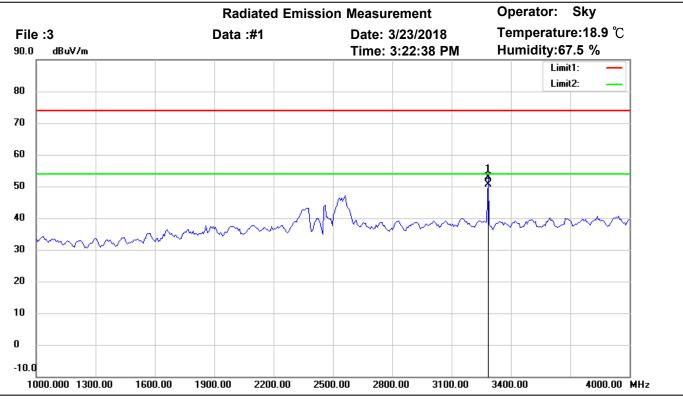

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3284.569	55.24	peak	-2.39	52.85	74.00	150	75	-21.15	
*	3284.569	53.10	AVG	-2.39	50.71	54.00	150	75	-3.29	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

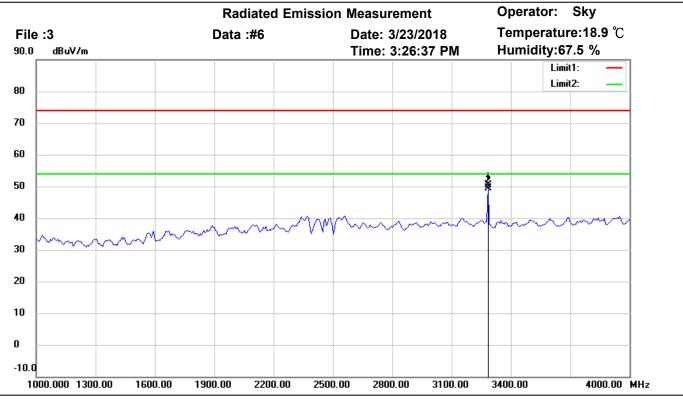

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3284.569	52.88	peak	-2.39	50.49	74.00	150	140	-23.51	
*	3284.569	51.70	AVG	-2.39	49.31	54.00	150	140	-4.69	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

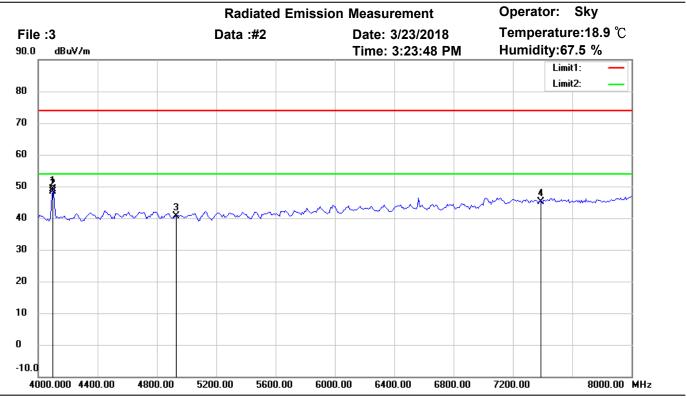

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4096.192	50.31	peak	-1.11	49.20	74.00	150	45	-24.80	
*	4096.192	49.49	AVG	-1.11	48.38	54.00	150	45	-5.62	
	4924.000	40.51	peak	0.20	40.71	74.00	150	85	-33.29	
	7386.000	39.87	peak	5.17	45.04	74.00	150	135	-28.96	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

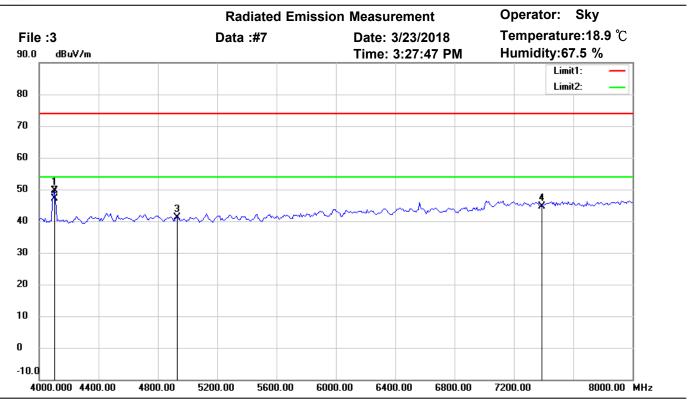

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4104.208	50.86	peak	-1.11	49.75	74.00	150	105	-24.25	
*	4104.208	48.20	AVG	-1.11	47.09	54.00	150	105	-6.91	
	4924.000	40.98	peak	0.20	41.18	74.00	150	70	-32.82	
	7386.000	39.38	peak	5.17	44.55	74.00	150	130	-29.45	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

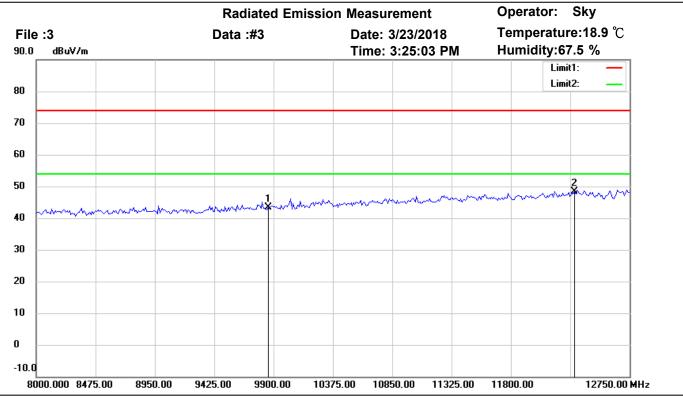

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	34.92	peak	8.44	43.36	74.00	150	10	-30.64	
*	12310.000	34.44	peak	13.92	48.36	74.00	150	75	-25.64	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

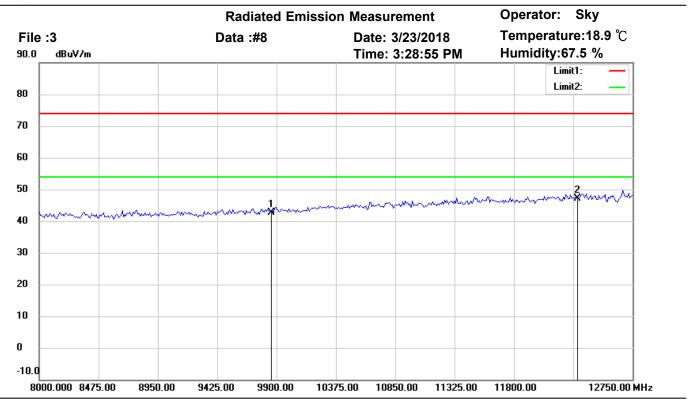

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	34.14	peak	8.44	42.58	74.00	150	10	-31.42	
*	12310.000	33.30	peak	13.92	47.22	74.00	150	205	-26.78	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

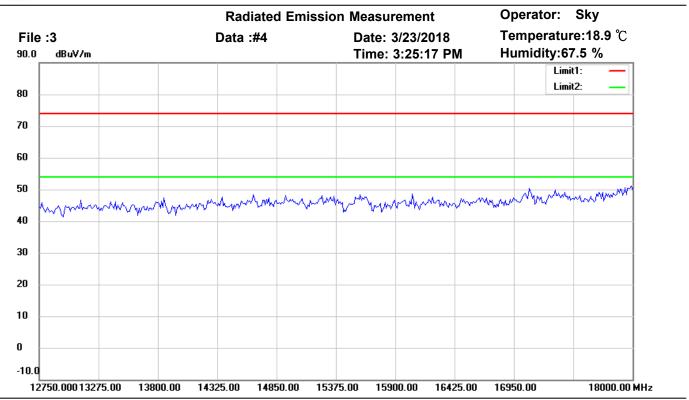

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

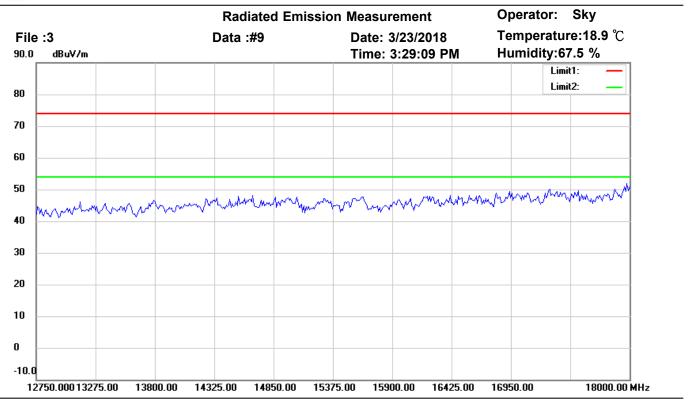

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n20 CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

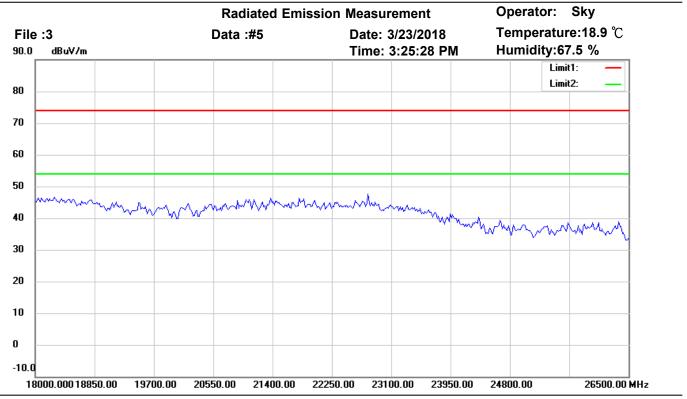

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 802.11n20 CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

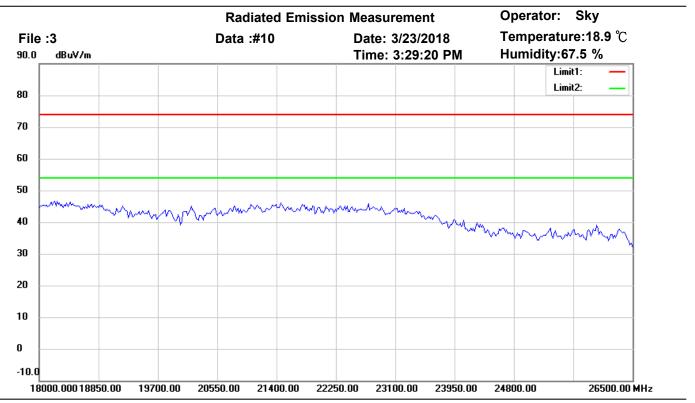

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n20 CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Registration number: W6M21803-17891-P-15B


## **Appendix**

## **Measurement diagrams**

Spurious Emissions radiated\_TX\_Bluetooth Low Energy



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

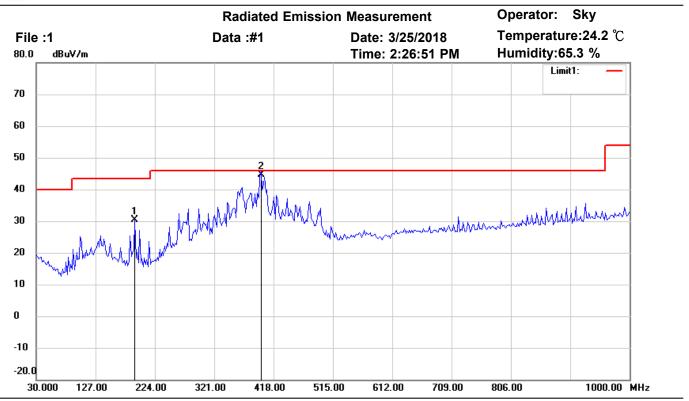

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2402MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	191.3427	41.60	peak	-11.12	30.48	43.50	100	130	-13.02	
*	397.3947	48.21	QP	-3.61	44.60	46.00	100	95	-1.40	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

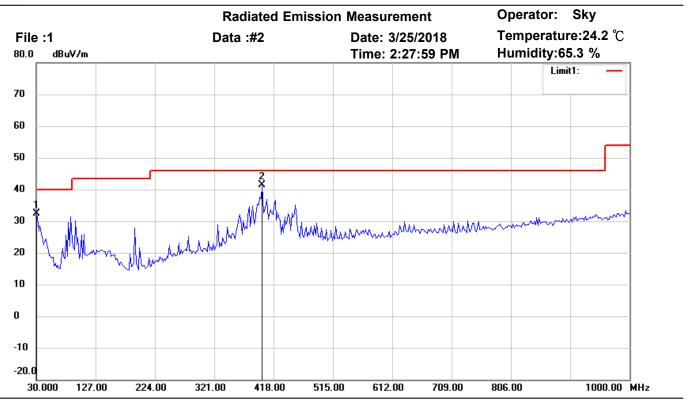

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2402MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	30.0060	40.41	peak	-8.14	32.27	40.00	100	270	-7.73	
*	399.3387	44.98	peak	-3.57	41.41	46.00	100	125	-4.59	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

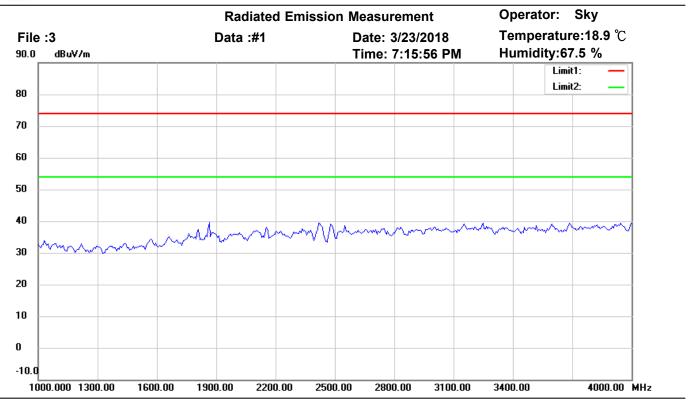

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2402MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

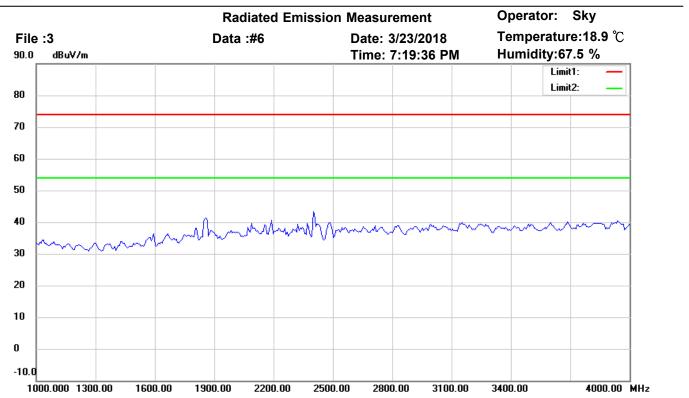

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 2402MHz

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

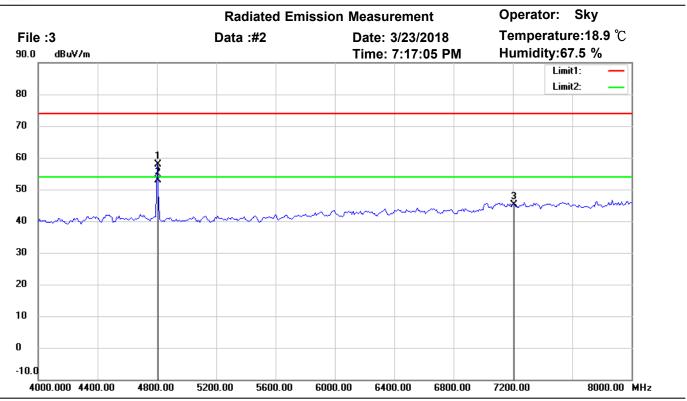

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2402MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4807.562	57.68	peak	0.09	57.77	74.00	250	355	-16.23	
*	4807.562	52.73	AVG	0.09	52.82	54.00	250	355	-1.18	
	7206.000	40.03	peak	5.06	45.09	74.00	150	70	-28.91	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

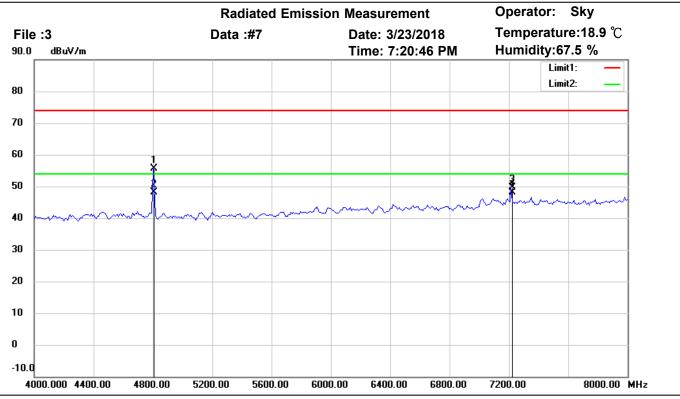

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2402MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4808.021	55.47	peak	0.09	55.56	74.00	150	185	-18.44	
*	4808.021	48.13	AVG	0.09	48.22	54.00	150	185	-5.78	
	7214.429	44.56	peak	5.06	49.62	74.00	150	70	-24.38	
	7214.429	43.11	AVG	5.06	48.17	54.00	150	70	-5.83	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

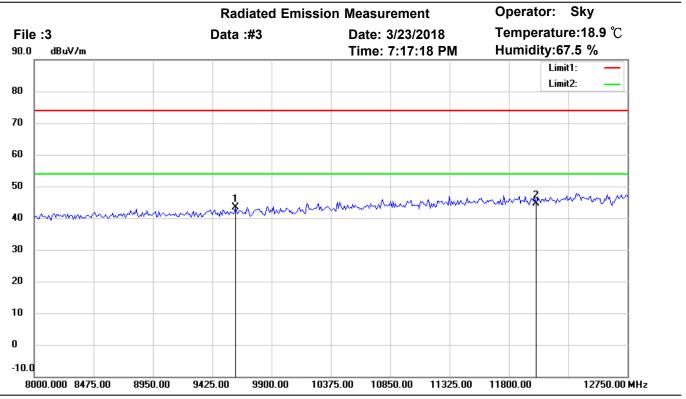

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2402MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	35.40	peak	7.96	43.36	74.00	150	40	-30.64	
*	12010.000	31.72	peak	12.90	44.62	74.00	150	225	-29.38	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

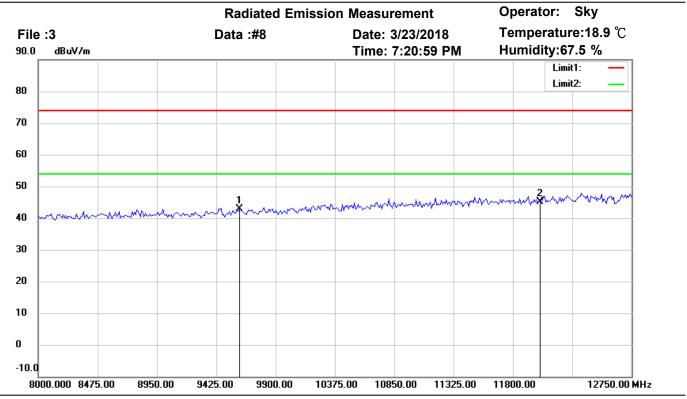

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2402MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	34.96	peak	7.96	42.92	74.00	150	35	-31.08	
*	12010.000	32.13	peak	12.90	45.03	74.00	150	285	-28.97	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

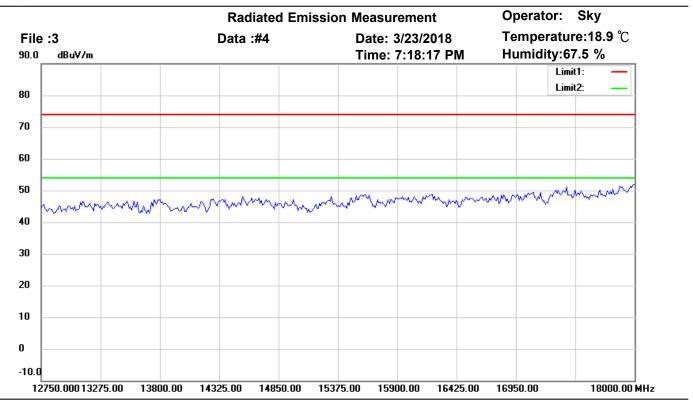

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2402MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

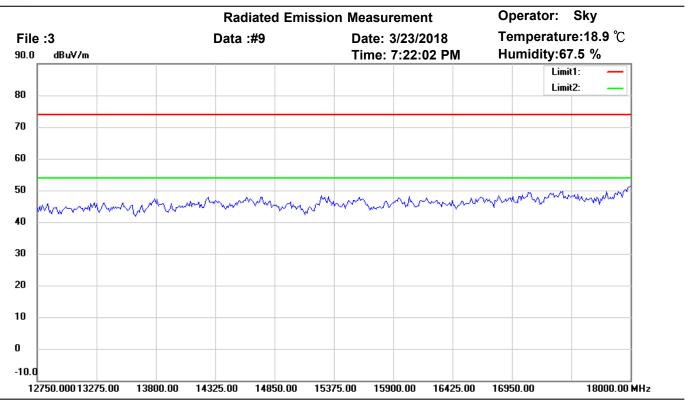

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 2402MHz

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

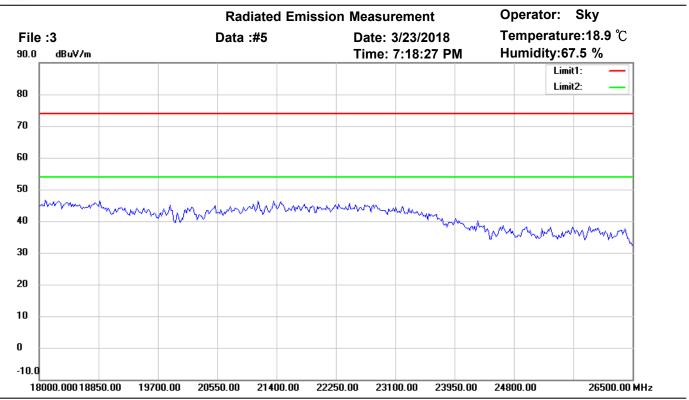

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2402MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

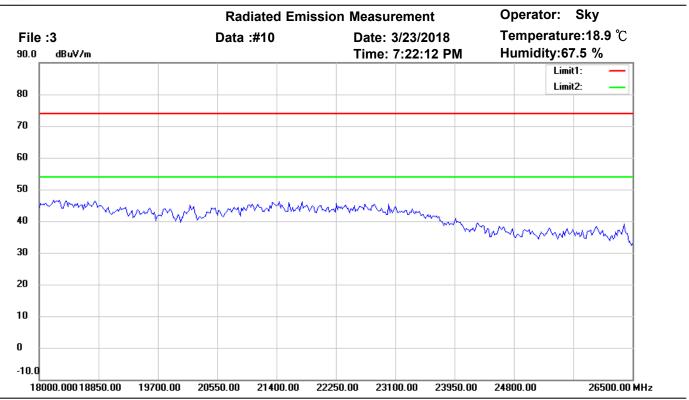

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 2402MHz

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

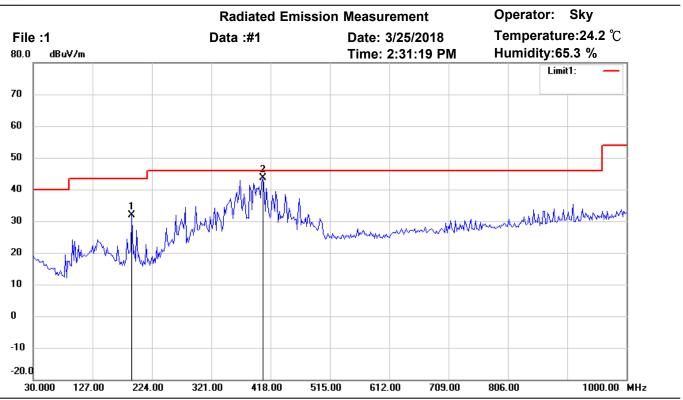

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	191.3427	43.08	peak	-11.12	31.96	43.50	100	260	-11.54	
*	405.1702	47.24	peak	-3.50	43.74	46.00	100	95	-2.26	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

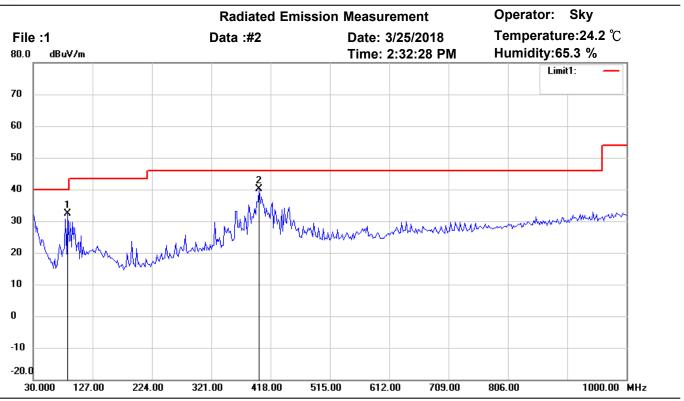

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	86.3726	46.36	peak	-13.95	32.41	40.00	100	30	-7.59	
*	399.3387	43.60	peak	-3.57	40.03	46.00	100	270	-5.97	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

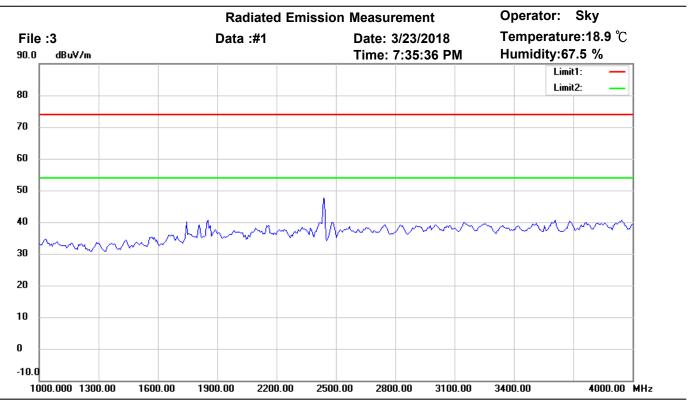

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

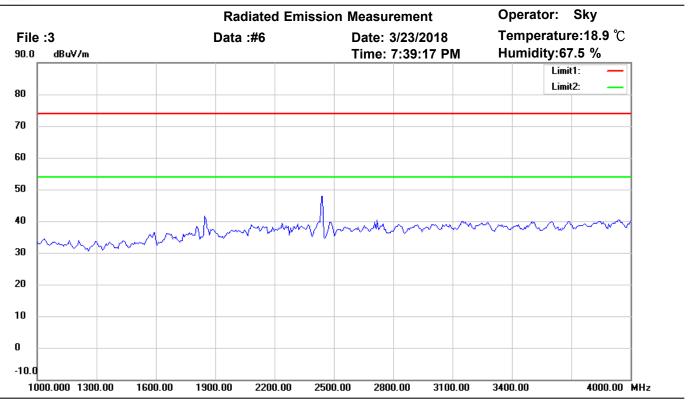

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

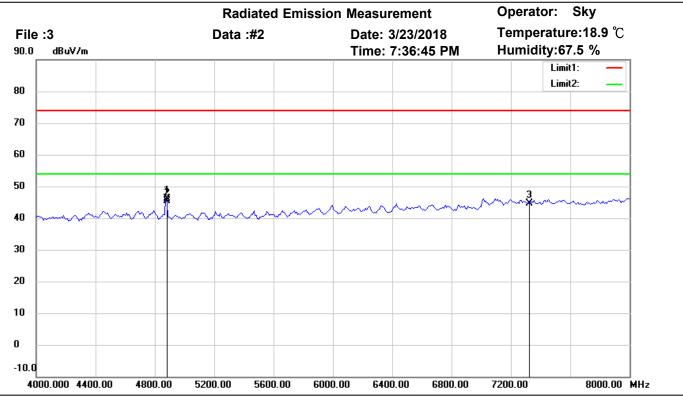

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4873.748	46.03	peak	0.16	46.19	74.00	150	25	-27.81	
*	4873.748	45.10	AVG	0.16	45.26	54.00	150	25	-8.74	
	7320.000	39.61	peak	5.10	44.71	74.00	150	105	-29.29	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

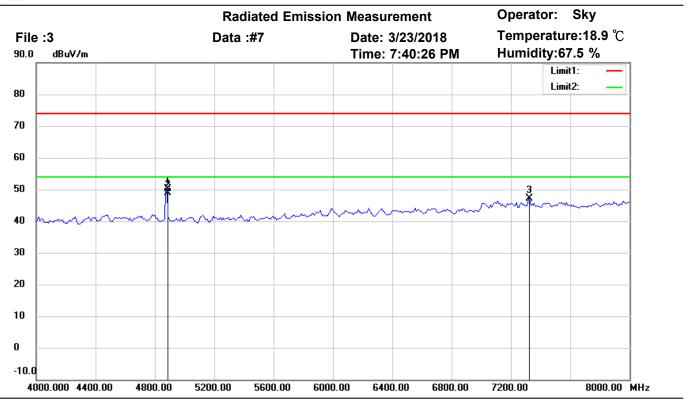

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4881.764	49.90	peak	0.17	50.07	74.00	150	60	-23.93	
*	4881.764	48.70	AVG	0.17	48.87	54.00	150	60	-5.13	
	7320.000	41.93	peak	5.10	47.03	74.00	150	205	-26.97	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

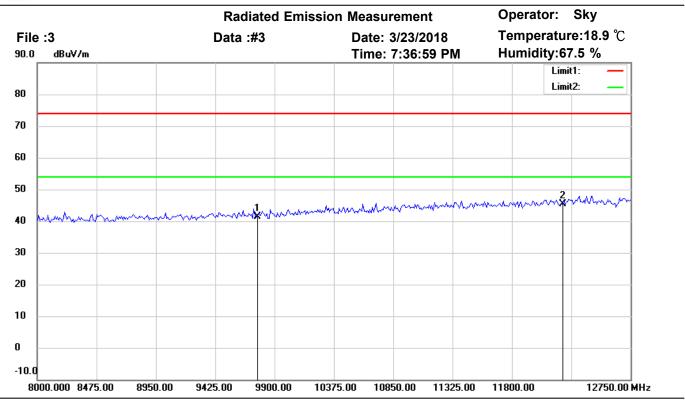

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	33.17	peak	8.21	41.38	74.00	150	30	-32.62	
*	12200.000	31.21	peak	14.09	45.30	74.00	150	100	-28.70	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

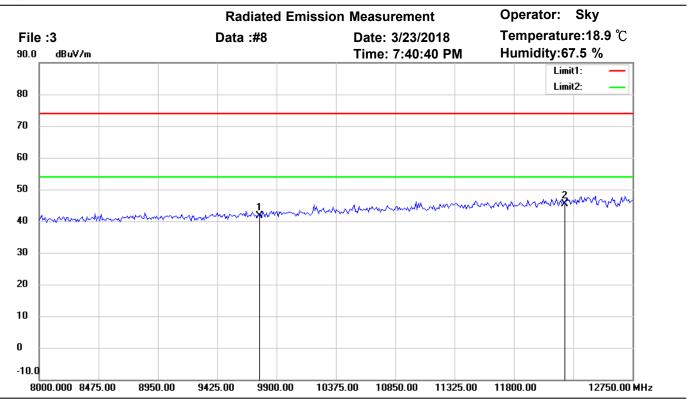

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	33.33	peak	8.21	41.54	74.00	150	95	-32.46	
*	12200.000	31.22	peak	14.09	45.31	74.00	150	165	-28.69	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

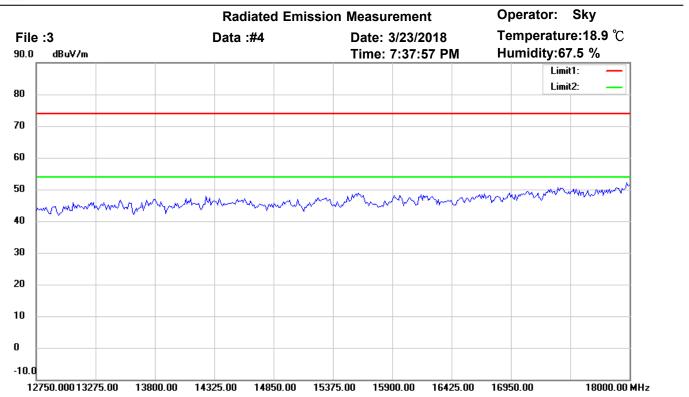

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

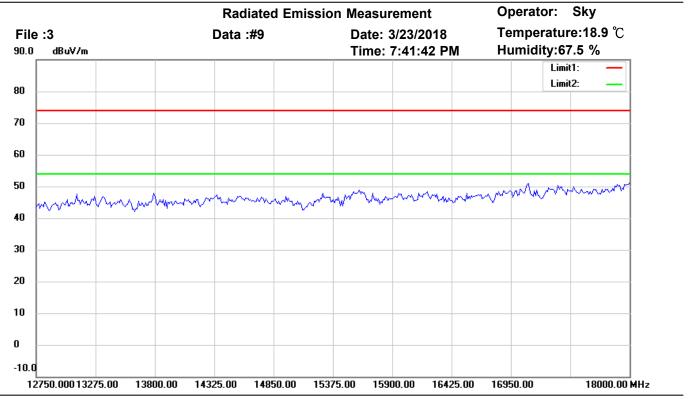

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 2440MHz

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

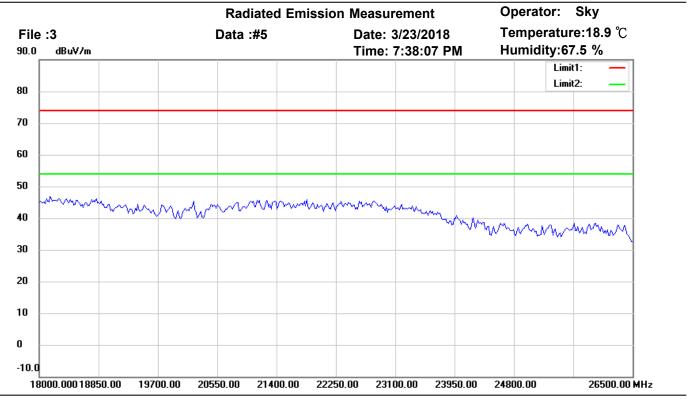

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

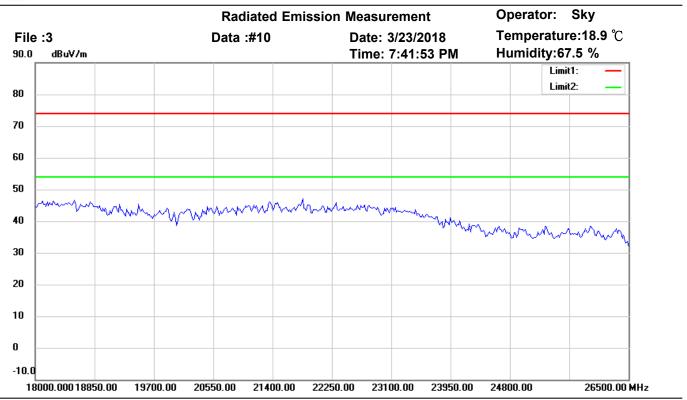

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 2440MHz

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

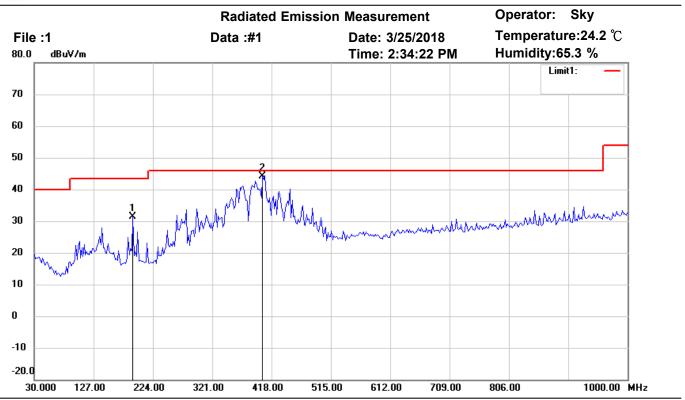

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	191.3427	42.47	peak	-11.12	31.35	43.50	100	10	-12.15	
*	403.2265	47.64	QP	-3.52	44.12	46.00	100	30	-1.88	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

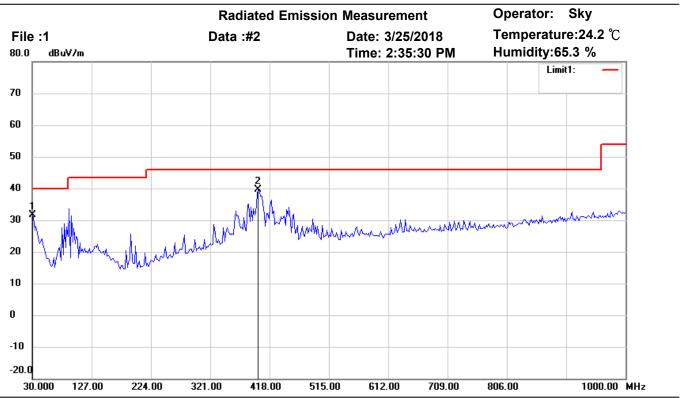

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	30.0000	39.80	peak	-8.14	31.66	40.00	100	15	-8.34	
*	399.3387	43.09	peak	-3.57	39.52	46.00	100	255	-6.48	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

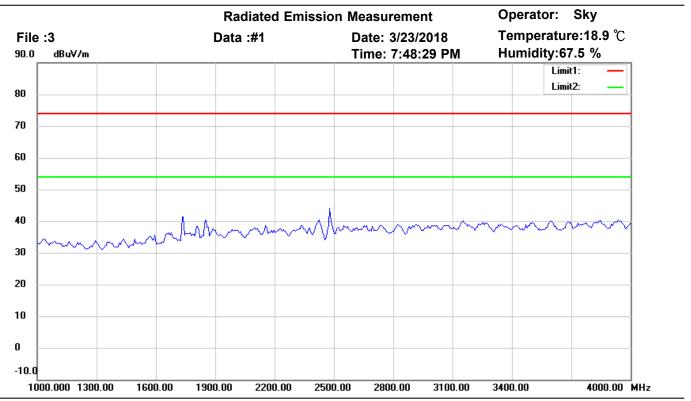

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

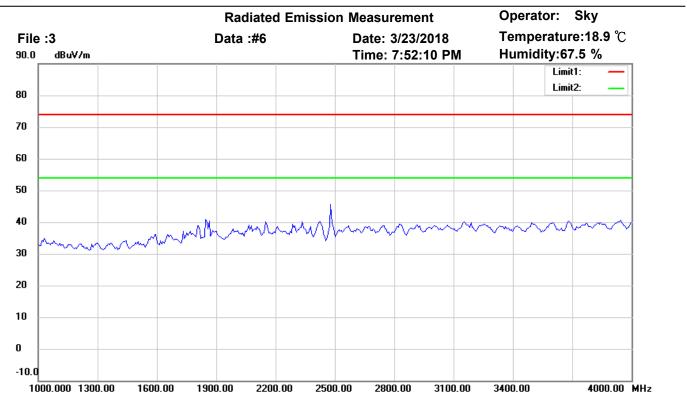

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 2480MHz

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

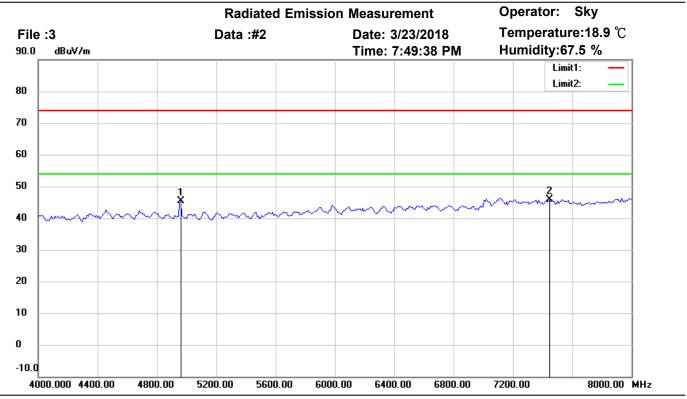

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	45.18	peak	0.21	45.39	74.00	150	90	-28.61	
*	7440.000	40.67	peak	5.18	45.85	74.00	150	100	-28.15	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

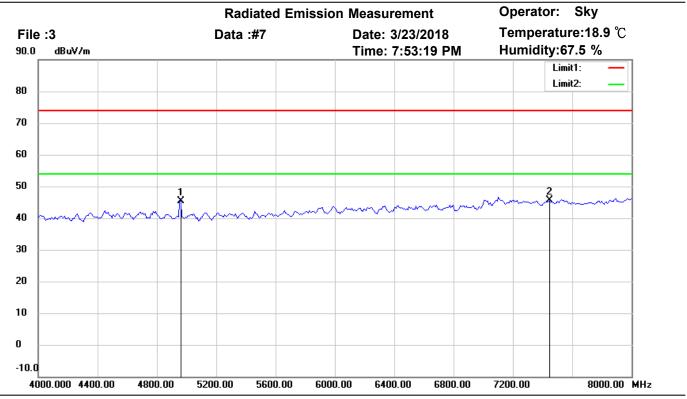

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	45.06	peak	0.21	45.27	74.00	150	15	-28.73	
*	7440.000	40.46	peak	5.18	45.64	74.00	150	275	-28.36	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

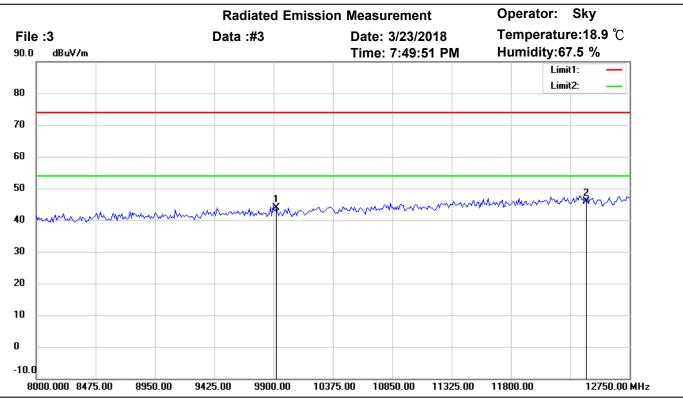

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	35.30	peak	8.55	43.85	74.00	150	35	-30.15	
*	12400.000	31.45	peak	14.41	45.86	74.00	150	200	-28.14	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

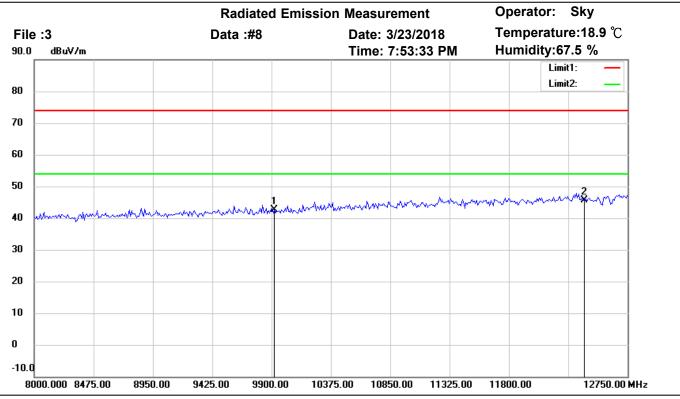

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	34.14	peak	8.55	42.69	74.00	150	25	-31.31	
*	12400.000	31.21	peak	14.41	45.62	74.00	150	70	-28.38	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

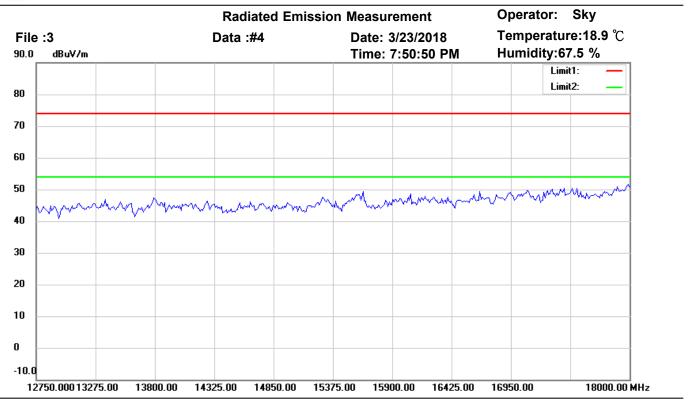

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

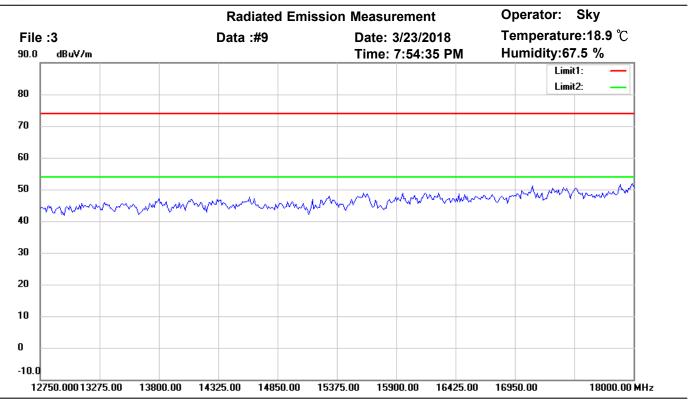

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 2480MHz

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

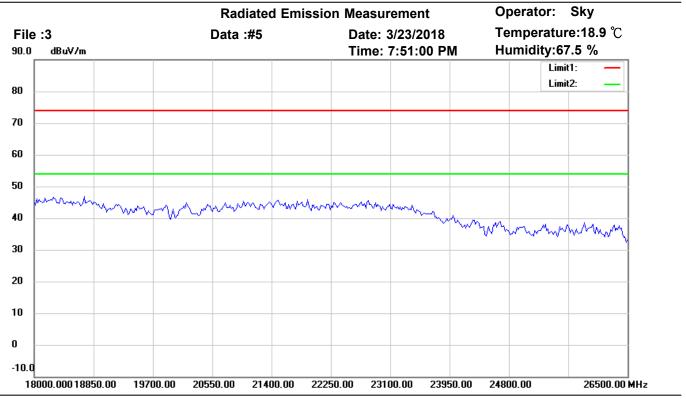

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

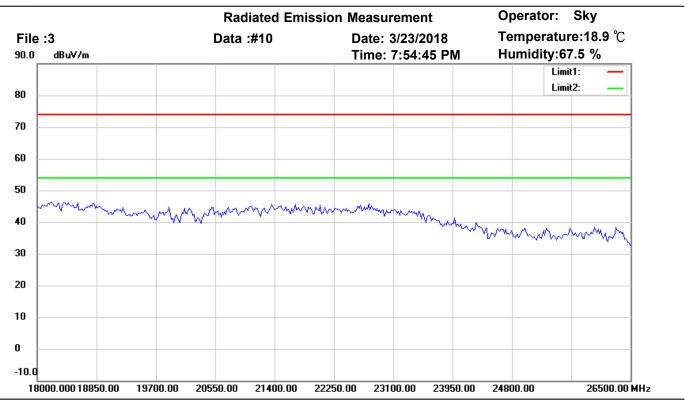

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 2480MHz

Note:

M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m

Registration number: W6M21803-17891-P-15B


## **Appendix**

## **Measurement diagrams**

Spurious Emissions radiated\_TX\_Zigbee



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

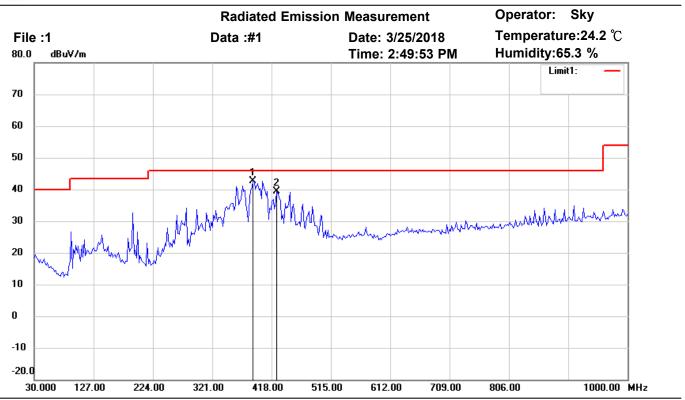

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2405MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	387.6754	46.52	peak	-3.82	42.70	46.00	100	60	-3.30	
	426.5530	42.63	peak	-3.31	39.32	46.00	100	245	-6.68	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

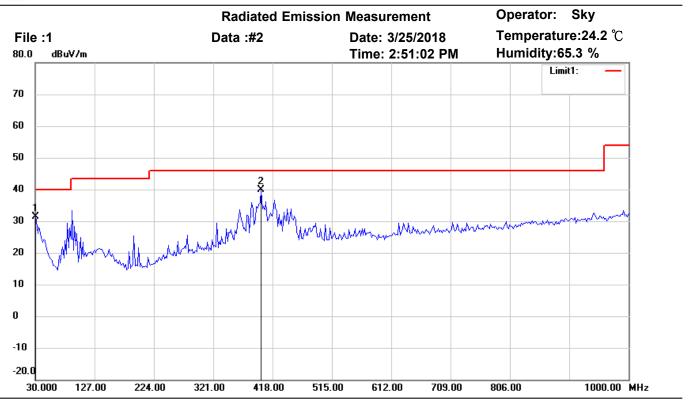

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2405MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	30.0000	39.61	peak	-8.14	31.47	40.00	100	55	-8.53	
*	399.3387	43.50	peak	-3.57	39.93	46.00	100	120	-6.07	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

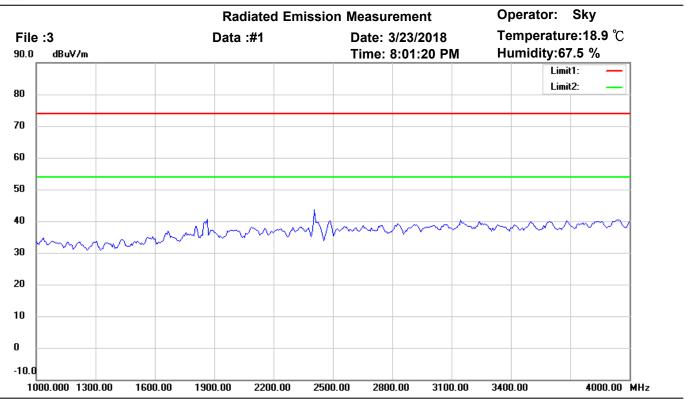

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2405MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

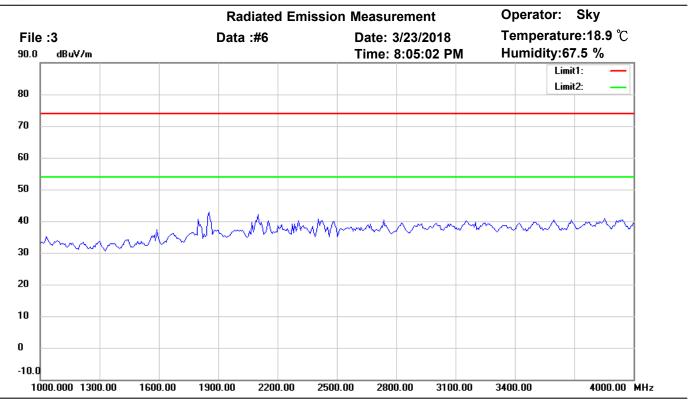

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 2405MHz

Note:


M/N:

<b></b>	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

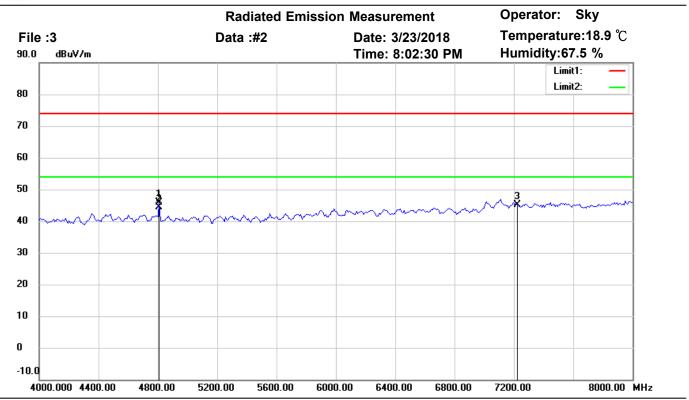

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2405MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4809.619	45.78	peak	0.09	45.87	74.00	150	10	-28.13	
*	4809.619	44.20	AVG	0.09	44.29	54.00	150	10	-9.71	
	7215.000	40.14	peak	5.06	45.20	74.00	150	285	-28.80	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

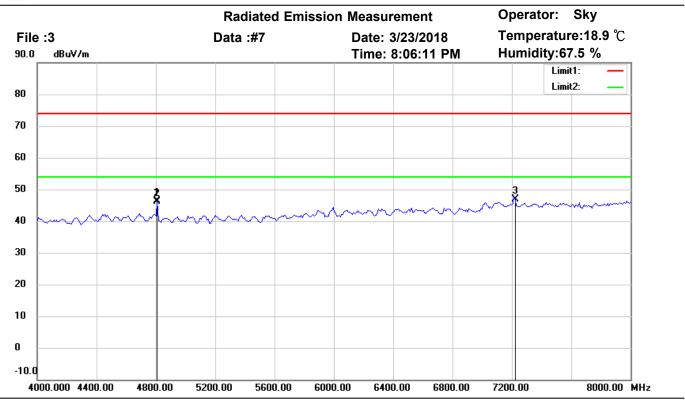

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2405MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4809.619	46.35	peak	0.09	46.44	74.00	150	275	-27.56	
*	4809.619	45.95	AVG	0.09	46.04	54.00	150	275	-7.96	
	7215.000	41.90	peak	5.06	46.96	74.00	150	100	-27.04	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

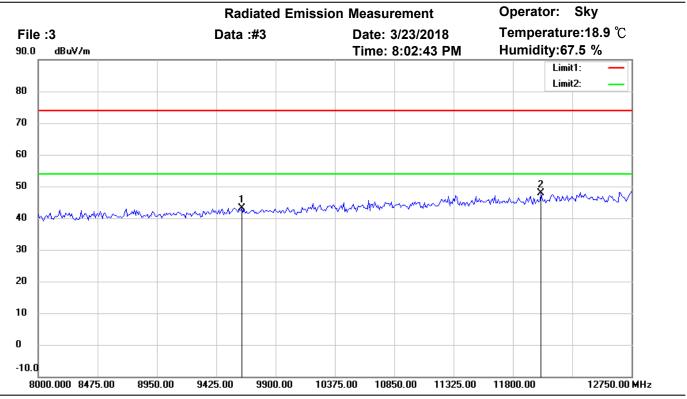

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2405MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9620.000	35.11	peak	7.97	43.08	74.00	150	95	-30.92	
*	12025.000	34.89	peak	13.04	47.93	74.00	150	135	-26.07	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

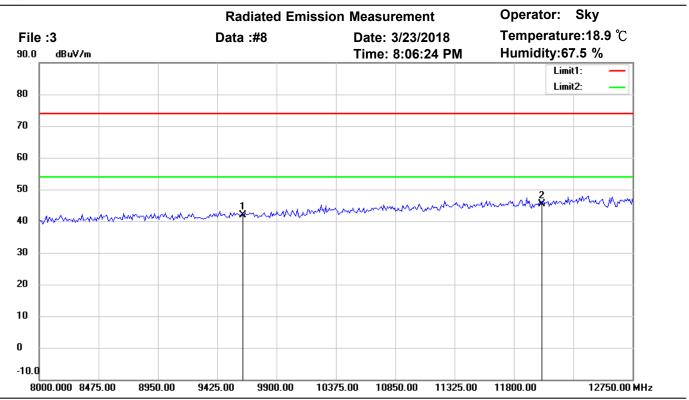

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2405MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9620.000	33.82	peak	7.97	41.79	74.00	150	70	-32.21	
*	12025.000	32.34	peak	13.04	45.38	74.00	150	45	-28.62	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

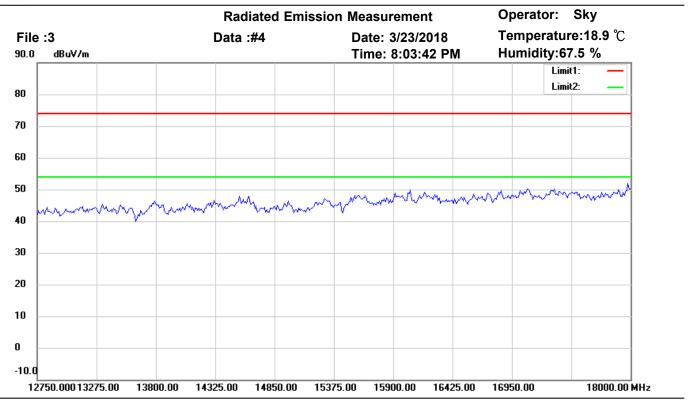

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2405MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

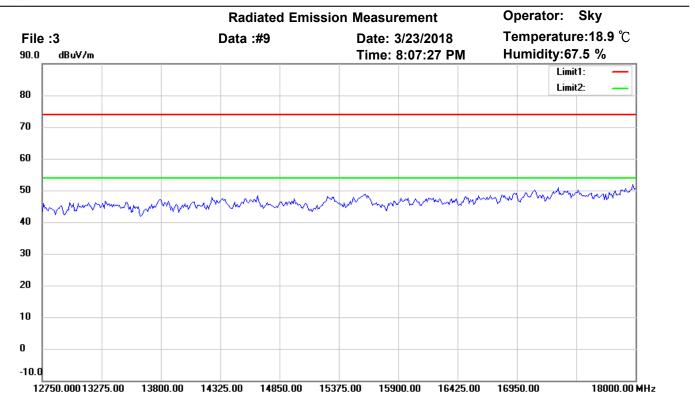

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 2405MHz

Note:


M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	

Distance: 3m



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

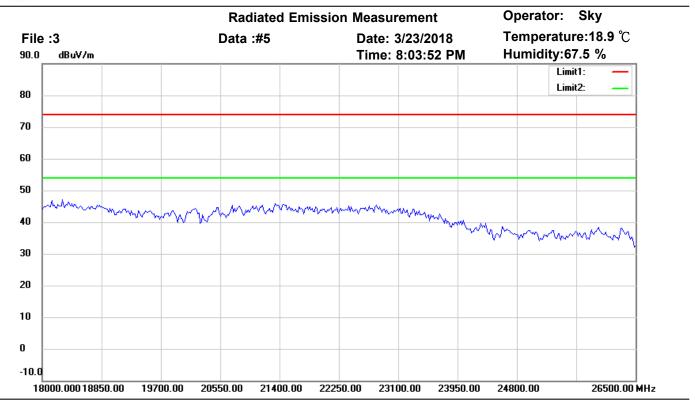

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2405MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

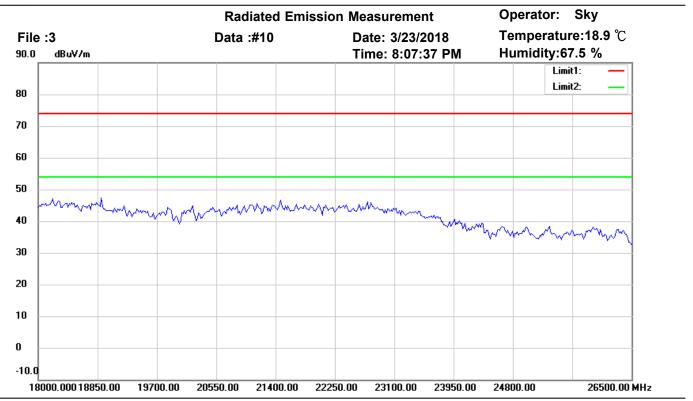

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 2405MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

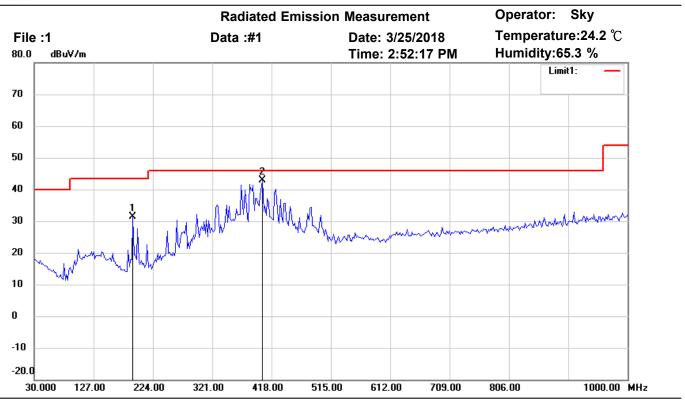

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	191.3427	42.41	peak	-11.12	31.29	43.50	100	205	-12.21	
*	403.2265	46.28	peak	-3.52	42.76	46.00	100	15	-3.24	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

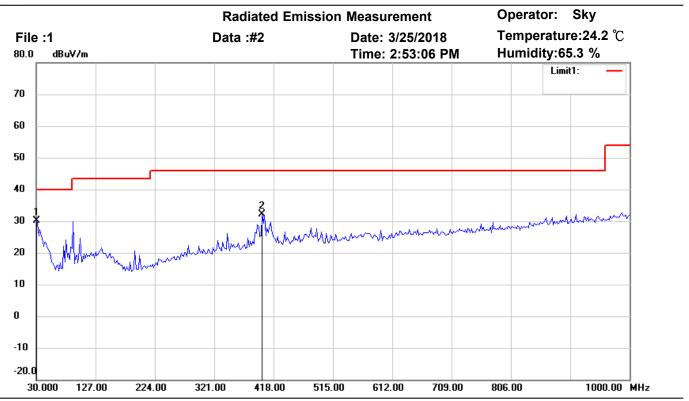

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	30.0000	38.29	peak	-8.14	30.15	40.00	100	125	-9.85	
	399.3387	35.78	peak	-3.57	32.21	46.00	100	95	-13.79	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

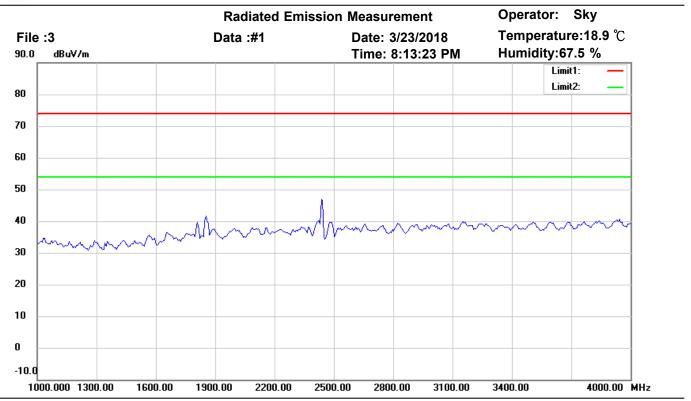

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

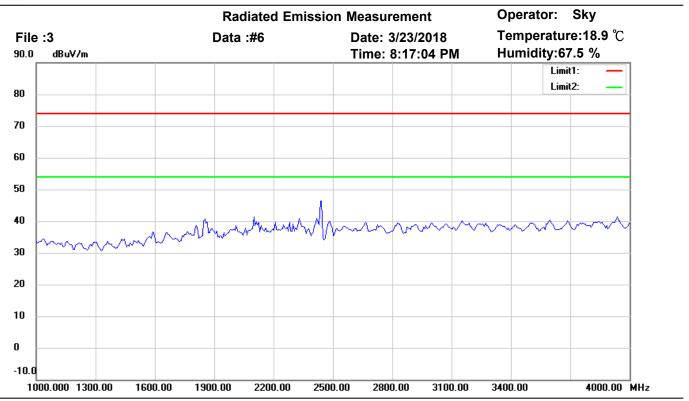

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 2440MHz


Note:

M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

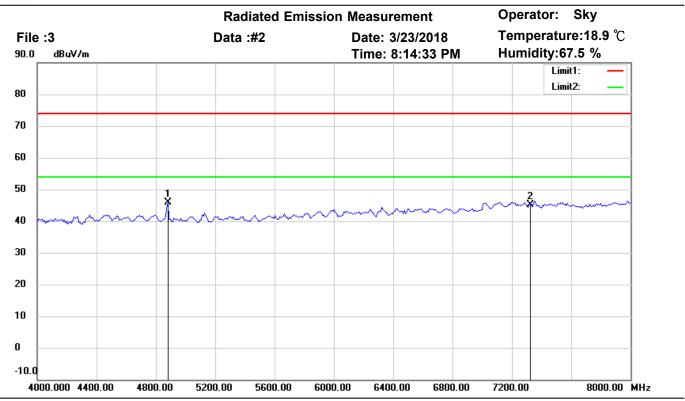

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4880.000	45.63	peak	0.17	45.80	74.00	150	70	-28.20	
	7320.000	40.00	peak	5.10	45.10	74.00	150	200	-28.90	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

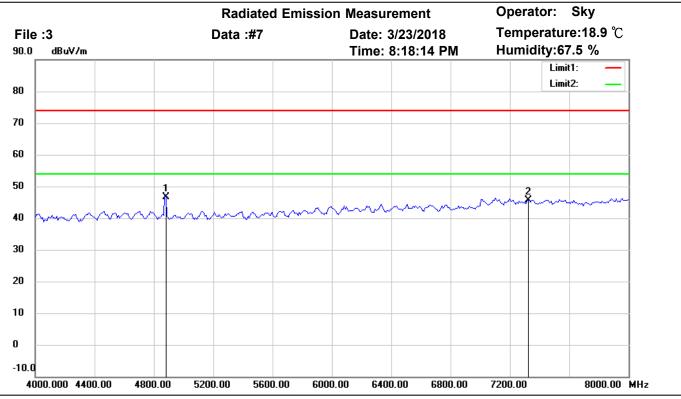

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4880.000	46.36	peak	0.17	46.53	74.00	150	90	-27.47	
	7320.000	40.51	peak	5.10	45.61	74.00	150	105	-28.39	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

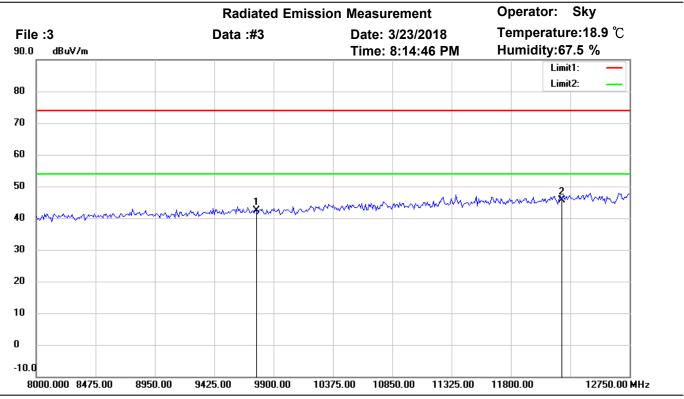

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	34.06	peak	8.21	42.27	74.00	150	15	-31.73	
*	12200.000	31.66	peak	14.09	45.75	74.00	150	295	-28.25	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

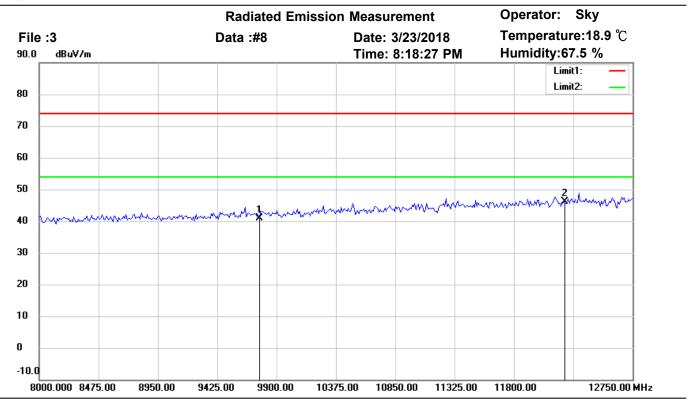

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	32.61	peak	8.21	40.82	74.00	150	75	-33.18	
*	12200.000	32.11	peak	14.09	46.20	74.00	150	140	-27.80	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

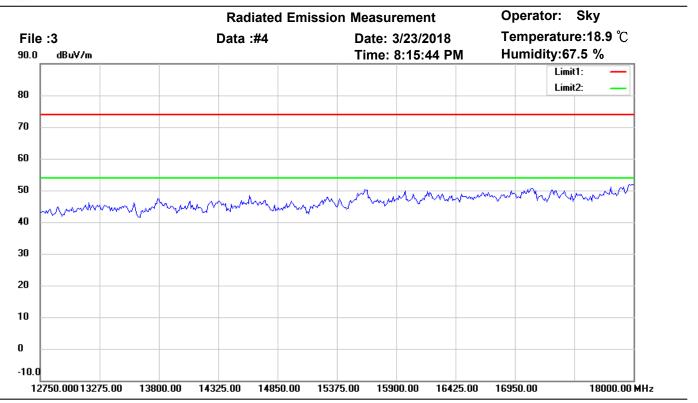

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

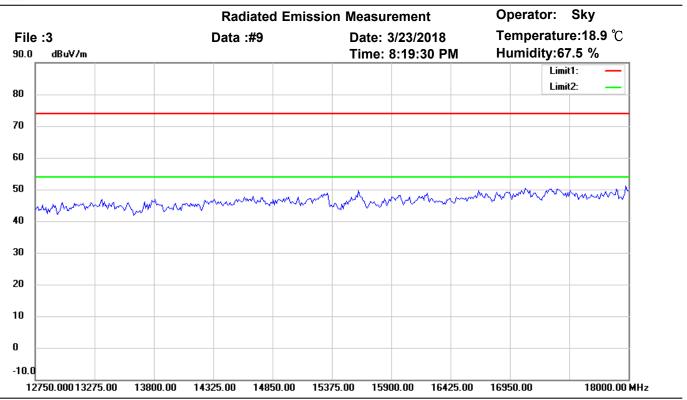

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 2440MHz


Note:

M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

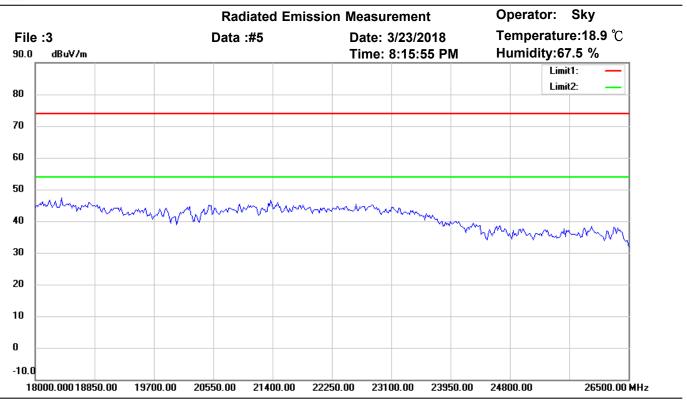

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2440MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

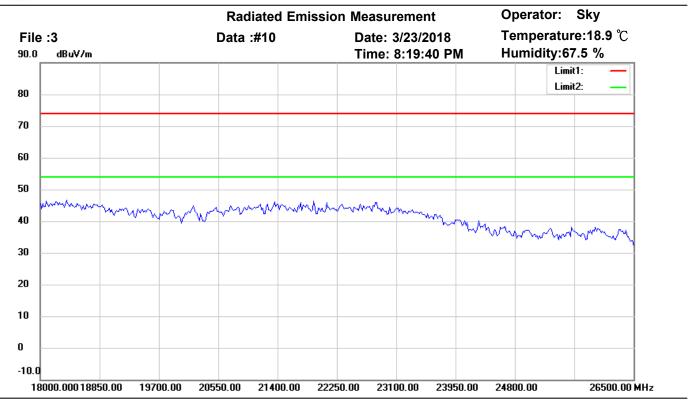

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 2440MHz


Note:

M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

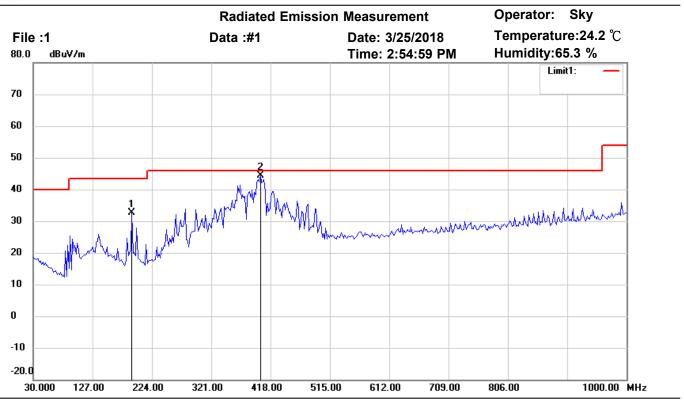

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	191.3427	43.74	peak	-11.12	32.62	43.50	100	145	-10.88	
*	401.2826	47.91	peak	-3.55	44.36	46.00	100	30	-1.64	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

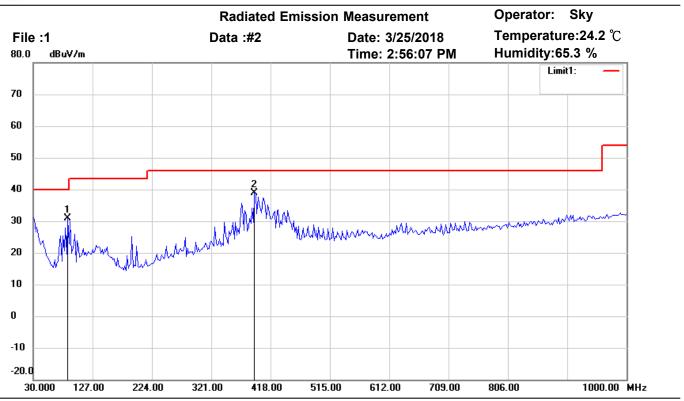

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	86.3726	44.87	peak	-13.95	30.92	40.00	100	125	-9.08	
*	391.5631	42.58	peak	-3.74	38.84	46.00	100	60	-7.16	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

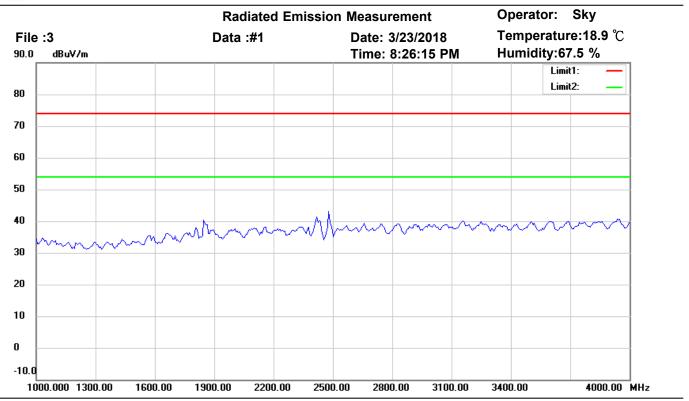

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

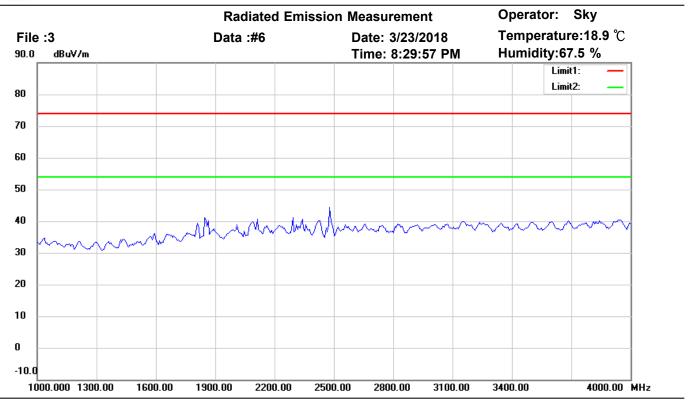

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 2480MHz


Note:

M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

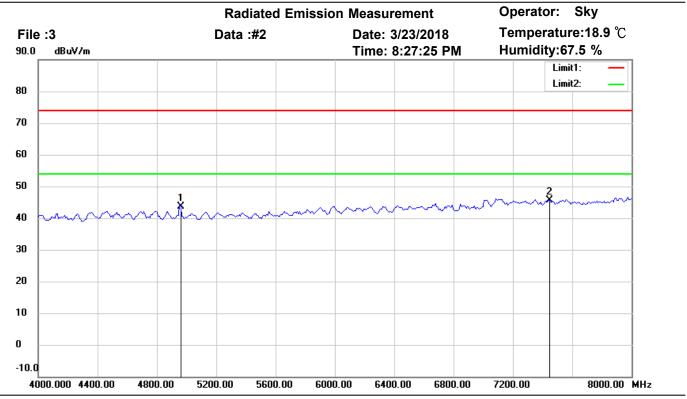

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	43.31	peak	0.21	43.52	74.00	150	30	-30.48	
*	7440.000	40.41	peak	5.18	45.59	74.00	150	175	-28.41	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

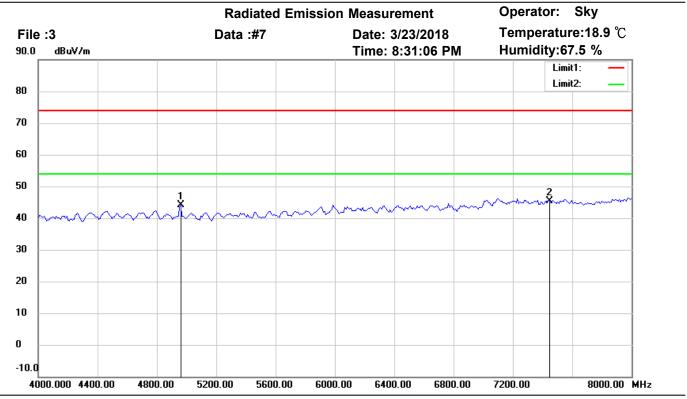

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	43.87	peak	0.21	44.08	74.00	150	205	-29.92	
*	7440.000	40.10	peak	5.18	45.28	74.00	150	135	-28.72	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

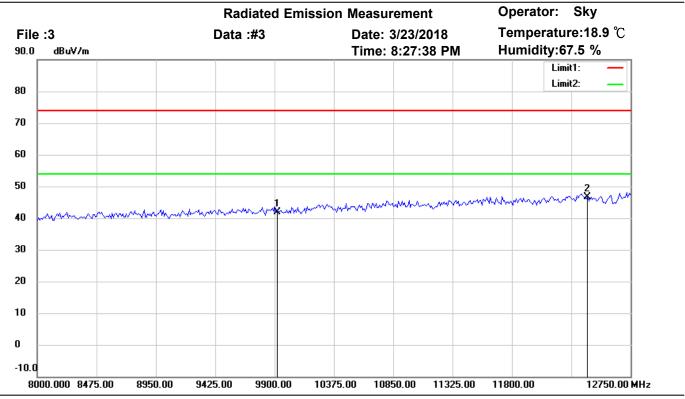

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	33.23	peak	8.55	41.78	74.00	150	15	-32.22	
*	12400.000	32.34	peak	14.41	46.75	74.00	150	265	-27.25	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

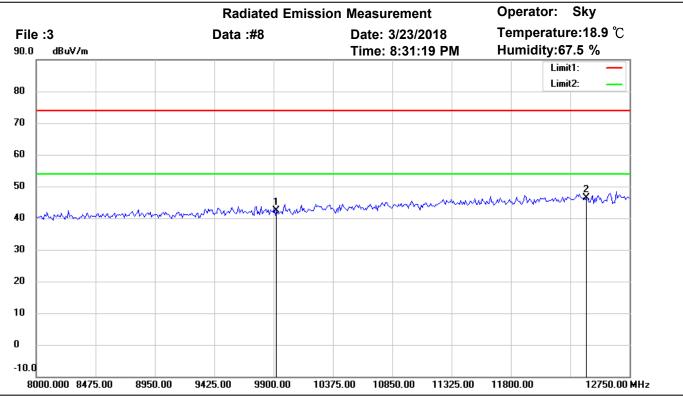

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	33.93	peak	8.55	42.48	74.00	150	75	-31.52	
*	12400.000	31.85	peak	14.41	46.26	74.00	150	110	-27.74	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

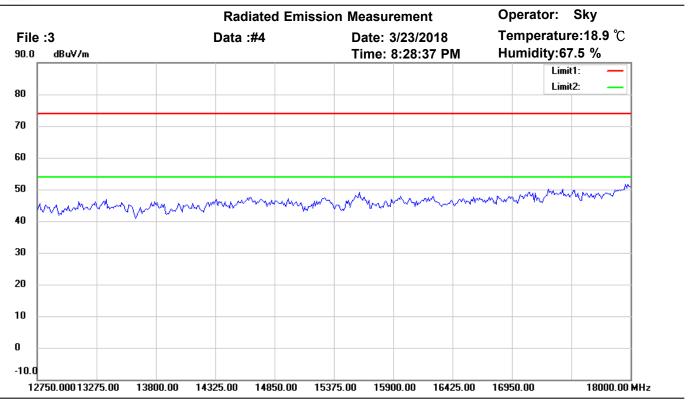

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

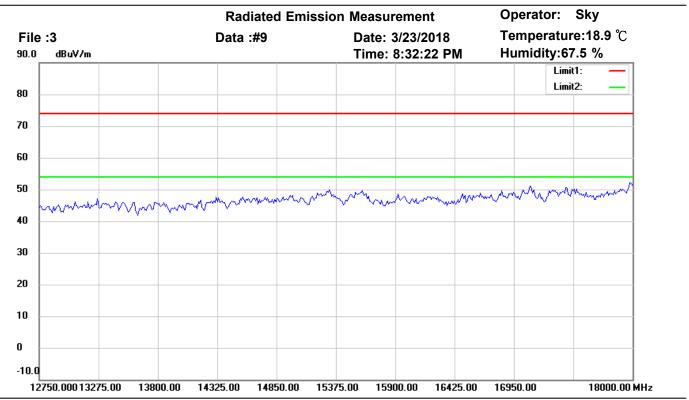

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 2480MHz


Note:

M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

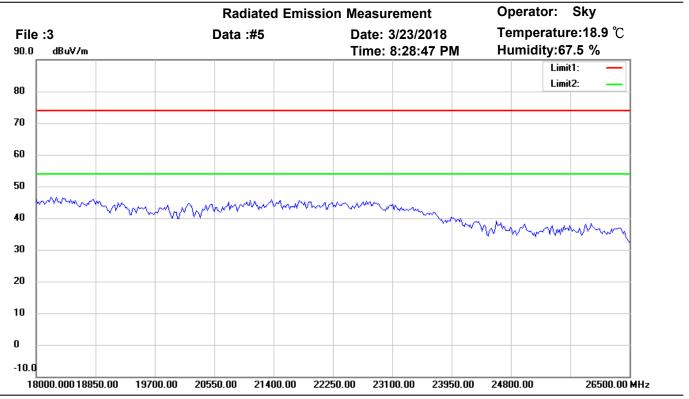

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

EUT: W6M21803-17891 Power: 120 Va.c.


M/N: Distance: 3m

Test Mode: TX 2480MHz

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

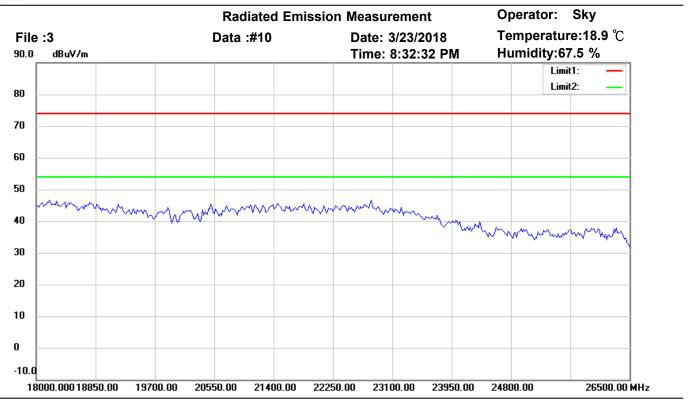

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21803-17891 Power: 120 Va.c.

Test Mode: TX 2480MHz

Note:

M/N:

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	