

# FCC Part 15B Measurement and Test Report

For

**Shenzhen Wisky Technology Co., LTD.**

**5th Floor, W2-A Building, Hi-tech Park South 1st Road, Nanshan District,**

**Shenzhen**

**FCC ID: Y5KW032I**

**Test Standards:** FCC Part 15 Subpart B

**Product Description:** Entertainment Tablet

**Tested Model:** W032I

**Report No.:** STR1308408I-3

**Tested Date:** 2013-08-27 to 2013-09-07

**Issued Date:** 2013-09-08

**Tested By:** Silin Chen / Engineer

**Reviewed By:** Lahm Peng / EMC Manager

**Approved & Authorized By:** Jandy so / PSQ Manager

**Prepared By:**

**SEM.Test Compliance Service Co., Ltd**

3/F, Jinbao Commerce Building, Xin'an Fanshen Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY .....	4
1.5 EUT SETUP AND OPERATION MODE .....	5
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>3. CONDUCTED EMISSIONS .....</b>	<b>7</b>
3.1 MEASUREMENT UNCERTAINTY .....	7
3.2 TEST EQUIPMENT LIST AND DETAILS .....	7
3.3 TEST PROCEDURE.....	7
3.4 BASIC TEST SETUP BLOCK DIAGRAM.....	7
3.5 ENVIRONMENTAL CONDITIONS .....	8
3.6 SUMMARY OF TEST RESULTS/PLOTS .....	8
3.7 CONDUCTED EMISSIONS TEST DATA.....	8
<b>4. RADIATED EMISSIONS.....</b>	<b>11</b>
4.1 MEASUREMENT UNCERTAINTY .....	11
4.2 TEST EQUIPMENT LIST AND DETAILS .....	11
4.3 TEST PROCEDURE.....	11
4.4 TEST RECEIVER SETUP .....	12
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
4.6 ENVIRONMENTAL CONDITIONS .....	12
4.7 SUMMARY OF TEST RESULTS/PLOTS .....	12

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Shenzhen Wisky Technology Co., LTD.  
Address of applicant: 5th Floor, W2-A Building, Hi-tech Park South 1st Road,  
Nanshan District, Shenzhen  
Manufacturer: Shenzhen Wisky Technology Co., LTD.  
Address of manufacturer: 5th Floor, W2-A Building, Hi-tech Park South 1st Road,  
Nanshan District, Shenzhen

General Description of EUT	
Product Name:	Entertainment Tablet
Trade Name:	/
Model No.:	W032I
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Rated Voltage:	DC 3.7V
Power Adaptor Model:	FY0502000 Input 100-240V, 50/60Hz, Output DC 5V
Highest Internal Frequency:	1GHz
Lowest Internal Frequency:	32.768 kHz
Classification of ITE:	Class B

## 1.2 Test Standards

The following report is prepared on behalf of the Shenzhen Wisky Technology Co., LTD. in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

## 1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Charging & Playing	1kHz Audio & Video playing
TM2	Downloading	Connect to PC

### EUT Cable List and Details

Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	With Ferrite
DC Cable	1.2	Unshielded	Without Ferrite

### Special Cable List and Details

Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Earphone	1.0	Unshielded	Without Ferrite

### Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E23	/

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable

### 3. Conducted Emissions

#### 3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 2.88$  dB.


#### 3.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2013-05-07	2014-05-06
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2013-05-07	2014-05-06
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2013-05-07	2014-05-06

#### 3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

#### 3.4 Basic Test Setup Block Diagram

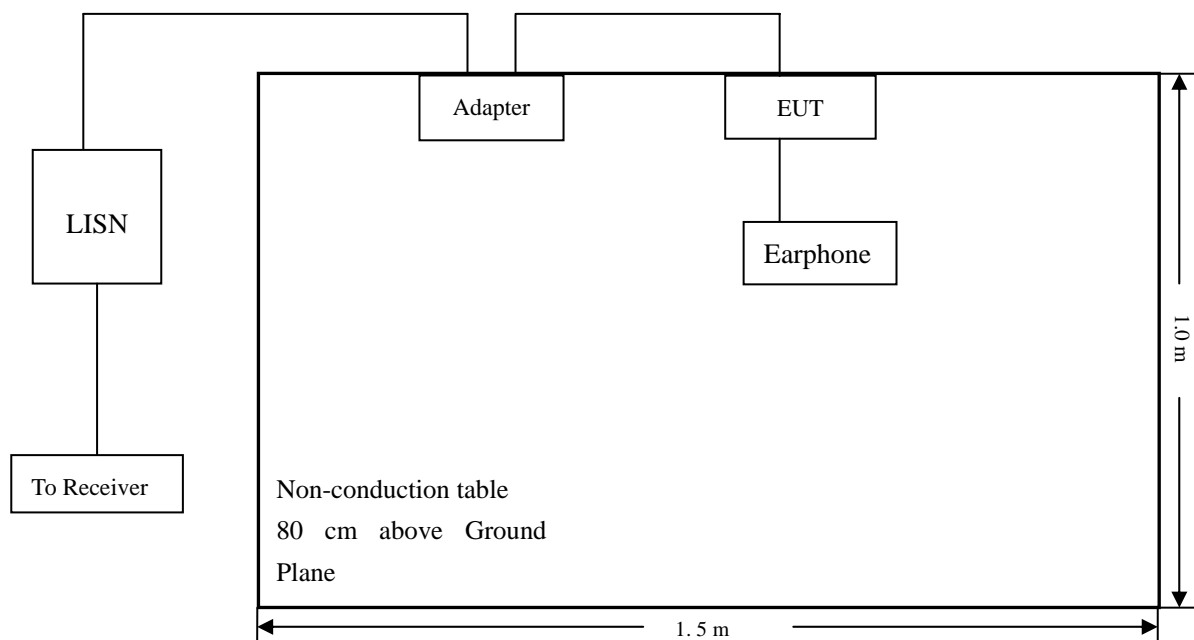

### 3.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

### 3.6 Summary of Test Results/Plots

According to the data in section 3.7, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:

**-13.81 dB at 23.978 MHz** in the **Line** mode, **Ave** detector, **0.15-30MHz**

### 3.7 Conducted Emissions Test Data



Plot of Conducted Emissions Test Data


EUT:Entertainment Tablet

Tested Model:W032I


Operating Condition:Charging and Playing

Comment:Input AC 120V/60Hz, Output DC 5V

Test Specification:Neutral

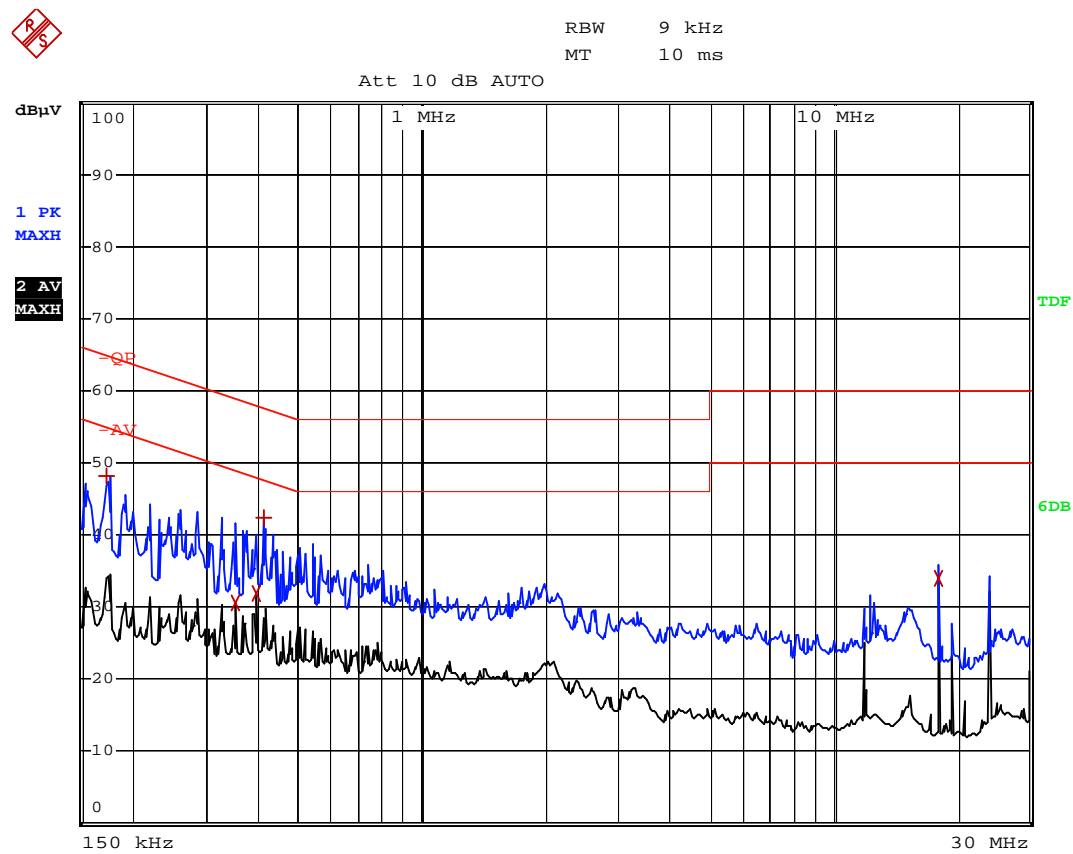

Test Specification: Line

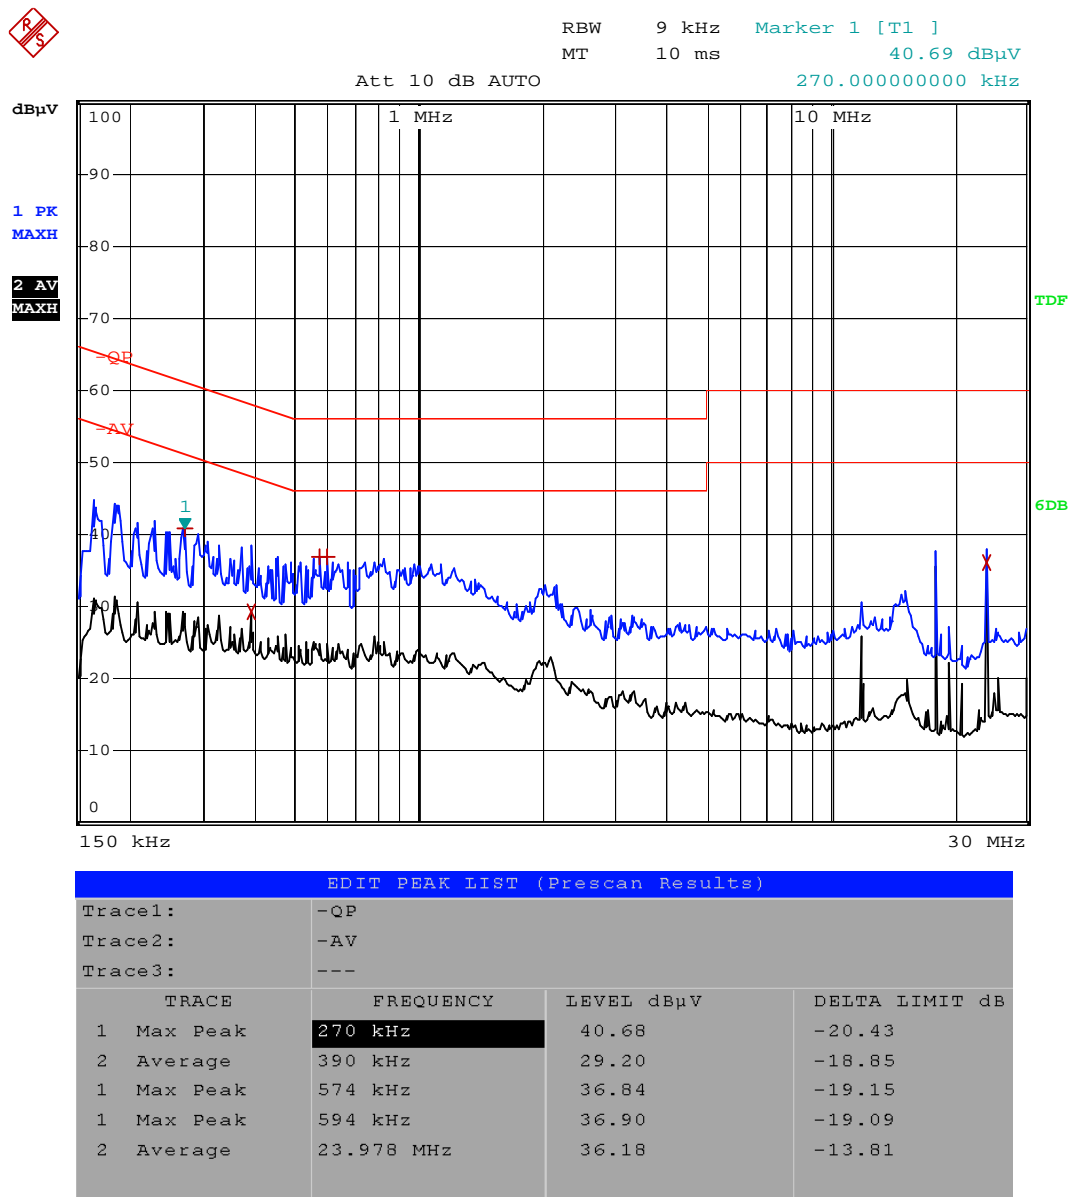

## 4. Radiated Emissions

### 4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is  $\pm 5.10$  dB.

### 4.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2013-05-07	2014-05-06
EMI Test Receiver	R&S	ESVB	825471/005	2013-05-07	2014-05-06
Pre-amplifier	Agilent	8447F	3113A06717	2013-05-07	2014-05-06
Pre-amplifier	Compliance Direction	PAP-0118	24002	2013-05-07	2014-05-06
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2013-04-20	2014-04-19
Horn Antenna	ETS	3117	00086197	2013-04-20	2014-04-19
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2013-04-20	2014-04-19

### 4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

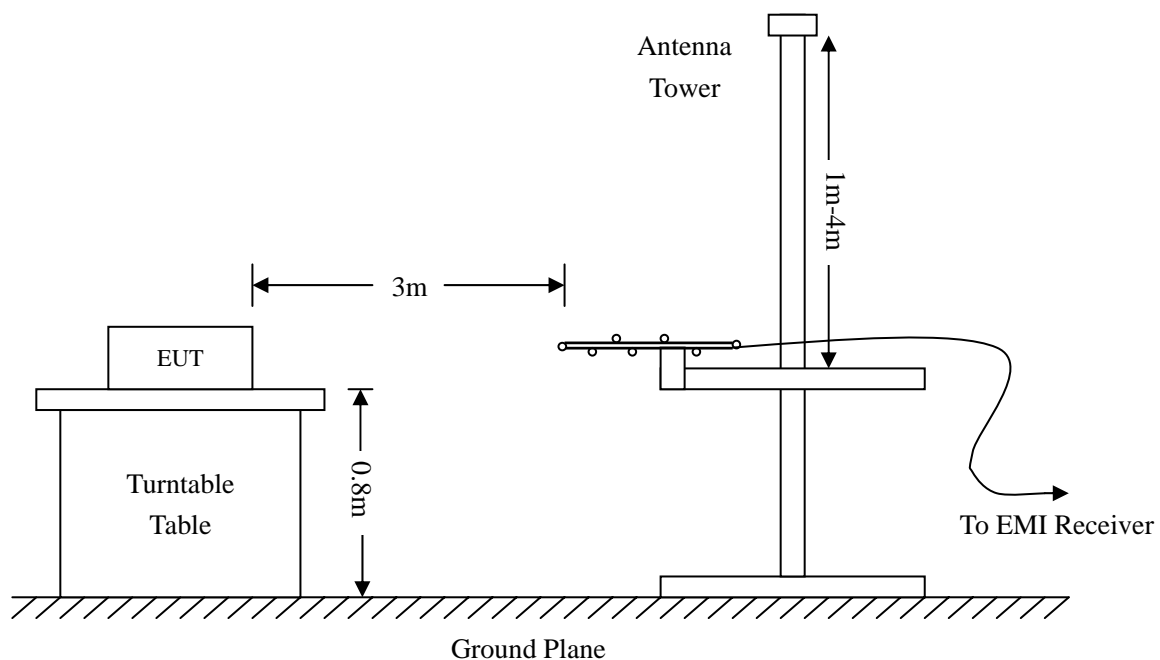

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

#### 4.4 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

#### 4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

#### 4.6 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar


#### 4.7 Summary of Test Results/Plots

According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

**-6.93 dB at 724.2611 MHz in the Vertical polarization, Downloading mode, 9 kHz to 5 GHz, 3Meters**


Plot of Radiated Emissions Test Data

EUT: Entertainment Tablet  
Tested Model: W032I  
Operating Condition: Charging and Playing  
Comment: AC 120V/60Hz; Adapter DC 5V  
  
Test Specification: Horizontal

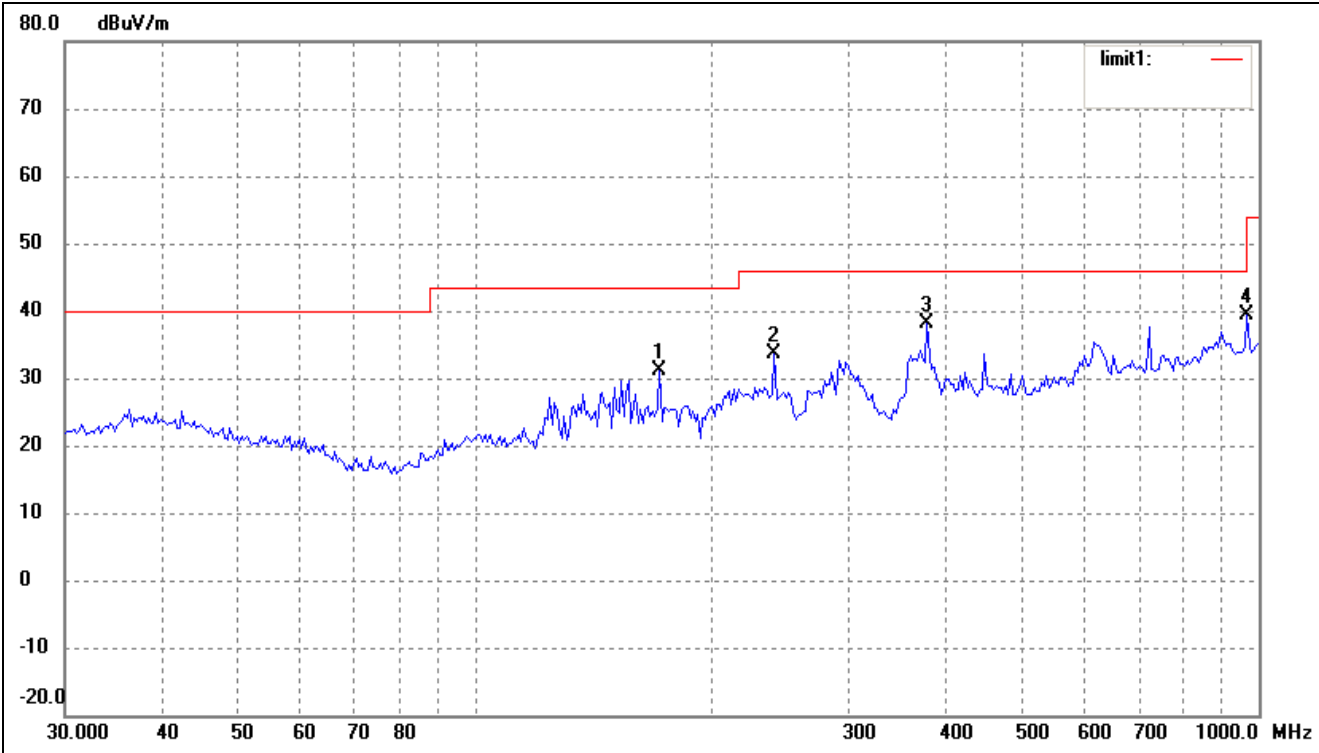

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	171.9944	27.53	3.71	31.24	43.50	-12.26	250	100	peak
2	240.8302	26.58	7.02	33.60	46.00	-12.40	250	100	peak
3	377.2590	27.50	10.64	38.14	46.00	-7.86	250	100	peak
4	965.5421	21.01	18.37	39.38	54.00	-14.62	250	100	peak

Test Specification: Vertical

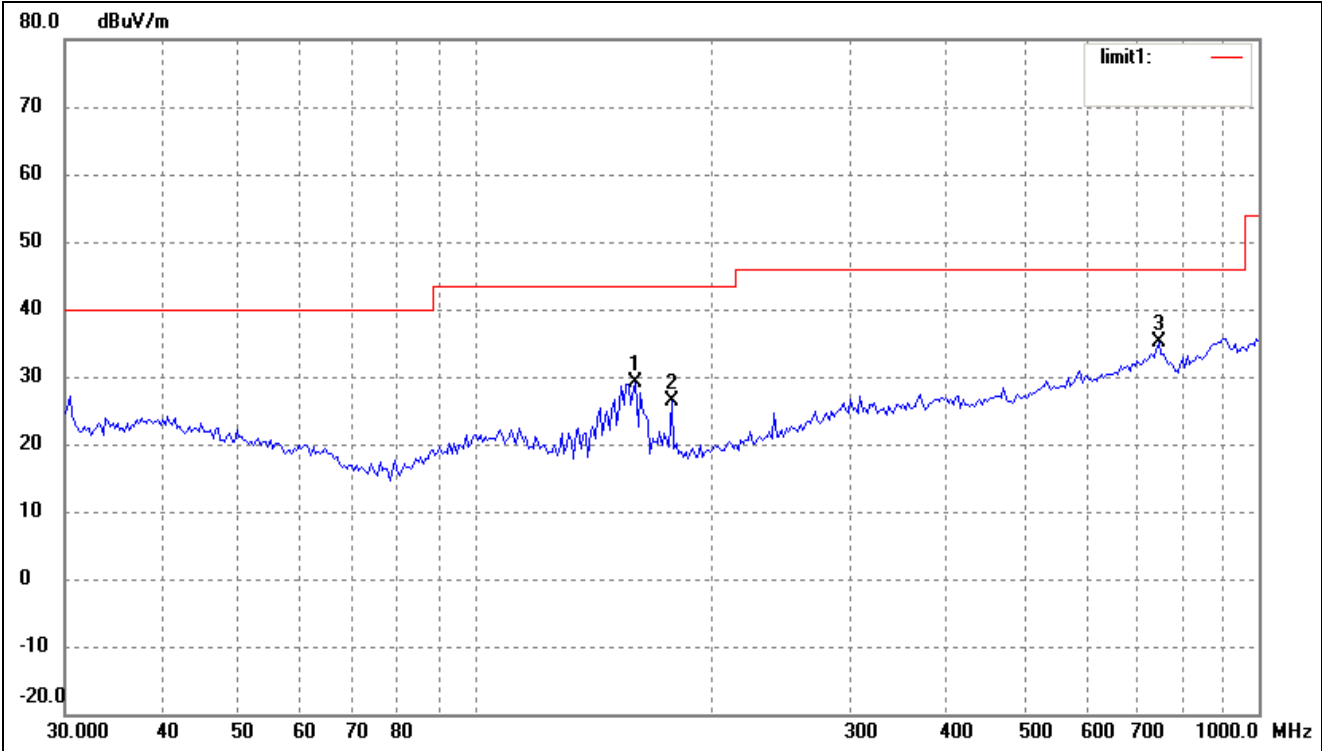

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	( °)	(cm)	
1	160.3457	25.38	3.65	29.03	43.50	-14.47	0	100	peak
2	178.1327	22.62	3.74	26.36	43.50	-17.14	0	100	peak
3	744.8661	17.12	17.95	35.07	46.00	-10.93	0	100	peak

Plot of Radiated Emissions Test Data


EUT:Entertainment Tablet

Tested Model:W032I

Operating Condition:Downloading


Comment:Connected to PC

Test Specification:Horizontal

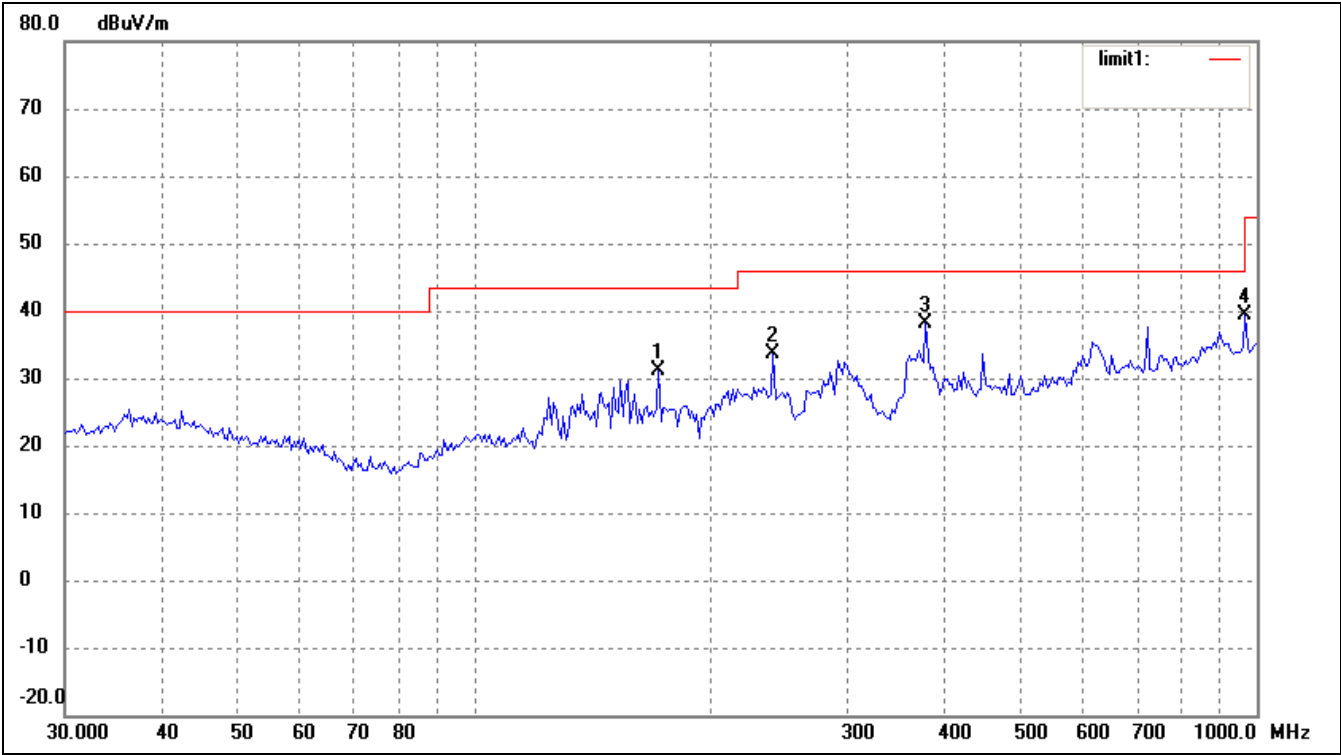

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	171.9944	27.53	3.71	31.24	43.50	-12.26	250	100	peak
2	240.8302	26.58	7.02	33.60	46.00	-12.40	250	100	peak
3	377.2590	27.50	10.64	38.14	46.00	-7.86	250	100	peak
4	965.5421	21.01	18.37	39.38	54.00	-14.62	250	100	peak

Test Specification: Vertical

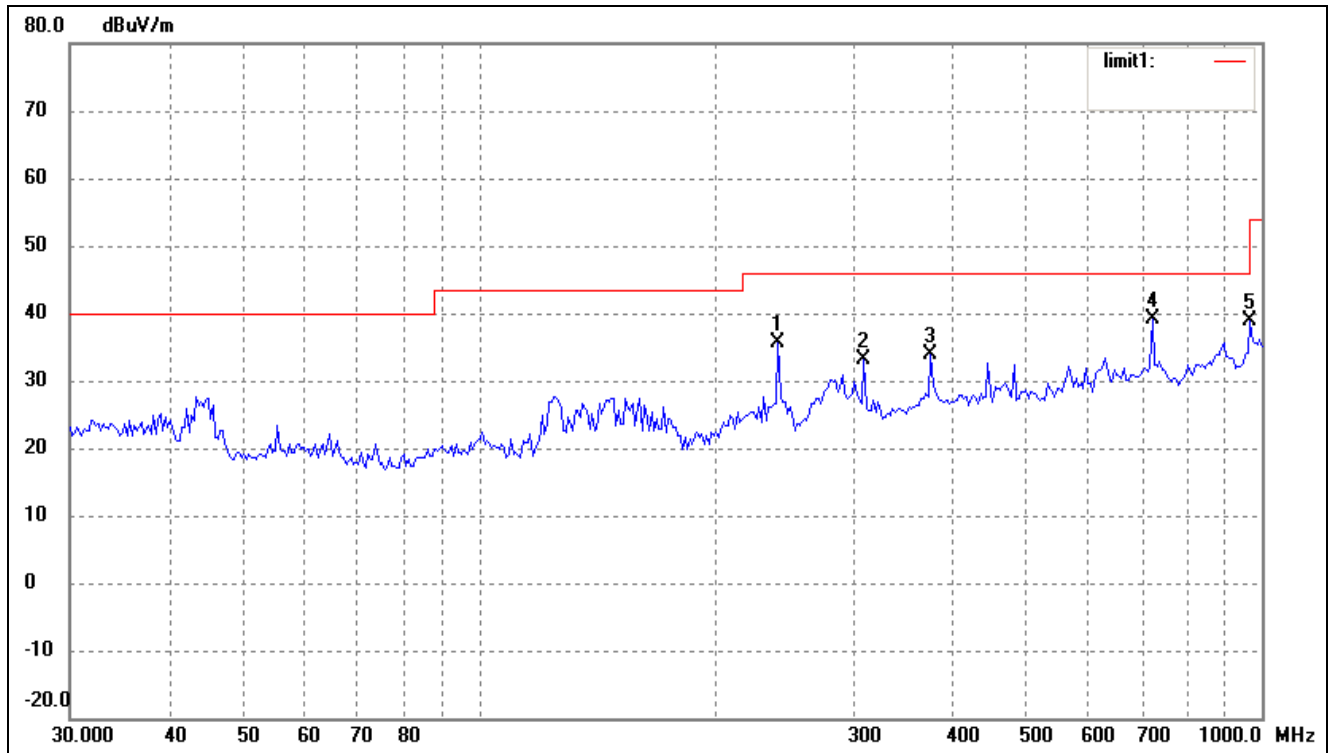

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( °)	Height (cm)	Remark
1	240.8303	28.69	7.02	35.71	46.00	-10.29	0	100	peak
2	309.9977	22.77	10.33	33.10	46.00	-12.90	0	100	peak
3	377.2590	23.12	10.64	33.76	46.00	-12.24	0	100	peak
4	724.2611	22.14	16.93	39.07	46.00	-6.93	0	100	peak
5	965.5421	20.48	18.37	38.85	54.00	-15.15	0	100	peak

Note: Testing is carried out with frequency rang 9kHz to 5GHz, which above 9kHz to 30MHz and above 1GHz spurious are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

\*\*\*\*\* END OF REPORT \*\*\*\*\*