

CENTRE OF TESTING SERVICE INTERNATIONAL

OPERATE ACCORDING TO ISO/IEC 17025

FCC ID TEST REPORT

TEST REPORT NUMBER: CGZ3101214-04363-O



CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China.





	TEST REPORT For FCC ID 47 CFR PART 15 OCT, 2009
Report Reference No	CGZ3101214-04363-O
Date of issue	05 January 2011
Testing Laboratory Name	CENTRE OF TESTING SERVICE CO., LTD
Address	Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China.
Testing location/ procedure	Full application of Harmonised standards ■
	Partial application of Harmonised standards \square
	Other standard testing method \square
Applicant's name	Honcam technology co., ltd.
Address	6/f b Block, huafeng first technology zone, shunchang road, xixiang, baoan district, Shenzhen city, China
Test specification	
Standard	47 CFR PART 15 OCT, 2009, ANSI C63.4-2009
Test Report Form No	CTSEMC-1.0
TRF Originator	CENTRE OF TESTING SERVICE CO., LTD
Master TRF	Dated 2009-01
CENTRE OF TESTING SERVICE C	O., LTD. All rights reserved.
CENTRE OF TESTING SERVICE C material. CENTRE OF TESTING SE	in whole or in part for non-commercial purposes as long as the O., LTD is acknowledged as copyright owner and source of the RVICE CO., LTD takes no responsibility for and will not assume liability er's interpretation of the reproduced material due to its placement and
Test item description	PS3 Bluetooth Headset
Trade Mark	
Manufacturer	Honcam technology co., ltd.
Model/Type reference	HC-PS3052
Ratings	3.7 V, AC 120V/60Hz for Xbox
Operating Frequency	2402.00~2480.00MHz/ GFSK
Result	Positive

Tiolet

Supervised by:

Approved by:

Violet Lee / File administrators

Compiled by:

Raymond Dai / Technique principal

Kevin Liang / Manager

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

CENTRE OF TESTING SERVICE





FCCID -- TEST REPORT

Test Report No. : CGZ3101214-04363-O <u>05 January 2011</u> Date of issue

Type / Model	HC-PS3052
EUT	PS3 Bluetooth Headset
Applicant	Honcam technology co., ltd.
Address	6/f b Block, huafeng first technology zone, shunchang road, xixiang, baoan district, Shenzhen city, China
Telephone	+86-755-61529388
Fax	+86-755-61176638
Contact	sunny Tsang
Manufacturer	Honcam technology co., ltd.
Address	6/f b Block, huafeng first technology zone, shunchang road, xixiang, baoan district, Shenzhen city, China
Telephone	+86-755-61529388
Fax	+86-755-61176638
Contact	sunny Tsang
Test report holder	Honcam technology co., ltd.
Address	6/f b Block, huafeng first technology zone, shunchang road, xixiang, baoan district, Shenzhen city, China
Telephone	+86-755-61529388
Fax	+86-755-61176638
Contact	sunny Tsang

Test Result according to the standards on page 3: Positive

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Page 2 of 49





TABLE OF CONTENTS

Description	Page
1. TEST STANDARDS	5
2. SUMMARY	_
2. SUMMARY	5
2.1 GENERAL REMARKS	5
2.2 FINAL ASSESSMENT	
3. EQUIPMENT UNDER TEST	5
3.1 POWER SUPPLY SYSTEM UTILISED	5
3.2 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
3.3 EUT OPERATION MODE	
3.4 EUT CONFIGURATION	6
4. TEST ENVIRONMENT	7
4.4.4	_
4.1 Address of the test laboratory	
4.2 TEST FACILITY	
4.4 DEFINITIONS OF SYMBOLS USED IN THIS TEST REPORT	
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	
4.6 MEASUREMENT UNCERTAINTY	
5. SUMMARY OF STANDARDS AND RESULTS	8
5.1.DESCRIPTION OF STANDARDS AND RESULTS	8
6. POWER LINE CONDUCTED EMISSION TEST	9
6.1.Test Equipment	
6.2. BLOCK DIAGRAM OF TEST SETUP	
6.3. Power Line Conducted Emission Test Limits	
6.4.Test Procedure	
6.5. POWER LINE CONDUCTED EMISSION TEST RESULTS	
7. RADIATED DISTURBANCE (ELECTRIC FIELD)	14
7.1.TEST EQUIPMENT	
7.2.BLOCK DIAGRAM OF TEST SETUP	14
7.3. RADIATED EMISSION LIMIT STANDARD: FCC 15.247	
7.4.TEST PROCEDURE	
8. CARRIER FREQUENCY SEPARATION TEST	25

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406 Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn



CT5

CENTRE OF TESTING SERVICE

8.1. Test Equipment	25
8.2. TEST INFORMATION	25
8.3. TEST RESULTS	25
9. 20 DB BANDWIDTH TEST	27
9.1. TEST EQUIPMENT.	
9.2. Test Information	
9.3. TEST RESULTS	27
10. NUMBER OF HOPPING FREQUENCY TEST	29
10.1. Test Equipment	29
10.2. Test Information	
10.3. TEST RESULTS	
11. DWELL TIME TEST	31
11.1. TEST EQUIPMENT	24
11.2. TEST INFORMATION	
12. MAXIMUM PEAK OUTPUT POWER TEST	33
12.1. TEST EQUIPMENT	33
12.2. Test Information	33
12.3. TEST RESULTS	33
13. BAND EDGE COMPLIANCE TEST	35
13.1. Test Equipment	35
13.2. Test Information	
13.3. TEST RESULTS	
14. OCCUPIED BANDWIDTH (99% BW) TEST	38
14.1. Test Equipment	38
14.2. Test Information	
14.3. TEST RESULTS	
15. RECEIVER SPURIOUS EMISSION TEST	40
15.1.Test Equipment	40
15.2.BLOCK DIAGRAM OF TEST SETUP	40
15.3.RADIATED EMISSION LIMIT STANDARD: FCC 15.209	41
15.4.Test Procedure	41
15.5.RADIATED EMISSION TEST RESULTS	
16. DEVIATION TO TEST SPECIFICATIONS	49
··· = = ··· ··· · · · · · · · · · · · ·	

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471 Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





1. TEST STANDARDS

The tests were performed according to following standards:

- 47 CFR PART 15 OCT, 2009
- ANSI C63.4-2009

2. SUMMARY

2.1 GENERAL REMARKS

Date of receipt of test sample	14 December 2010
Testing commenced on	17 December 2010
Testing concluded on	29 December 2010

2.2 FINAL ASSESSMENT

The FCC requirements pertaining to the technical standards and tested operation modes are

- fulfilled.
- □ **not** fulfilled.

The equipment under test

- fulfils the FCC requirements cited on page 3.
- **does not** fulfil the FCC requirements cited on page 3.

3. EQUIPMENT UNDER TEST

3.1 Power supply system utilised

Power supply voltage : ■ 3.7 V, AC 120V/60Hz for Xbox

3.2 Short description of the Equipment under Test (EUT)

Number of tested samples: 1

Serial number: Prototype

3.3 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

Test program (customer specific)

Operation mode 1: Low (2402MHz), Mid (2442MHz), High (2480MHz)

Note: X position of EUT is the worst case, so only these test results be recorded in the test report.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fa Complaint line: +86-20-85533471 E

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn

ts@cts-lab.com.cn See Reverse For Terms And Conditions of Service

Report No.: CGZ3101214-04363-O





3.4 EUT configuration

3.4.1. Description of configuration (EUT)

Description		PS3 Bluetooth Headset
Model Number	:	HC-PS3052
Operation frequency	:	2402.00~2480.00MHz/ GFSK
Radio Technology	:	HFSS
Modulation Technology	:	GFSK modulation
Antenna	:	Integral antenna, met requirement of FCC 15.203
Antenna Assembly Gain	:	2dBi (maximum)

3.4.2. Tested Supporting System Details

Name	6.4 // Colour LCD Monitor
M/N	JV-A688
S/N	N/A
Manufacturer	JEJA
Power Cord	Unshielded, Detachabled, 1.8m , 2Pin
Data Cable	Unshielded, Detachabled, 1.8m
Certificate	By VoC

Name	XBOX 360 Console
M/N	XBOX 360
S/N	N/A
Manufacturer	Microsoft
Data Cable	Unshielded, Detachabled, 1.5m
Certificate	By CoC

Name	AC/DC Adapter
M/N	HP-A1503P2
S/N	OC21S591607928
Manufacturer	Microsoft
Power Cord	Unshielded, Detachabled, 1.8m , 3Pin
Certificate	By DoC

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-m

E-mail: cts@cts-lab.com.cn





4. TEST ENVIRONMENT

4.1 Address of the test laboratory

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

4.2 Test facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L3394

CENTRE OF TESTING SERVICE CO., LTD has been assessed and proved to be in compliance with CNAS-CL01: 2006 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

IC-Registration No.: 8374

The 3m Alternate Test Site of CENTRE OF TESTING SERVICE CO., LTD has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 8374 on June 24, 2009.

FCC-Registration No.: 971995

CENTRE OF TESTING SERVICE CO., LTD, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration No.791995, July 21, 2009.

4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35 ° C
Humidity:	25~75 %
Atmospheric pressure:	86~106 kPa

4.4 Definitions of symbols used in this test report

- - The black square indicates that the listed condition, standard or equipment is applicable for this report.
- □ The empty square indicates that the listed condition, standard or equipment is **not** applicable for this report.

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the CTS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3101214-04363-O Page 7 of 49



variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

4.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction disturbance	150kHz~30MHz	±1.22dB	(1)
Power disturbance	30MHz~300MHz	±1.38dB	(1)
Radiation emission (3m)	30MHz~300MHz	±3.14dB	(1)
	300MHz~1000MHz	±3.18dB	(1)

^{(1).} This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5. Summary of standards and results

5.1.Description of Standards and Results

EMISSION			
Description of Test Item	Standard	Results	
Conducted Emission Test	FCC Part 15 C: 15.247 ANSI C63.4-2009	PASSED	
Radiated Emission Test	FCC Part 15 C: 15.247 ANSI C63.4-2009	PASSED	
Carrier Frequency Separation Test	FCC Part 15 C: 15.247 ANSI C63.4-2009	PASSED	
20 dB Bandwidth Test	FCC Part 15 C: 15.247 ANSI C63.4-2009	PASSED	
Number Of Hopping Frequency Test	FCC Part 15 C: 15.247 ANSI C63.4-2009	PASSED	
Dwell Time Test	FCC Part 15 C: 15.247 ANSI C63.4-2009	PASSED	
Maximum Peak Output Power Test	FCC Part 15 C: 15.247 ANSI C63.4-2009	PASSED	
Band Edge Compliance Test	FCC Part 15 C: 15.247 ANSI C63.4-2009	PASSED	
RF Exposure Test	FCC Part 2: 2.1307(b)(1)	PASSED	
Receiver Spurious Emission Test	FCC Part 15 C: 15.247 ANSI C63.4-2009	PASSED	

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3101214-04363-O Page 8 of 49






6. Power Line Conducted Emission Test

6.1.Test Equipment

Conduc	Conducted Disturbance						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.		
1	EMI Test Receiver	ROHDE & SCHWARZ	ESHS10	842884/012	2009/12		
2	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/025	2009/12		
3	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/026	2009/12		
4	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100301	2009/12		
5	EMI Test Software	ROHDE & SCHWARZ	ESK1	N/A	2009/12		

6.2. Block Diagram of Test Setup

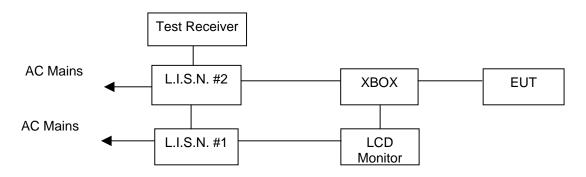

(EUT: PS3 Bluetooth Headset)

6.3. Power Line Conducted Emission Test Limits

		Maximum RF Line Voltage			
Frequency		Quasi-Peak Level	Average Level		
		dB(μV)	dB(μV)		
150kHz ~ 5	500kHz	66 ~ 56*	56 ~ 46*		
500kHz ~ 5	5MHz	56	46		
5MHz ~ 3	30MHz	60	50		

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

6.4.Test Procedure

The EUT Via XBOX Power connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#1). Power on the PC and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC Part 15C on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS 10) is set at 10kHz.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3101214-04363-O Page 9 of 49






6.5. Power Line Conducted Emission Test Results PASSED.

Channel:	TX Mode	Result:	■ - passed
Test point:	Va		☐ - not passed
Frequency range:	0.15~30MHz		

EUT	PS3 Bluetooth Headset
Firm Name	Honcam technology co., ltd.
Operating Condition	3.7 V, AC 120V/60Hz for Xbox
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test Date:	18 December 2010
Operator	Peter
MODEL NO	HC-PS3052

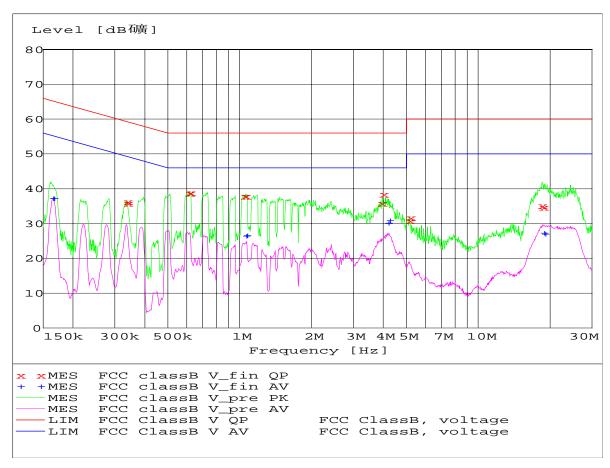

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





CENTRE OF TESTING SERVICE

MEASURE Frequency	Level	Trans	d Lir	mit M	argin Li	
MHz	dBµV	dB	Œ	βμV	dB	
0.337414	36.40	10.1	59	22.6	Va	GND
0.336663	35.50	10.1	59	23.5	Va	GND
0.616146	38.30	10.1	56	17.7	Va	GND
0.614811	38.50	10.1	56	17.5	Va	GND
1.048110	37.80	10.1	56	18.2	Va	GND
1.056512	37.90	10.1	56	18.1	Va	GND
3.928870	35.80	10.1	56	20.2	Va	GND
3.992110	38.50	10.1	56	17.5	Va	GND
5.154187	30.80	10.1	60	29.2	Va	GND
5.195503	31.70	10.1	60	28.3	Va	GND
18.490507	35.10	9.9	60	24.9	Va	GND
18.713280	34.70	9.9	60	25.3	Va	GND

MEASUREMENT RESULT: "FCC classB V_fin AV" Frequency Level Transd Limit Margin Line PE

riequency	Level	Hallst	, LIIIII	ı ıvıaı yı	II LIIIE	- F
MHz	dBµV	dΒ	dBµ∨	′ dB		
	•		•			
0.164415	37.30	10.2	55	17.7	Vb	GND
0.165733	37.30	10.2	55	17.7	Vb	GND
1.060740	26.40	10.1	46	19.6	Vb	GND
1.069243	26.60	10.1	46	19.4	Vb	GND
4.188010	30.10	10.1	46	15.9	Vb	GND
4.238467	31.00	10.1	46	15.0	Vb	GND
18.788133	27.40	9.9	50	22.6	Vb	GND
19.014490	27.10	9.9	50	22.9	Vb	GND

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3101214-04363-O Page 11 of 49






CENTRE OF TESTING SERVICE

Channel:	TX Mode	Result:	■ - passed
Test point:	Vb		□ - not passed
Frequency range:	0.15~30MHz		

EUT	PS3 Bluetooth Headset
Firm Name	Honcam technology co., ltd.
Operating Condition	3.7 V, AC 120V/60Hz for Xbox
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test Date:	18 December 2010
Operator	Peter
MODEL NO	HC-PS3052

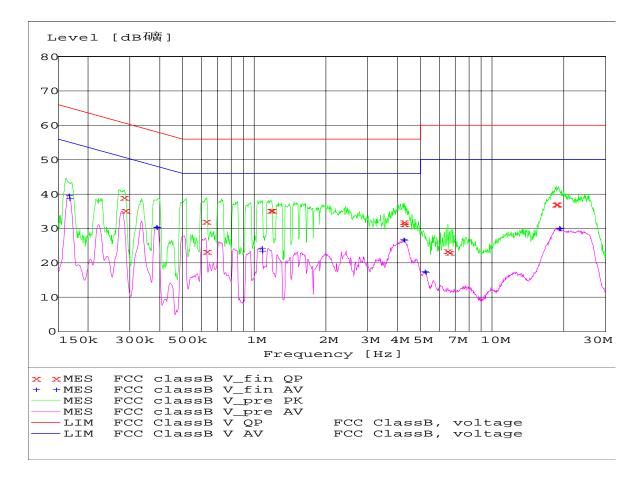

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





CENTRE OF TESTING SERVICE

MEASUREME					_	
Frequency	Level	Transd	Limi	t Marg	gin Lin	e PE
MHz	dΒμV	dB	dΒμ\	/ dE	3	
0.000040	00.00	40.0	0.4	04.0	\	OND
0.282840	39.20	10.2	61	21.8	Vb	GND
0.284436	35.60	10.2	61	25.4	Vb	GND
0.623270	32.50	10.1	56	23.5	Vb	GND
0.628370	23.40	10.1	56	32.7	Vb	GND
1.167291	35.70	10.1	56	20.3	Vb	GND
1.181786	35.50	10.1	56	20.5	Vb	GND
4.238366	31.40	10.1	56	24.6	Vb	GND
4.255480	31.30	10.1	56	24.7	Vb	GND
6.471930	23.50	10.0	60	36.5	Vb	GND
6.575720	23.20	10.0	60	36.9	Vb	GND
18.566472	37.00	9.9	60	23.0	Vb	GND
18.638230	37.40	9.9	60	22.6	Vb	GND
MEASUREM	ENT RE	SULT:	"FCC	class	BV fi	n AV"
MEASUREM Frequency					_	
MEASUREM Frequency MHz	Level	Transd	Limi	t Marg	gin Lin	
Frequency				t Marg	gin Lin	
Frequency	Level	Transd	Limi	t Marg	gin Lin	
Frequency MHz	Level dBµV	Transd dB	Limi dBµ	t Marg V d	gin Lin B	e PE
Frequency MHz 0.165078	Level dBµV 39.60	Transd dB 10.2	Limi dBµ 55	t Març V d 15.6	gin Lin B Vb	e PE GND
Frequency MHz 0.165078 0.166401	Level dBµV 39.60 38.70	Transd dB 10.2 10.2	Limi dBµ 55 55	t Març V d 15.6 16.4	gin Lin B Vb Vb	e PE GND GND
Frequency MHz 0.165078 0.166401 0.384810	Level dBµV 39.60 38.70 30.50	Transd dB 10.2 10.2 10.1	Limi dBµ 55 55 48	t Marg V d 15.6 16.4 17.6	gin Lin B Vb Vb Vb	GND GND GND
Frequency MHz 0.165078 0.166401 0.384810 0.387895	Level dBµV 39.60 38.70 30.50 30.30	Transd dB 10.2 10.2 10.1 10.1	Limi dBµ 55 55 48 48	t Marg V d 15.6 16.4 17.6 17.8	gin Lin B Vb Vb Vb Vb	GND GND GND GND GND
0.165078 0.166401 0.384810 0.387895 1.069240	Level dBµV 39.60 38.70 30.50 30.30 24.40	Transd dB 10.2 10.2 10.1 10.1 10.1	Limi dBµ 55 55 48 48 46	t Marg V d 15.6 16.4 17.6 17.8 21.6	gin Lin B Vb Vb Vb Vb Vb	GND GND GND GND GND GND
0.165078 0.166401 0.384810 0.387895 1.069240 1.073517	Level dBµV 39.60 38.70 30.50 30.30 24.40 23.50	Transd dB 10.2 10.2 10.1 10.1 10.1 10.1	55 55 48 48 46 46	t Marg V d 15.6 16.4 17.6 17.8 21.6 22.5	gin Lin B Vb Vb Vb Vb Vb	GND GND GND GND GND GND GND
Frequency MHz 0.165078 0.166401 0.384810 0.387895 1.069240 1.073517 4.221579	Level dBµV 39.60 38.70 30.50 30.30 24.40 23.50 26.80	Transd dB 10.2 10.2 10.1 10.1 10.1 10.1 10.1	Limi dBµ 55 55 48 48 46 46 46	t Marg V d 15.6 16.4 17.6 17.8 21.6 22.5 19.2	gin Lin B Vb Vb Vb Vb Vb Vb Vb	GND GND GND GND GND GND GND GND
Frequency MHz 0.165078 0.166401 0.384810 0.387895 1.069240 1.073517 4.221579 4.238465 5.174810 5.216291	Level dBµV 39.60 38.70 30.50 30.30 24.40 23.50 26.80 26.60	Transd dB 10.2 10.2 10.1 10.1 10.1 10.1 10.1 10.1	Limi dBµ 55 55 48 46 46 46 46	t Marg V d 15.6 16.4 17.6 17.8 21.6 22.5 19.2	gin Lin B Vb Vb Vb Vb Vb Vb Vb	GND GND GND GND GND GND GND GND
Frequency MHz 0.165078 0.166401 0.384810 0.387895 1.069240 1.073517 4.221579 4.238465 5.174810	Level dBµV 39.60 38.70 30.50 30.30 24.40 23.50 26.80 26.60 17.50	Transd dB 10.2 10.2 10.1 10.1 10.1 10.1 10.1 10.1	55 55 48 48 46 46 46 46 50	t MargV d 15.6 16.4 17.6 17.8 21.6 22.5 19.2 19.4 32.5	gin Lin B Vb	GND GND GND GND GND GND GND GND GND

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn






7. Radiated disturbance (electric field)

7.1.Test Equipment

Radiated disturbance (electric field)						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100868	2009/12	
2	Biconical Antenna	ROHDE & SCHWARZ	HK116	100221	2009/12	
3	Log per Antenna	ROHDE & SCHWARZ	HL223	100226	2009/12	
4	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2009/12	
5	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2009/12	

7.2.Block Diagram of Test Setup

7.2.1 Block Diagram of connection between EUT and simulators

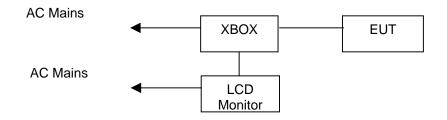

(EUT: PS3 Bluetooth Headset)

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406


Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn See Reverse For Terms And Conditions of Service

Report No.: CGZ3101214-04363-O Page 14 of 49





7.2.2 Anechoic Chamber Setup Diagram

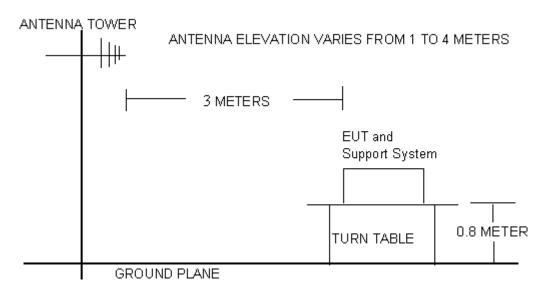

7.3. Radiated Emission Limit Standard: FCC 15.247

FR	FREQUENCY		DISTANCE	FIELD STRENGTHS LIMIT		
	MHz		Meters	μV/m	dB(μV)/m	
30	~	88	3	100	40.0	
88	~	216	3	150	43.5	
216	~	960	3	200	46.0	
960	~	1000	3	500	54.0	
Above 1000		000	3	Other:74.0 dB(μ 54.0 dB(μV)/m		

- Remark: (1) Emission level $dB\mu V = 20 \log Emission level \mu V/m$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

7.4.Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2009on radiated emission Test.

The frequency range from 30MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 120kHz RBW below 1GHz and a Peak and Average detector with 1MHz RBW above 1GHz,

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406 Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3101214-04363-O Page 15 of 49





CENTRE OF TESTING SERVICE

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 300kHz VBW below 1GHz and a Peak detector with 1MHz VBW above 1GHz, A average detector with 10Hz VBW above 1GHz

Pretest x, y, z position of EUT, final, select the worst case x position test and record the test results in the report.

The test modes (TX Mode) is tested in Anechoic Chamber and all the scanning waveforms are reported on section 7.5

7.5. Radiated Emission Test Results

PASSED.

The frequency range from 30MHz to 230MHz, 230MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn



Channel:	TX Mode	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	30-230MHz and 230-1000MHz		

EUT	PS3 Bluetooth Headset		
Firm Name	Honcam technology co., ltd.		
Operating Condition	3.7 V, AC 120V/60Hz for Xbox		
Test Condition	Ambient Temperature: 25°C Humidity: 56%		
Test Date:	18 December 2010 ~ 30 December 2010		
Operator	Peter		
MODEL NO	HC-PS3052		

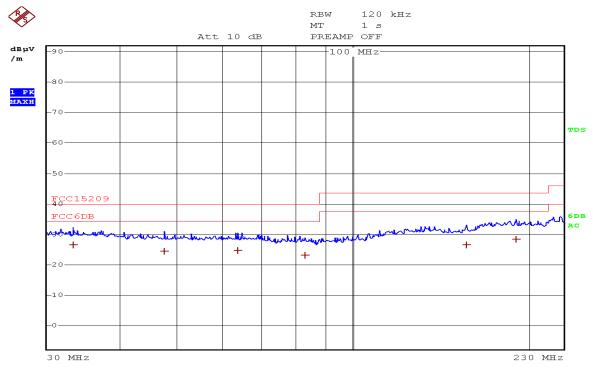

	ED	IT PEAK LIST (Fina	al Measurement Res	ults)
Tra	ce1:	FCC15209		
Tra	ce2:			
Tra	.ce3:			
	TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1	Quasi Peak	33.32 MHz	26.41	-13.58
1	Quasi Peak	47.68 MHz	24.49	-15.50
1	Quasi Peak	63.64 MHz	24.58	-15.41
1	Quasi Peak	83.16 MHz	23.18	-16.81
1	Quasi Peak	156.92 MHz	26.59	-16.91
1	Quasi Peak	190.36 MHz	28.33	-15.17

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


CENTRE OF TESTING SERVICE CO., LTD.

 $\hbox{\bf Building F, Dachuang industrial park, No. 379, Zhongshan Dadao, Guangzhou, China}\\$

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





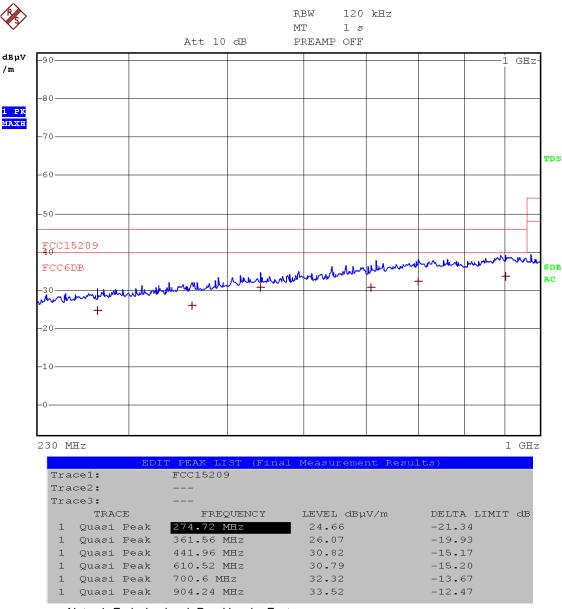

Note: 1. Emission level=Read level + Factor 2. Factor=Antenna factor + Cable loss

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-95533471 E-mail: cts@cts-lab.com.cn See Reverse For Terms And Conditions of Service





CENTRE OF TESTING SERVICE

Channel:	Low 2402MHz	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	1GHz-26.5GHz		

EUT	PS3 Bluetooth Headset	
Firm Name	Honcam technology co., ltd.	
Operating Condition	3.7 V, AC 120V/60Hz for Xbox	
Test Condition	Ambient Temperature: 25°C Humidity: 56%	
Test Date:	18 December 2010 ~ 30 December 2010	
Operator	Peter	
MODEL NO	HC-PS3052	

Frequency	Result	[dBµV]	Limit [dBµV]	Dlii	mit [dBµV]
[MHz]	Average	Peak	Average	Peak	Average	Peak
1838.7	43.7	54.5	54	74	10.3	19.5
2744.5	44.1	53.7	54	74	9.9	20.3
4804.1	50.6	54.0	54	74	3.6	20.0
6375.1	46.1	56.8	54	74	7.9	17.2
7206.5	48.0	50.7	54	74	6.0	23.3
8512.3	44.4	53.0	54	74	9.6	21.0

Note: 1. Emission level=Read level + Factor
2. Factor=Antenna factor + Cable loss

Channel:	Mid 2442MHz	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	1GHz-26.5GHz		11,11,11

Frequency	Result	[dBµV]	Limit [dBµV]	Dli	mit [dBµV]
[MHz]	Average	Peak	Average	Peak	Average	Peak
1828.7	43.5	53.5	54	74	10.5	20.5
2734.5	45.1	55.7	54	74	8.9	18.3
4884.0	51.0	54.7	54	74	3.0	20.3
6375.1	43.2	53.8	54	74	10.8	20.2
7326.2	49.8	54.7	54	74	5.2	19.3
8512.2	46.1	56.0	54	74	7.9	18.0

Note: 1. Emission level=Read level + Factor
2. Factor=Antenna factor + Cable loss

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406 Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3101214-04363-O Page 19 of 49





CENTRE OF TESTING SERVICE

Channel:	High 2480MHz	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	1GHz-26.5GHz		

Frequency	Result	[dBµV]	Limit [[dBµV]	Dli	mit [dBµV]
[MHz]	Average	Peak	Average	Peak	Average	Peak
1829.3	43.4	53.5	54	74	10.6	20.5
2735.5	46.2	55.7	54	74	7.8	18.3
4960.0	50.2	53.7	54	74	3.8	21.3
6375.1	41.6	51.8	54	74	12.4	22.2
7440.0	49.9	54.7	54	74	4.1	19.3
8532.3	43.1	53.0	54	74	10.9	21.0

Note: 1. Emission level=Read level + Factor

2. Factor=Antenna factor + Cable loss

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines)


Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn



Channel:	TX Mode	Result:	■ - passed
Test point:	Vertical		□ - not passed
Frequency range:	30-230MHz and 230-1000MHz		

EUT	PS3 Bluetooth Headset		
Firm Name	Honcam technology co., ltd.		
Operating Condition	3.7 V, AC 120V/60Hz for Xbox		
Test Condition	Ambient Temperature: 25°C Humidity: 56%		
Test Date:	18 December 2010 ~ 30 December 2010		
Operator	Peter		
MODEL NO	HC-PS3052		

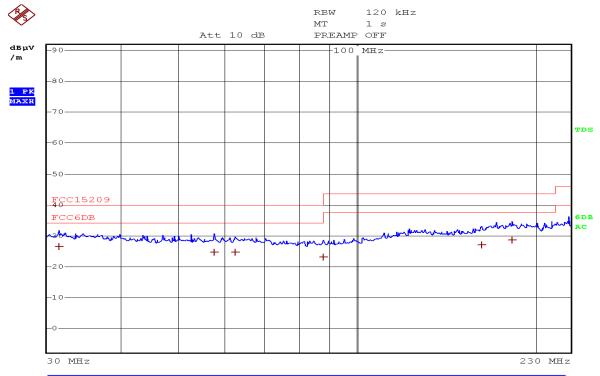

	EDIT PEAK LIST (F	inal Measurement 1	Results)
Tracel:	FCC15209		
Trace2:			
Trace3:			
TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Pe	ak 31.44 MHz	26 . 57	-13.42
1 Quasi Pe	ak 57.44 MHz	24.54	-15.45
1 Quasi Pe	ak 62.4 MHz	24.60	-15.40
1 Quasi Pe	ak 87.8 MHz	23.10	-16.89
1 Quasi Pe	ak 162.32 MHz	27.13	-16.36
1 Quasi Pe	ak 182.76 MHz	28.50	-14.99

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

 $\label{eq:buildingF} \textbf{Building F, Dachuang industrial park, No. 379, Zhongshan Dadao, Guangzhou, China}$


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3101214-04363-O Page 21 of 49





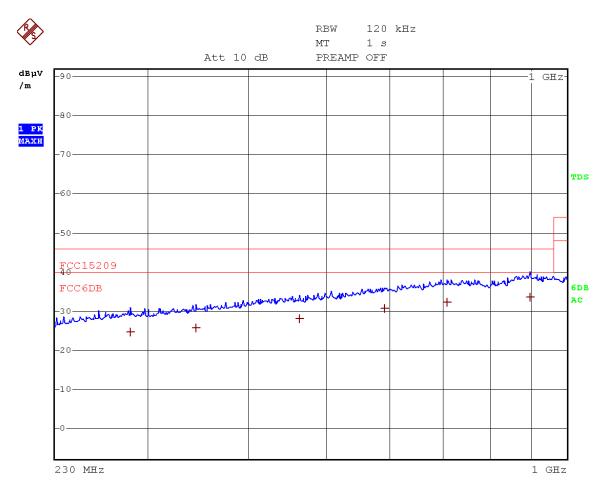

	EDIT PEAK LIST (F	inal Measurement R	esults)
Tracel:	FCC15209		
Trace2:			
Trace3:			
TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Pe	ak 285.6 MHz	24.59	-21.40
1 Quasi Pe	ak 344.88 MHz	25.77	-20.23
1 Quasi Pe	ak 464.24 MHz	28.18	-17.81
1 Quasi Pe	ak 593.04 MHz	30.72	-15.27
1 Quasi Pe	ak 707.92 MHz	32.39	-13.60
1 Quasi Pe	ak 899.88 MHz	33.60	-12.40

Note: 1. Emission level=Read level + Factor 2. Factor=Antenna factor + Cable loss

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406 Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





CENTRE OF TESTING SERVICE

Channel:	Low 2402MHz	Result:	■ - passed
Test point:	Vertical		□ - not passed
Frequency range:	1G-26.5GHz		

EUT	PS3 Bluetooth Headset
Firm Name	Honcam technology co., ltd.
Operating Condition	3.7 V, AC 120V/60Hz for Xbox
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test Date:	18 December 2010 ~ 30 December 2010
Operator	Peter
MODEL NO	HC-PS3052

Frequency	Result [dBµV]		Limit [dBµV]		Dlimit[dBµV]	
[MHz]	Average	Peak	Average	Peak	Average	Peak
1838.7	42.7	52.5	54	74	11.3	21.5
2744.5	43.1	53.7	54	74	10.9	20.3
4804.1	51.0	54.7	54	74	3.0	19.3
6375.1	42.1	52.8	54	74	11.9	21.2
7206.5	49.0	53.7	54	74	5.0	20.3
8512.3	41.4	51.0	54	74	12.6	23.0

Note: 1. Emission level=Read level + Factor 2. Factor=Antenna factor + Cable loss

Channel:	Mid 2442MHz	Result:	■ - passed
Test point:	Vertical		□ - not passed
Frequency range:	1G-26.5GHz		

	1					
Frequency	Result	Result [dBµV]		Limit [dBµV]		nit [dBµV]
[MHz]	Average	Peak	Average	Peak	Average	Peak
1828.7	42.5	53.5	54	74	11.5	20.5
2734.5	43.1	52.7	54	74	10.9	21.3
4884.0	50.1	55.0	54	74	3.9	19.0
6375.1	42.2	52.8	54	74	11.8	21.2
7326.2	498	53.7	54	74	4.2	20.3
8512.2	44.1	53.0	54	74	9.9	21.0

Note: 1. Emission level=Read level + Factor

2. Factor=Antenna factor + Cable loss

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406 Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





CENTRE OF TESTING SERVICE

Channel:	High 2480MHz	Result:	■ - passed
Test point:	Vertical		□ - not passed
Frequency range:	1G-26.5GHz		

Frequency	Result [dBµV]		uency Result [dBµV] Limit [dBµV]		Dlimit [dBµV]	
[MHz]	Average	Peak	Average	Peak	Average	Peak
1829.3	42.4	52.5	54	74	11.6	21.5
2735.5	44.2	53.7	54	74	9.8	20.3
4960.0	50.0	52.7	54	74	3.0	21.3
6375.1	42.6	52.8	54	74	11.4	21.2
7440.0	50.0	54.7	54	74	4.0	19.3
8532.3	43.1	53.0	54	74	10.9	21.0

Note: 1. Emission level=Read level + Factor

2. Factor=Antenna factor + Cable loss

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471 Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3101214-04363-O Page 24 of 49





8. Carrier frequency separation test

8.1. Test Equipment

Carrier frequency separation test						
Item	tem Test Equipment Manufacturer Model No. Serial No. Last Cal					
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	10868	200912	
2	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	200912	
3	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	200912	
4	Spectrum	Agilent	E4446A	44300459	200912	

8.2. Test Information

EUT:	PS3 Bluetooth Headset
M/N:	HC-PS3052
Firm Name:	Honcam technology co., ltd.
Power supply:	3.7 V, AC 120V/60Hz for Xbox
Test Condition:	Ambient Temperature: 25°C Humidity: 56%
Test standard:	FCC PART 15C: 15.247
Test mode:	Transmitting, Hopping on
Test Frequency:	Low: 2402MHz; Mid: 2442MHz; High: 2480MHz
Test Date:	18 December 2010 ~ 04 January 2011
Test By:	Peter

8.3. Test Results

PASSED.

The testing data was attached in the next pages.

СН	Channel separation (kHz)	Limit	Conclusion	
(Low)	806	>the 20dB Bandwidth or 25kHz	PASSED	
(LOW)	000	(whichever is greater)	TAGGLD	
(Mid)	813	>the 20dB Bandwidth or 25kHz	PASSED	
(iviiu)	013	(whichever is greater)	PASSED	
(High)	042	>the 20dB Bandwidth or 25kHz	DACCED	
(High)	813	(whichever is greater)	PASSED	

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471


Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn









Test frequency:2402MHz

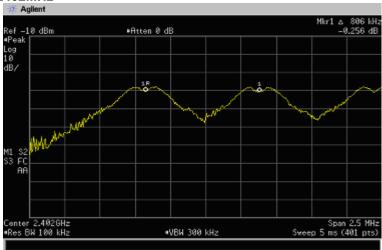

Test frequency:2442MHz

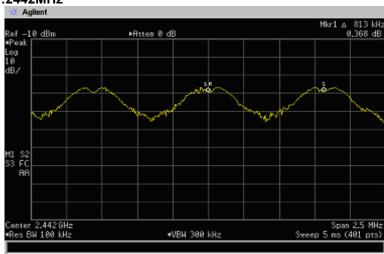

Test frequency:2480MHz

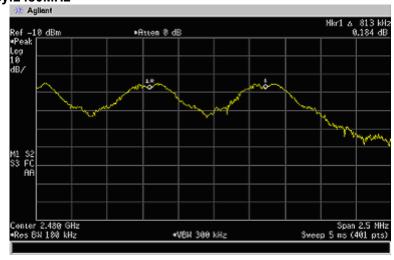

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3101214-04363-O





9. 20 dB Bandwidth test

9.1. Test Equipment

20 dB I	20 dB Bandwidth test						
Item Test Equipment Manufacturer Model No. Serial No. La				Last Cal.			
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	10868	200912		
2	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	200912		
3	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	200912		
4	Spectrum	Agilent	E4446A	44300459	200912		

9.2. Test Information

EUT:	PS3 Bluetooth Headset			
M/N:	HC-PS3052			
Firm Name:	Honcam technology co., ltd.			
Power supply:	3.7 V, AC 120V/60Hz for Xbox			
Test Condition:	Ambient Temperature: 25°C Humidity: 56%			
Test standard:	FCC PART 15C: 15.247			
Test mode:	Transmitting, Hopping on			
Test Frequency:	Low: 2402MHz; Mid: 2442MHz; High: 2480MHz			
Test Date:	18 December 2010 ~ 04 January 2011			
Test By:	Peter			

9.3. Test Results

PASSED.

The testing data was attached in the next pages.

Channel	20dB Bandwidth (kHz)	Limit (kHz)	Conclusion
(Low)	765		PASSED
(Mid)	773		PASSED
(High)	773		PASSED

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn









Test Frequency:2402MHz

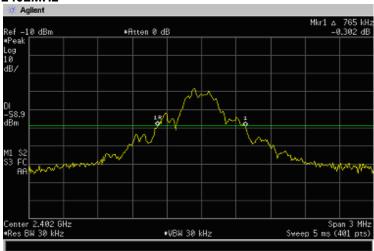

Test Frequency:2442MHz

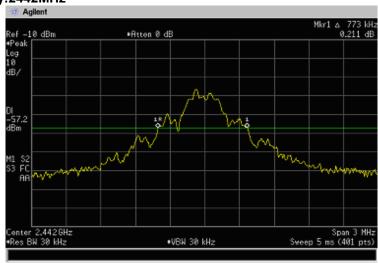

Test Frequency:2480MHz

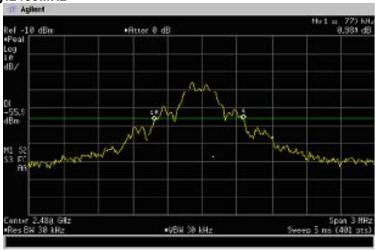

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





10. Number of Hopping Frequency test

10.1. Test Equipment

Numbe	Number of Hopping Frequency test						
Item	Test Equipment Manufacturer Model No. Serial No. Last Cal.						
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	10868	200912		
2	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	200912		
3	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	200912		
4	Spectrum	Agilent	E4446A	44300459	200912		

10.2. Test Information

EUT:	PS3 Bluetooth Headset			
M/N:	HC-PS3052			
Firm Name:	Honcam technology co., ltd.			
Power supply:	3.7 V, AC 120V/60Hz for Xbox			
Test Condition:	Ambient Temperature: 25°C Humidity: 56%			
Test standard:	FCC PART 15C: 15.247			
Test mode:	Transmitting, Hopping on			
Test Frequency:	Low: 2402MHz; Mid: 2442MHz; High: 2480MHz			
Test Date:	18 December 2010 ~ 30 December 2010			
Test By:	Peter			

10.3. Test Results

PASSED.

The testing data was attached in the next pages.

Number of channel	Limit	Conclusion	
74	>=15	PASSED	

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


CENTRE OF TESTING SERVICE CO., LTD.


Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn



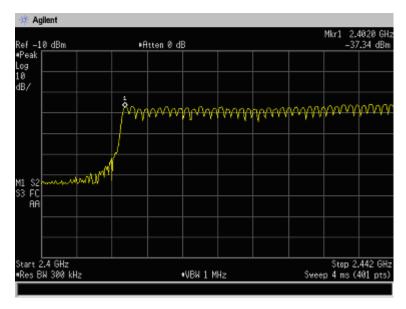

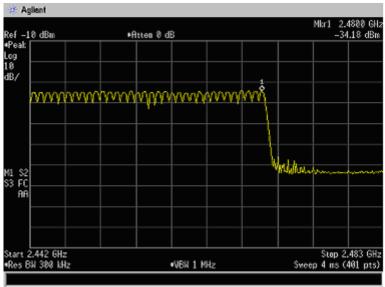

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





11. Dwell time test

11.1. Test Equipment

Dwell time test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	10868	200912	
2	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	200912	
3	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	200912	

11.2. Test Information

EUT:	PS3 Bluetooth Headset
M/N:	HC-PS3052
Firm Name:	Honcam technology co., ltd.
Power supply:	3.7 V, AC 120V/60Hz for Xbox
Test Condition:	Ambient Temperature: 25°C Humidity: 56%
Test standard:	FCC PART 15C: 15.247
Test mode:	Transmitting, Hopping On
Test Frequency:	Normal
Test Date:	18 December 2010 ~ 30 December 2010
Test By:	Peter

11.3. Test Results

PASSED.

The testing data was attached in the next pages.

This system hopping 42 hops in any 10s, and for each hop it transmit 5 pulses, each pulse dwell $540\mu s$, so the dwell time is:

42/10*74*0.4*5*540*10⁻⁶=335.6ms

dwell time	Limit	Conclusion
335.6ms	<400ms	PASSED

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406


Complaint line: +86-20-85533471 E-I

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3101214-04363-O Page 31 of 49



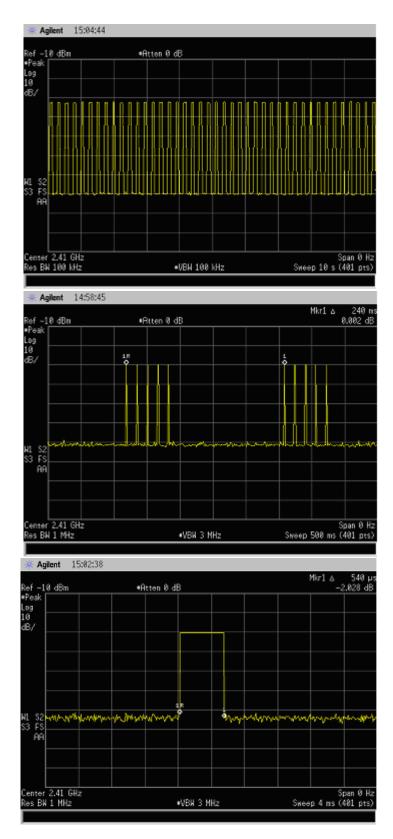

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





12. Maximum Peak Output power test

12.1. Test Equipment

Maxim	Maximum Peak Output power test						
Item	tem Test Equipment Manufacturer Model No. Serial No. Last Cal.						
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	10868	200912		
2	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	200912		
3	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	200912		

12.2. Test Information

EUT:	PS3 Bluetooth Headset
M/N:	HC-PS3052
Firm Name:	Honcam technology co., ltd.
Power supply:	3.7 V, AC 120V/60Hz for Xbox
Test Condition:	Ambient Temperature: 25°C Humidity: 56%
Test standard:	FCC PART 15C: 15.247
Test mode:	Transmitting, Hopping off
Test Frequency:	Low: 2402MHz; Mid: 2442MHz; High: 2480MHz;
Test Date:	18 December 2010 ~ 30 December 2010
Test By:	Peter

12.3. Test Results

PASSED.

The testing data was attached in the next pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.



СН	Freq Ant. (MHz) pol	Emission Level	l Result I	Morgin	Limits		
		pol	(dBμV)	(dBm)	Margin	(mW)	(dBm)
Low	2402.0	Н	94.78	0.62	20.33	125	20.97
Low	2402.0	V	88.84	-6.34	27.31	125	20.97
Mid	2442.0	Н	93.94	0.51	20.46	125	20.97
	2442.0	V	86.14	-9.16	30.13	125	20.97
High	2480.0	Н	95.35	0.49	20.48	125	20.97
	2480.0	V	89.34	-8.15.	29.12	125	20.97

Calculation Result = $30 + 10\log(TP)$ TP= (Emission Level * D)² / 30 * G

(This formula descript in IC RSS-210 clause 11, where D is the distance in meters between the tow antennas, TP is transmitter output power in watts and G is the antenna numerical gain referenced to isotropic gain, in here G = 1 supplied by customer)

Emission Level = Antenna Factor + Cable Loss + Reading.

(RBW=1MHz, VBW=1MHz peak detector.)

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.







13. Band Edge Compliance test

13.1. Test Equipment

Band Edge Compliance test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	10868	200912	
2	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	200912	
3	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	200912	

13.2. Test Information

EUT:	PS3 Bluetooth Headset
M/N:	HC-PS3052
Firm Name:	Honcam technology co., ltd.
Power supply:	3.7 V, AC 120V/60Hz for Xbox
Test Condition:	Ambient Temperature: 25°C Humidity: 56%
Test standard:	FCC PART 15C: 15.247
Test mode:	Transmitting, Hopping on and Hopping off
Took Francisco as a	Low: 2402MHz; Mid: 2442MHz; High: 2480MHz;
Test Frequency:	High: 2482MHz
Test Date:	18 December 2010 ~ 30 December 2010
Test By:	Peter

13.3. Test Results

PASSED.

The testing data was attached in the next pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





Test Frequency: Low (Hopping on)

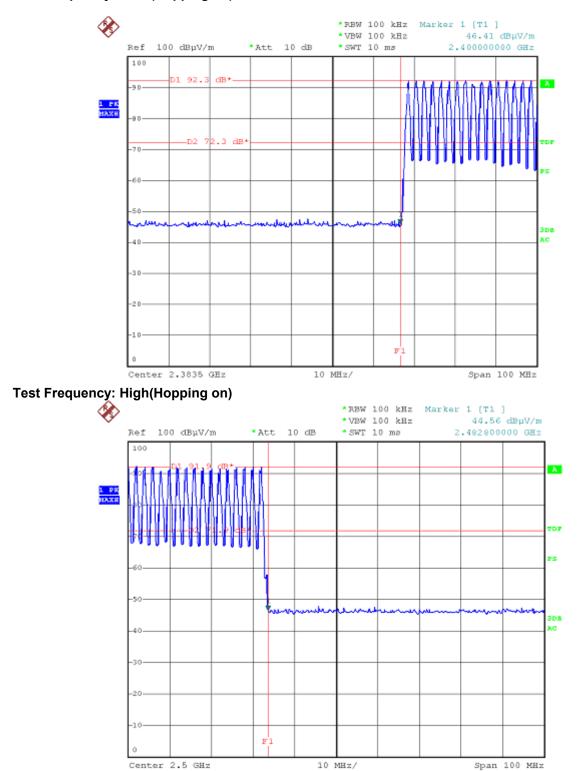

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn







Test Frequency: High(Hopping off)

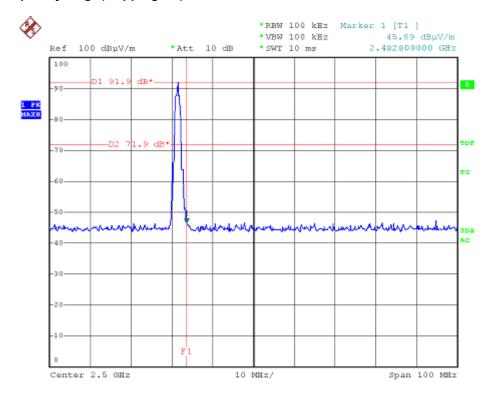

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





14. Occupied Bandwidth (99% BW) test

14.1. Test Equipment

Band E	Band Edge Compliance test						
Item Test Equipment Manufacturer Model No. Serial No.							
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	10868	200912		
2	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	200912		
3	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	200912		
4	Spectrum	Agilent	E4446A	44300459	200912		

14.2. Test Information

EUT:	PS3 Bluetooth Headset
M/N:	HC-PS3052
Firm Name:	Honcam technology co., ltd.
Power supply:	3.7 V, AC 120V/60Hz for Xbox
Test Condition:	Ambient Temperature: 25°C Humidity: 56%
Test standard:	FCC PART 15C: 15.247
Test mode:	Transmitting, Hopping on and Hopping off
Test Frequency:	2402MHz ,
Test Date:	18 December 2010
Test By:	Jackson

14.3. Test Results

PASSED.

The testing data was attached in the next pages.


Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn See Reverse For Terms And Conditions of Service

Report No.: CGZ3101214-04363-O Page 38 of 49



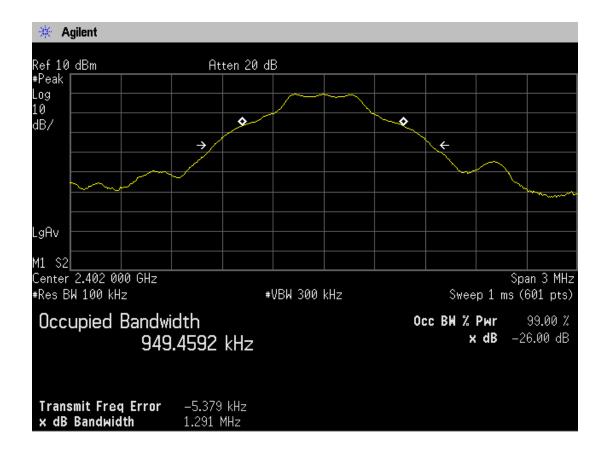

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn

Complaint line: +86-20-85533471






15. Receiver Spurious Emission Test

15.1.Test Equipment

Radia	Radiated disturbance (electric field)						
Item	tem Test Equipment Manufacturer Model No. Serial No. La						
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100868	2009/12		
2	Biconical Antenna	ROHDE & SCHWARZ	HK116	100221	2009/12		
3	Log per Antenna	ROHDE & SCHWARZ	HL223	100226	2009/12		
4	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2009/12		
5	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2009/12		

15.2.Block Diagram of Test Setup

15.2.1 Block Diagram of connection between EUT and simulators

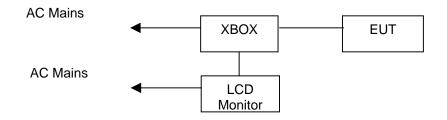

(EUT: PS3 Bluetooth Headset)

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406


Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn See Reverse For Terms And Conditions of Service

Report No.: CGZ3101214-04363-O Page 40 of 49





15.2.2 Anechoic Chamber Setup Diagram

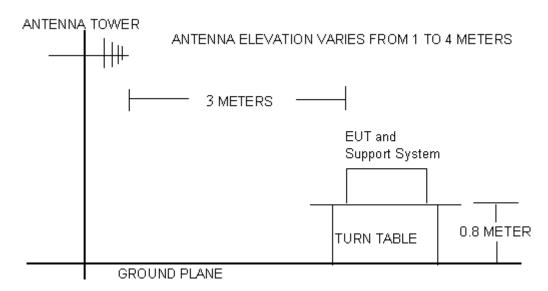

15.3. Radiated Emission Limit Standard: FCC 15.209

FREQUENCY		CY	DISTANCE	FIELD STRENGTHS LIMIT		
MHz			Meters	μV/m	dB(μV)/m	
30	30 ~ 88		3	100	40.0	
88	~	216	3	150	43.5	
216	216 ~ 960		3	200	46.0	
960	960 ~ 1000		3	500	54.0	
Above 1000			3	Other:74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)		

Remark:

- (1) Emission level $dB\mu V = 20 \log Emission level \mu V/m$
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

15.4.Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2009on radiated emission Test.

The frequency range from 30MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 120kHz RBW below 1GHz and a Peak and Average detector with 1MHz RBW above 1GHz

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

 $\label{eq:buildingF} \textbf{Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China}$

Tel: +86-20-85543113 (32 lines) Fax: +86-20 Complaint line: +86-20-85533471 E-mail: cts@

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3101214-04363-O Page 41 of 49





CENTRE OF TESTING SERVICE

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 300kHz VBW below 1GHz and a Peak detector with 1MHz VBW above 1GHz, A average detector with 10Hz VBW above 1GHz

Pretest x, y, z position of EUT, final, select the worst case x position test and record the test results in the report.

The test modes (Standby Mode) is tested in Anechoic Chamber and all the scanning waveforms are reported on section 15.5

15.5.Radiated Emission Test Results PASSED.

The frequency range from 30MHz to 230MHz, 230MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn



Channel:	Receive Mode	Result:	■ - passed
Test point:	Horizontal		☐ - not passed
Frequency range:	30-230MHz and 230-1000MHz		

EUT	PS3 Bluetooth Headset	
Firm Name	Honcam technology co., ltd.	
Operating Condition	3.7 V, AC 120V/60Hz for Xbox	
Test Condition	Ambient Temperature: 25°C Humidity: 56%	
Test Date:	18 December 2010	
Operator	Peter	
MODEL NO	HC-PS3052	

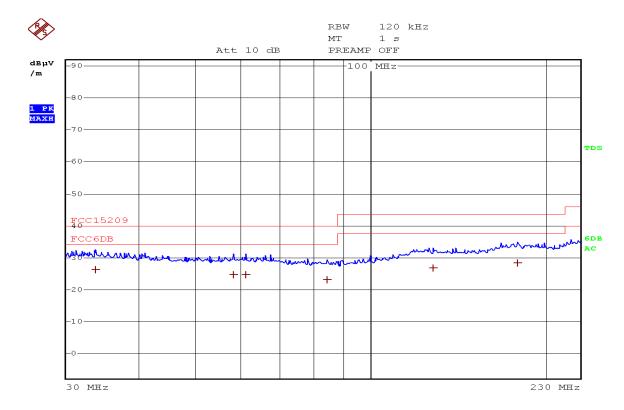

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn



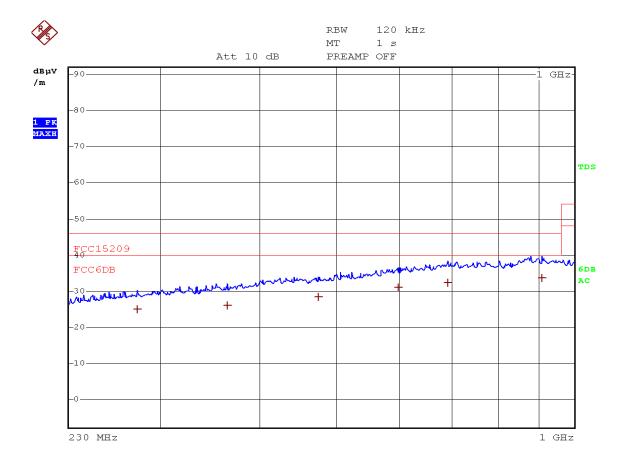

Frequency	Result [dBµV/m]		Limit [dBµV/m]		Dlimit [dBµV/m]	
[MHz]	Average	QP	Average	QP	Average	QP
33.11		29.0		40.0		11.0
64.61		30.4		43.5		13.1
125.56		27.8		43.5		15.7
199.56		30.5		43.5		13.0
312.67		32.0		43.5		11.5
767.56		29.0		46.0		17.0

Note:1. Emission level=Read level + Factor. 2. Factor=Antenna factor + Cable loss

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





CENTRE OF TESTING SERVICE

Channel:	Receive Mode	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	Above 1GHz		

Frequency	Result [dBµV]		Limit [dBµV]		Dlimit [dBµV]	
[MHz]	Average	Peak	Average	Peak	Average	Peak
1829.3	34.0	40.0	54	74	20.0	34.0
4960.0	33.5	39.0	54	74	21.5	35.0
6375.1	33.0	42.0	54	74	21.0	32.0
8532.3	30.0	38.0	54	74	24.0	36.0

Note:1. Emission level=Read level + Factor.

2. Factor=Antenna factor + Cable loss

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn





Channel:	Receive Mode	Result:	■ - passed
Test point:	Vertical		□ - not passed
Frequency range:	30-230MHz and 230-1000MHz		

EUT	PS3 Bluetooth Headset		
Firm Name	Honcam technology co., ltd.		
Operating Condition	3.7 V, AC 120V/60Hz for Xbox		
Test Condition	Ambient Temperature: 25°C Humidity: 56%		
Test Date:	18 December 2010		
Operator	Peter		
MODEL NO	HC-PS3052		

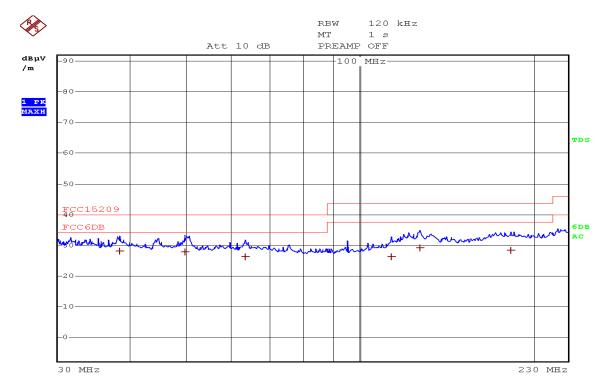

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn See Reverse For Terms And Conditions of Service





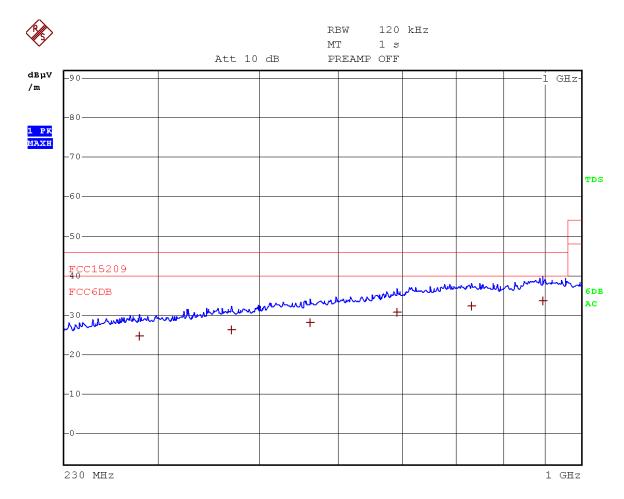

Frequency	Result [dBµV/m]		Limit [dBµV/m]		Dlimit [dBµV/m]
[MHz]	Average	QP	Average	QP	Average	QP
33.28		27.0		40.0		13.0
65.61		29.0		43.5		14.5
124.56		26.6		43.5		16.9
198.56		30.5		43.5		13.0
311.67		31.0		43.5		12.5
767.56		29.0		46.0		17.0

Note:1. Emission level=Read level + Factor. 2. Factor=Antenna factor + Cable loss

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471

Fax: +86-20-38780406 E-mail: cts@cts-lab.com.cn





CENTRE OF TESTING SERVICE

Channel:	Receive Mode	Result:	■ - passed
Test point:	Vertical		□ - not passed
Frequency range:	Above 1GHz		_ net paesea

Frequency	Result [dBµV]		Limit [dBµV]		Dlimit [dBµV]	
[MHz]	Average	Peak	Average	Peak	Average	Peak
1829.2	33.0	39.0	54	74	21.0	35.0
4961.1	32.5	38.5	54	74	22.5	35.5
6375.2	32.0	41.0	54	74	22.0	33.0
8532.0	30.0	38.0	54	74	24.0	36.0

Note:1. Emission level=Read level + Factor. 2. Factor=Antenna factor + Cable loss

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

CENTRE OF TESTING SERVICE





16. Deviation to test specifications

[NONE]

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China Fax: +86-20-38780406

Tel: +86-20-85543113 (32 lines) Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

Page 49 of 49