Report No.: 13033851

TEST REPORT

Applicant:	Ngai Lik Electronics Enterprises Limited
Address of Applicant:	Flat 29-32, 8/F., Block B, Focal Industrial Centre, 21 Man Lok Street, Hung Hom, Kowloon, Hong Kong.
Manufacturer:	Ngai Lik Electronics Enterprises Limited
Address of Manufacturer:	Flat 29-32, 8/F., Block B, Focal Industrial Centre, 21 Man Lok Street, Hung Hom, Kowloon, Hong Kong.
Product name:	FM STEREO RADIO WITH BLUETOOTH/CD/USB/MP3 PLAYER
Model:	For main: BTU108AM-FM; PBBT2701 For AC Adapter: APX910A
Rating(s):	For main: Input DC 9V, 9W; For AC Adapter: Input 100-240V~, 50/60Hz, 0.5A max. Output: DC 9V, 1A
Trademark:	AXESS for PBBT2701
Standards:	FCC Part 15.247 :2011
FCC ID:	Y8ABTU108AM-FM
Data of Receipt:	2013-03-19
Date of Test:	2013-03-19~2013-05-15
Date of Issue:	2013-05-16
Test Result	Pass*

^{*} In the configuration tested, the test item complied with the standards specified above.

Authorized for issue by:

Test by:	Jum	y giu	Reviewed by:	Pan	ler !
May.16.201	3 Jumy Qiu		May.16.2013	Pauler Li	
	Project Engineer			Project Manage	r
Date	Name/Position	Signature	Date	Name/Position	Sianature

ITL Page 2 of 86 Report No.: 13033851

Possible test case verdicts:

test case does not apply to the test object ..: N/A

test object does meet the requirement P (Pass)

test object does not meet the requirement ..: F (Fail)

Testing Laboratory information:

Testing Laboratory Name: I-Test Laboratory

Address : 1-2 floor, South Block, Building A2 , No 3 Keyan Lu,

Science City, Guangzhou, Guangdong Province, P.R. China

Testing location : Same as above

Tel : 0086-20-32209330

Fax : 0086-20-62824387

E-mail : itl@i-testlab.com

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report would be invalid test report without all the signatures of testing technician and approver.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

General product information:

The models BTU108AM-FM and PBBT2701 are fully identical to each other except with different model no. used for trading purpose.

All tests were performed on the model BTU108AM-FM as representative.

ITL Page 3 of 86 Report No.: 13033851

1 Test Summary

Test	Test Requirement	Test method	Result
	FCC PART 15 C	FCC PART 15 C	
Antenna Requirement	section 15.247 (c) and Section 15.203	section 15.247 (c) and Section 15.203	PASS
Occupied Bandwidth (-20dB)	FCC PART 15 C section 15.247 (a)(1);	ANSI C63.10: Clause 6.9 & DA 00-705	PASS
Carrier Frequencies Separated	FCC PART 15 C section 15.247(a)(1);	DA 00-705	PASS
Hopping Channel Number	FCC PART 15 C section 15.247(a)(1)(iii)	DA 00-705	PASS
Dwell Time	FCC PART 15 C section 15.247(a)(1)(iii);	DA 00-705	PASS
Maximum Peak Output Power	FCC PART 15 C section 15.247(b)(1);	ANSI C63.10: Clause 6.10 & DA 00-705	PASS
Conducted Spurious Emission (30 MHz to 25 GHz)	FCC PART 15 C section 15.247(d);	ANSI C63.10: Clause 6.7 & DA 00-705	PASS
Radiated Spurious Emission (9 kHz to 25 GHz)	FCC PART 15 C section 15.247(d);	ANSI C63.10: Clause 6.4, 6.5 and 6.6 & DA 00-705	PASS
Band Edges Measurement	FCC PART 15 C section 15.247 (d) &15.205	ANSI C63.10: Clause 6.9 & DA 00-705	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207;	ANSI C63.10: Clause 6.2 & DA 00-705	PASS

Remark:

N/A: not applicable. Refer to the relative section for the details.

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.

DA 00-705: "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems"

2 Contents

			Page
T	EST RE	PORT	1
1	TES	T SUMMARY	3
2	CO1	TENTS	
2			
3	GEN	ERAL INFORMATION	5
	3.1	CLIENT INFORMATION	5
	3.2	GENERAL DESCRIPTION OF E.U.T.	
	3.3	DETAILS OF E.U.T.	
	3.4	DESCRIPTION OF SUPPORT UNITS	5
	3.5	TEST LOCATION	6
	3.6	DEVIATION FROM STANDARDS	
	3.7	ABNORMALITIES FROM STANDARD CONDITIONS	6
	3.8	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	3.9	TEST FACILITY	
	3.10	MEASUREMENT UNCERTAINTY	6
4	INST	RUMENTS USED DURING TEST	7
5	TES	T RESULTS	8
	5.1	E.U.T. TEST CONDITIONS	8
	5.2	ANTENNA EQUIREMENT	10
	5.3	OCCUPIED BANDWIDTH	
	5.4	CARRIER FREQUENCIES SEPARATED	
	5.5	HOPPING CHANNEL NUMBER	
	5.6	DWELL TIME	
	5.7	MAXIMUM PEAK OUTPUT POWER	
	5.8	CONDUCTED SPURIOUS EMISSIONS	
	5.9	RADIATED SPURIOUS EMISSIONS	
	5.9.1	,	
	5.10 5.11	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	
	5.11 5.12	CONDUCTED EMISSIONS AT MAINS TERMINALS 150 KHZ TO 30 MHZ	
	5.12 5.12		
	0.12	. ,	

ITL Page 5 of 86 Report No.: 13033851

3 General Information

3.1 Client Information

Applicant:

Ngai Lik Electronics Enterprises Limited

Address of Applicant: Flat 29-32, 8

Flat 29-32, 8/F., Block B, Focal Industrial Centre, 21 Man Lok Street, Hung I

Kowloon, Hong Kong.

3.2 General Description of E.U.T.

Name: FM STEREO RADIO WITH BLUETOOTH/CD/USB/MP3 PLAYER

Model No.: BTU108AM-FM

Trade Mark: AXESS for PBBT2701

Operating Frequency: 2402 MHz to 2480 MHz for Bluetooth.

Channels: 79 channels with 1MHz step for Bluetooth

Type of Modulation GFSK, ($\pi/4$) DQPSK, 8DPSK for Bluetooth

Dwell time Per channel is less than 0.4s.

Antenna Type PCB Antenna Antenna gain: 3dBi max

Speciality: Bluetooth 2.1with EDR

Function: Audio speaker system with Bluetooth function.

3.3 Details of E.U.T.

EUT Power Supply: AC Power, Class II

Rated power: 9Vdc 1A for main; AC 100-240V, 50/60Hz, 0.5A for adapter

Test mode: The program used to control the EUT for staying in continuous transmitting and

receiving mode is programmed. Channel lowest (2402MHz), middle

(2441MHz) and highest (2480MHz) are chosen for Bluetooth full testing. Normal mode: the Bluetooth has been tested on the Modulation of GFSK; EDR mode: the Bluetooth has been tested on the Modulation of (π /4)DQPSK and 8DPSK, compliance test and record the worst case on (π /4)DQPSK and

8DPSK

Power cord:

3.4 Description of Support Units

The EUT has been tested as an independent unit for fixed frequency by testing lab.

ITL Page 6 of 86 Report No.: 13033851

3.5 Test Location

All tests were performed at:

Guangzhou ITL Co., Ltd.

1-2 floor, South Block, Building A2 , No 3 Keyan Lu, Science City, Guangzhou, Guangdong Province, P.R. China

0086-20-32209330

itl@i-testlab.com

No tests were sub-contracted.

3.6 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

3.7 Abnormalities from Standard Conditions

None.

3.8 Other Information Requested by the Customer

None.

3.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS(Lab code:L4957)
- FCC (Registration No.:935596)
- IC (Registration NO.:8368A)

3.10 Measurement Uncertainty

The below measurement uncertainties given below are based on a 95% confidence level (base on a coverage factor (k=2).)

Parameter	Uncertainty
Radio frequency	±1.06 x 10 ⁻⁷
total RF power, conducted	1.37 dB
RF power density , conducted	2.89 dB
All emissions, radiated	±3.35 dB
Temperature	±0.23 °C
Humidity	±0.3 %
DC and low frequency voltages	±0.3 %

ITL Page 7 of 86 Report No.: 13033851

4 Instruments Used during Test

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	Agilent	N9010A	MY51250936	2013.02.01	2014.01.31
2	Pre Amplifier	HP	8447F	3113A05905	2012.09.07	2013.09.06
3	Pre Amplifier	Mini-circuits	MLA-0120-A02-34	2648A04738	2012.06.08	2013.06.07
4	Biconilog Antenna	ETS•Lindgren	3142D	00108096	2013.01.29	2014.01.28
5	Horn Antenna	A-INFOMW	JXTXLB-10180-N	J203109061213	2012.12.18	2013.12.17
6	EMI Test Receiver	R&S	ESCI	100124	2012.06.08	2013.06.07
7	LISN	R&S	ENV216	100120	2012.06.08	2013.06.07
8	50Ω Coaxial Cable	Mini-circuits	CBL	ITL-115	2012.09.07	2013.09.06
9	Semi-Anechoic chamber	ETS•Lindgren	FACT3 2.0	ITL-100	2013.04.11	2014.04.10
10	Loop Antenna	ZHINAN	ZN30900A	002489	2013.01.23	2014.01.22
11	Horn Antenna	Schwarzbeck	BBHA 9170	ITL-118	2012.06.08	2013.06.07

ITL Page 8 of 86 Report No.: 13033851

5 Test Results

5.1 E.U.T. test conditions

Test Voltage: Input: AC 120V, 60 Hz

Temperature: 20.0 -25.0 °C **Humidity:** 38-50 % RH

Atmospheric Pressure: 1000 -1010 mbar

Test frequencies and frequency range:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band

specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which	Number of	Location in frequency range
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1
	J	near bottom

Frequency range of radiated emission measurements

Lowest frequency generated	Upper frequency range of measurement	
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz,	
At or above 10 GHz to below	5th harmonic of highest fundamental frequency or to 100 GHz,	
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz,	

ITL Page 9 of 86 Report No.: 13033851

EUT channels and frequencies list for bluetooth:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2413	22	2424
1	2403	12	2414	23	2425
2	2404	13	2415	24	2426
3	2405	14	2416	25	2427
4	2406	15	2417	26	2428
5	2407	16	2418	27	2429
6	2408	17	2419	28	2430
7	2409	18	2420	29	2431
8	2410	19	2421	30	2432
9	2411	20	2422	31	2433
10	2412	21	2423	32	2434
33	2435	49	2451	65	2467
34	2436	50	2452	66	2468
35	2437	51	2453	67	2469
36	2438	52	2454	68	2470
37	2439	53	2455	69	2471
38	2440	54	2456	70	2472
39	2441	55	2457	71	2473
40	2442	56	2458	72	2474
41	2443	57	2459	73	2475
42	2444	58	2460	74	2476
43	2445	59	2461	75	2477
44	2446	60	2462	76	2478
45	2447	61	2463	77	2479
46	2448	62	2464	78	2480
47	2449	63	2465		
48	2450	64	2466		

Test frequencies are the lowest channel: 0 channel(2402 MHz), middle channel: 39 channel(2441 MHz) and highest channel: 78 channel(2480 MHz)

ITL Page 10 of 86 Report No.: 13033851

5.2 Antenna equirement

Standard requirement

15.203 requirement:

For intentional device. According to 15.203. an intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna

The antenna is a Printed antenna and no consideration of replacement. The best case gain of the antenna is 3dBi.

Test result: The unit does meet the FCC requirements.

ITL Page 11 of 86 Report No.: 13033851

5.3 Occupied Bandwidth

Test Requirement: FCC Part 15 C section 15.247

(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Test Method: ANSI C63.10: Clause 6.9 & DA 00-705

Test Status: Pre-test the EUT in continuous transmitting mode at the lowest, middle

and highest channel with different data package. Compliance test in normal mode (DH5), EDR mode (2DH5) and EDR mode (3DH5) as the

worst case was found.

Test Configuration:

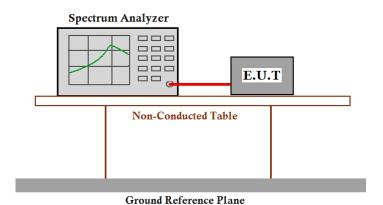

Test Procedure:

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
- 2. Set the spectrum analyzer: Span = approximately 2 to 3 times the 20dB bandwidth, centring on a hopping channel;
- 3. Set the spectrum analyzer: RBW >= 1% of the 20dB bandwidth VBW >= RBW. Sweep = auto; Detector Function = Peak. Trace = Max Hold.
- 4. Mark the peak frequency and -20dB points bandwidth.

Test result (-20dB bandwidth), for Bluetooth

Normal mode (DH5):

Test Channel	Bandwidth(MHz)	2/3 bandwidth(MHz)
Lowest	1.06	0.71
Middle	1.12	0.75
Highest	1.12	0.75

EDR mode (2DH5):

Test Channel	Bandwidth(MHz)	2/3 bandwidth(MHz)
Lowest	1.37	0.91
Middle	1.39	0.93
Highest	1.38	0.92

EDR mode (3DH5):

Test Channel	Bandwidth(MHz)	2/3 bandwidth(MHz)
Lowest	1.38	0.92
Middle	1.39	0.93
Highest	1.39	0.93


ITL Page 13 of 86 Report No.: 13033851

For Bluetooth

Result plot as follows:


DH5:

Lowest Channel:

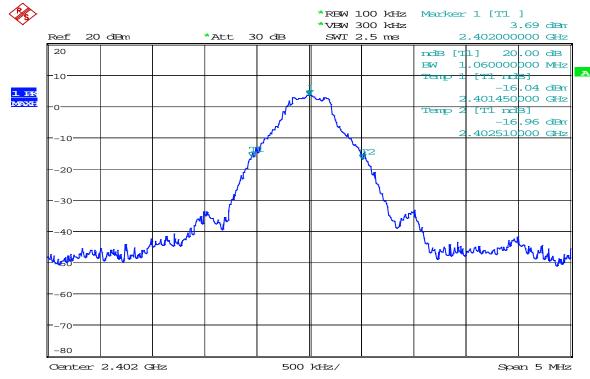

Date: 15.MAY.2013 15:18:50


Middle Channel:

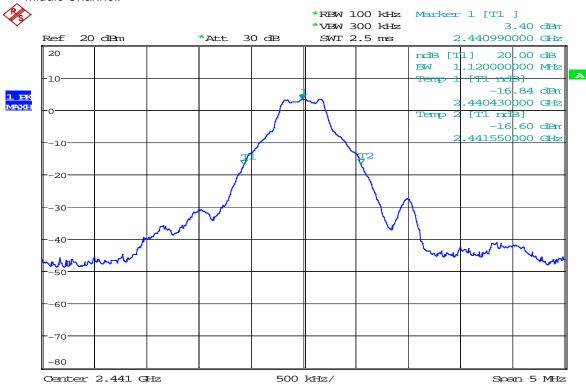



Page 14 of 86 Report No.: 13033851




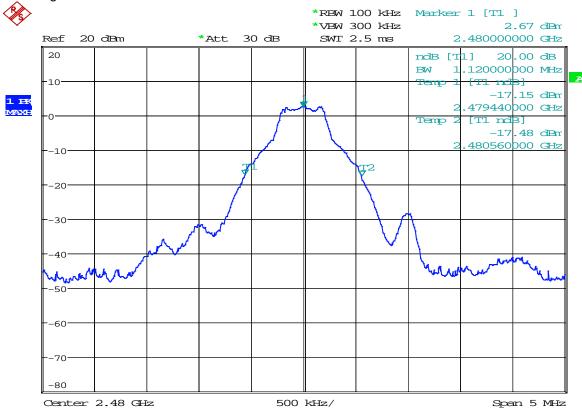


Date: 15.MAY.2013 15:21:00

2DH5:


Lowest channel:

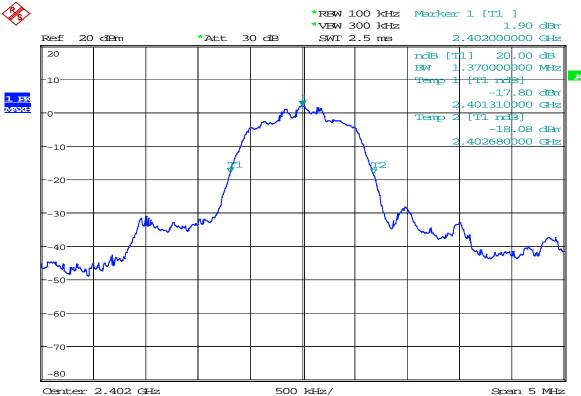

Date: 15.MAY.2013 15:27:03






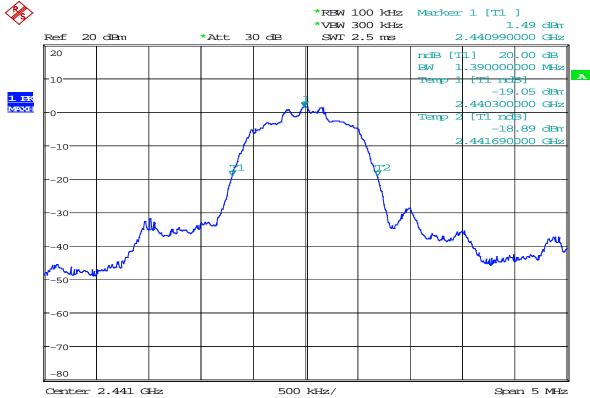

Date: 15.MAY.2013 15:26:23


Highest channel:

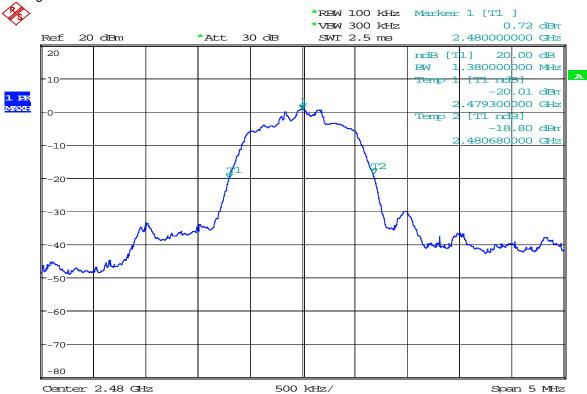

ITL Page 16 of 86

3DH5:


Lowest channel:

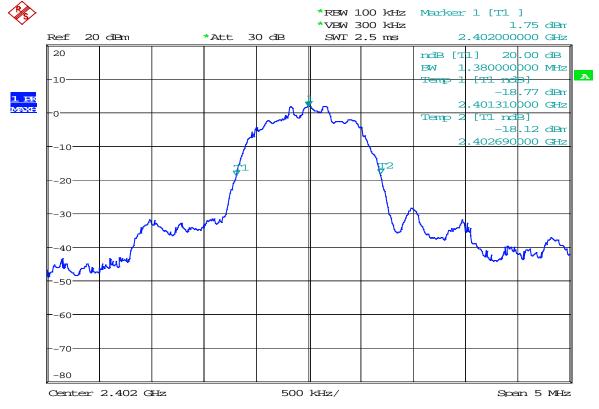


Report No.: 13033851


Date: 15.MAY.2013 15:27:56

Middle channel:

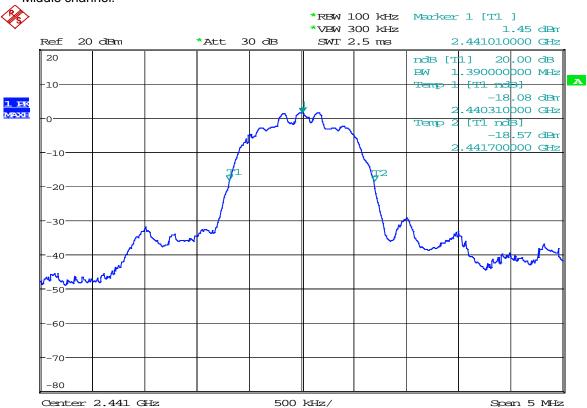

Page 17 of 86 Report No.: 13033851



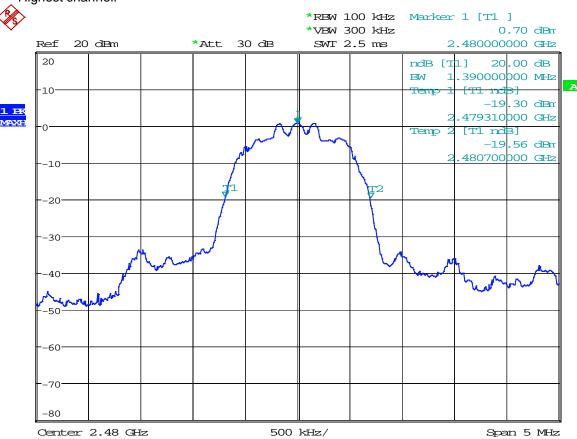

Date: 15.MAY.2013 15:29:18

ITL Page 18 of 86 Report No.: 13033851

5.4 Carrier Frequencies Separated


Test Requirement: FCC Part 15 C section 15.247

(a),(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Method: DA 00-705

Test Status: Pre-test the EUT in continuous transmitting mode at the lowest, middle and highest channel with different data package. Compliance test in normal mode (DH5), EDR mode (2DH5) and EDR mode (3DH5) as the worst case was found.

Test Configuration:

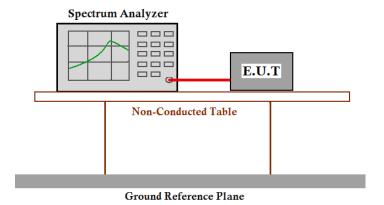

Test Procedure:

- 1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW >= 1% of the span, VBW >= RBW,. Sweep = auto; Detector Function = Peak. Trace = Max, hold.
- Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

Test result:

ITL Page 19 of 86 Report No.: 13033851

For Bluetooth

DH5

Test Channel	Carrier Frequencies Separated	Pass/Fail
Lower Channels (channel 0 and channel 1)	1.00 MHz	Pass
Middle Channels (channel 39 and channel 40)	1.00 MHz	Pass
Upper Channels (channel 77 and channel 78)	1.00 MHz	Pass

Remark:

The limit is maximum two-thirds of the 20 dB bandwidth: 0.75 MHz

2DH5

Test Channel	Carrier Frequencies Separated	Pass/Fail
Lower Channels (channel 0 and channel 1)	1.00 MHz	Pass
Middle Channels (channel 39 and channel 40)	1.00 MHz	Pass
Upper Channels (channel 77 and channel 78)	1.00 MHz	Pass

Remark:

The limit is maximum two-thirds of the 20 dB bandwidth:0.93MHz

ITL

Page 20 of 86

Report No.: 13033851

3DH5

Test Channel	Carrier Frequencies Separated	Pass/Fail
Lower Channels (channel 0 and channel 1)	1.00 MHz	Pass
Middle Channels (channel 39 and channel 40)	1.00 MHz	Pass
Upper Channels (channel 77 and channel 78)	1.00 MHz	Pass

Remark:


The limit is maximum two-thirds of the 20 dB bandwidth: 0.93MHz

ITL Page 21 of 86 Report No.: 13033851


For Bluetooth

Carrier Frequencies Separated plot:

1. Lowest Channels:

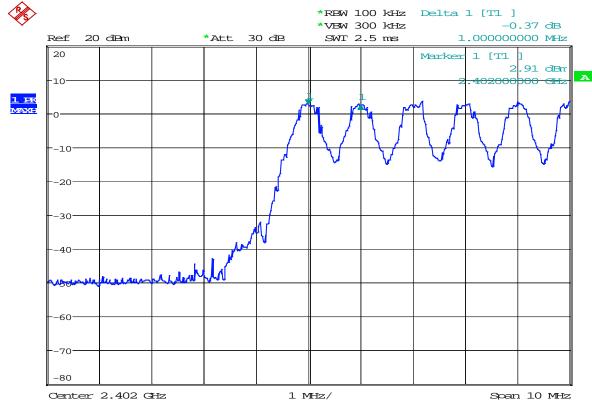


2. Middle Channels: 15.MAY.2013 15:33:11

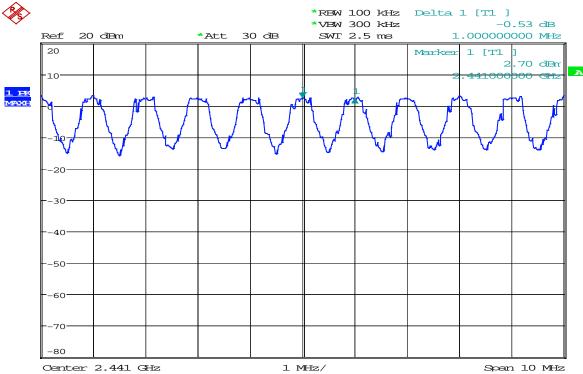


ITL Page 22 of 86 Report No.: 13033851

3. Highest Channels

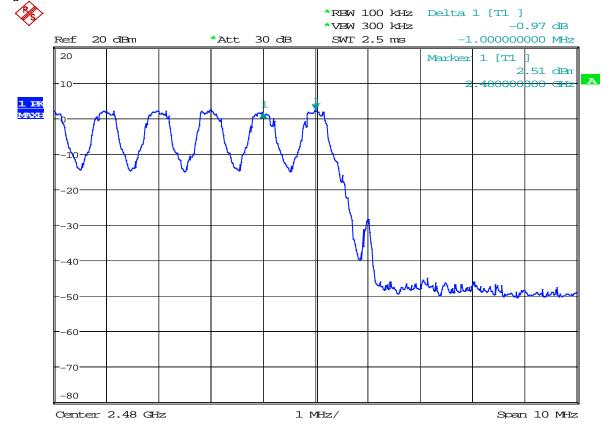

Date: 15.MAY.2013 15:36:53 2DH5


1. Lowest Channels:

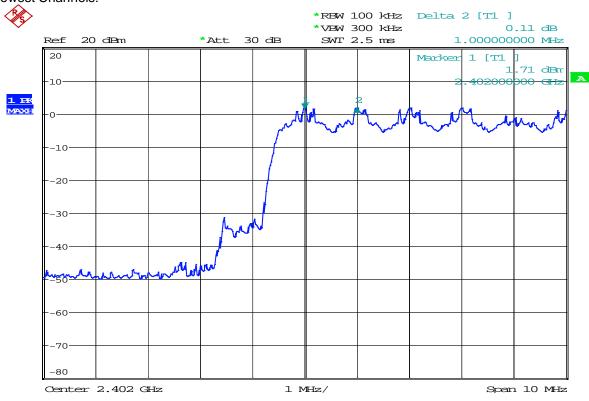


Date: 15.MAY.2013 15:42:42

ITL Page 23 of 86 Report No.: 13033851

2. Middle Channels:

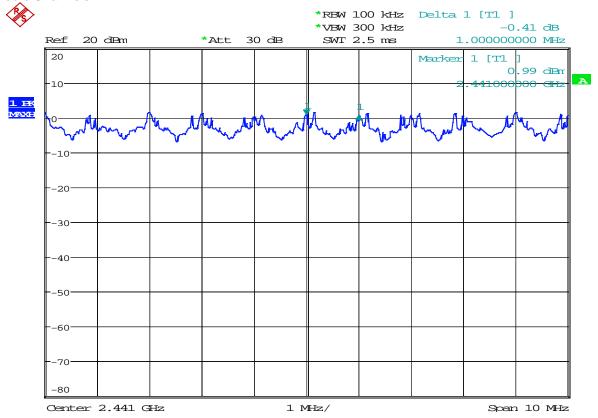

Date: 15.MAY.2013 15:45:19
3. Highest Channels

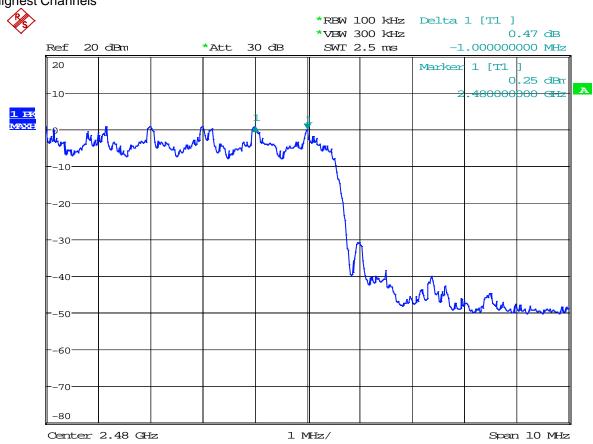


ITL Page

Page 24 of 86 Report No.: 13033851


3DH5

1. Lowest Channels:

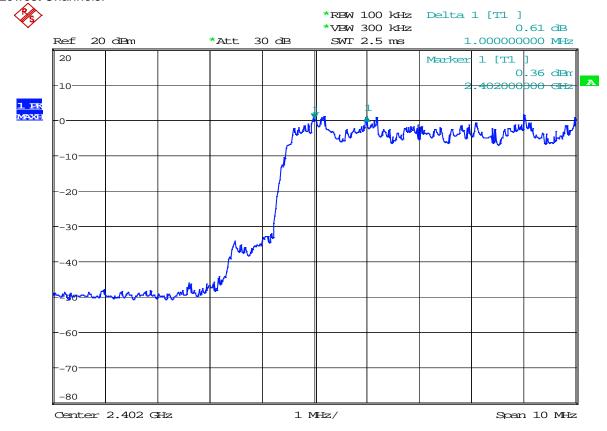


Date: 15.MAY.2013 15:56:31

2. Middle Channels:

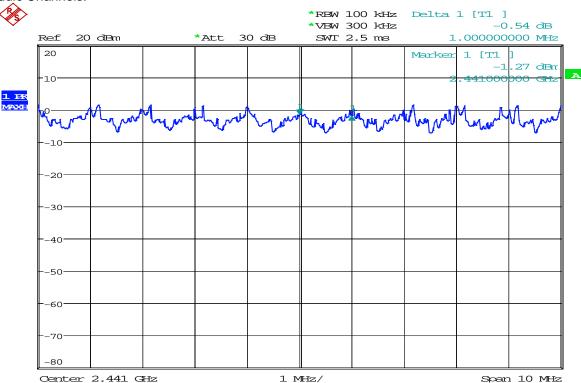

ITL Page 25 of 86 Report No.: 13033851

3. Highest Channels

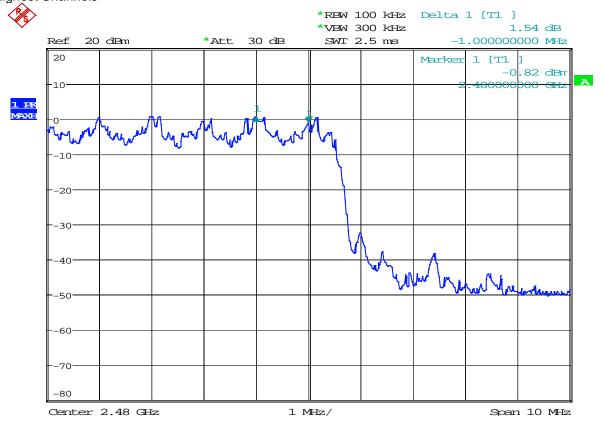

Date: 15.MAY.2013 15:49:50

ITL Page 26 of 86 Report No.: 13033851

5.5 Hopping Channel Number

Test Requirement: FCC Part15 C section 15.247

(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use

at least 15 channels.


Test Method: DA 00-705

Test Status: Pre-test the EUT in hopping mode with different data packet. Compliance test

in hopping with normal mode (DH5), EDR mode (2DH5) and EDR mode

(3DH5) as the worst case was found.

Test Configuration:

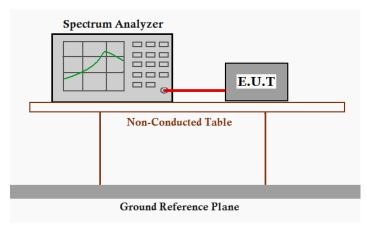

Test Procedure:


- 1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 300 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
- 3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
- 4. Set the spectrum analyzer: start frequency = 2400 MHz. stop frequency = 2483.5 MHz. Submit the test result graph.

ITL

Page 27 of 86 Report No.: 13033851


For buletooth


Test result: Total channels are 79 channels.

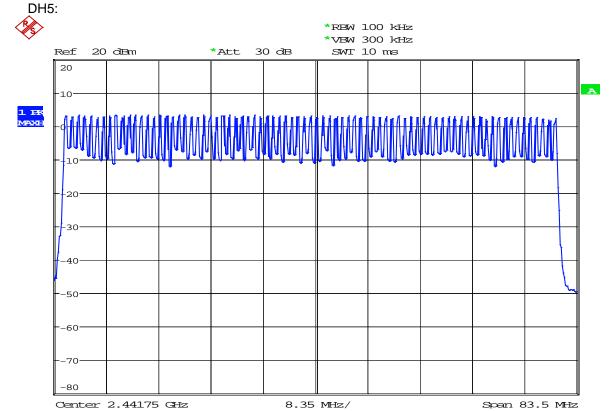

Date: 15.MAY.2013 18:25:11

2DH5:

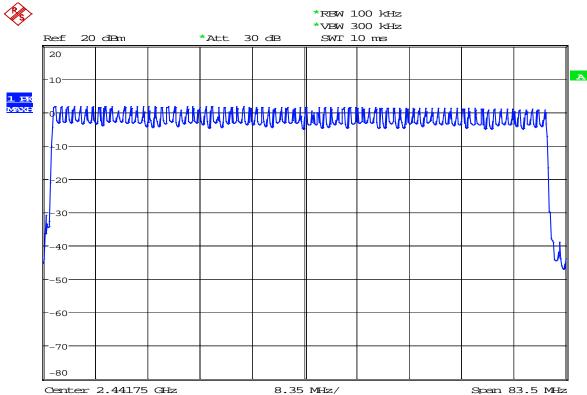

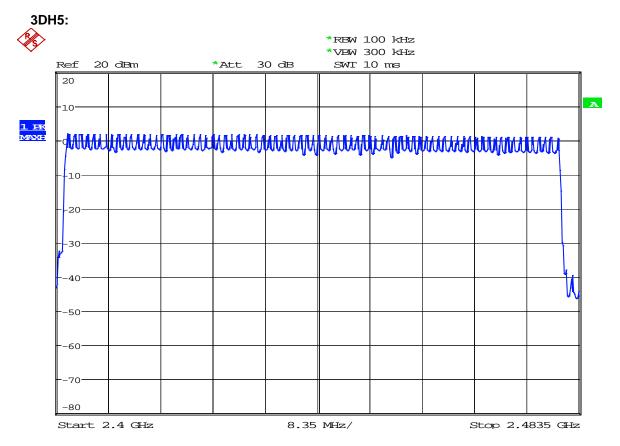

Date: 15.MAY.2013 16:08:39

Test result: The unit does meet the FCC requirements.

ITL Page 29 of 86 Report No.: 13033851

5.6 Dwell Time

Test Requirement: FCC Part 15 C section 15.247

> (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping

frequency provided that a minimum of 15 channels are used.


Test Method: DA 00-705

Pre-test the EUT in continuous transmitting mode at the lowest, middle and **Test Status:**

> highest channel with different data packet. Compliance test in hopping with Normal mode (DH1, DH3 and DH5) and EDR mode (2DH1, 2DH3

and 2DH5; 3DH1, 3DH3 and 3DH5) as the worst case was found.

Test Configuration:

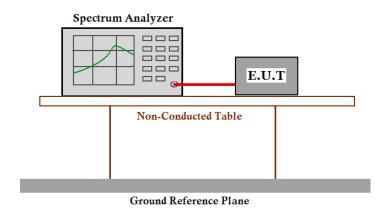

Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
- 2. Set spectrum analyzer span = 0. centered on a hopping channel;
- 3. Set RBW = 1 MHz and VBW = 1 MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Detector Function = Peak. Trace = View;
- 4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.). Repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.

ITL Page 30 of 86 Report No.: 13033851

Test Result:

For bluetooth

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

Normal mode (DH1, DH3 and DH5)

1. Channel 0: 2.402GHz

DH1 time slot = 0.37(ms) * (1600/(2*79)) * 31.6 = 118.4ms

DH3 time slot = 1.65 (ms) * (1600/(4*79)) * 31.6 = 264.0 ms

DH5 time slot = 2.91 (ms) * (1600/(6*79)) * 31.6 = 310.4 ms

2. Channel 39: 2.441GHz

DH1 time slot = 0.38(ms) * (1600/(2*79)) * 31.6 = 121.6ms

DH3 time slot = 1.65(ms) * (1600/(4*79)) * 31.6 = 264.0ms

DH5 time slot = 2.91(ms) * (1600/(6*79)) * 31.6 = 310.4ms

3. Channel 78: 2.480GHz

DH1 time slot = 0.38(ms) * (1600/(2*79)) * 31.6 = 121.6ms

DH3 time slot = 1.66 (ms) * (1600/(4*79)) * 31.6 = 265.6 ms

DH5 time slot = 2.91(ms) * (1600/(6*79)) * 31.6 = 310.4ms

EDR mode (2DH1, 2DH3 and 2DH5)

4. Channel 0: 2.402GHz

2DH1 time slot = 0.41(ms) * (1600/(2*79)) * 31.6 = 131.2ms

2DH3 time slot =1.66 (ms) * (1600/(4*79)) * 31.6 = 265.6ms

2DH5 time slot = 2.91(ms) * (1600/(6*79)) * 31.6 = 310.4ms

5. Channel 39: 2.441GHz

2DH1 time slot = 0.40(ms) * (1600/(2*79)) * 31.6 = 128.0ms

2DH3 time slot =1.66 (ms) * (1600/(4*79)) * 31.6 = 265.6ms

2DH5 time slot = 2.91(ms) * (1600/(6*79)) * 31.6 = 310.4ms

6. Channel 78: 2.480GHz

2DH1 time slot = 0.41(ms) * (1600/(2*79)) * 31.6 = 131.2ms

2DH3 time slot =1.66 (ms) * (1600/(4*79)) * 31.6 = 265.6ms

2DH5 time slot = 2.91 (ms) * (1600/(6*79)) * 31.6 = 310.4 ms

EDR mode (3DH1, 3DH3 and 3DH5)

7 **Channel 0:** 2.402GHz

3DH1 time slot = 0.40(ms) * (1600/(2*79)) * 31.6 = 128.0ms

3DH3 time slot = 1.66 (ms) * (1600/(4*79)) * 31.6 = 265.6 ms

3DH5 time slot = 2.91(ms) * (1600/(6*79)) * 31.6 = 310.4ms

8. Channel 39: 2.441GHz

3DH1 time slot = 0.40 (ms) * (1600/(2*79)) * 31.6 = 128.0 ms

3DH3 time slot = 1.66 (ms) * (1600/(4*79)) * 31.6 = 265.6 ms

3DH5 time slot = 2.91 (ms) * (1600/(6*79)) * 31.6 = 310.4ms

9. Channel 78: 2.480GHz

3DH1 time slot = 0.40(ms) * (1600/(2*79)) * 31.6 = 128.0ms

3DH3 time slot = 1.66(ms) * (1600/(4*79)) * 31.6 = 265.6ms

3DH5 time slot = 2.91(ms) * (1600/(6*79)) * 31.6 = 310.4ms

The results are not greater than 0.4 seconds

The unit does meet the FCC requirements.

Report No.: 13033851


ITL

For Bluetooth

Please refer the graph as below:

1. Lowest channel (2.402 GHz):


(1) DH1

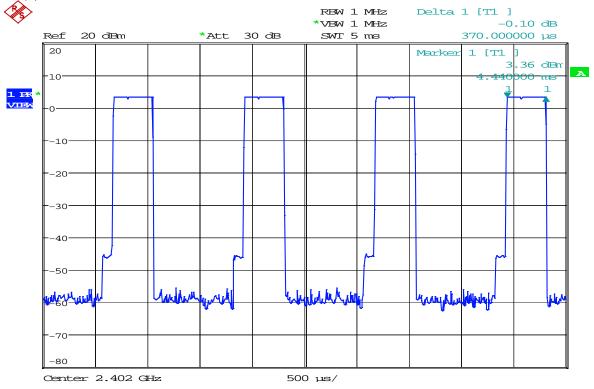


Date:

15.MAY.2013 18:59:17



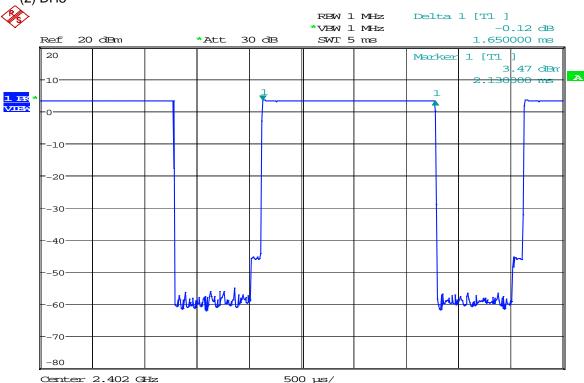


Page 33 of 86 Report No.: 13033851

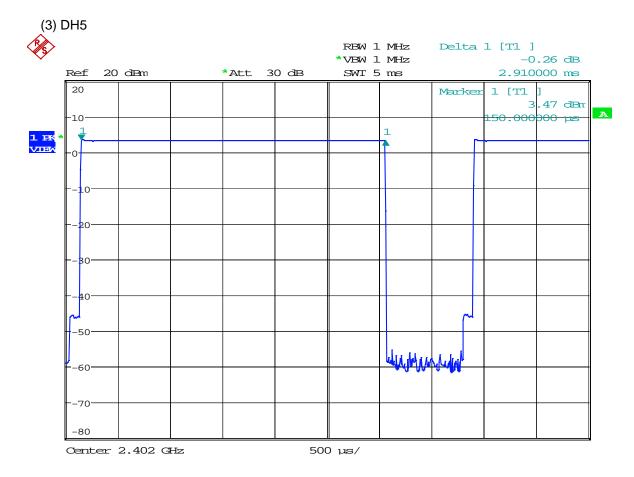


Date: 15.MAY.2013 19:07:14 2. Middle channel (2.441 GHz):


(1) DH1

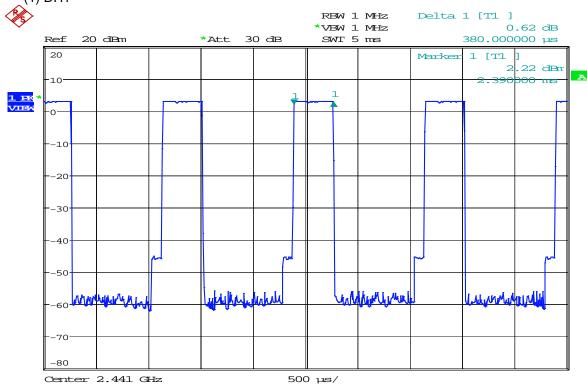

Page 34 of 86 Report No.: 13033851

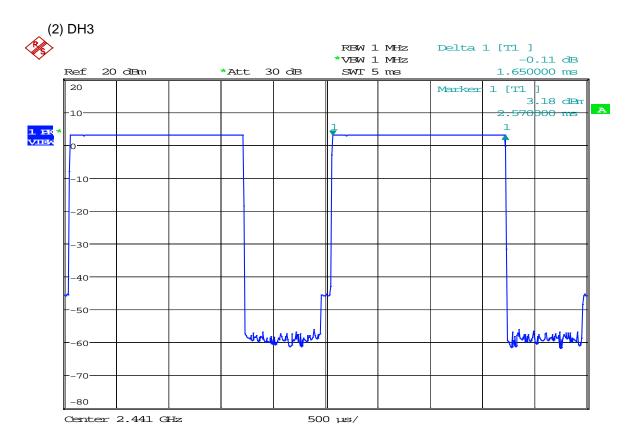


Date: 15.MAY.2013 19:04:53

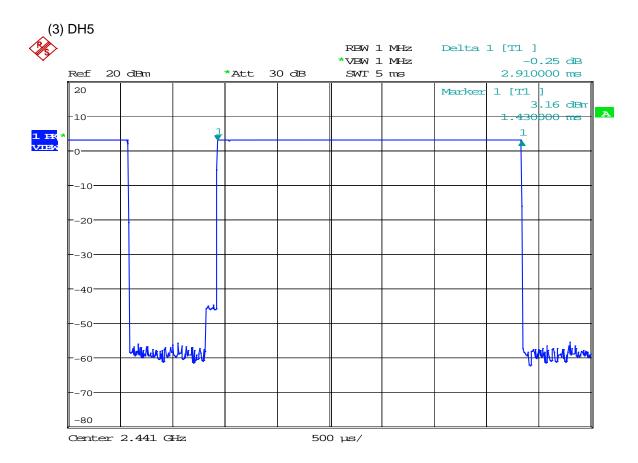

ITL Page 35 of 86 Report No.: 13033851

3. Highest channel (2.480 GHz):

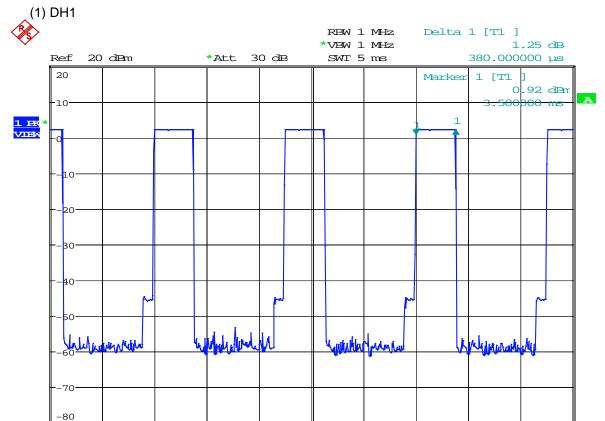



500 µs/

Date: 15.MAY.2013 19:01:28

Center 2.48 GHz

(2) DH3

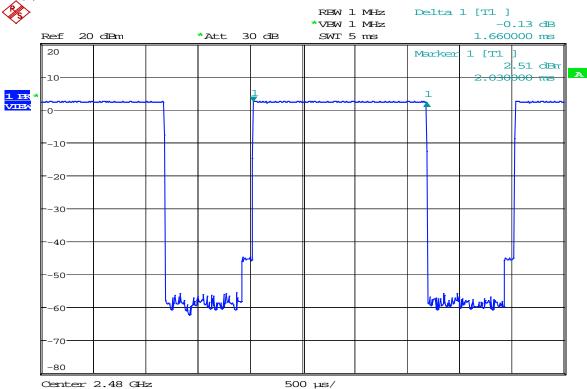


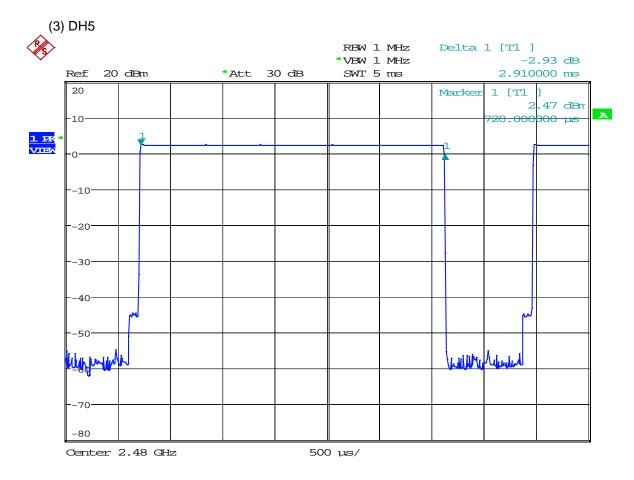


Date: 15.MAY.2013 19:09:34

4. Lowest channel (2.402 GHz):



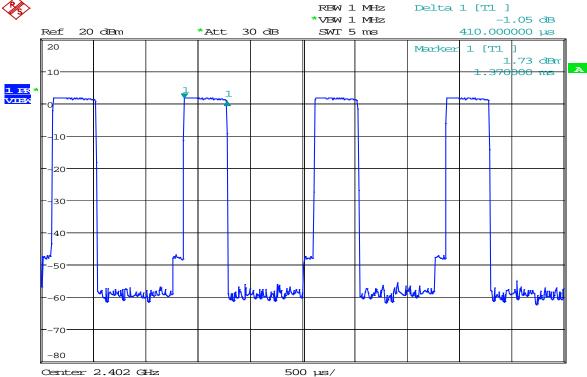


Page 37 of 86 Report No.: 13033851

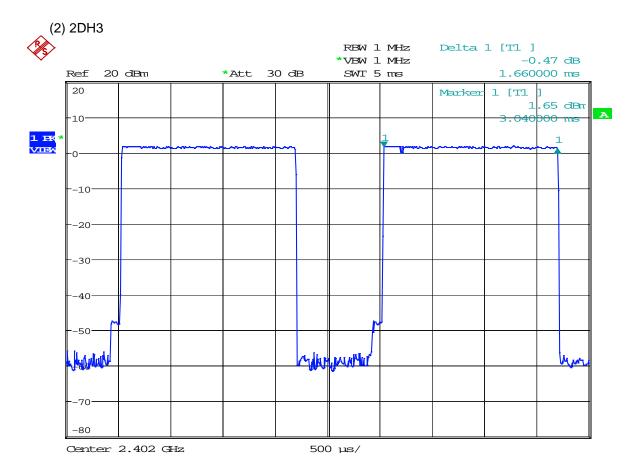

Date: 15.MAY.2013 19:17:26


(3) 2DH5

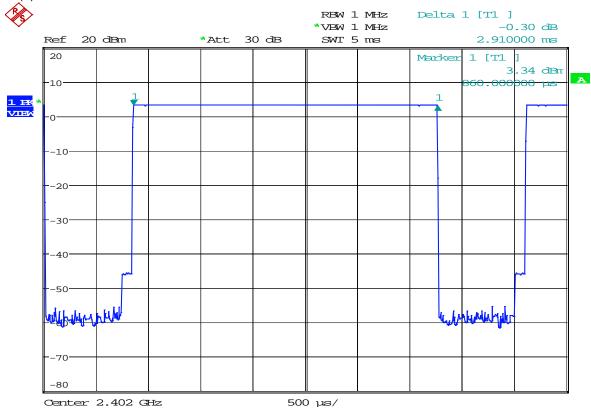


ITL Page 38 of 86 Report No.: 13033851

5. Middle channel (2.441 GHz):


(1) 2DH1

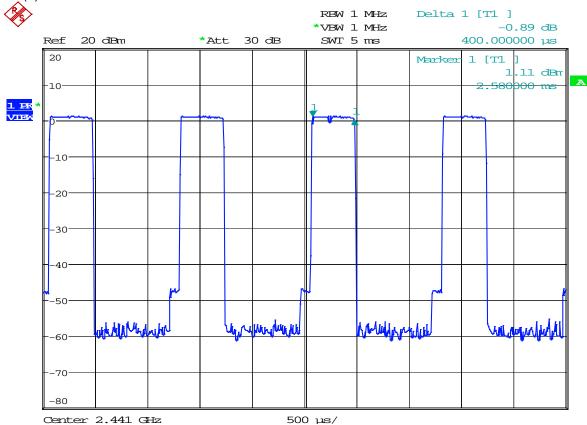

Date: 15.MAY.2013 19:13:31

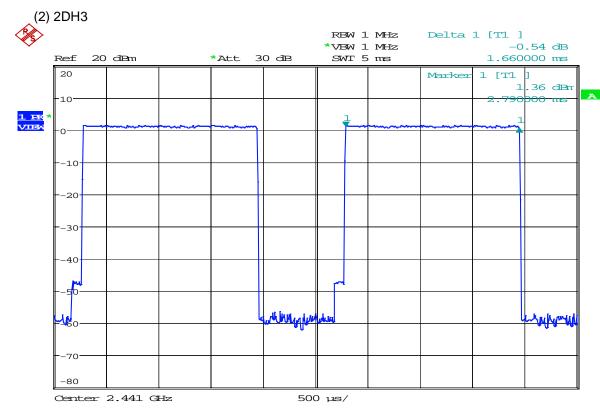


Page 39 of 86 Report No.: 13033851

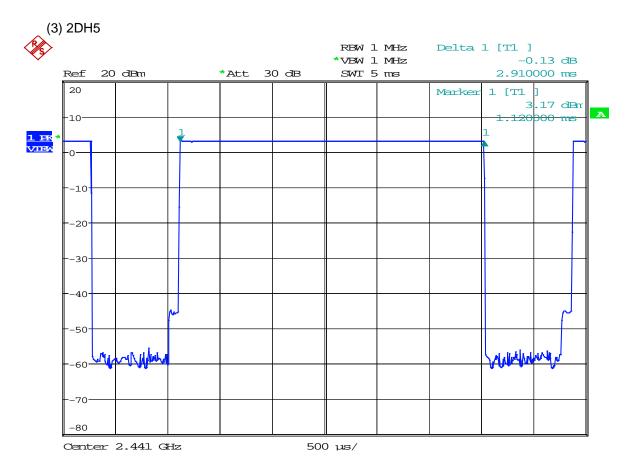


Date: 15.MAY.2013 19:42:15 6. Highest channel (2.480 GHz):


(1) 2DH1

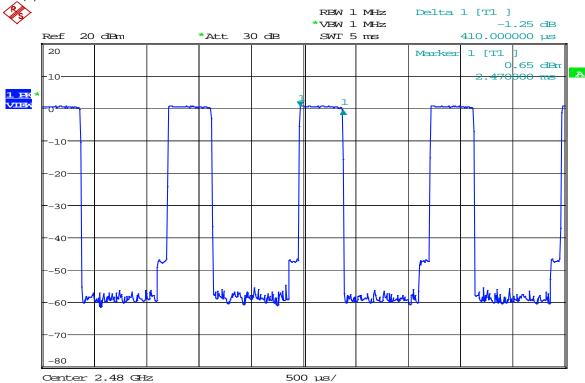

Page 40 of 86 Report No.: 13033851

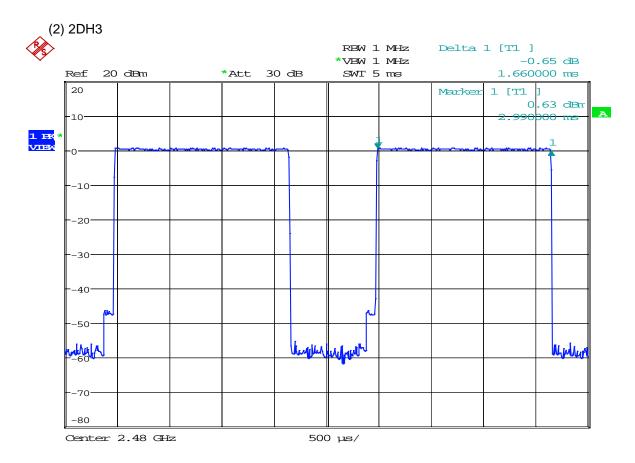


Date: 15.MAY.2013 19:20:17

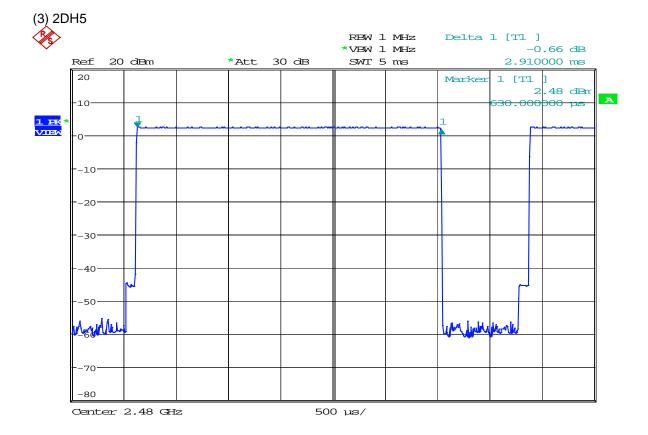




7. Lowest channel (2.402 GHz):

(1). 3DH1

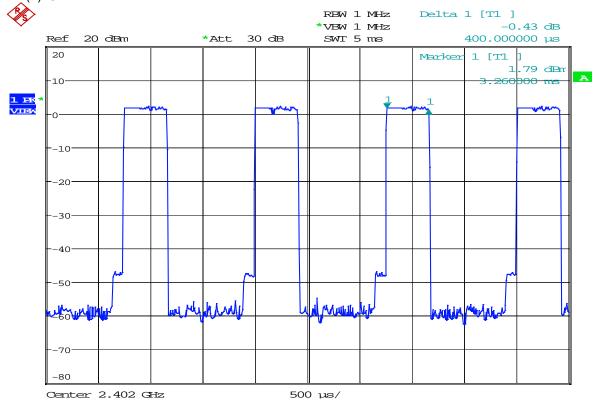


Date: 15.MAY.2013 19:43:54

(2) 3DH3

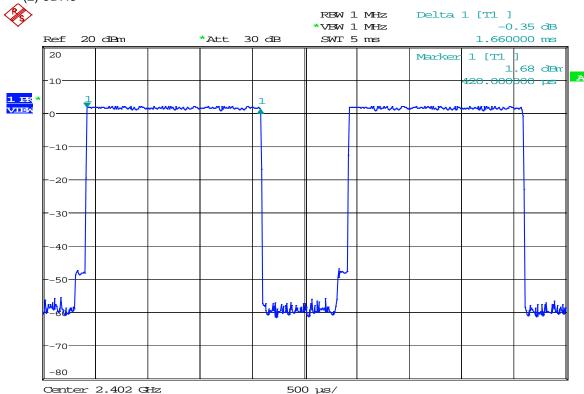



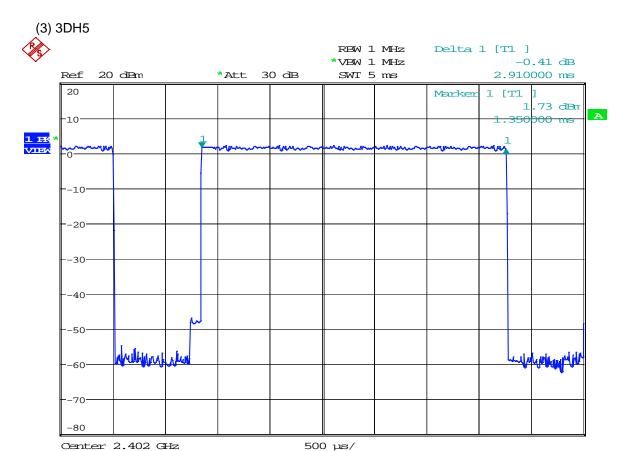



Report No.: 13033851

Date: 15.MAY.2013 19:49:28


8. Middle channel (2.441 GHz):

(1). 3DH1

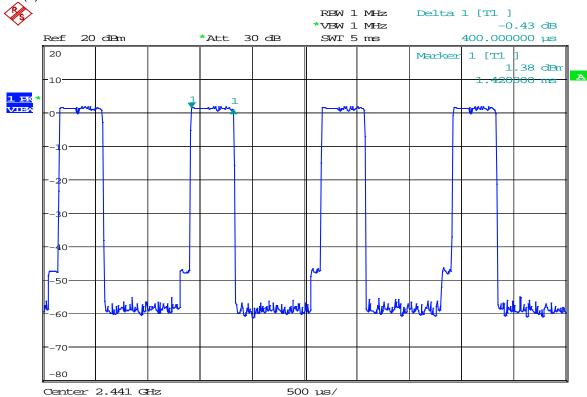

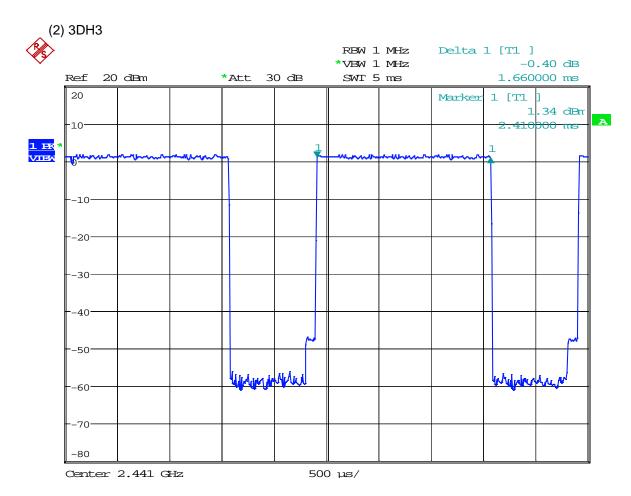


Date: 15.MAY.2013 19:47:13

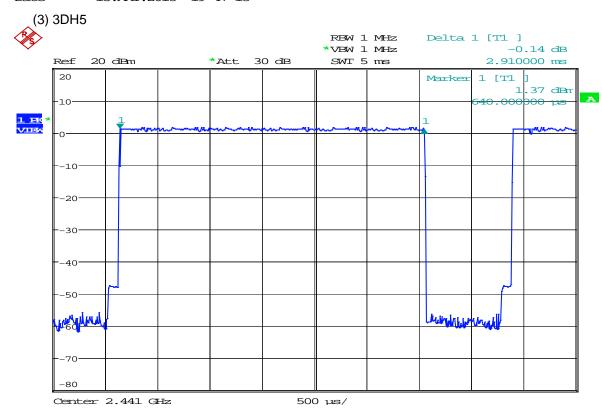

ITL Page 44 of 86 Report No.: 13033851


9. Highest channel (2.480 GHz):



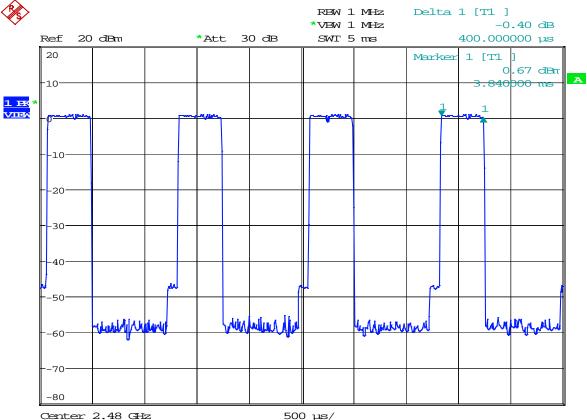


Date: 15.MAY.2013 19:45:21

(2) 3DH3

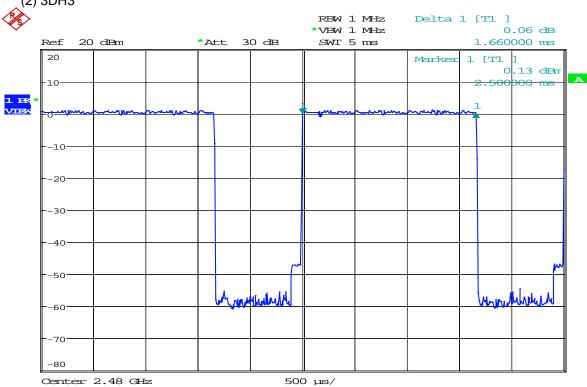

Page 45 of 86 Report No.: 13033851

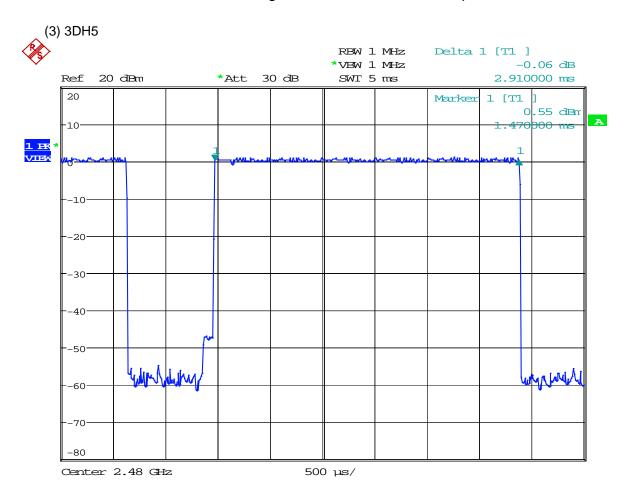

Date: 15.MAY.2013 19:51:34

Remark:

In communication data link mode (expect inquiry or page mode) the hopping rate is 1600 per second, the 79 channels will be randomly selected for RF channel, and each channel have equal probability to be selected. The hop selection scheme is defined in Clause 2.6 of Part B of Volume

2 of core specification of Bluetooth.

The Dwell time must be calculated via following formula:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

Period = 0.4 (seconds/channel) x 79 (channel) = 31.6 seconds

So

Dwell time DH1= slot time * (1600/2/79) * 31.6

Dwell time DH3= slot time * (1600/4/79) * 31.6

Dwell time DH5= slot time * (1600/6/79) * 31.6

The RF channel will remain fixed for duration of a packet, that means for DH3 packet the RF frequency will remain unchanged during 3 slots (1slot=1/1600=625us), and for DH5 packet the RF frequency will remain unchanged during 5 slots, illustrated the principle as below:

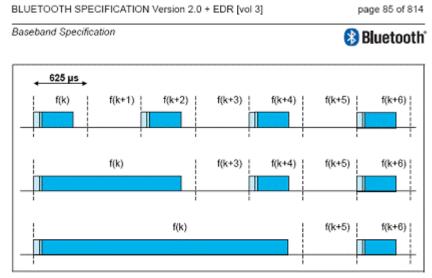


Figure 2.14: Single- and multi-slot packets.

Therefore, in a certain period for different packet types, the quantities of hops (not hopping rate 1600) are different, accurately, the quantity of hops for DH1 is double of DH3's and triple of DH5's. "for DH1 packet, 1 hop in 1 slot; for DH3 packet, ½ hop in 1 slot; for DH5 packet, 1/3 hop in 1 slot.", explained as below:

From the illustrated hopping scheme:

For DH1, in two slots, there are two hops, i.e. f(k) in Slot(k), f(k+1) in Slot(k+1), means DH1 1 hop in 1 slot;

For DH3, in four slots, there are two hops, i.e. f(k) in Slot(k) & Slot(k+1) & Slot(k+2), f(k+3) in Slot(k+3), means DH3 2 hops in four slots -> $\frac{1}{2}$ hop in 1 slot;

For DH5, in six slots, there are two hops, i.e. f(k) in Slot(k) & Slot(k+1) & Slot(k+2) & Slot(k+3) & Slot(k+4), f(k+5) in Slot(k+5), means DH3 2 hops in six slots -> 1/3 hop in 1 slot.

The Hopping rate in the formula should not be fixed value, for DH1, it is 1600/2; for DH3, it is 1600/4; for DH5, it is 1600/6.

To calculate Dwell time of data transmission of Bluetooth system, the worst case is for Bluetooth PICONET that contains two devices only (although Bluetooth PICONET can support up to eight devices), and for Bluetooth data transmission, after device A sending a packet to device B, device A must get response packet from device B to continue data transmission;

For DH1 packet: assume device A is EUT, the worst case is after device A sending a DH1 packet to device B, device A gets a DH1 response packet from device B, that means device A needs 1 time slot for transmitting and 1 time slot for receiving, therefore, the actual hopping rate of device A is half of 1600, i.e. 800 hops per second for EUT;

For DH3 packet: assume device A is EUT, the worst case is after device A sending a DH3 packet to device B, device A gets a DH1 response packet from device B, that means device A needs 3 time slots for transmitting and 1 time slot for receiving, therefore, the actual hopping rate of device A is quarter of 1600, i.e. 400 hops per second for EUT;

For DH5 packet: assume device A is EUT, the worst case is after device A sending a DH5 packet to device B, device A gets a DH1 response packet from device B, that means device A needs 5 time slots for transmitting and 1 time slot for receiving, therefore, the actual hopping rate of device A is sixth of 1600, i.e. 1600/6=266.7 hops per second for EUT;

ITL Page 48 of 86 Report No.: 13033851

5.7 Maximum Peak Output Power

Test Requirement: FCC Part 15 C section 15.247

(b)(1)For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band:

0.125 watts.

Refer to the result "Hopping channel number" of this document. The 1

watt (30.0 dBm) limit applies.

Test Method: ANSI C63.10: Clause 6.10 & DA 00-705


Test Limit:

Test mode: Pre-test the EUT in continuous transmitting mode at the lowest, middle and

highest channel with different data packet. Compliance test in continuous transmitting mode with normal (DH5), EDR mode (2DH5) and EDR mode

(3DH5) as the worst case was found.

Test Configuration:

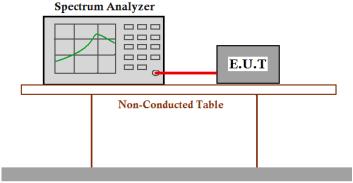

Ground Reference Plane

Test Procedure:

- 1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 3 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak.
- 3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


ormal mode: Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	4.13	21.0	Pass
Middle	2441	3.74	21.0	Pass
Highest	2480	3.12	21.0	Pass
DR mode(2DH5):			
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	2.60	21.0	Pass
Middle	2441	2.76	21.0	Pass
Highest	2480	1.97	21.0	Pass
OR mode(3DH5):			
Test Channel	Fundamental Frequency	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	3.45	21.0	Pass
Middle	2441	2.65	21.0	Pass
Highest	2480	2.44	21.0	Pass
emark: cable lo	se=0.5dB			

ITL Page 50 of 86 Report No.: 13033851

For Bluetooth


Normal mode:


Lowest Channel:

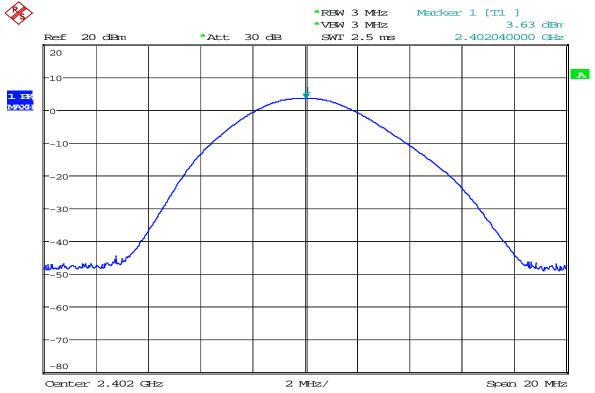


15.MAY.2013 19:57:33

Middle Channel:

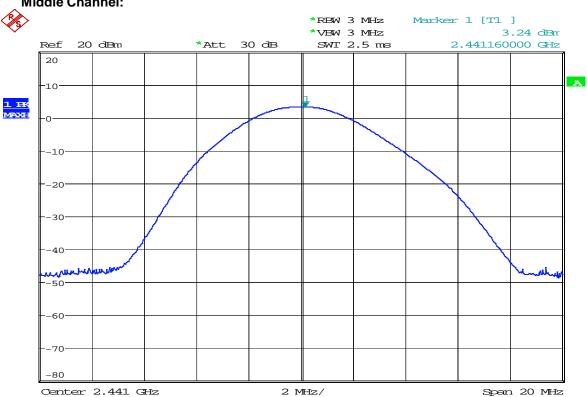






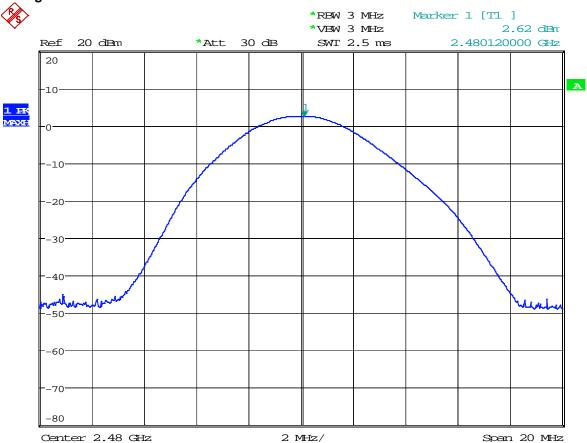


Date: 15.MAY.2013 19:59:08

EDR mode (2DH5): Lowest Channel:

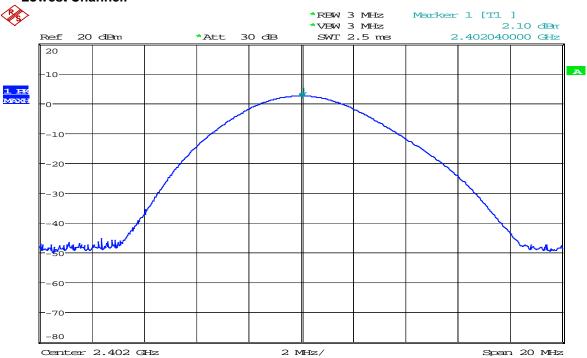


ITL Page 52 of 86 Report No.: 13033851

Middle Channel:

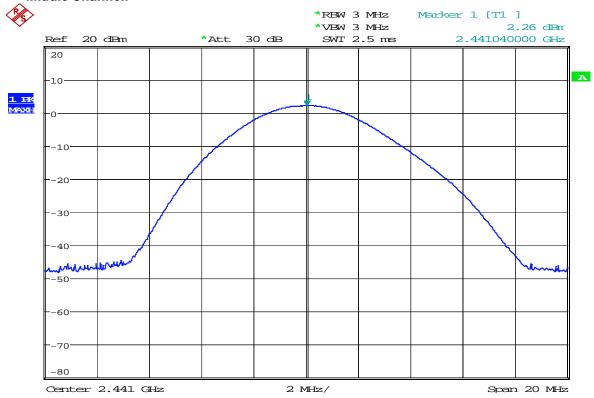


Date: 15.MAY.2013 20:03:36

Highest Channel:

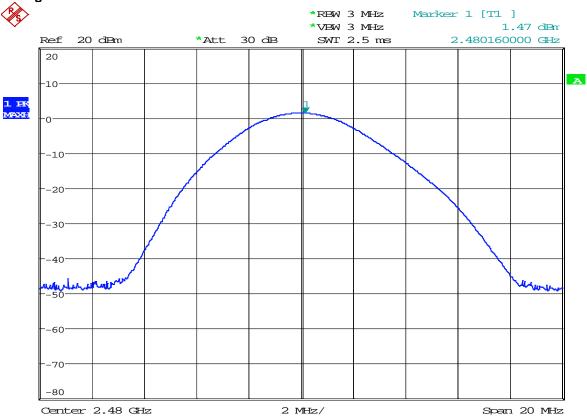


ITL Page 53 of 86 Report No.: 13033851

EDR mode (3DH5): Lowest Channel:

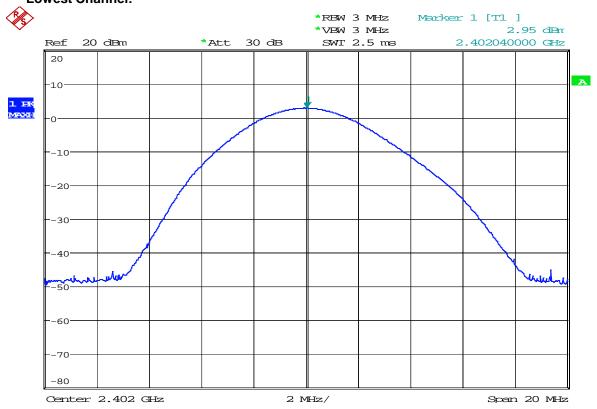


Date: 15.MAY.2013 20:05:49

Middle Channel:

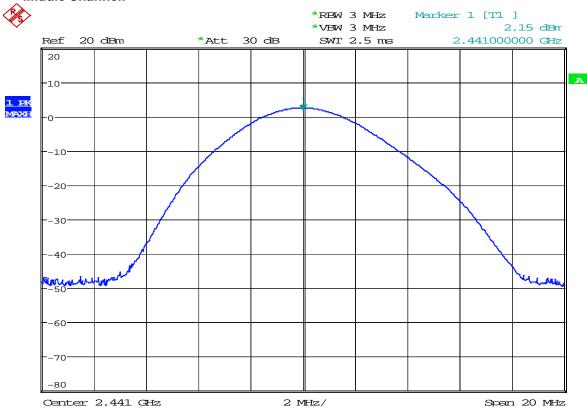

Highest Channel:

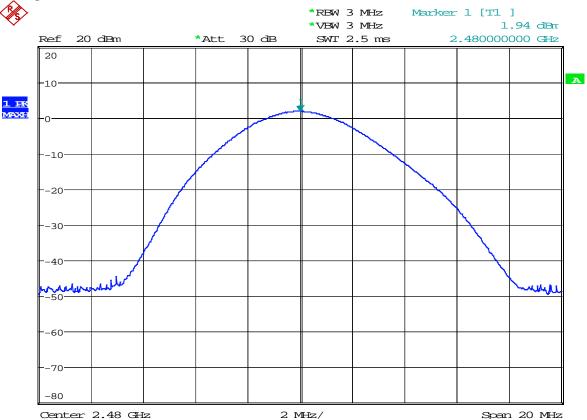

Date: 15.MAY.2013 20:07:03

ITL Page 55 of 86 Report No.: 13033851

5.8 Conducted Spurious Emissions

Test Requirement: FCC Part15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.


Test Method: ANSI C63.10: Clause 6.7 & DA 00-705

Test Status: Pre-test the EUT in continuous transmitting mode at the lowest, middle and

highest channel with different data packet. Compliance test in continuous transmitting mode with normal (DH5), EDR mode (2DH5) and EDR mode

(3DH5) as the worst case was found.

Test Configuration:

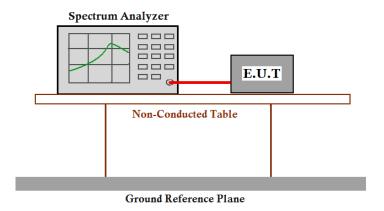

Test Procedure:

- 1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 100 kHz. VBW >= RBW. Sweep = auto; Detector Function = Peak (Max. hold).

ITL Page 56 of 86 Report No.: 13033851

For bluetooth

Test result plot as follows (Normal mode):


Lowest Channel:





ITL Page 57 of 86 Report No.: 13033851



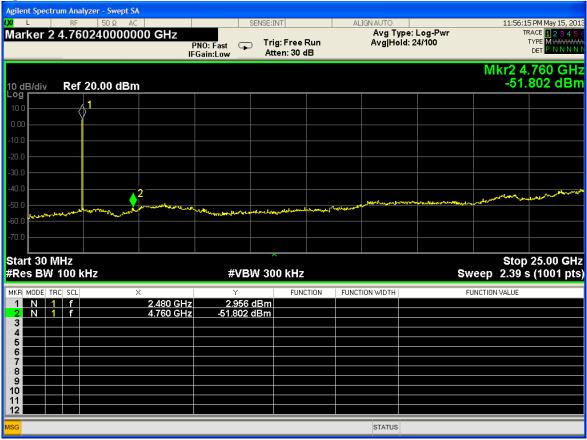

Test result plot as follows (EDR mode-2DH5):



ITL Page 58 of 86 Report No.: 13033851

Middle Channel



Highest channel



ITL Page 59 of 86 Report No.: 13033851

Test result plot as follows (EDR mode-3DH5):

Lowest Channel:




Middle Channel



ITL Page 60 of 86 Report No.: 13033851

Highest channel

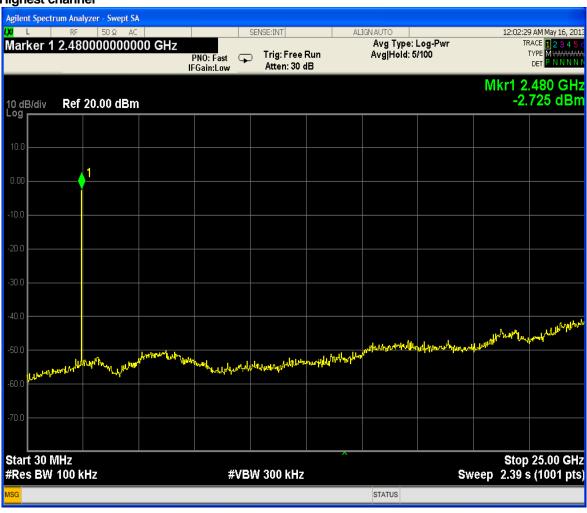

ITL Page 61 of 86 Report No.: 13033851

5.9 Radiated Spurious Emissions

Test Requirement: FCC Part15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that Contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, and provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: ANSI C63.10: Clause 6.4, 6.5 and 6.6 & DA 00-705

Test Status: Pre-test the EUT in continuous transmitting mode at the lowest, middle and

highest channel with different data packet. Compliance test in continuous transmitting mode with normal mode (DH5) as the worst case was found.

Detector: For PK value:

RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz, 9kHz for <30MHz

VBW ≥ RBW Sweep = auto

Detector function = peak

Trace = max hold

For AV value:

RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz, 9kHz for <30MHz

VBW =10 Hz

Sweep = auto

Detector function = peak

Trace = max hold

15.209 Limit: Section 15.209(a)


Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


ITL Page 62 of 86 Report No.: 13033851

Test Configuration:

1) 9kHz to 30MHz emissions:

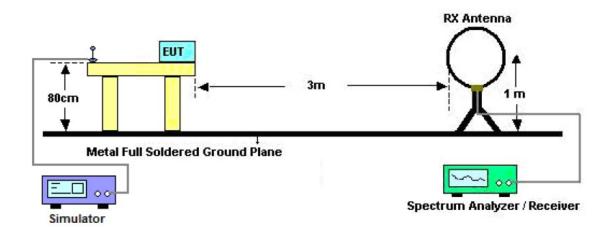


2) 30 MHz to 1 GHz emissions:

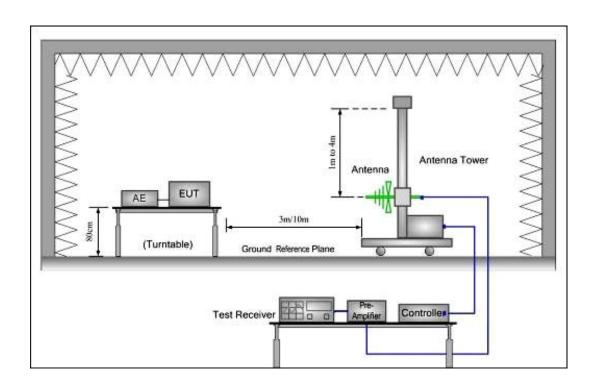

ITL Page 63 of 86 Report No.: 13033851

3) 1 GHz to 40 GHz emissions:

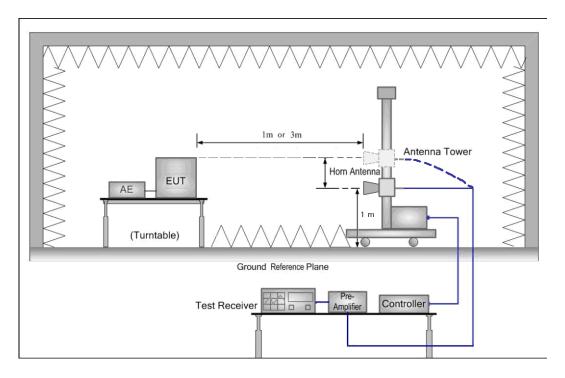

Test Procedure: The procedure used was ANSI Standard C63.4:2003. The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log(dwell time/100 ms), in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

ITL Page 64 of 86 Report No.: 13033851

5.9.1 Harmonic and other spurious emissions

Test at low Channel in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dBµV/m)

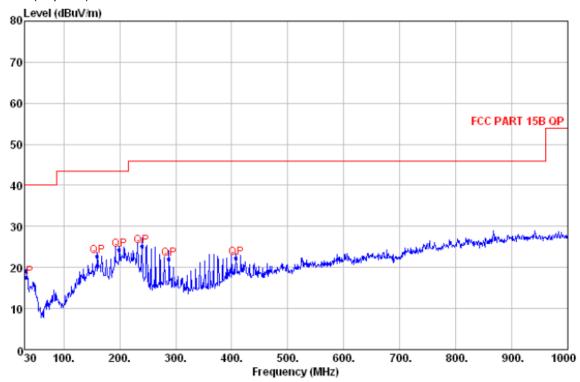

Quasi-peak measurement

No.	Freq	Level	Remark	Antenna Factor	Cable Loss	Limit Line	Margin	A/pos	T/pos
	MHz	dBuV/m		dB/m	dB	dBuV/m	dB	cm	deg
1	32.910	17.63	QP	16.24	0.66	40.00	-22.37	100	115
2	159.980	22.69	QP	7.80	1.51	43.50	-20.81	100	157
3	199.750	24.20	QP	8.87	1.70	43.50	-19.30	100	191
4	239.520	25.12	QP	10.90	1.88	46.00	-20.88	200	213
5	288.020	22.11	QP	13.42	2.08	46.00	-23.89	200	246
6	408.300	22.38	QP	16.08	2.48	46.00	-23.62	200	82

Level=Read Level + Antenna Factor + Cable Loss

ITL Page 65 of 86 Report No.: 13033851


Test at low Channel in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBµV/m)

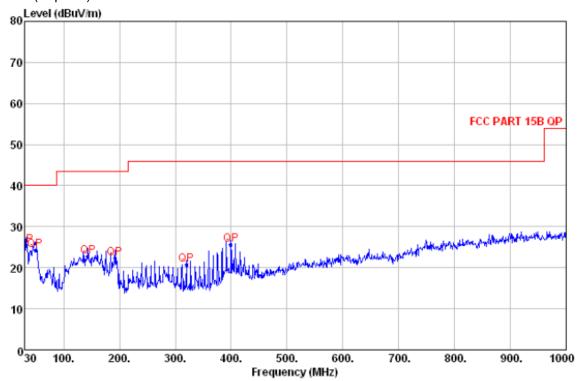

Quasi-peak measurement

No.	Freq	Level	Remark	Antenna Factor	Cable Loss	Limit Line	Margin	A/pos	T/pos
	MHz	dBuV/m		dB/m	dB	dBuV/m	dB	cm	deg
1	32.910	25.37	QP	16.24	0.66	40.00	-14.63	100	158
2	49.400	24.31	QP	8.57	0.80	40.00	-15.69	100	244
3	143.490	22.74	QP	7.40	1.43	43.50	-20.76	100	182
4	191.990	22.30	QP	8.66	1.67	43.50	-21.20	200	205
5	320.030	20.82	QP	14.00	2.19	46.00	-25.18	200	332
6	399.570	25.72	QP	15.98	2.45	46.00	-20.28	200	15

Level=Read Level + Antenna Factor + Cable Loss

ITL Page 66 of 86 Report No.: 13033851

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency	Antenna	Cable loss	Preamp	Reading	Emission	Limit	Antenna
(MHz)	factors (dB/m)	(dB)	factor (dB)	Level	Level	(dBµV/m)	polarization
	(dD/III)		(GD)	(dBµV)	(dBµV/m)		
4804.000	34.32	9.59	27.62	35.16	51.45	74.00	V
7206.000	34.88	12.15	27.33	34.98	54.68	74.00	V
9608.000	37.72	14.41	27.14	38.45	63.44	74.00	V
4804.000	34.32	9.59	27.62	35.75	52.04	74.00	Н
7206.000	34.88	12.15	27.33	35.32	55.02	74.00	Н
9608.000	37.72	14.41	27.14	38.01	63.00	74.00	Н

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level	Emission Level	Limit (dBµV/m)	Antenna polarization
	(4.2/111)		(42)	(dBµV)	(dBµV/m)		
4804.000	34.32	9.59	27.62	20.72	37.01	54.00	V
7206.000	34.88	12.15	27.33	20.38	40.08	54.00	V
9608.000	37.72	14.41	27.14	23.11	48.10	54.00	V
4804.000	34.32	9.59	27.62	21.45	37.74	54.00	Н
7206.000	34.88	12.15	27.33	21.34	41.04	54.00	Н
9608.000	37.72	14.41	27.14	21.07	46.06	54.00	Н

ITL Page 67 of 86 Report No.: 13033851

Test at Middle Channel in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dBµV/m)

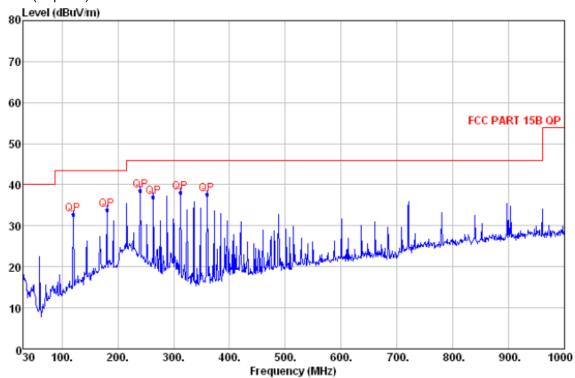

Quasi-peak measurement

No.	Freq	Level	Remark	Antenna Factor	Cable Loss	Limit Line	Margin	A/pos	T/pos
	MHz	dBuV/m		dB/m	dB	dBuV/m	dB	cm	deg
1	120.210	32.69	QP	7.70	1.30	43.50	-10.81	100	124
2	180.350	33.96	QP	8.30	1.61	43.50	-9.54	100	157
3	240.490	38.64	QP	10.93	1.89	46.00	-7.36	100	215
4	263.770	37.08	QP	12.42	1.98	46.00	-8.92	200	168
5	312.270	38.21	QP	13.69	2.17	46.00	-7.79	200	352
6	359.800	37.64	QP	14.39	2.31	46.00	-8.36	200	82

Level=Read Level + Antenna Factor + Cable Loss

ITL Page 68 of 86 Report No.: 13033851


Test at Middle Channel in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBµV/m)

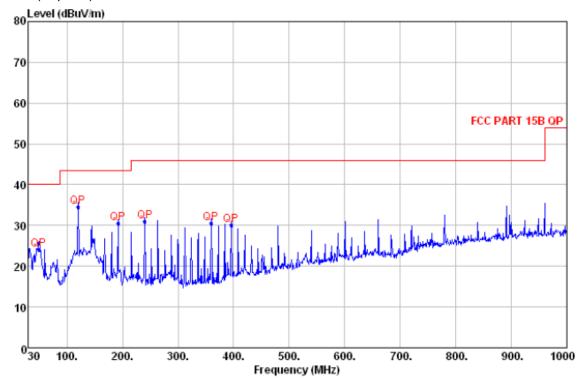

Quasi-peak measurement

No.	Freq	Level	Remark	Antenna Factor	Cable Loss	Limit Line	Margin	A/pos	T/pos
	MHz	dBuV/m		dB/m	dB	dBuV/m	dB	cm	deg
1	49.400	24.01	QP	8.57	0.80	40.00	-15.99	100	123
2	120.210	34.64	QP	7.70	1.30	43.50	-8.86	100	24
3	191.990	30.42	QP	8.66	1.67	43.50	-13.08	100	186
4	240.490	30.91	QP	10.93	1.89	46.00	-15.09	200	244
5	359.800	30.63	QP	14.39	2.31	46.00	-15.37	200	79
6	395.690	30.01	QP	15.83	2.43	46.00	-15.99	200	317

Level=Read Level + Antenna Factor + Cable Loss

ITL Page 69 of 86 Report No.: 13033851

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency	Antenna	Cable loss	Preamp	Reading	Emission	Limit	Antenna
(MHz)	factors (dB/m)	(dB)	factor (dB)	Level	Level	(dBµV/m)	polarization
	(dD/III)		(GD)	(dBµV)	(dBµV/m)		
4882.000	34.33	9.59	27.60	34.01	50.33	74.00	V
7323.000	34.92	12.17	27.31	32.55	52.33	74.00	V
9764.000	37.91	14.49	27.13	37.23	62.50	74.00	V
4882.000	34.33	9.59	27.60	35.04	51.36	74.00	Н
7323.000	34.92	12.17	27.31	35.07	54.85	74.00	Н
9764.000	37.91	14.49	27.13	38.01	63.28	74.00	Н

Average Measurement:

71.014901	il casal cilic						
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level	Emission Level	Limit (dBµV/m)	Antenna polarization
	(ub/iii)		(db)	(dBµV)	(dBµV/m)		
4882.000	34.33	9.59	27.60	22.50	38.82	54.00	V
7323.000	34.92	12.17	27.31	23.24	43.02	54.00	V
9764.000	37.91	14.49	27.13	24.08	49.35	54.00	V
4882.000	34.33	9.59	27.60	21.85	38.17	54.00	Н
7323.000	34.92	12.17	27.31	22.30	42.08	54.00	Н
9764.000	37.91	14.49	27.13	24.33	49.60	54.00	Н

ITL Page 70 of 86 Report No.: 13033851

Test at high Channel in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dBµV/m)

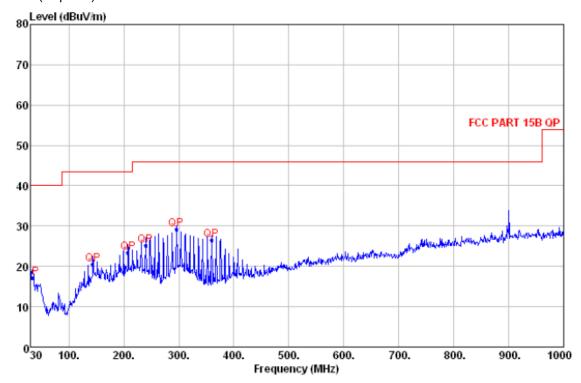

Quasi-peak measurement

No.	Freq	Level	Remark	Antenna Factor	a Cable Loss	Limit Line	Margin	A/pos	T/pos
	MHz	_dBuV/m		dB/m	dB	dBuV/m	dB		deg
1 2 3 4 5 6	32.910 143.490 207.510 239.520 295.780 359.800	17.09 20.47 23.43 25.13 29.13 26.52	QP QP QP QP QP QP	16. 24 7. 40 9. 15 10. 90 13. 72 14. 39	0.66 1.43 1.74 1.88 2.11 2.31	40.00 43.50 43.50 46.00 46.00 46.00	-22.91 -23.03 -20.07 -20.87 -16.87 -19.48	100 100 100 200 200 200	117 163 285 51 199 215

Level=Read Level + Antenna Factor + Cable Loss

ITL Page 71 of 86 Report No.: 13033851


Test at High Channel in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBµV/m)

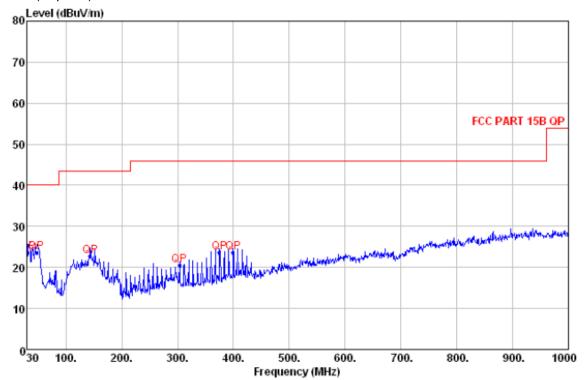

Quasi-peak measurement

No.	Freq	Level	Remark	Antenna Factor	Cable Loss	Limit Line	Margin	A/pos	T/pos
	MHz	dBuV/m		dB/m	dB	dBuV/m	dΒ	cm	deg
	31 040	02 70	OD.	16 03	0 65	40.00	16 00	100	113
1	31.940	23.72	QP	16.83	0.65		-16.28	100	
2	47.460	23.69	QP	9.41	0.78	40.00	-16.31	100	142
3	143.490	22.71	QP	7.40	1.43	43.50	-20.79	100	243
4	303.540	20.43	QP	13.73	2.14	46.00	-25.57	200	172
5	375.320	23.61	QP	15.11	2.36	46.00	-22.39	200	271
6	399.570	23.60	QΡ	15.98	2.45	46.00	-22.40	200	168

Level=Read Level + Antenna Factor + Cable Loss

ITL Page 72 of 86 Report No.: 13033851

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency	Antenna	Cable loss	Preamp	Reading	Emission	Limit	Antenna polarization
(MHz)	factors (dB/m)	(dB)	factor (dB)	Level	Level	(dBµV/m)	polarization
	(dD/III)		(db)	(dBµV)	(dBµV/m)		
4960.000	34.36	9.60	27.61	35.23	51.58	74.00	V
7440.000	34.98	12.19	27.30	33.91	53.78	74.00	V
9920.000	37.96	14.52	27.11	37.62	62.99	74.00	V
4960.000	34.36	9.60	27.61	35.12	51.47	74.00	Н
7440.000	34.98	12.19	27.30	35.05	54.92	74.00	Н
9920.000	37.96	14.52	27.11	37.80	63.17	74.00	Н

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Antenna polarization
4960.000	34.36	9.60	27.61	20.01	36.36	54.00	V
7440.000	34.98	12.19	27.30	20.53	40.40	54.00	V
9920.000	37.96	14.52	27.11	24.23	49.60	54.00	V
4960.000	34.36	9.60	27.61	21.74	38.09	54.00	Н
7440.000	34.98	12.19	27.30	21.42	41.29	54.00	Н
9920.000	37.96	14.52	27.11	23.04	48.41	54.00	Н

ITL Page 73 of 86 Report No.: 13033851

5.10 Radiated Emissions which fall in the restricted bands

Test Requirement: FCC Part15 C Section 15.247

(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Method: ANSI C63.10: Clause 6.4, 6.5 and 6.6 & DA 00-705

Test Status: Pre-test the EUT in continuous transmitting mode at the lowest (2402

MHz), middle (2441 MHz) and highest (2480 MHz) channel with different

data packet. Compliance test in continuous transmitting mode with

normal mode (DH5) as the worst case was found.

Measurement Distance: 3m (Semi-Anechoic Chamber)

15.209 Limit: Section 15.209(a)

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the

following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Detector: For PK value:

RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz

VBW ≥ RBW Sweep = auto

Detector function = peak

Trace = max hold

For AV value:

RBW = 1 MHz for f ≥ 1 GHz, 100 kHz for f < 1 GHz

VBW = 10 Hz

Sweep = auto

Detector function = peak

Trace = max hold

ITL Page 74 of 86 Report No.: 13033851

Test Result:

For bluetooth

1. Low Channel (2402MHz)

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dBµV)	Average Reading Level (dBµV)	Peak Emission Level (dBµV/m)	Average Emission Level (dBµV/m)
2310.000	26.65	6.45	27.78	35.04	21.27	40.36	26.59
2390.000	26.56	6.46	27.79	34.85	21.34	40.08	26.57
2500.000	25.70	6.62	27.80	35.28	21.00	39.80	25.52
2483.500	25.79	6.61	27.80	35.49	22.34	40.09	26.94

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dBµV)	Average Reading Level (dBµV)	Peak Emission Level (dBµV/m)	Average Emission Level (dBµV/m)
2310.000	26.65	6.45	27.78	35.01	22.32	40.33	27.64
2390.000	26.56	6.46	27.79	35.57	21.46	40.80	26.69
2500.000	25.70	6.62	27.80	35.46	22.42	39.98	26.94
2483.500	25.79	6.61	27.80	36.24	21.69	40.84	26.29

2. Middle Channel (2441MHz)

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dBµV)	Average Reading Level (dBµV)	Peak Emission Level (dBµV/m)	Average Emission Level (dBµV/m)
2310.000	26.65	6.45	27.78	35.08	21.54	40.40	26.86
2390.000	26.56	6.46	27.79	34.98	22.32	40.21	27.55
2500.000	25.70	6.62	27.80	35.24	21.48	39.76	26.00
2483.500	25.79	6.61	27.80	36.24	22.88	40.84	27.48

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dBµV)	Average Reading Level (dBµV)	Peak Emission Level (dBµV/m)	Average Emission Level (dBµV/m)
2310.000	26.65	6.45	27.78	34.51	22.40	39.83	27.72
2390.000	26.56	6.46	27.79	35.40	21.45	40.63	26.68
2500.000	25.70	6.62	27.80	35.02	21.62	39.54	26.14
2483.500	25.79	6.61	27.80	35.43	22.58	40.03	27.18

ITL Page 75 of 86 Report No.: 13033851

3. High Channel (2480MHz)

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dBµV)	Average Reading Level (dBµV)	Peak Emission Level (dBµV/m)	Average Emission Level (dBµV/m)
2310.000	26.65	6.45	27.78	35.40	21.98	40.72	27.30
2390.000	26.56	6.46	27.79	34.42	21.75	39.65	26.98
2500.000	25.70	6.62	27.80	35.65	21.11	40.17	25.63
2483.500	25.79	6.61	27.80	35.03	21.23	39.63	25.83

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dBµV)	Average Reading Level (dBµV)	Peak Emission Level (dBµV/m)	Average Emission Level (dBµV/m)
2310.000	26.65	6.45	27.78	35.32	22.01	40.64	27.33
2390.000	26.56	6.46	27.79	35.42	22.46	40.65	27.69
2500.000	25.70	6.62	27.80	34.16	21.49	38.68	26.01
2483.500	25.79	6.61	27.80	35.34	20.52	39.94	25.12

Remark: No any other emission which falls in restricted bands can be detected and be reported.

Test result: The unit does meet the FCC requirements.

ITL Page 76 of 86 Report No.: 13033851

5.11 Band Edges Requirement

Test Requirement: FCC Part15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits

specified in Section 15.209(a) (see Section

15.205(c)).


Frequency Band: 2400 MHz to 2483.5 MHz

Test Method: ANSI C63.10: Clause 6.9 & DA 00-705

Test Status: Pre-test the EUT in continuous transmitting mode at the

lowest (2402 MHz), and highest (2480 MHz) channel and hopping mode with different data packet. Compliance test in continuous transmitting mode with normal (DH5) EDR mode (2DH5) and EDR mode (3DH5) as the worst case was found.

Test Configuration:

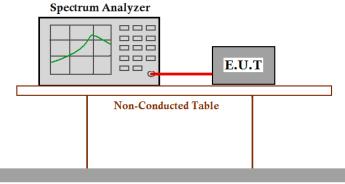

Ground Reference Plane

Test Procedure: Set RBW of spectrum analyzer to 100 kHz and VBW of

spectrum analyzer to 300 kHz with suitable frequency span

including 100 kHz bandwidth from band edge.

The band edges was measured and recorded Result:

The Lower Edges attenuated more than 20dB.

The Upper Edges attenuated more than 20dB.


The graph as below. Represents the emissions take for this device.

ITL Page 77 of 86

For Bluetooth

DH5:


Low channel:

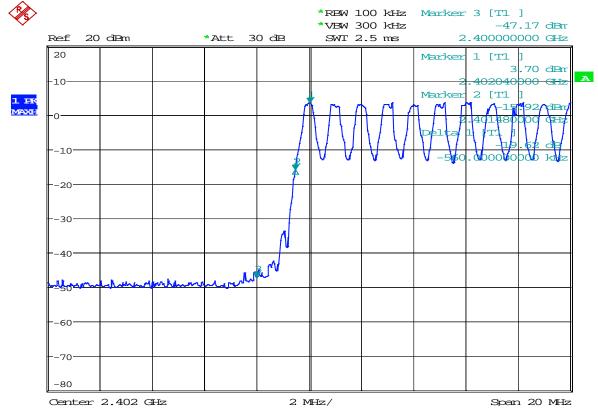

Report No.: 13033851


Date: 15.MAY.2013 20:22:53

High channel:

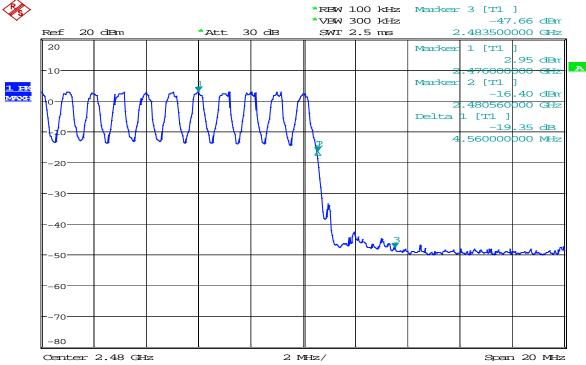


ITL Page 78 of 86 Report No.: 13033851



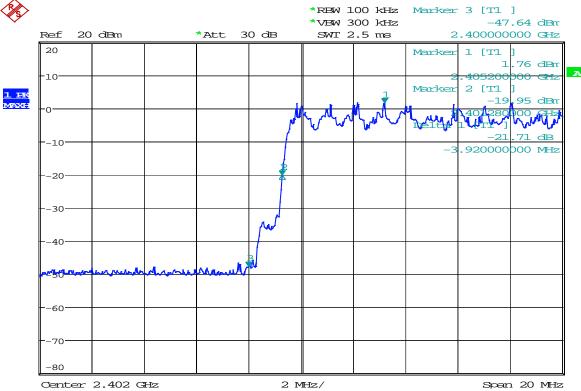

Date: 15.MAY.2013 20:36:02


High channel:

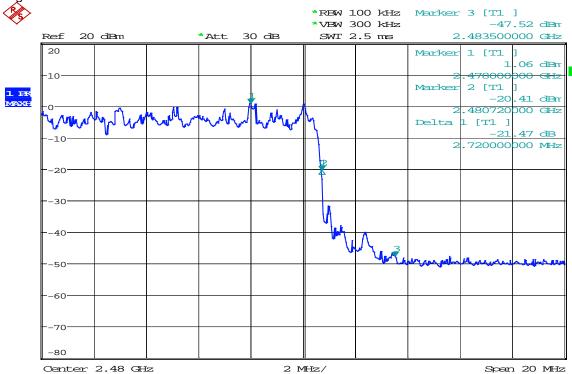

Date: 15.MAY.2013 20:39:11






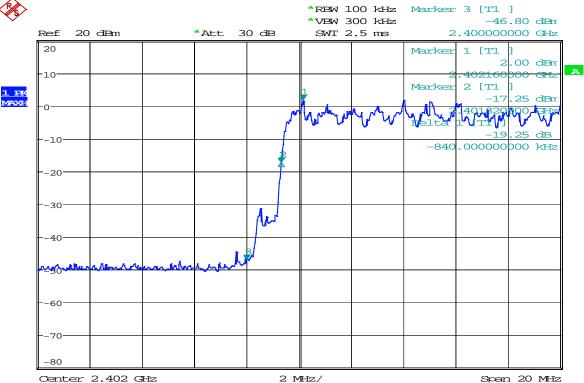

Date: 15.MAY.2013 20:43:40


High channel:

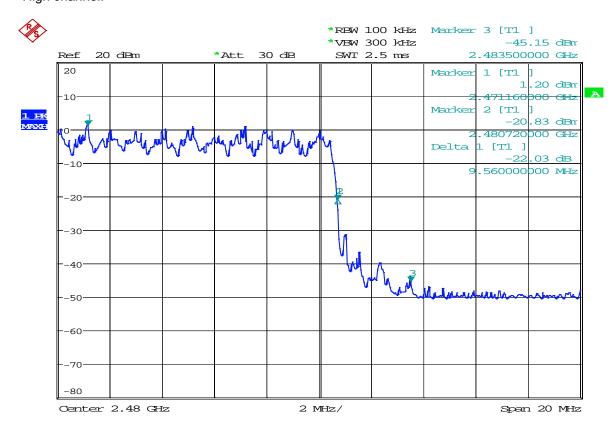

ITL


Page 80 of 86 Report No.: 13033851

DH5: Low channel:

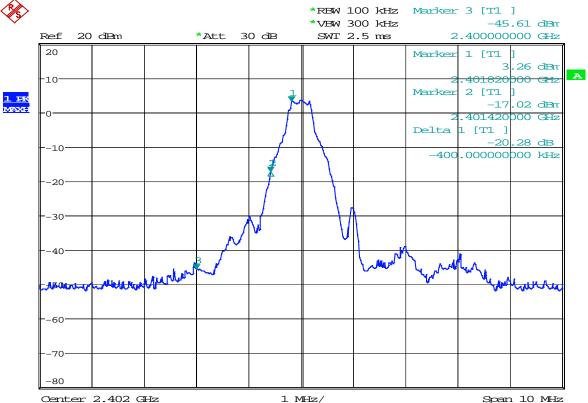


Date: 15.MAY.2013 20:49:43

High Chanel:

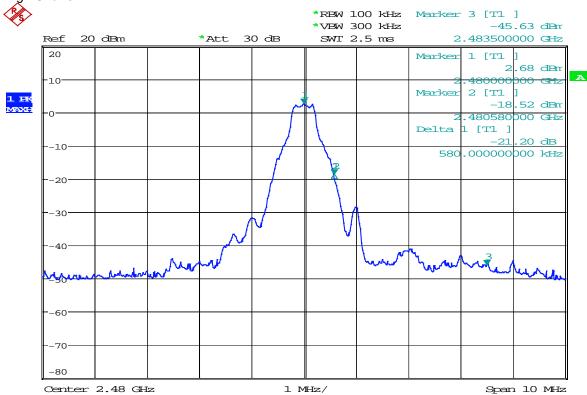


Page 81 of 86 Report No.: 13033851




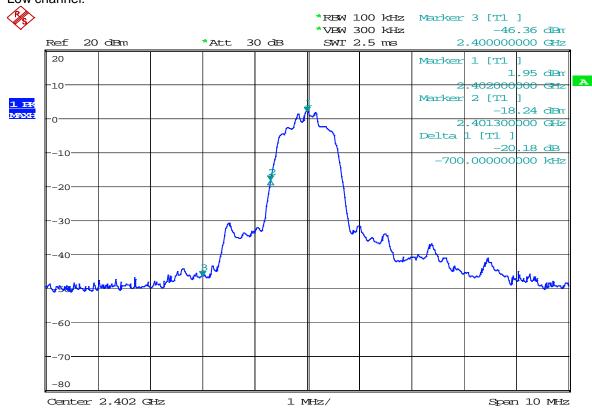

Date: 15.MAY.2013 20:53:53

High channel:

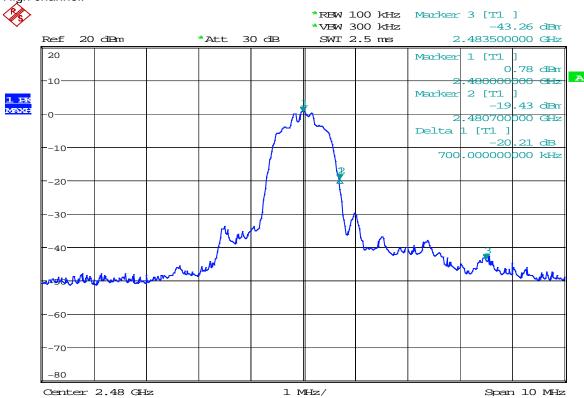

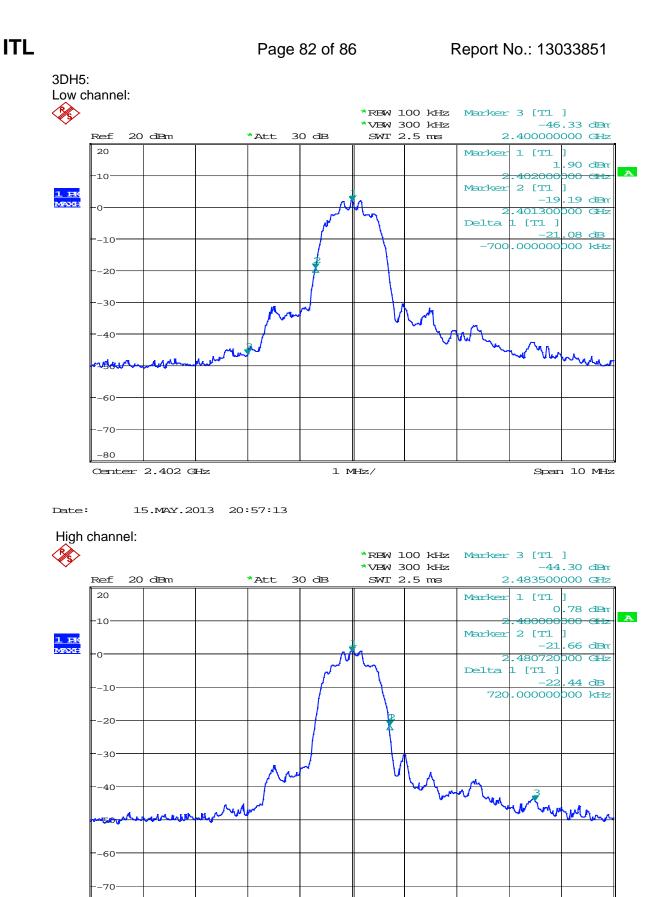

1 MHz/

Span 10 MHz

Date: 15.MAY.2013 21:01:10

Center 2.48 GHz

ITL Page 83 of 86 Report No.: 13033851

5.12 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz

Test Requirement: FCC Part 15 C section 15.207

Test Method: ANSI C63.10: Clause 6.2 & DA 00-705

Frequency Range: 150 kHz to 30 MHz

Detector: Peak for pre-scan (9 kHz Resolution Bandwidth)

Test Limit

Limits for conducted disturbance at the mains ports of class B

Frequency Range	Class B Limit dB(μV)				
r requeitcy Kange	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			


NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

EUT Operation:

Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Pre-Scan has been conducted to determine the worstcase mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Test Configuration:

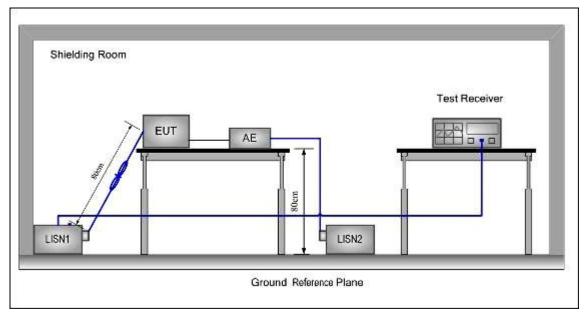

Test procedure:

- 1. The mains terminal disturbance voltage test was conducted in a shielded room.
- 2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu H + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
- 4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

ITL Page 85 of 86 Report No.: 13033851


5.12.1 Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected. For EUT the communicating was worst case mode.

The following Quasi-Peak and Average measurements were performed on the EUT Live line

Peak Scan:

Level (dBµV)

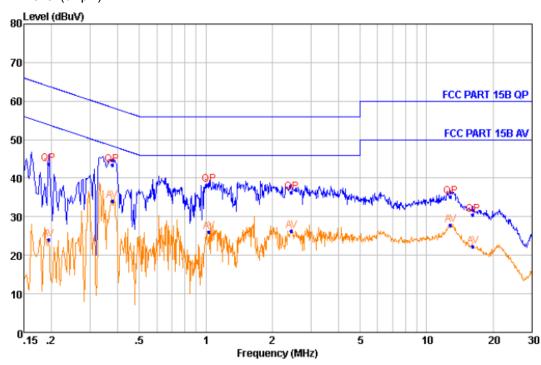

Quasi-peak and Average measurement

NO.	Freq MHz	Level dBuV	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBuV	Margin dB
1 2 3 4 5 6 7 8 9	0. 194 0. 194 0. 376 0. 376 1. 035 1. 035 2. 442 2. 442 12. 819 12. 819 16. 188	43. 75 24. 12 43. 56 34. 09 38. 24 26. 16 36. 22 26. 40 35. 27 27. 80 30. 59	QP Average	9.68 9.68 9.66 9.66 9.67 9.67 9.64 9.64 9.69 9.70	0. 21 0. 21 0. 25 0. 25 0. 31 0. 31 0. 36 0. 36 0. 45 0. 45	63. 84 53. 84 58. 36 48. 36 56. 00 46. 00 56. 00 46. 00 60. 00	-20.09 -29.72 -14.80 -14.27 -17.76 -19.84 -19.78 -19.60 -24.73 -22.20 -29.41
12	16.188	22.24	Average	9.70	0.47	50.00	-27.76


Note: 1. Margin = Limit Line - Level
2. Level = Read level + LISM Factor + Cable Loss

Report No.: 13033851

Neutral Line

Peak Scan:

Level (dBµV)

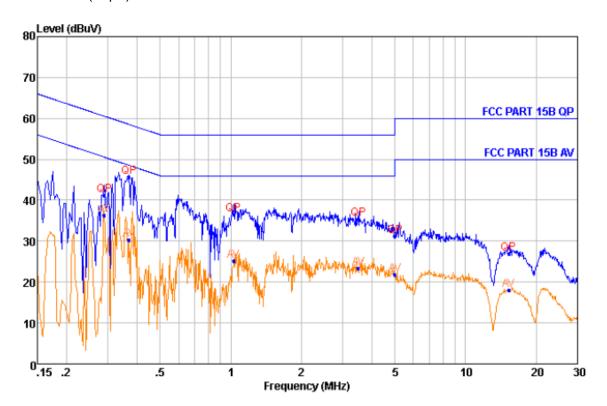

Quasi-peak and Average measurement

NO.	Freq MHz	Level dBuV	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBuV	Margin dB
1	0.289	41.18	QP	9.65	0.24	60.54	-19.36
2	0.289	36.38	Average	9.65	0.24	50.54	-14.16
3	0.368	45.62	QP	9.66	0.25	58.54	-12.92
4	0.368	30.23	Average	9.66	0.25	48.54	-18.31
5	1.029	36.54	QP	9.63	0.31	56.00	-19.46
6	1.029	25.12	Average	9.63	0.31	46.00	-20.88
7	3.501	35.53	QP	9.62	0.38	56.00	-20.47
8	3.501	23.32	Average	9.62	0.38	46.00	-22.68
9	5.000	31.26	QP	9.62	0.40	56.00	-24.74
10	5.000	21.93	Average	9.62	0.40	46.00	-24.07
11	15.273	26.99	QP	9.63	0.46	60.00	-33.01
12	15.273	17.99	Average	9.63	0.46	50.00	-32.01

Note: 1. Margin = Limit Line - Level
2. Level = Read level + LISM Factor + Cable Loss