







ISO/IEC17025 Accredited Lab.

Report No: FCC 1104104-01 File reference No: 2011-05-28

Applicant: Rainkine Thompson Ltd

Product: RTL LINX1+ vehicle telematics unit

Brand Name: RTL

Model No: RTL LINX1+

Test Standards: FCC Part 15 Subpart B: 2009

Test result: It is herewith confirmed and found to comply with the requirements

set up by ANSI C63.4&FCC Part 15 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: May 28, 2011

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. Chegongmiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1104104-01 Page 2 of 16

Date: 2011-05-28



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

## **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

# IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

### VCCI- Registration No.: R-3015 and C-3332

The EMC Laboratory has been registered and fully described in a report filed with the (VCCI) Voluntary Control Council for Interference. The acceptance letter from the VCCI is maintained in our files. Registration IC No.: R-3015 and C-3332

Date: 2011-05-28



# **Test Report Conclusion** Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Test Uncertainty.	4
1.5	Submitted Sample	4
1.6	Test Duration.	4
2.0	List of Measurement Equipment	5
2.1	Conducted Emission Test.	5
2.2	Radiated electromagnetic disturbance test.	5
2.3	Auxiliary Equipment	5
2.4	I/O Cable	5
3.0	Technical Details.	6
3.1	Investigations Requested.	6
3.2	Test Standards.	6
4.0	Power line Conducted Emission Test	7
5.0	Radiated Disturbance Test.	10
6.0	FCC Label	15
7.0	Photo of testing	16

Date: 2011-05-28



#### 1.0 General Details

### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

### 1.2 Applicant Details

Applicant: Rainkine Thompson Ltd

Address: 44a Lower Market Street, Broadbottom, Cheshire, SK14 6AA, UK

Telephone: +44 (0) 1457767309 Fax: +44 1457 762247

### 1.3 Description of EUT

Product: RTL LINX1+ vehicle telematics unit

Manufacturer: Cwlinux Ltd.

Address: Unit 138, 13/F, Weswick Comm. Bldg., 147-151 Queen's Road East, Wanchai, Hong

Kong, China.

Brand Name: RTL

Model Number: RTL LINX1+
Additional Model Number: --

Rating: Input: 12VDC

Remark: --

## 1.4 Submitted Sample: 1 Sample

### 1.5 Test Duration

2011-04-12 to 2011-05-28

### 1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

leng any

The sample tested by

Print Name: Terry Tang

"The report refers only to the sample tested and does not apply to the bulk production.

This report is issued in confidential to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for illegal purpose. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate."

Date: 2011-05-28



## **List of Measurement Equipment**

#### 2.1 **Conducted Emission Test**

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESH3	860905/006	RS	2011.4.26	1Year
Spectrum Analyzer	ESA-L1500A	US37451154	HP	2011.4.26	1Year
PULSE LIMITER	ESH3-Z2	100281	RS	2011.4.26	1Year
LISN	ESH3-Z5	100294	RS	2011.4.26	1Year
LISN	ESH3-Z5	100253	RS	2011.4.26	1Year
LISN	LS16C	10010947251	AFJ	2011.4.26	1Year
LISN (Three Phase)	NSLK 8126	8126453	Schwarebeck	2011.4.26	1Year

#### 2.2 Radiated electromagnetic disturbance test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESVD	100008	RS	2011.4.26	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
Spectrum Analyzer	8595E	3441A00893	НР	2011.4.26	1Year
Amplifier	8447D	2727A05017	HP	2011.4.26	1Year
Bilog Antenna	VULB9163	9163/340	Schwarebeck	2011.4.26	1Year
Horn Antenna	BBHA 9120D	9120D-631	Schwarebeck	2011.4.26	1Year

#### 2.3 **Auxiliary Equipment**

					Calibration
Name	Model No.	Serial No.	Manufacturer	Cable	Cycle
				Data cable	
Mouse	OM860XC	HM0509	BIGCOW	of 1.5m	FCC DOC
				length	
Vaybaard	SK-8115	CN-0DJ313-71616-04J-06S4	DELL	Data cable of	FCC DOC
Keyboard	SK-0113	CN-0DJ313-/1010-04J-0084	DELL	2.0m length	FCC DOC
Fambana	DT-301			Data cable of	
Earphone	D1-301			2.0m length	
PC	R400	R8-825ER	Lenovo		FCC DOC

Page 6 of 16

Report No: 1104104-01 Date: 2011-05-28



#### 3.0 **Technical Details**

3.1 **Investigations Requested** Perform Electromagnetic Interference [EMI] tests for FCC Requirement.

3.2 **Test Standards** 


FCC Part 15 Subpart B: 2009

Date: 2011-05-28



### 4.0 Conducted Power line Test

### 4.1 Schematics of the test




**EUT: Equipment Under Test** 

### 4.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2009. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003. Cables and peripherals were moved to find the maximum emission levels for each frequency.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

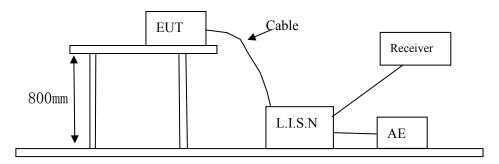

#### 4.3 Power line conducted Emission Limit

Eraguanay (MHz)	Class A Limits dB(µV)		Class B Limits dB(μV)	
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	79.00	66.00	66.00~56.00*	56.00~46.00*
$0.50 \sim 5.00$	73.00	60.00	56.00	46.00
5.00 ~ 30.00	73.00	60.00	60.00	50.00

Notes:

- 1. \*decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

### 4.4 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

This report is issued in confidential to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for illegal purpose. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate."

<sup>&</sup>quot;The report refers only to the sample tested and does not apply to the bulk production.

Report No: 1104104-01 Page 8 of 16

Conducted Emission on Live Terminal (150kHz to 30MHz)

## **EUT Operating Environment**

Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: --Equipment Level: Class B** 

**Results: N/A** 

Date: 2011-05-28

Frequency	Line	Reading(dBμV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
	Live				

Report No: 1104104-01 Page 9 of 16

Date: 2011-05-28

## B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

**EUT Operating Environment** 

Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: -- Equipment Level: Class B** 

Results: N/A

Please refer to following diagram for individual

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
	Neutral				

Note: Due to DC Operation, this test item not applicable.

Date: 2011-05-28



#### 5.0 Radiated Disturbance Test


#### 5.1 Schematics of the test



### 5.2 Test Method and test Procedure:

The EUT was tested according to ANSI C63.4 –2009, The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak 0values with a resolution bandwidth of 120KHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

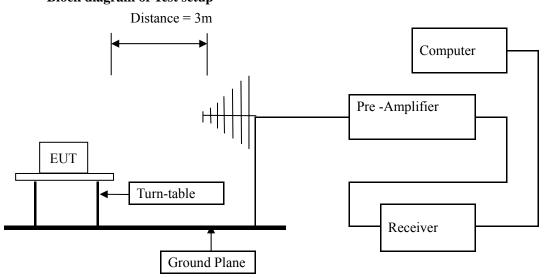

#### 5.3 Radiated Emission Limit

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.00
88-216	3	43.50
216-960	3	46.00
Above 960	3	54.00

Note: The lower limit shall apply at the transition frequencies

### 5.4 Test result

The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. All readings are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.

This report is issued in confidential to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for illegal purpose. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate."

<sup>&</sup>quot;The report refers only to the sample tested and does not apply to the bulk production.

Date: 2011-05-28




## A: Radiated Disturbance (30MHz----1000MHz)

### **EUT Operating Environment**

Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Working Equipment Level: Class B

**Results: Pass** 

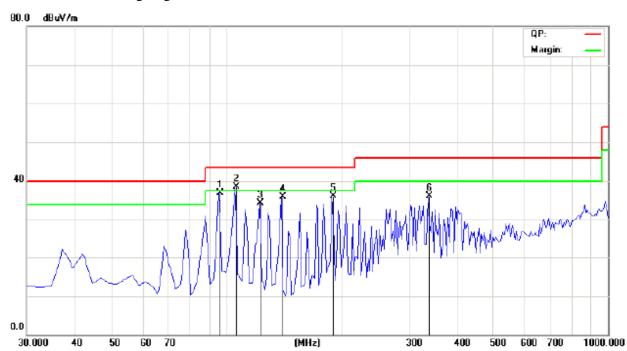

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBμV/m)
95.475	36.91	Н	43.50
105.175	38.46	Н	43.50
122.150	34.34	Н	43.50
139.125	35.88	Н	43.50
190.050	36.05	Н	43.50
337.975	36.15	Н	46.00

<sup>&</sup>quot;The report refers only to the sample tested and does not apply to the bulk production.


Report No: 1104104-01 Date: 2011-05-28 Radiated Disturbance (30MHz----1000MHz)

### **EUT Operating Environment**

Temperature:25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: Working Equipment Level: Class B** 

**Results: Pass** 

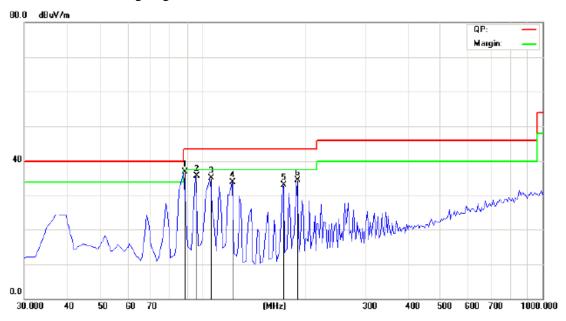

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
88.200	36.95	V	43.50
95.475	35.78	V	43.50
105.175	35.16	V	43.50
122.150	33.83	V	43.50
173.075	33.01	V	43.50
190.050	34.42	V	43.50

<sup>&</sup>quot;The report refers only to the sample tested and does not apply to the bulk production.

Date: 2011-05-28




# C: Radiated Disturbance (1000MHz----6000MHz)

### **EUT Operating Environment**

Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: Working Equipment Level: Class B** 

**Results: Pass** 

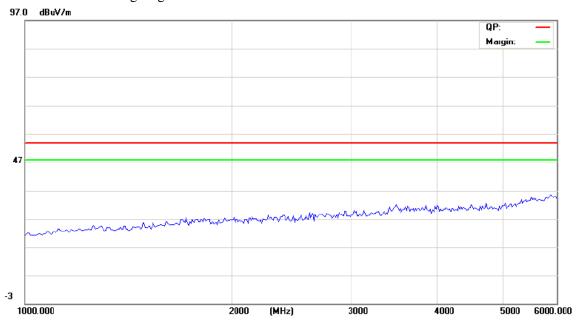

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
		Н	

<sup>-</sup>The test data shows much less than the limit, no necessary take down the results.

Date: 2011-05-28




# D: Radiated Disturbance (1000MHz----6000MHz)

### **EUT Operating Environment**

Temperature:25°C Humidity: 75%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: Working Equipment Level: Class B** 

**Results: Pass** 

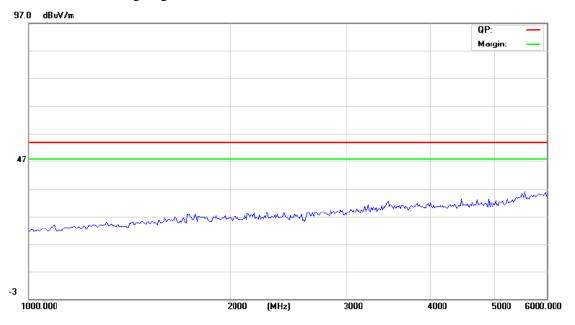

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
	-	V	

<sup>-</sup>The test data shows much less than the limit, no necessary take down the results.

Date: 2011-05-28



Page 15 of 16

6.0

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.


Mark Location: On the product body

Report No: 1104104-01 Date: 2011-05-28



- 7.0 Photo of testing
- Conducted test View—N/A 7.1

#### 7.2 Radiated emission test view--

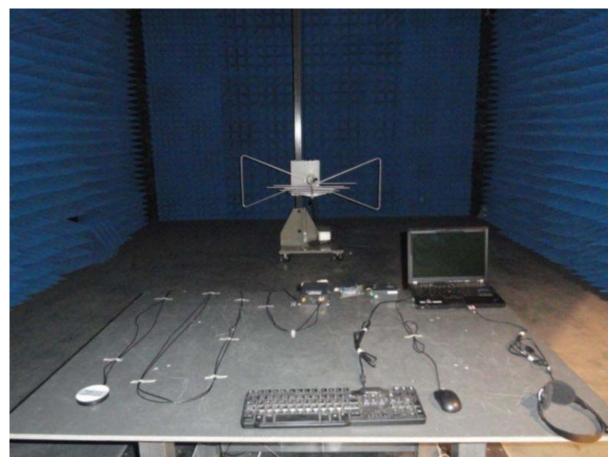

-End of the report-