

# RF Exposure Lab

802 N. Twin Oaks Valley Road, Suite 105 • San Marcos, CA 92069 • U.S.A.

TEL (760) 471-2100 • FAX (760) 471-2121

<http://www.rfexposurelab.com>

## CERTIFICATE OF COMPLIANCE SAR EVALUATION

Dejero Labs Inc.  
412 Albert St., Suite 100  
Waterloo, ON N2L 3V3  
Canada

Dates of Test:  
Test Report Number:


May 6-22, 2016  
SAR.20160508  
Revision B

FCC ID:	Y99DEJ455
IC Certificate:	12762A-DEJ455
Model(s):	LIVE+ EnGo
Part Number:	10-110-XX
Contains Module:	Sierra Wireless Model MC7455
Test Sample:	Engineering Unit Same as Production
Serial Number:	Eng 1
Equipment Type:	Wireless Video Transceiver
Classification:	Portable Transmitter Next to Body
TX Frequency Range:	699 – 716 MHz, 777 – 787 MHz, 814 – 849 MHz, 1710 – 1755 MHz, 1850 – 1915 MHz, 2305 – 2315 MHz, 2496 – 2690 MHz
Frequency Tolerance:	± 2.5 ppm
Maximum RF Output:	700 MHz (LTE) – 24.00 dBm, 782 MHz (LTE) – 24.00 dBm, 835 MHz (UMTS) – 24.00 dBm, 835 MHz (LTE) – 24.00 dBm, 1750 MHz (UMTS) – 24.00 dBm; 1750 MHz (LTE) – 24.00 dBm, 1900 MHz (UMTS) – 24.00 dBm, 1900 MHz (LTE) – 24.00 dBm, 2300 MHz (LTE) – 23.00 dBm, 2500 MHz (LTE) – 23.00 dBm Conducted
Signal Modulation:	WCDMA, QPSK, 16QAM
Antenna Type:	Internal
Application Type:	Certification
FCC Rule Parts:	Part 2, 22, 24
KDB Test Methodology:	KDB 447498 D01 v06, KDB 941225 D01 v03r01, KDB 941225 D05 v02r01
Industry Canada:	RSS-102 Issue 5, Safety Code 6
Maximum SAR Value:	0.80 W/kg Reported
Max. Simultaneous:	0.04 Separation Ratio
Separation Distance:	0 mm

This wireless mobile and/or portable device has been shown to be compliant for localized specific absorption rate (SAR) for uncontrolled environment/general exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and IEC 62209-2:2010 (See test report).

I attest to the accuracy of the data. All measurements were performed by myself or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RF Exposure Lab, LLC certifies that no party to this application is subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).



Jay M. Moulton  
Vice President



Certificate # 2387.01

## Table of Contents

1.	Introduction .....	3
	SAR Definition [5].....	4
2.	SAR Measurement Setup .....	5
	Robotic System .....	5
	System Hardware.....	5
	System Electronics.....	6
	Probe Measurement System .....	6
3.	Probe and Dipole Calibration.....	14
4.	Phantom & Simulating Tissue Specifications.....	15
	Head & Body Simulating Mixture Characterization .....	15
5.	ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2].....	16
	Uncontrolled Environment .....	16
	Controlled Environment.....	16
6.	Measurement Uncertainty .....	17
7.	System Validation.....	18
	Tissue Verification.....	18
	Test System Verification.....	18
8.	SAR Test Data Summary .....	19
	Procedures Used To Establish Test Signal .....	19
	Device Test Condition .....	19
9.	LTE Document Checklist.....	20
10.	FCC 3G Measurement Procedures .....	24
	10.1 Procedures Used to Establish RF Signal for SAR .....	24
	10.2 SAR Measurement Conditions for WCDMA/HSDPA/HSUPA.....	24
	11.4 SAR Measurement Conditions for LTE Bands .....	28
	SAR Data Summary –LTE Band 13 .....	57
	SAR Data Summary –LTE Band 12 .....	58
	SAR Data Summary – 850 MHz Body – UMTS Band 5.....	59
	SAR Data Summary –LTE Band 26 .....	60
	SAR Data Summary – 1750 MHz Body – UMTS Band 4.....	61
	SAR Data Summary –LTE Band 4 .....	62
	SAR Data Summary – 1900 MHz Body – UMTS Band 2.....	63
	SAR Data Summary –LTE Band 25 .....	64
	SAR Data Summary –LTE Band 30 .....	65
	Vice PresidentSAR Data Summary –LTE Band 7.....	65
	SAR Data Summary –LTE Band 41 .....	67
	SAR Data Summary – Simultaneous Evaluation .....	68
12.	Test Equipment List.....	69
13.	Conclusion .....	70
14.	References.....	71
	Appendix A – System Validation Plots and Data .....	72
	Appendix B – SAR Test Data Plots .....	88
	Appendix C – SAR Test Setup Photos .....	100
	Appendix D – Probe Calibration Data Sheets.....	114
	Appendix E – Dipole Calibration Data Sheets .....	159
	Appendix F – Phantom Calibration Data Sheets .....	208

## 1. Introduction

This measurement report shows compliance of the Dejero Labs Inc. Model LIVE+ EnGo FCC ID: Y99DEJ455 with FCC Part 2, 1093, ET Docket 93-62 Rules for mobile and portable devices and IC Certificate: 12762A-DEJ455 with RSS102 Issue 5 & Safety Code 6. The FCC have adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on August 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC regulated portable devices. [1], [6]

The test results recorded herein are based on a single type test of Dejero Labs Inc. Model LIVE+ EnGo and therefore apply only to the tested sample.

The test procedures, as described in ANSI C95.1 – 1999 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [2], ANSI C95.3 – 2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields [3], IEEE Std.1528 – 2003 Recommended Practice [4], and Industry Canada Safety Code 6 Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz were employed.

The following table indicates all the wireless technologies operating in the LIVE+ EnGo Wireless Video Transceiver. The table also shows the tolerance for the power level for each mode (if applicable).

Band	Technology	Class	3GPP Nominal Power dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
Band 25 – 1900 MHz	LTE – FDD	3	23	+1.0/-1.5	21.5	24.0
Band 2 – 1900 MHz	LTE – FDD	3	23	+1.0/-1.5	21.5	24.0
Band 12 – 700 MHz	LTE – FDD	3	23	+1.0/-1.5	21.5	24.0
Band 13 – 782 MHz	LTE – FDD	3	23	+1.0/-1.5	21.5	24.0
Band 5 – 850 MHz	LTE – FDD	3	23	+1.0/-1.5	21.5	24.0
Band 4 – 1750 MHz	LTE – FDD	3	23	+1.0/-1.5	21.5	24.0
Band 7 – 2600 MHz	LTE – FDD	3	22	+1.0/-1.5	20.5	23.0
Band 26 – 850 MHz	LTE – FDD	3	23	+1.0/-1.5	21.5	24.0
Band 30 – 2300 MHz	LTE – FDD	3	22	+1.0/-1.5	20.5	23.0
Band 41 – 2500 MHz	LTE – TDD	3	22	+1.0/-1.5	20.5	23.0
Band 5 – 850 MHz	UMTS	3	23	+1.0/-1.5	21.5	24.0
Band 4 – 1750 MHz	UMTS	3	23	+1.0/-1.5	21.5	24.0
Band 2 – 1900 MHz	UMTS	3	23	+1.0/-1.5	21.5	24.0

## SAR Definition [5]

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dV$ ) of a given density ( $\rho$ ).

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

$\sigma$  = conductivity of the tissue (S/m)

$\rho$  = mass density of the tissue (kg/m<sup>3</sup>)

$E$  = rms electric field strength (V/m)

## 2. SAR Measurement Setup

## Robotic System

These measurements are performed using the DASY52 automated dosimetric assessment system. The DASY52 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 2.1).

## System Hardware

A cell controller system contains the power supply, robot controller teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the HP Intel Core2 computer with Windows XP system and SAR Measurement Software DASY52, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.



### Figure 2.1 SAR Measurement System Setup

## System Electronics

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

## Probe Measurement System

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration (see Fig. 2.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi fiber line ending at the front of the probe tip. (see Fig. 2.3) It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY52 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.



**DAE System**

**Probe Specifications**

**Calibration:** In air from 10 MHz to 6.0 GHz  
In brain and muscle simulating tissue at Frequencies of 450 MHz, 835 MHz, 1750 MHz, 1900 MHz, 2450 MHz, 2600 MHz, 3500 MHz, 5200 MHz, 5300 MHz, 5600 MHz, 5800 MHz

**Frequency:** 10 MHz to 6 GHz

**Linearity:**  $\pm 0.2\text{dB}$  (30 MHz to 6 GHz)

**Dynamic:** 10 mW/kg to 100 W/kg

**Range:** Linearity:  $\pm 0.2\text{dB}$

**Dimensions:** Overall length: 330 mm

**Tip length:** 20 mm

**Body diameter:** 12 mm

**Tip diameter:** 2.5 mm

**Distance from probe tip to sensor center:** 1 mm

**Application:** SAR Dosimetry Testing  
Compliance tests of wireless device



**Figure 2.2 Triangular Probe Configurations**



**Figure 2.3 Probe Thick-Film Technique**



## Probe Calibration Process

### Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure described in with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in and found to be better than +/-0.25dB. The sensitivity parameters (Norm X, Norm Y, Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe is tested.

### Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm<sup>2</sup>.

### Temperature Assessment \*

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor based temperature probe is used in conjunction with the E-field probe

$$SAR = C \frac{\Delta T}{\Delta t}$$

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

where:

$\Delta t$  = exposure time (30 seconds),

$\sigma$  = simulated tissue conductivity,

$C$  = heat capacity of tissue (brain or muscle),

$\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for brain tissue)


$\Delta T$  = temperature increase due to RF exposure.

SAR is proportional to  $\Delta T / \Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place.

Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;



**Figure 2.4 E-Field and Temperature Measurements at 900MHz**

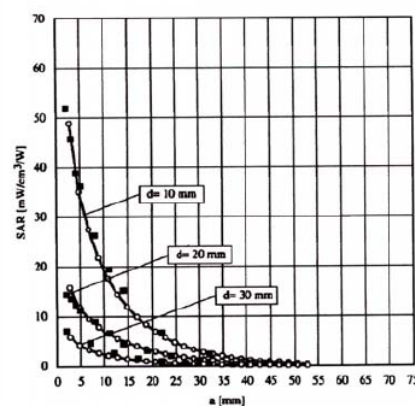

**Figure 2.5 E-Field and Temperature Measurements at 1800MHz**



## Data Extrapolation

The DASY52 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  $V_i$  = compensated signal of channel i (i=x,y,z)  
 $U_i$  = input signal of channel i (i=x,y,z)  
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with  $V_i$  = compensated signal of channel i (i = x,y,z)  
 $Norm_i$  = sensor sensitivity of channel i (i = x,y,z)  
 $\mu V/(V/m)^2$  for E-field probes  
 $ConvF$  = sensitivity of enhancement in solution  
 $E_i$  = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with  $SAR$  = local specific absorption rate in W/g  
 $E_{tot}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{free} = \frac{E_{tot}^2}{3770}$$

with  $P_{pwe}$  = equivalent power density of a plane wave in W/cm<sup>2</sup>  
 $E_{tot}$  = total electric field strength in V/m

## Scanning procedure

- The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.
- The „reference“ and „drift“ measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. +/- 5 %.
- The highest integrated SAR value is the main concern in compliance test applications. These values can mostly be found at the inner surface of the phantom and cannot be measured directly due to the sensor offset in the probe. To extrapolate the surface values, the measurement distances to the surface must be known accurately. A distance error of 0.5mm could produce SAR errors of 6% at 1800 MHz. Using predefined locations for measurements is not accurate enough. Any shift of the phantom (e.g., slight deformations after filling it with liquid) would produce high uncertainties. For an automatic and accurate detection of the phantom surface, the DASY5 system uses the mechanical surface detection. The detection is always at touch, but the probe will move backward from the surface the indicated distance before starting the measurement.
- The „area scan“ measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The scan uses different grid spacings for different frequency measurements. Standard grid spacing for head measurements in frequency ranges  $\leq 2$ GHz is 15 mm in x - and y- dimension. For higher frequencies a finer resolution is needed, thus for the grid spacing is reduced according the following table:

Area scan grid spacing for different frequency ranges	
Frequency range	Grid spacing
$\leq 2$ GHz	$\leq 15$ mm
2 – 4 GHz	$\leq 12$ mm
4 – 6 GHz	$\leq 10$ mm

Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in annex B.

- A „zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous „coarse” scan. It uses a fine meshed grid where the robot moves the probe in steps along all the 3 axis (x,y and z-axis) starting at the bottom of the Phantom. The grid spacing for the cube measurement is varied according to the measured frequency range, the dimensions are given in the following table:

<b>Zoom scan grid spacing and volume for different frequency ranges</b>			
Frequency range	Grid spacing for x, y axis	Grid spacing for z axis	Minimum zoom scan volume
≤ 2 GHz	≤ 8 mm	≤ 5 mm	≥ 30 mm
2 – 3 GHz	≤ 5 mm	≤ 5 mm	≥ 28 mm
3 – 4 GHz	≤ 5 mm	≤ 4 mm	≥ 28 mm
4 – 5 GHz	≤ 4 mm	≤ 3 mm	≥ 25 mm
5 – 6 GHz	≤ 4 mm	≤ 2 mm	≥ 22 mm

DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in annex B. Test results relevant for the specified standard (see section 3) are shown in table form in section 7.

## Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of all points in the three directions x, y and z. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 1 to 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.

## Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

## Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

## Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

## Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

**SAM PHANTOM**

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 2.6)

**Phantom Specification**

**Phantom:** SAM Twin Phantom (V4.0)  
**Shell Material:** Vivac Composite  
**Thickness:**  $2.0 \pm 0.2$  mm



**Figure 2.6 SAM Twin Phantom**

**Device Holder for Transmitters**

In combination with the SAM Twin Phantom V4.0 the Mounting Device (see Fig. 2.7), enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC, CENELEC, IEC and IEEE specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



**Figure 2.7 Mounting Device**

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

### **3. Probe and Dipole Calibration**

**See Appendix D and E.**

## 4. Phantom & Simulating Tissue Specifications

### Head & Body Simulating Mixture Characterization

The head and body mixtures consist of the material based on the table listed below. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. Body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations.

**Table 4.1 Typical Composition of Ingredients for Tissue**

Ingredients		Simulating Tissue					
		750 MHz Body	835 MHz Body	1750 MHz Body	1900 MHz Body	2300 MHz Body	2600 MHz Body
Mixing Percentage							
Water			52.50		69.91		
Sugar			45.00		0.00		
Salt		Proprietary Purchased from Speag	1.40	Proprietary Purchased from Speag	0.13	Proprietary Purchased from Speag	Proprietary Purchased from Speag
HEC			1.00		0.00		
Bactericide			0.10		0.00		
DGBE			0.00		29.96		
Dielectric Constant	Target	55.5	55.20	53.4	53.30	52.90	52.51
Conductivity (S/m)	Target	0.96	0.97	1.49	1.52	1.81	2.16



## 5. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2]

### Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 5.1 Human Exposure Limits**

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIROMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR <sup>1</sup> Head	1.60	8.00
SPATIAL AVERAGE SAR <sup>2</sup> Whole Body	0.08	0.40
SPATIAL PEAK SAR <sup>3</sup> Hands, Feet, Ankles, Wrists	4.00	20.00

<sup>1</sup> The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

<sup>2</sup> The Spatial Average value of the SAR averaged over the whole body.

<sup>3</sup> The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

## 6. Measurement Uncertainty

Measurement uncertainty table is not required per KDB 865664 D01 v01r04 section 2.8.2 page 12. SAR measurement uncertainty analysis is required in the SAR report only when the highest measured SAR in a frequency band is  $\geq 1.5$  W/kg for 1-g SAR. The equivalent ratio (1.5/1.6) should be applied to extremity and occupational exposure conditions. The highest reported value is less than 1.5 W/kg. Therefore, the measurement uncertainty table is not required.

## 7. System Validation

### Tissue Verification

**Table 7.1 Measured Tissue Parameters**

		750 MHz Body		835 MHz Body		1750 MHz Body	
Date(s)		May 6, 2016		May 6, 2016		May 12, 2016	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: $\epsilon$		55.53	55.57	55.20	55.91	53.43	53.32
Conductivity: $\sigma$		0.96	0.99	0.97	0.99	1.49	1.52
		1900 MHz Body		2300 MHz Body		2600 MHz Body	
Date(s)		May 16, 2016		May 12, 2016		May 16, 2016	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: $\epsilon$		53.30	52.07	52.90	52.63	52.51	52.38
Conductivity: $\sigma$		1.52	1.47	1.81	1.84	2.16	2.21

See Appendix A for data printout.


### Test System Verification

Prior to assessment, the system is verified to the  $\pm 10\%$  of the specifications at the test frequency by using the system kit. Power is normalized to 1 watt. (Graphic Plots Attached)

**Table 7.2 System Dipole Validation Target & Measured**

	Test Frequency	Targeted SAR <sub>1g</sub> (W/kg)	Measure SAR <sub>1g</sub> (W/kg)	Tissue Used for Verification	Deviation Target and Fast SAR to SAR (%)	Plot Number
06-May-2016	750 MHz	8.47	8.65	Body	+ 2.13	1
06-May-2016	835 MHz	9.28	9.53	Body	+ 2.69	2
12-May-2016	1750 MHz	37.70	38.50	Body	+ 2.12	3
16-May-2016	1900 MHz	40.40	39.80	Body	- 1.49	4
12-May-2016	2300 MHz	48.10	48.20	Body	+ 0.21	5
16-May-2016	2600 MHz	54.80	54.10	Body	- 1.28	6

See Appendix A for data plots.

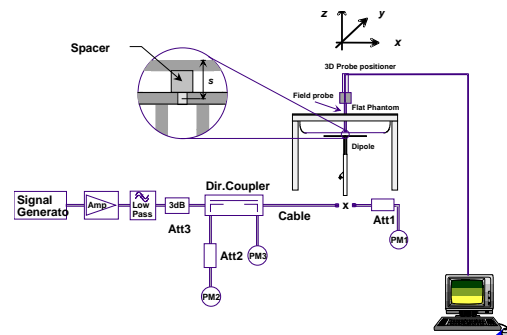

**Figure 7.1 Dipole Validation Test Setup**

## **8. SAR Test Data Summary**

### **See Measurement Result Data Pages**

See Appendix B for SAR Test Data Plots.  
See Appendix C for SAR Test Setup Photos.

### **Procedures Used To Establish Test Signal**

The device was either placed into simulated transmit mode using the manufacturer's test codes or the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

### **Device Test Condition**

In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power unless otherwise noted. If a conducted power deviation of more than 5% occurred, the test was repeated. The power drift of each test is measured at the start of the test and again at the end of the test. The drift percentage is calculated by the formula  $((\text{end}/\text{start}) - 1) * 100$  and rounded to three decimal places. The drift percentage is calculated into the resultant SAR value on the data sheet for each test.

The EUT was tested on the end of the device where the antennas are located and on each side next to the antenna. All measurements for the device were conducted with the side of the device 10 mm from the phantom. The 10 mm gap was to simulate the closest distance the side can get to the user when installed in the carrying bag which is the normal use for the device. The carrying bag is made of all nylon and Styrofoam.

The device was on a minimum of 10 cm of Styrofoam during each test.

The WCDMA testing was conducted using 12.2 kbps RMC configured in Test Loop Mode 1. The HSPA testing was conducted with HS-DPCCH, E-DPCCH and E-DPDCH all enabled and a 12.2 kbps RMC. FRC was configured according to HS-DPCCH Sub-Test 1 using H-set 1 and QPSK.

## 9. LTE Document Checklist

- 1) Identify the operating frequency range of each LTE transmission band used by the device

LTE Operating Band	Uplink (transmit)	Downlink (Receive)	Duplex mode (FDD/TDD)
	Low - high	Low - high	
4	1710-1755	2110-2155	FDD
5 & 26	814-849	859-894	FDD
13	777-787	746-756	FDD
12	704-716	734-746	FDD
2 & 25	1850-1915	1930-1995	FDD
30	2305-2315	2350-2360	FDD
7	2500-2570	2620-2690	FDD
41	2496-2690	2496-2690	TDD

- 2) Identify the channel bandwidths used in each frequency band; 1.4, 3, 5, 10, 15, 20 MHz etc

LTE Band Class	Bandwidth (MHz)	Frequency or Freq. Band (MHz)
4	1.4, 3, 5, 10, 15, 20	1710-1755
5	1.4, 3, 5, 10	824-849
26	1.4, 3, 5, 10, 15	814-849
13	5, 10	777-787
12	1.4, 3, 5, 10	704-716
2 & 25	1.4, 3, 5, 10, 15, 20	1850-1915
30	5, 10	2305-2315
7	5, 10, 15, 20	2500-2570
41	5, 10, 15, 20	2496-2690

- 3) Identify the high, middle and low (H, M, L) channel numbers and frequencies in each LTE frequency band

LTE Band Class	Bandwidth (MHz)	Frequency (MHz)/Channel #					
		Low		Mid		High	
4	1.4	1710.7	19957	1732.5	20175	1754.3	20393
4	3	1711.5	19965	1732.5	20175	1753.5	20385
4	5	1712.5	19975	1732.5	20175	1752.5	20375
4	10	1715.0	20000	1732.5	20175	1750.0	20350
4	15	1717.5	20025	1732.5	20175	1747.5	20325
4	20	1720.0	20050	1732.5	20175	1745.0	20300
5	1.4	824.7	20407	836.5	20525	848.3	20643
5	3	825.5	20415	836.5	20525	847.5	20635
5	5	826.5	20425	836.5	20525	846.5	20625
5	10	829.0	20450	836.5	20525	844.0	20600
26	1.4	814.7	26697	831.5	26865	848.3	27033
26	3	815.5	26705	831.5	26865	847.5	27025

26	5	816.5	26715	831.5	26865	846.5	27015
26	10	819.0	26740	831.5	26865	844.0	26990
26	15	821.5	24765	831.5	26865	841.5	26995
13	5	779.5	23205	782.0	23230	784.5	23255
13	10	-----	-----	782.0	23230	-----	-----
12	1.4	699.7	23017	707.5	23095	715.3	23173
12	3	700.5	23025	707.5	23095	714.5	23165
12	5	701.5	23035	707.5	23095	713.5	23155
12	10	704.0	23060	707.5	23095	711.0	23130
2 & 25	1.4	1850.7	18607	1882.5	26365	1914.3	26715
2 & 25	3	1851.5	18615	1882.5	26365	1913.5	26690
2 & 25	5	1852.5	18625	1882.5	26365	1912.5	26665
2 & 25	10	1855.0	18650	1882.5	26365	1910.0	26640
2 & 25	15	1857.5	18675	1882.5	26365	1907.5	26615
2 & 25	20	1860.0	18700	1882.5	26365	1905.0	26590
30	5	2307.5	27685	2310	27710	2312.5	27735
30	10	-----	-----	2310	27710	-----	-----
7	5	2502.5	20775	2535	21100	2567.5	21425
7	10	2505.0	20800	2535	21100	2565.0	21400
7	15	2507.5	20825	2535	21100	2562.5	21375
7	20	2510.0	20850	2535	21100	2560.0	21350
41	5	2498.5	39675	2593	40620	2687.5	41565
41	10	2501.0	39700	2593	40620	2685.0	41540
41	15	2503.5	39725	2593	40620	2682.5	41515
41	20	2506.0	39750	2593	40620	2680.0	41490

- 4) Specify the UE category and uplink modulations used:
- UE Category: 3
  - Uplink modulations: QPSK and 16QAM
- 5) Include descriptions of the LTE transmitter and antenna implementation; and also identify whether it is a standalone transmitter operating independently of other wireless transmitters in the device or sharing hardware components and/or antenna(s) with other transmitters etc

The device has 8 antennas:

- WWAN Main (6-Transmit and 8-Receive) Antenna

- 6) Identify the LTE voice/data requirements in each operating mode and exposure condition with respect to head and body test configurations, antenna locations, handset flip-cover or slide positions, antenna diversity conditions etc

The device is a data only device. Data mode was tested in each operating mode and exposure condition in the body configuration. See test setup photos to see all configurations tested.

- 7) Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design:

- a) Only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards

MPR is mandatory, built-in by design on all production units. It was enabled during testing.

Modulation	Channel Bandwidth/transmission Bandwidth Configuration (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

- b) A-MPR (additional MPR) must be disabled

A-MPR was disabled during testing.

- 8) Include the maximum average conducted output power on the required test channels for each channel bandwidth and UL modulation used in each frequency band:

The maximum average conducted output power for the testing is listed on pages 30-57 of this report. The below table shows the factory set point with the allowable tolerance.

LTE Band	Power Class	Modulation	Factory Conducted Power (dBm)	
			Set point	Tolerance (+/-)
4	3	QPSK	23.0	+1.0/-1.5
4	3	16QAM	22.0	+1.0/-1.5
5 & 26	3	QPSK	23.0	+1.0/-1.5
5 & 26	3	16QAM	22.0	+1.0/-1.5
13	3	QPSK	23.0	+1.0/-1.5
13	3	16QAM	22.0	+1.0/-1.5
12	3	QPSK	23.0	+1.0/-1.5
12	3	16QAM	22.0	+1.0/-1.5
2 & 25	3	QPSK	23.0	+1.0/-1.5
2 & 25	3	16QAM	22.0	+1.0/-1.5
30	3	QPSK	22.0	+1.0/-1.5
30	3	16QAM	21.0	+1.0/-1.5
7	3	QPSK	22.0	+1.0/-1.5
7	3	16QAM	21.0	+1.0/-1.5
41	3	QPSK	23.0	+1.0/-1.5
41	3	16QAM	22.0	+1.0/-1.5



- 9) Identify all other U.S. wireless operating modes (3G, Wi-Fi, WiMax, Bluetooth etc), device/exposure configurations (head and body, antenna and handset flip-cover or slide positions, antenna diversity conditions etc.) and frequency bands used for these modes

Other wireless modes:

Technology	Frequency (MHz)	Band Name	Transmitter Range	Receiver Range	Factory Conducted Power (dBm)	
					Set point	Tolerance (+/-)
WCDMA/HSPA	R7 HSDPA Cat 10 R6 HSUPA Cat 6	Band II – 1900MHz	1850-1900	1930-1990	23.0	+1.0/-1.5
		Band V – 850MHz	826-850	970-890	23.0	+1.0/-1.5
		Band IV – 1750 MHz	1710-1755	2110-2155	23.0	+1.0/-1.5

- 10) Include the maximum average conducted output power measured for the other wireless modes and frequency bands.

The maximum average conducted output power measured for the testing is listed on pages 26-27 of this report. The table in item 9 shows the factory set point with the allowable tolerance.

- 11) When power reduction is applied to certain wireless modes to satisfy SAR compliance for simultaneous transmission conditions, other equipment certification or operating requirements, include the maximum average conducted output power measured in each power reduction mode applicable to the simultaneous voice/data transmission configurations for such wireless configurations and frequency bands; and also include details of the power reduction implementation and measurement setup

Power reduction is not required to satisfy SAR compliance.

- 12) Include descriptions of the test equipment, test software, built-in test firmware etc. required to support testing the device when power reduction is applied to one or more transmitters/antennas for simultaneous voice/data transmission

Power reduction is not required to satisfy SAR compliance.

- 13) When appropriate, include a SAR test plan proposal with respect to the above

Power reduction is not required to satisfy SAR compliance.

- 14) If applicable, include preliminary SAR test data and/or supporting information in laboratory testing inquiries to address specific issues and concerns or for requesting further test reduction considerations appropriate for the device; for example, simultaneous transmission configurations.

Not applicable.

## 10. FCC 3G Measurement Procedures

Power measurements were performed using a base station simulator under average power.

### 10.1 Procedures Used to Establish RF Signal for SAR

The device was placed into a simulated call using a base station simulator in a screen room. Such test signals offer a consistent means for testing SAR and recommended for evaluating SAR. The SAR measurement software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5% occurred, the tests were repeated.

### 10.2 SAR Measurement Conditions for WCDMA/HSDPA/HSUPA

Configure the call box 8960 to support all WCDMA tests in respect to the 3GPP 34.121 (listed in Table below). Measure the power at Ch4132, 4182 and 4233 for US cell; Ch9262, 9400 and 9538 for US PCS band.

For Rel99

- Set a Test Mode 1 loop back with a 12.2kbps Reference Measurement Channel (RMC).
- Set and send continuously Up power control commands to the device
- Measure the power at the device antenna connector using the power meter with average detector.

For HSDPA Rel 6

- Establish a Test Mode 1 loop back with both 1 12.2kbps RMC channel and a H-Set1 Fixed Reference Channel (FRC). With the 8960 this is accomplished by setting the signal Channel Coding to "Fixed Reference Channel" and configuring for HSET-1 QKSP.
- Set beta values and HSDPA settings for HSDPA Subtest1 according to Table below.
- Send continuously Up power control commands to the device
- Measure the power at the device antenna connector using the power meter with modulated average detector.
- Repeat the measurement for the HSDPA Subtest2, 3 and 4 as given in Table below.

For HSUPA Rel 6

- Use UL RMC 12.2kbps and FRC H-Set1 QPSK, Test Mode 1 loop back. With the 8960 this is accomplished by setting the signal Channel Coding to "E-DCH Test Channel" and configuring the equipment category to Cat5\_10ms.
- Set the Absolute Grant for HSUPA Subtest1 according to Table below.
- Set the device power to be at least 5dB lower than the Maximum output power
- Send power control bits to give one TPC\_cmd = +1 command to the device. If device doesn't send any E-DPCH data with decreased E-TFCI within 500ms, then repeat this process until the decreased E-TFCI is reported.
- Confirm that the E-TFCI transmitted by the device is equal to the target E-TFCI in Table below. If the E-TFCI transmitted by the device is not equal to the target E-TFCI, then send power control bits to give one TPC\_cmd = -1 command to the UE. If UE sends any E-DPCH data with decreased E-TFCI within 500 ms, send new power control bits to give one TPC\_cmd = -1 command to the UE. Then confirm that the E-TFCI transmitted by the UE is equal to the target E-TFCI in Table below.
- Measure the power using the power meter with modulated average detector.
- Repeat the measurement for the HSUPA Subtest2, 3, 4 and 5 as given in Table below.

3GPP Release Version	Mode	Cellular Band [dBm]			Sub-Test (See Table Below)	MPR
		4132	4183	4233		
99	WCDMA	23.89	23.91	23.87	-	-
6	HSDPA	23.86	23.87	23.79	1	0
6		23.82	23.89	23.85	2	0
6		23.39	23.42	23.37	3	0.5
6		23.94	23.49	23.40	4	0.5
6	HSUPA	23.80	23.90	23.83	1	0
6		21.95	21.99	21.96	2	2
6		22.97	23.08	22.99	3	1
6		22.06	22.01	22.04	4	2
6		23.82	23.84	23.87	5	0

3GPP Release Version	Mode	PCS Band [dBm]			Sub-Test (See Table Below)	MPR
		9262	9400	9538		
99	WCDMA	23.83	23.86	23.81	-	-
6	HSDPA	23.79	23.82	23.76	1	0
6		23.81	23.75	23.79	2	0
6		23.36	23.34	23.36	3	0.5
6		23.41	23.31	23.39	4	0.5
6	HSUPA	23.84	23.82	23.75	1	0
6		21.97	22.01	21.89	2	2
6		22.94	23.05	22.94	3	1
6		21.99	21.95	22.03	4	2
6		23.82	23.80	23.71	5	0

3GPP Release Version	Mode	AWS Band [dBm]			Sub-Test (See Table Below)	MPR
		1312	1413	1513		
99	WCDMA	23.88	23.95	23.90	-	-
6	HSDPA	23.82	23.86	23.74	1	0
6		23.74	23.72	23.76	2	0
6		23.45	23.39	23.38	3	0.5
6		23.43	23.34	23.35	4	0.5
6	HSUPA	23.80	23.80	23.77	1	0
6		21.98	22.06	21.84	2	2
6		22.92	23.01	22.98	3	1
6		21.97	21.92	22.05	4	2
6		23.85	23.87	23.68	5	0

### Sub-Test Setup for Release 6 HSDPA

Sub-Test	$\beta_c$	$\beta_d$	$B_c / \beta_d$	$\beta_{hs}$
1	2/15	15/15	2/15	4/15
2	12/15	15/15	15/15	24/15
3	15/15	8/15	15/8	30/15
4	15/15	4/15	15/4	30/15
$\Delta_{ack}$ , $\Delta_{nack}$ and $\Delta_{cqi} = 8$				

### Sub-Test Setup for Release 6 HSUPA

Sub-Test	$\beta_c$	$\beta_d$	$B_c / \beta_d$	$\beta_{hs}$	$B_{ec}$	$B_{ed}$	MPR	AG Index	E-TFCI
1	11/15	15/15	11/15	22/15	209/225	1039/225	0.0	20	75
2	6/15	15/15	6/15	12/15	12/15	94/75	2.0	12	67
3	15/15	9/15	15/9	30/15	30/15	47/15	1.0	15	92
4	2/15	15/15	2/15	4/15	2/15	56/15	2.0	17	71
5	15/15	15/15	15/15	30/15	24/15	134/15	0.0	21	81
$\Delta_{ack}$ , $\Delta_{nack}$ and $\Delta_{cqi} = 8$									

**Figure 10.1 Test Reduction Table – WCDMA**

Band/ Frequency (MHz)	Technology	Required Channel	Tested/ Reduced
Band 2 1850-1910 MHz	WCDMA <sup>2</sup>	9262	Reduced <sup>1</sup>
		9400	Tested
		9538	Reduced <sup>1</sup>
Band 5 824-849 MHz		4132	Reduced <sup>1</sup>
		4183	Tested
		4233	Reduced <sup>1</sup>
Band 4 1710-1755 MHz		1312	Reduced <sup>1</sup>
		1413	Tested
		1513	Reduced <sup>1</sup>

Reduced<sup>1</sup> – When the mid channel is 3 dB (0.8 W/kg) below the limit, the remaining channels are not required per KDB 447498 D01 v06 section 4.3.3 page 14.

Reduced<sup>2</sup> – All reductions were the same for each side where the antenna was close enough to require testing. For all other sides, the testing was reduced per KDB447498 D01 v06 section 4.3.1 1) page 11.

## 11.4 SAR Measurement Conditions for LTE Bands

### 11.4.1 LTE Functionality

The follow table identifies all the channel bandwidths in each frequency band supported by this device.

LTE Band Class	Bandwidth (MHz)	Frequency or Freq. Band (MHz)
4	1.4, 3, 5, 10, 15, 20	1710-1755
5	1.4, 3, 5, 10	824-849
26	1.4, 3, 5, 10, 15	814-849
13	5, 10	777-787
12	1.4, 3, 5, 10	704-716
2 & 25	1.4, 3, 5, 10, 15, 20	1850-1915
30	5, 10	2305-2315
7	5, 10, 15, 20	2500-2570
41	5, 10, 15, 20	2496-2690

### 11.4.2 Test Conditions

All SAR measurements for LTE were performed using the Anritsu MT8820C. A closed loop power control setting allowed the UE to transmit at the maximum output power during the SAR measurements. The Figure 11.1 table indicates all the test reduction utilized for this report.

MPR was enabled for this device. A-MPR was disabled for all SAR test measurements.

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
4	QPSK	1.4 MHz	6	0	19957	1710.7	23.2
					20175	1732.5	23.1
					20393	1754.3	23.2
			3	1	19957	1710.7	24.0
					20175	1732.5	24.0
					20393	1754.3	24.0
			1	0	19957	1710.7	24.0
					20175	1732.5	23.9
					20393	1754.3	23.9
			1	5	19957	1710.7	24.0
					20175	1732.5	24.0
					20393	1754.3	23.9
		3 MHz	15	0	19965	1711.5	23.3
					20175	1732.5	23.4
					20385	1753.5	23.2
			8	3	19965	1711.5	23.1
					20175	1732.5	23.1
					20385	1753.5	23.2
			1	0	19965	1711.5	24.0
					20175	1732.5	24.0
					20385	1753.5	23.9
			1	14	19965	1711.5	24.0
					20175	1732.5	24.0
					20385	1753.5	24.0
		5 MHz	25	0	19975	1712.5	23.3
					20175	1732.5	23.3
					20375	1752.5	23.2
			12	6	19975	1712.5	23.1
					20175	1732.5	23.3
					20375	1752.5	23.2
			1	0	19975	1712.5	24.0
					20175	1732.5	24.0
					20375	1752.5	24.0
			1	24	19975	1712.5	24.0
					20175	1732.5	24.0
					20375	1752.5	23.9



Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
4	QPSK	10 MHz	50	0	20000	1715	23.1
					20175	1732.5	23.2
					20350	1750	23.3
			25	12	20000	1715	23.2
					20175	1732.5	23.3
					20350	1750	23.4
			1	0	20000	1715	24.0
					20175	1732.5	24.0
					20350	1750	24.0
			1	24	20000	1715	24.0
					20175	1732.5	24.0
					20350	1750	24.0
		15 MHz	75	0	20025	1717.5	23.1
					20175	1732.5	23.2
					20325	1747.5	23.2
			36	19	20025	1717.5	23.2
					20175	1732.5	23.2
					20325	1747.5	23.2
			1	0	20025	1717.5	24.0
					20175	1732.5	24.0
					20325	1747.5	24.0
			1	74	20025	1717.5	24.0
					20175	1732.5	24.0
					20325	1747.5	24.0
		20 MHz	100	0	20050	1720	23.2
					20175	1732.5	23.2
					20300	1745	23.3
			50	25	20050	1720	23.1
					20175	1732.5	23.1
					20300	1745	23.3
			1	0	20050	1720	24.0
					20175	1732.5	24.0
					20300	1745	24.0
			1	99	20050	1720	24.0
					20175	1732.5	24.0
					20300	1745	24.0

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
4	16QAM	1.4 MHz	6	0	19957	1710.7	22.0
					20175	1732.5	22.0
					20393	1754.3	22.2
			3	1	19957	1710.7	23.1
					20175	1732.5	23.1
					20393	1754.3	23.2
			1	0	19957	1710.7	23.0
					20175	1732.5	23.0
					20393	1754.3	23.1
			1	5	19957	1710.7	23.1
					20175	1732.5	23.0
					20393	1754.3	23.1
		3 MHz	15	0	19965	1711.5	22.2
					20175	1732.5	22.3
					20385	1753.5	22.4
			8	3	19965	1711.5	22.1
					20175	1732.5	22.3
					20385	1753.5	22.2
			1	0	19965	1711.5	23.1
					20175	1732.5	23.0
					20385	1753.5	23.1
			1	14	19965	1711.5	23.3
					20175	1732.5	23.2
					20385	1753.5	23.4
		5 MHz	25	0	19975	1712.5	22.3
					20175	1732.5	22.2
					20375	1752.5	22.1
			12	6	19975	1712.5	22.3
					20175	1732.5	22.2
					20375	1752.5	22.4
			1	0	19975	1712.5	23.0
					20175	1732.5	23.0
					20375	1752.5	23.1
			1	24	19975	1712.5	23.0
					20175	1732.5	23.0
					20375	1752.5	23.1

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
4	16QAM	10 MHz	50	0	20000	1715	22.2
					20175	1732.5	22.1
					20350	1750	22.3
			25	12	20000	1715	22.3
					20175	1732.5	22.2
					20350	1750	22.4
			1	0	20000	1715	23.3
					20175	1732.5	23.2
					20350	1750	23.2
			1	24	20000	1715	23.3
					20175	1732.5	23.1
					20350	1750	23.2
		15 MHz	75	0	20025	1717.5	22.1
					20175	1732.5	22.0
					20325	1747.5	22.1
			36	19	20025	1717.5	22.3
					20175	1732.5	22.3
					20325	1747.5	22.2
			1	0	20025	1717.5	23.2
					20175	1732.5	23.3
					20325	1747.5	23.3
			1	74	20025	1717.5	23.1
					20175	1732.5	23.0
					20325	1747.5	23.2
		20 MHz	100	0	20050	1720	22.2
					20175	1732.5	22.1
					20300	1745	22.3
			50	25	20050	1720	22.1
					20175	1732.5	22.0
					20300	1745	22.2
			1	0	20050	1720	23.3
					20175	1732.5	23.4
					20300	1745	23.2
			1	99	20050	1720	23.1
					20175	1732.5	23.2
					20300	1745	23.2

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
5	QPSK	1.4 MHz	6	0	20407	824.7	23.0
					20525	836.5	23.0
					20643	848.3	23.1
			3	1	20407	824.7	24.0
					20525	836.5	23.9
					20643	848.3	24.0
			1	0	20407	824.7	23.9
					20525	836.5	24.0
					20643	848.3	24.0
			1	5	20407	824.7	24.0
					20525	836.5	23.9
					20643	848.3	24.0
		3 MHz	15	0	20415	825.5	23.0
					20525	836.5	22.9
					20635	847.5	23.1
			8	3	20415	825.5	23.0
					20525	836.5	23.1
					20635	847.5	23.1
			1	0	20415	825.5	23.9
					20525	836.5	24.0
					20635	847.5	24.0
			1	14	20415	825.5	24.0
					20525	836.5	24.0
					20635	847.5	24.0
		5 MHz	25	0	20425	826.5	23.1
					20525	836.5	22.9
					20625	846.5	23.1
			12	6	20425	826.5	23.0
					20525	836.5	23.1
					20625	846.5	23.1
			1	0	20425	826.5	23.8
					20525	836.5	24.0
					20625	846.5	24.0
			1	24	20425	826.5	24.0
					20525	836.5	24.0
					20625	846.5	24.0

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
5	QPSK	10 MHz	50	0	20450	829	22.9
					20525	836.5	22.8
					20600	844	22.8
			25	12	20450	829	23.0
					20525	836.5	22.9
					20600	844	23.0
			1	0	20450	829	24.0
					20525	836.5	24.0
					20600	844	23.9
			1	24	20450	829	23.9
					20525	836.5	24.0
					20600	844	24.0
	16QAM	1.4 MHz	6	0	20407	824.7	22.1
					20525	836.5	22.2
					20643	848.3	22.2
			3	1	20407	824.7	22.9
					20525	836.5	23.0
					20643	848.3	23.1
			1	0	20407	824.7	23.1
					20525	836.5	23.2
					20643	848.3	23.2
			1	5	20407	824.7	23.2
					20525	836.5	23.2
					20643	848.3	23.4
		3 MHz	15	0	20415	825.5	22.0
					20525	836.5	22.1
					20635	847.5	22.1
			8	3	20415	825.5	21.9
					20525	836.5	22.1
					20635	847.5	22.0
			1	0	20415	825.5	23.0
					20525	836.5	23.1
					20635	847.5	23.1
			1	14	20415	825.5	23.4
					20525	836.5	23.3
					20635	847.5	23.4

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
5	16QAM	5 MHz	25	0	20425	826.5	21.9
					20525	836.5	21.9
					20625	846.5	21.9
			12	6	20425	826.5	22.1
					20525	836.5	22.1
					20625	846.5	22.3
			1	0	20425	826.5	23.0
					20525	836.5	23.2
					20625	846.5	23.2
			1	24	20425	826.5	23.3
					20525	836.5	23.3
					20625	846.5	23.4
		10 MHz	50	0	20450	829	21.8
					20525	836.5	21.8
					20600	844	21.9
			25	12	20450	829	21.9
					20525	836.5	21.9
					20600	844	21.9
			1	0	20450	829	23.1
					20525	836.5	23.4
					20600	844	23.2
			1	24	20450	829	23.1
					20525	836.5	23.3
					20600	844	23.3

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
13	QPSK	5 MHz	25	0	23205	779.5	23.35
					23255	784.5	23.35
			12	6	23205	779.5	23.46
					23255	784.5	23.47
			1	0	23205	779.5	23.45
					23255	784.5	23.40
			1	24	23205	779.5	23.49
					23255	784.5	23.44
		10 MHz	50	0	23230	782.0	23.26
			25	13	23230	782.0	23.51
			1	0	23230	782.0	23.48
			1	49	23230	782.0	23.48
	16QAM	5 MHz	25	0	23205	779.5	22.33
					23255	784.5	22.32
			12	6	23205	779.5	22.58
					23255	784.5	22.66
			1	0	23205	779.5	23.48
					23255	784.5	23.55
			1	24	23205	779.5	23.64
					23255	784.5	23.57
		10 MHz	50	0	23230	782.0	22.20
			25	13	23230	782.0	22.48
			1	0	23230	782.0	23.38
			1	49	23230	782.0	23.30



Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
25	QPSK	1.4 MHz	6	0	26047	1850.7	23.2
					26365	1882.5	23.1
					26683	1914.3	23.0
			3	1	26047	1850.7	24.0
					26365	1882.5	24.0
					26683	1914.3	23.8
			1	0	26047	1850.7	24.0
					26365	1882.5	24.0
					26683	1914.3	23.9
			1	5	26047	1850.7	24.0
					26365	1882.5	24.0
					26683	1914.3	23.8
		3 MHz	15	0	26055	1851.5	23.1
					26365	1882.5	23.1
					26675	1913.5	22.9
			8	3	26055	1851.5	23.4
					26365	1882.5	23.3
					26675	1913.5	23.2
			1	0	26055	1851.5	24.0
					26365	1882.5	24.0
					26675	1913.5	23.9
			1	14	26055	1851.5	24.0
					26365	1882.5	24.0
					26675	1913.5	23.9
		5 MHz	25	0	26065	1852.5	23.1
					26365	1882.5	23.0
					26665	1912.5	22.9
			12	6	26065	1852.5	23.2
					26365	1882.5	23.0
					26665	1907.5	23.1
			1	0	26065	1852.5	24.0
					26365	1882.5	24.0
					26665	1907.5	24.0
			1	24	26065	1852.5	24.0
					26365	1882.5	24.0
					26665	1907.5	23.8

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
25	QPSK	10 MHz	50	0	26090	1855	23.2
					26365	1882.5	23.0
					26640	1910	23.0
			25	12	26090	1855	23.2
					26365	1882.5	23.0
					26640	1910	23.1
			1	0	26090	1855	24.0
					26365	1882.5	24.0
					26640	1910	24.0
			1	24	26090	1855	24.0
					26365	1882.5	24.0
					26640	1910	23.9
		15 MHz	75	0	26115	1857.5	23.2
					26365	1882.5	23.0
					26615	1907.5	23.1
			36	19	26115	1857.5	23.2
					26365	1882.5	23.0
					26615	1907.5	23.0
			1	0	26115	1857.5	24.0
					26365	1882.5	24.0
					26615	1907.5	24.0
			1	74	26115	1857.5	24.0
					26365	1882.5	24.0
					26615	1907.5	23.8
		20 MHz	100	0	26140	1860	23.0
					26365	1882.5	23.0
					26590	1905	23.2
			50	25	26140	1860	22.9
					26365	1882.5	23.0
					26590	1905	23.1
			1	0	26140	1860	24.0
					26365	1882.5	24.0
					26590	1905	24.0
			1	99	26140	1860	24.0
					26365	1882.5	24.0
					26590	1905	23.9

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
25	16QAM	1.4 MHz	6	0	26047	1850.7	22.1
					26365	1882.5	21.9
					26683	1914.3	22.0
			3	1	26047	1850.7	23.0
					26365	1882.5	22.9
					26683	1914.3	23.0
			1	0	26047	1850.7	23.2
					26365	1882.5	23.3
					26683	1914.3	23.1
			1	5	26047	1850.7	23.0
					26365	1882.5	22.9
					26683	1914.3	23.0
		3 MHz	15	0	26055	1851.5	22.2
					26365	1882.5	22.0
					26675	1913.5	22.2
			8	3	26055	1851.5	22.2
					26365	1882.5	21.9
					26675	1913.5	22.1
			1	0	26055	1851.5	23.2
					26365	1882.5	23.3
					26675	1913.5	23.1
			1	14	26055	1851.5	23.0
					26365	1882.5	23.2
					26675	1913.5	23.1
		5 MHz	25	0	26065	1852.5	22.3
					26365	1882.5	22.2
					26665	1912.5	22.2
			12	6	26065	1852.5	22.0
					26365	1882.5	22.0
					26665	1907.5	22.2
			1	0	26065	1852.5	23.1
					26365	1882.5	23.0
					26665	1907.5	23.0
			1	24	26065	1852.5	22.9
					26365	1882.5	23.1
					26665	1907.5	23.0

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
25	16QAM	10 MHz	50	0	26090	1855	22.2
					26365	1882.5	22.3
					26640	1910	22.1
			25	12	26090	1855	22.3
					26365	1882.5	22.2
					26640	1910	22.1
			1	0	26090	1855	23.1
					26365	1882.5	23.3
					26640	1910	23.2
			1	24	26090	1855	23.2
					26365	1882.5	23.0
					26640	1910	23.0
		15 MHz	75	0	26115	1857.5	22.0
					26365	1882.5	22.1
					26615	1907.5	21.9
			36	19	26115	1857.5	22.1
					26365	1882.5	22.1
					26615	1907.5	21.9
			1	0	26115	1857.5	23.2
					26365	1882.5	23.3
					26615	1907.5	23.3
			1	74	26115	1857.5	23.1
					26365	1882.5	23.2
					26615	1907.5	23.0
		20 MHz	100	0	26140	1860	22.1
					26365	1882.5	22.0
					26590	1905	21.9
			50	25	26140	1860	22.1
					26365	1882.5	22.2
					26590	1905	22.1
			1	0	26140	1860	23.3
					26365	1882.5	23.3
					26590	1905	23.2
			1	99	26140	1860	23.1
					26365	1882.5	23.2
					26590	1905	23.0

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
26	QPSK	1.4 MHz	6	0	26697	814.7	23.2
					26865	831.5	23.1
					27033	848.3	23.2
			3	1	26697	814.7	24.0
					26865	831.5	24.0
					27033	848.3	24.0
			1	0	26697	814.7	24.0
					26865	831.5	23.9
					27033	848.3	23.9
			1	5	26697	814.7	24.0
					26865	831.5	24.0
					27033	848.3	23.9
		3 MHz	15	0	26705	815.5	23.3
					26865	831.5	23.4
					27025	847.5	23.2
			8	3	26705	815.5	23.1
					26865	831.5	23.1
					27025	847.5	23.2
			1	0	26705	815.5	24.0
					26865	831.5	24.0
					27025	847.5	23.9
			1	14	26705	815.5	24.0
					26865	831.5	24.0
					27025	847.5	24.0
		5 MHz	25	0	26715	816.5	23.3
					26865	831.5	23.3
					27015	846.5	23.2
			12	6	26715	816.5	23.1
					26865	831.5	23.3
					27015	846.5	23.2
			1	0	26715	816.5	24.0
					26865	831.5	24.0
					27015	846.5	24.0
			1	24	26715	816.5	24.0
					26865	831.5	24.0
					27015	846.5	23.9

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
26	QPSK	10 MHz	50	0	26740	819.0	23.1
					26865	831.5	23.2
					26990	844.0	23.3
			25	12	26740	819.0	23.2
					26865	831.5	23.3
					26990	844.0	23.4
			1	0	26740	819.0	24.0
					26865	831.5	24.0
					26990	844.0	24.0
			1	24	26740	819.0	24.0
					26865	831.5	24.0
					26990	844.0	24.0
		15 MHz	75	0	24765	821.5	23.1
					26865	831.5	23.2
					26995	841.5	23.2
			36	19	24765	821.5	23.2
					26865	831.5	23.2
					26995	841.5	23.2
			1	0	24765	821.5	24.0
					26865	831.5	24.0
					26995	841.5	24.0
			1	74	24765	821.5	24.0
					26865	831.5	24.0
					26995	841.5	24.0

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
26	16QAM	1.4 MHz	6	0	26697	814.7	22.0
					26865	831.5	22.0
					27033	848.3	22.2
			3	1	26697	814.7	23.1
					26865	831.5	23.1
					27033	848.3	23.2
			1	0	26697	814.7	23.0
					26865	831.5	23.0
					27033	848.3	23.1
			1	5	26697	814.7	23.1
					26865	831.5	23.0
					27033	848.3	23.1
		3 MHz	15	0	26705	815.5	22.2
					26865	831.5	22.3
					27025	847.5	22.4
			8	3	26705	815.5	22.1
					26865	831.5	22.3
					27025	847.5	22.2
			1	0	26705	815.5	23.1
					26865	831.5	23.0
					27025	847.5	23.1
			1	14	26705	815.5	23.3
					26865	831.5	23.2
					27025	847.5	23.4
		5 MHz	25	0	26715	816.5	22.3
					26865	831.5	22.2
					27015	846.5	22.1
			12	6	26715	816.5	22.3
					26865	831.5	22.2
					27015	846.5	22.4
			1	0	26715	816.5	23.0
					26865	831.5	23.0
					27015	846.5	23.1
			1	24	26715	816.5	23.0
					26865	831.5	23.0
					27015	846.5	23.1

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
26	16QAM	10 MHz	50	0	26740	819.0	22.2
					26865	831.5	22.1
					26990	844.0	22.3
			25	12	26740	819.0	22.3
					26865	831.5	22.2
					26990	844.0	22.4
			1	0	26740	819.0	23.3
					26865	831.5	23.2
					26990	844.0	23.2
			1	24	26740	819.0	23.3
					26865	831.5	23.1
					26990	844.0	23.2
		15 MHz	75	0	24765	821.5	22.1
					26865	831.5	22.0
					26995	841.5	22.1
			36	19	24765	821.5	22.3
					26865	831.5	22.3
					26995	841.5	22.2
			1	0	24765	821.5	23.2
					26865	831.5	23.3
					26995	841.5	23.3
			1	74	24765	821.5	23.1
					26865	831.5	23.0
					26995	841.5	23.2



Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
12	QPSK	1.4 MHz	6	0	23017	699.7	23.0
					23095	707.5	23.0
					23173	715.3	23.1
			3	1	23017	699.7	24.0
					23095	707.5	23.9
					23173	715.3	24.0
			1	0	23017	699.7	23.9
					23095	707.5	24.0
					23173	715.3	24.0
			1	5	23017	699.7	24.0
					23095	707.5	23.9
					23173	715.3	24.0
		3 MHz	15	0	23025	700.5	23.0
					23095	707.5	22.9
					23165	714.5	23.1
			8	3	23025	700.5	23.0
					23095	707.5	23.1
					23165	714.5	23.1
			1	0	23025	700.5	23.9
					23095	707.5	24.0
					23165	714.5	24.0
			1	14	23025	700.5	24.0
					23095	707.5	24.0
					23165	714.5	24.0
		5 MHz	25	0	23035	701.5	23.1
					23095	707.5	22.9
					23155	713.5	23.1
			12	6	23035	701.5	23.0
					23095	707.5	23.1
					23155	713.5	23.1
			1	0	23035	701.5	23.8
					23095	707.5	24.0
					23155	713.5	24.0
			1	24	23035	701.5	24.0
					23095	707.5	24.0
					23155	713.5	24.0

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
12	QPSK	10 MHz	50	0	23060	704.0	22.9
					23095	707.5	22.8
					23130	711.0	22.8
			25	12	23060	704.0	23.0
					23095	707.5	22.9
					23130	711.0	23.0
			1	0	23060	704.0	24.0
					23095	707.5	24.0
					23130	711.0	23.9
			1	24	23060	704.0	23.9
					23095	707.5	24.0
					23130	711.0	24.0
	16QAM	1.4 MHz	6	0	23017	699.7	22.1
					23095	707.5	22.2
					23173	715.3	22.2
			3	1	23017	699.7	22.9
					23095	707.5	23.0
					23173	715.3	23.1
			1	0	23017	699.7	23.1
					23095	707.5	23.2
					23173	715.3	23.2
			1	5	23017	699.7	23.2
					23095	707.5	23.2
					23173	715.3	23.4
		3 MHz	15	0	23025	700.5	22.0
					23095	707.5	22.1
					23165	714.5	22.1
			8	3	23025	700.5	21.9
					23095	707.5	22.1
					23165	714.5	22.0
			1	0	23025	700.5	23.0
					23095	707.5	23.1
					23165	714.5	23.1
			1	14	23025	700.5	23.4
					23095	707.5	23.3
					23165	714.5	23.4

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
12	16QAM	5 MHz	25	0	23035	701.5	21.9
					23095	707.5	21.9
					23155	713.5	21.9
			12	6	23035	701.5	22.1
					23095	707.5	22.1
					23155	713.5	22.3
			1	0	23035	701.5	23.0
					23095	707.5	23.2
					23155	713.5	23.2
			1	24	23035	701.5	23.3
					23095	707.5	23.3
					23155	713.5	23.4
		10 MHz	50	0	23060	704.0	21.8
					23095	707.5	21.8
					23130	711.0	21.9
			25	12	23060	704.0	21.9
					23095	707.5	21.9
					23130	711.0	21.9
			1	0	23060	704.0	23.1
					23095	707.5	23.4
					23130	711.0	23.2
			1	24	23060	704.0	23.1
					23095	707.5	23.3
					23130	711.0	23.3

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
30	QPSK	5 MHz	25	0	27685	2307.5	22.4
					27735	2312.5	22.4
			12	6	27685	2307.5	22.5
					27735	2312.5	22.5
			1	0	27685	2307.5	22.5
					27735	2312.5	22.4
			1	24	27685	2307.5	22.5
					27735	2312.5	22.4
		10 MHz	50	0	27710	2310	22.3
			25	13	27710	2310	22.5
			1	0	27710	2310	22.5
			1	49	27710	2310	22.5
	16QAM	5 MHz	25	0	27685	2307.5	21.3
					27735	2312.5	21.3
			12	6	27685	2307.5	21.6
					27735	2312.5	21.7
			1	0	27685	2307.5	21.5
					27735	2312.5	21.6
			1	24	27685	2307.5	21.6
					27735	2312.5	21.6
		10 MHz	50	0	27710	2310	21.2
			25	13	27710	2310	21.5
			1	0	27710	2310	21.4
			1	49	27710	2310	21.3

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
7	QPSK	5 MHz	25	0	20775	2502.5	23.3
					21100	2535.0	23.3
					21425	2567.5	23.2
			12	6	20775	2502.5	23.1
					21100	2535.0	23.3
					21425	2567.5	23.2
			1	0	20775	2502.5	24.0
					21100	2535.0	24.0
					21425	2567.5	24.0
			1	24	20775	2502.5	24.0
					21100	2535.0	24.0
					21425	2567.5	23.9

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
7	QPSK	10 MHz	50	0	20800	2505.0	23.1
					21100	2535.0	23.2
					21400	2565.0	23.3
			25	12	20800	2505.0	23.2
					21100	2535.0	23.3
					21400	2565.0	23.4
			1	0	20800	2505.0	24.0
					21100	2535.0	24.0
					21400	2565.0	24.0
			1	24	20800	2505.0	24.0
					21100	2535.0	24.0
					21400	2565.0	24.0
		15 MHz	75	0	20825	2507.5	23.1
					21100	2535.0	23.2
					21375	2562.5	23.2
			36	19	20825	2507.5	23.2
					21100	2535.0	23.2
					21375	2562.5	23.2
			1	0	20825	2507.5	24.0
					21100	2535.0	24.0
					21375	2562.5	24.0
			1	74	20825	2507.5	24.0
					21100	2535.0	24.0
					21375	2562.5	24.0
		20 MHz	100	0	20850	2510.0	23.2
					21100	2535.0	23.2
					21350	2560.0	23.3
			50	25	20850	2510.0	23.1
					21100	2535.0	23.1
					21350	2560.0	23.3
			1	0	20850	2510.0	24.0
					21100	2535.0	24.0
					21350	2560.0	24.0
			1	99	20850	2510.0	24.0
					21100	2535.0	24.0
					21350	2560.0	24.0

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
7	16QAM	5 MHz	25	0	20775	2502.5	22.3
					21100	2535.0	22.2
					21425	2567.5	22.1
			12	6	20775	2502.5	22.3
					21100	2535.0	22.2
					21425	2567.5	22.4
			1	0	20775	2502.5	23.0
					21100	2535.0	23.0
					21425	2567.5	23.1
			1	24	20775	2502.5	23.0
					21100	2535.0	23.0
					21425	2567.5	23.1

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
7	16QAM	10 MHz	50	0	20800	2505.0	22.2
					21100	2535.0	22.1
					21400	2565.0	22.3
			25	12	20800	2505.0	22.3
					21100	2535.0	22.2
					21400	2565.0	22.4
			1	0	20800	2505.0	23.3
					21100	2535.0	23.2
					21400	2565.0	23.2
			1	24	20800	2505.0	23.3
					21100	2535.0	23.1
					21400	2565.0	23.2
		15 MHz	75	0	20825	2507.5	22.1
					21100	2535.0	22.0
					21375	2562.5	22.1
			36	19	20825	2507.5	22.3
					21100	2535.0	22.3
					21375	2562.5	22.2
			1	0	20825	2507.5	23.2
					21100	2535.0	23.3
					21375	2562.5	23.3
			1	74	20825	2507.5	23.1
					21100	2535.0	23.0
					21375	2562.5	23.2
		20 MHz	100	0	20850	2510.0	22.2
					21100	2535.0	22.1
					21350	2560.0	22.3
			50	25	20850	2510.0	22.1
					21100	2535.0	22.0
					21350	2560.0	22.2
			1	0	20850	2510.0	23.3
					21100	2535.0	23.4
					21350	2560.0	23.2
			1	99	20850	2510.0	23.1
					21100	2535.0	23.2
					21350	2560.0	23.2



Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
41	QPSK	5 MHz	25	0	39675	2498.5	23.3
					40620	2593.0	23.3
					41565	2687.5	23.2
			12	6	39675	2498.5	23.1
					40620	2593.0	23.3
					41565	2687.5	23.2
			1	0	39675	2498.5	24.0
					40620	2593.0	24.0
					41565	2687.5	24.0
			1	24	39675	2498.5	24.0
					40620	2593.0	24.0
					41565	2687.5	23.9

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
41	QPSK	10 MHz	50	0	39700	2501.0	23.1
					40620	2593.0	23.2
					41540	2685.0	23.3
			25	12	39700	2501.0	23.2
					40620	2593.0	23.3
					41540	2685.0	23.4
			1	0	39700	2501.0	24.0
					40620	2593.0	24.0
					41540	2685.0	24.0
			1	24	39700	2501.0	24.0
					40620	2593.0	24.0
					41540	2685.0	24.0
		15 MHz	75	0	39725	2503.5	23.1
					40620	2593.0	23.2
					41515	2682.5	23.2
			36	19	39725	2503.5	23.2
					40620	2593.0	23.2
					41515	2682.5	23.2
			1	0	39725	2503.5	24.0
					40620	2593.0	24.0
					41515	2682.5	24.0
			1	74	39725	2503.5	24.0
					40620	2593.0	24.0
					41515	2682.5	24.0
		20 MHz	100	0	39750	2506.0	23.2
					40620	2593.0	23.2
					41490	2680.0	23.3
			50	25	39750	2506.0	23.1
					40620	2593.0	23.1
					41490	2680.0	23.3
			1	0	39750	2506.0	24.0
					40620	2593.0	24.0
					41490	2680.0	24.0
			1	99	39750	2506.0	24.0
					40620	2593.0	24.0
					41490	2680.0	24.0

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
41	16QAM	5 MHz	25	0	39675	2498.5	22.3
					40620	2593.0	22.2
					41565	2687.5	22.1
			12	6	39675	2498.5	22.3
					40620	2593.0	22.2
					41565	2687.5	22.4
			1	0	39675	2498.5	23.0
					40620	2593.0	23.0
					41565	2687.5	23.1
			1	24	39675	2498.5	23.0
					40620	2593.0	23.0
					41565	2687.5	23.1

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
41	16QAM	10 MHz	50	0	39700	2501.0	22.2
					40620	2593.0	22.1
					41540	2685.0	22.3
			25	12	39700	2501.0	22.3
					40620	2593.0	22.2
					41540	2685.0	22.4
			1	0	39700	2501.0	23.3
					40620	2593.0	23.2
					41540	2685.0	23.2
			1	24	39700	2501.0	23.3
					40620	2593.0	23.1
					41540	2685.0	23.2
		15 MHz	75	0	39725	2503.5	22.1
					40620	2593.0	22.0
					41515	2682.5	22.1
			36	19	39725	2503.5	22.3
					40620	2593.0	22.3
					41515	2682.5	22.2
			1	0	39725	2503.5	23.2
					40620	2593.0	23.3
					41515	2682.5	23.3
			1	74	39725	2503.5	23.1
					40620	2593.0	23.0
					41515	2682.5	23.2
		20 MHz	100	0	39750	2506.0	22.2
					40620	2593.0	22.1
					41490	2680.0	22.3
			50	25	39750	2506.0	22.1
					40620	2593.0	22.0
					41490	2680.0	22.2
			1	0	39750	2506.0	23.3
					40620	2593.0	23.4
					41490	2680.0	23.2
			1	99	39750	2506.0	23.1
					40620	2593.0	23.2
					41490	2680.0	23.2

# SAR Data Summary –LTE Band 13

## MEASUREMENT RESULTS

Gap	Plot	Position/ Antenna	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.					(dBm)		
10 mm	-----	End/T1	782	23230	10 MHz/QPSK	1	24	0	24.0	0.162	0.16
	-----	End/T1	782	23230	10 MHz/QPSK	25	12	1	23.0	0.125	0.13
	-----	End/T2	782	23230	10 MHz/QPSK	1	24	0	24.0	0.160	0.16
	-----	End/T2	782	23230	10 MHz/QPSK	25	12	1	23.0	0.128	0.13
	-----	End/T3	782	23230	10 MHz/QPSK	1	24	0	24.0	0.159	0.16
	-----	End/T3	782	23230	10 MHz/QPSK	25	12	1	23.0	0.127	0.13
	-----	End/T4	782	23230	10 MHz/QPSK	1	24	0	24.0	0.165	0.17
	-----	End/T4	782	23230	10 MHz/QPSK	25	12	1	23.0	0.131	0.13
	-----	End/B1	782	23230	10 MHz/QPSK	1	24	0	24.0	0.178	0.18
	-----	End/B1	782	23230	10 MHz/QPSK	25	12	1	23.0	0.141	0.14
	-----	End/B2	782	23230	10 MHz/QPSK	1	24	0	24.0	0.131	0.13
	-----	End/B2	782	23230	10 MHz/QPSK	25	12	1	23.0	0.125	0.13
	-----	End/B3	782	23230	10 MHz/QPSK	1	24	0	24.0	0.169	0.17
	-----	End/B3	782	23230	10 MHz/QPSK	25	12	1	23.0	0.137	0.14
	-----	End/B4	782	23230	10 MHz/QPSK	1	24	0	24.0	0.188	0.19
	-----	End/B4	782	23230	10 MHz/QPSK	25	12	1	23.0	0.149	0.15
	-----	Short/T1	782	23230	10 MHz/QPSK	1	24	0	24.0	0.266	0.27
	-----	Short/T1	782	23230	10 MHz/QPSK	25	12	1	23.0	0.220	0.22
	-----	Short/T2	782	23230	10 MHz/QPSK	1	24	0	24.0	0.357	0.36
	-----	Short/T2	782	23230	10 MHz/QPSK	25	12	1	23.0	0.278	0.28
	-----	Short/T3	782	23230	10 MHz/QPSK	1	24	0	24.0	0.212	0.21
	-----	Short/T3	782	23230	10 MHz/QPSK	25	12	1	23.0	0.175	0.18
	-----	Short/T4	782	23230	10 MHz/QPSK	1	24	0	24.0	0.283	0.28
	-----	Short/T4	782	23230	10 MHz/QPSK	25	12	1	23.0	0.233	0.23
	-----	Short/B1	782	23230	10 MHz/QPSK	1	24	0	24.0	0.249	0.25
	-----	Short/B1	782	23230	10 MHz/QPSK	25	12	1	23.0	0.201	0.20
	-----	Short/B2	782	23230	10 MHz/QPSK	1	24	0	24.0	0.198	0.20
	-----	Short/B2	782	23230	10 MHz/QPSK	25	12	1	23.0	0.187	0.19
	-----	Short/B3	782	23230	10 MHz/QPSK	1	24	0	24.0	0.231	0.23
	-----	Short/B3	782	23230	10 MHz/QPSK	25	12	1	23.0	0.184	0.18
	-----	Short/B4	782	23230	10 MHz/QPSK	1	24	0	24.0	0.298	0.30
	-----	Short/B4	782	23230	10 MHz/QPSK	25	12	1	23.0	0.244	0.24
	-----	Long/T1	782	23230	10 MHz/QPSK	1	24	0	24.0	0.267	0.27
	-----	Long/T1	782	23230	10 MHz/QPSK	25	12	1	23.0	0.216	0.22
	-----	Long/T2	782	23230	10 MHz/QPSK	1	24	0	24.0	0.343	0.34
	-----	Long/T2	782	23230	10 MHz/QPSK	25	12	1	23.0	0.277	0.28
	-----	Long/T3	782	23230	10 MHz/QPSK	1	24	0	24.0	0.274	0.27
	-----	Long/T3	782	23230	10 MHz/QPSK	25	12	1	23.0	0.221	0.22
	-----	Long/T4	782	23230	10 MHz/QPSK	1	24	0	24.0	0.290	0.29
	-----	Long/T4	782	23230	10 MHz/QPSK	25	12	1	23.0	0.235	0.24
	-----	Long/B1	782	23230	10 MHz/QPSK	1	24	0	24.0	0.320	0.32
	-----	Long/B1	782	23230	10 MHz/QPSK	25	12	1	23.0	0.258	0.26
	-----	Long/B2	782	23230	10 MHz/QPSK	1	24	0	24.0	0.251	0.25
	-----	Long/B2	782	23230	10 MHz/QPSK	25	12	1	23.0	0.244	0.24
	1	Long/B3	782	23230	10 MHz/QPSK	1	24	0	24.0	0.358	0.36
	-----	Long/B3	782	23230	10 MHz/QPSK	25	12	1	23.0	0.283	0.28
	-----	Long/B4	782	23230	10 MHz/QPSK	1	24	0	24.0	0.304	0.30
	-----	Long/B4	782	23230	10 MHz/QPSK	25	12	1	23.0	0.238	0.24

Body  
1.6 W/kg (mW/g)  
averaged over 1 gram

- SAR Measurement  
Phantom Configuration  
SAR Configuration
- Test Signal Call Mode
- Test Configuration
- Tissue Depth is at least 15.0 cm

- ☐ Left Head  
☐ Head  
☐ Test Code  
☐ With Belt Clip

- ☒ Eli4  
☒ Body  
☒ Base Station Simulator  
☐ Without Belt Clip ☒ N/A

- ☐ Right Head



Jay M. Moulton  
Vice President

# SAR Data Summary –LTE Band 12

## MEASUREMENT RESULTS

Gap	Plot	Position/ Antenna	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.					(dBm)		
10 mm	-----	End/T1	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.146	0.15
	-----	End/T1	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.119	0.12
	-----	End/T2	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.146	0.15
	-----	End/T2	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.117	0.12
	-----	End/T3	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.119	0.12
	-----	End/T3	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.116	0.12
	-----	End/T4	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.190	0.19
	-----	End/T4	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.144	0.14
	-----	End/B1	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.112	0.11
	-----	End/B1	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.0887	0.09
	-----	End/B2	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.104	0.10
	-----	End/B2	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.0765	0.08
	-----	End/B3	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.211	0.21
	-----	End/B3	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.165	0.17
	-----	End/B4	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.108	0.11
	-----	End/B4	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.0775	0.08
	-----	Short/T1	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.178	0.18
	-----	Short/T1	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.142	0.14
	-----	Short/T2	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.168	0.17
	-----	Short/T2	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.138	0.14
	-----	Short/T3	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.147	0.15
	-----	Short/T3	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.117	0.12
	-----	Short/T4	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.212	0.21
	-----	Short/T4	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.161	0.16
	-----	Short/B1	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.190	0.19
	-----	Short/B1	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.146	0.15
	-----	Short/B2	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.121	0.12
	-----	Short/B2	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.105	0.11
	-----	Short/B3	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.166	0.17
	-----	Short/B3	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.130	0.13
	-----	Short/B4	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.137	0.14
	-----	Short/B4	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.101	0.10
	-----	Long/T1	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.243	0.24
	-----	Long/T1	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.195	0.20
	-----	Long/T2	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.226	0.23
	-----	Long/T2	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.181	0.18
	-----	Long/T3	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.247	0.25
	-----	Long/T3	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.194	0.19
	-----	Long/T4	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.282	0.28
	-----	Long/T4	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.218	0.22
	-----	Long/B1	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.231	0.23
	-----	Long/B1	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.183	0.18
	-----	Long/B2	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.184	0.18
	-----	Long/B2	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.152	0.15
	2	Long/B3	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.298	0.30
	-----	Long/B3	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.234	0.23
	-----	Long/B4	707.5	23095	10 MHz/QPSK	1	24	0	24.0	0.155	0.16
	-----	Long/B4	707.5	23095	10 MHz/QPSK	25	12	1	23.0	0.124	0.12

Body  
1.6 W/kg (mW/g)  
averaged over 1 gram

- SAR Measurement  
Phantom Configuration  
SAR Configuration
- Test Signal Call Mode
- Test Configuration
- Tissue Depth is at least 15.0 cm

- ☐ Left Head  
☐ Head  
☐ Test Code  
☐ With Belt Clip

- ☒ Eli4  
☒ Body  
☒ Base Station Simulator  
☐ Without Belt Clip ☒ N/A

- ☐ Right Head



Jay M. Moulton  
Vice President

# SAR Data Summary – 850 MHz Body – UMTS Band 5

## MEASUREMENT RESULTS

Gap	Plot	Frequency		Modulation	Position/ Antenna	End Power (dBm)	RMC	Test Set Up	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.							
10 mm	-----	836.6	4183	WCDMA	End/T1	23.91	12.2 kbps	Test Loop 1	0.135	0.14
	-----	836.6	4183		End/T2	23.91	12.2 kbps	Test Loop 1	0.190	0.19
	-----	836.6	4183		End/T3	23.91	12.2 kbps	Test Loop 1	0.142	0.15
	-----	836.6	4183		End/T4	23.91	12.2 kbps	Test Loop 1	0.200	0.20
	-----	836.6	4183		End/B1	23.91	12.2 kbps	Test Loop 1	0.163	0.17
	-----	836.6	4183		End/B2	23.91	12.2 kbps	Test Loop 1	0.118	0.12
	-----	836.6	4183		End/B3	23.91	12.2 kbps	Test Loop 1	0.210	0.21
	-----	836.6	4183		End/B4	23.91	12.2 kbps	Test Loop 1	0.143	0.15
	-----	836.6	4183		Short/T1	23.91	12.2 kbps	Test Loop 1	0.0353	0.04
	-----	836.6	4183		Short/T2	23.91	12.2 kbps	Test Loop 1	0.0272	0.03
	-----	836.6	4183		Short/T3	23.91	12.2 kbps	Test Loop 1	0.351	0.36
	-----	836.6	4183		Short/T4	23.91	12.2 kbps	Test Loop 1	0.323	0.33
	-----	836.6	4183		Short/B1	23.91	12.2 kbps	Test Loop 1	0.428	0.44
	-----	836.6	4183		Short/B2	23.91	12.2 kbps	Test Loop 1	0.342	0.35
	-----	836.6	4183		Short/B3	23.91	12.2 kbps	Test Loop 1	0.370	0.38
	-----	836.6	4183		Short/B4	23.91	12.2 kbps	Test Loop 1	0.381	0.39
	-----	836.6	4183		Long/T1	23.91	12.2 kbps	Test Loop 1	0.399	0.41
	3	836.6	4183		Long/T2	23.91	12.2 kbps	Test Loop 1	0.567	0.58
	-----	836.6	4183		Long/T3	23.91	12.2 kbps	Test Loop 1	0.425	0.43
	-----	836.6	4183		Long/T4	23.91	12.2 kbps	Test Loop 1	0.422	0.43
	-----	836.6	4183		Long/B1	23.91	12.2 kbps	Test Loop 1	0.482	0.49
	-----	836.6	4183		Long/B2	23.91	12.2 kbps	Test Loop 1	0.449	0.46
	-----	836.6	4183		Long/B3	23.91	12.2 kbps	Test Loop 1	0.462	0.47
	-----	836.6	4183		Long/B4	23.91	12.2 kbps	Test Loop 1	0.495	0.51

**Body**  
**1.6 W/kg (mW/g)**  
averaged over 1 gram

- SAR Measurement
  - Phantom Configuration
☐ Left Head
☒ Eli4
☐ Right Head
  - SAR Configuration
☐ Head
☒ Body
- Test Signal Call Mode
☐ Test Code
☒ Base Station Simulator
- Test Configuration
☐ With Belt Clip
☐ Without Belt Clip
☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President

# SAR Data Summary –LTE Band 26

## MEASUREMENT RESULTS

Gap	Plot	Position/ Antenna	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.					(dBm)		
10 mm	-----	End/T1	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.168	0.17
	-----	End/T1	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.131	0.13
	-----	End/T2	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.205	0.21
	-----	End/T2	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.164	0.16
	-----	End/T3	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.176	0.18
	-----	End/T3	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.138	0.14
	-----	End/T4	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.166	0.17
	-----	End/T4	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.129	0.13
	-----	End/B1	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.117	0.12
	-----	End/B1	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.124	0.12
	-----	End/B2	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.121	0.12
	-----	End/B2	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.0939	0.09
	-----	End/B3	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.189	0.19
	-----	End/B3	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.143	0.14
	-----	End/B4	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.142	0.14
	-----	End/B4	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.109	0.11
	-----	Short/T1	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.134	0.13
	-----	Short/T1	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.102	0.10
	-----	Short/T2	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.167	0.17
	-----	Short/T2	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.141	0.14
	-----	Short/T3	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.316	0.32
	-----	Short/T3	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.251	0.25
	-----	Short/T4	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.389	0.39
	-----	Short/T4	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.297	0.30
	-----	Short/B1	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.472	0.47
	-----	Short/B1	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.368	0.37
	-----	Short/B2	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.369	0.37
	-----	Short/B2	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.280	0.28
	-----	Short/B3	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.390	0.39
	-----	Short/B3	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.303	0.30
	-----	Short/B4	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.320	0.32
	-----	Short/B4	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.243	0.24
	-----	Long/T1	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.504	0.50
	-----	Long/T1	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.399	0.40
	-----	Long/T2	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.524	0.52
	-----	Long/T2	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.409	0.41
	-----	Long/T3	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.454	0.45
	-----	Long/T3	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.346	0.35
	-----	Long/T4	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.442	0.44
	-----	Long/T4	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.338	0.34
	-----	Long/B1	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.475	0.48
	-----	Long/B1	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.373	0.37
	-----	Long/B2	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.456	0.46
	-----	Long/B2	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.355	0.36
	-----	Long/B3	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.449	0.45
	-----	Long/B3	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.353	0.35
	-----	Long/B4	831.5	26865	15 MHz/QPSK	1	37	0	24.0	0.443	0.44
	-----	Long/B4	831.5	26865	15 MHz/QPSK	37	18	1	23.0	0.347	0.35

Body  
1.6 W/kg (mW/g)  
averaged over 1 gram

- SAR Measurement  
Phantom Configuration  
SAR Configuration
- Test Signal Call Mode
- Test Configuration
- Tissue Depth is at least 15.0 cm

☐ Left Head  
☐ Head  
☐ Test Code  
☐ With Belt Clip

☒ Eli4  
☒ Body  
☒ Base Station Simulator  
☐ Without Belt Clip ☒ N/A

☐ Right Head



Jay M. Moulton  
Vice President



# SAR Data Summary – 1750 MHz Body – UMTS Band 4

## MEASUREMENT RESULTS

Gap	Plot	Frequency		Modulation	Position/ Antenna	End Power (dBm)	RMC	Test Set Up	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.							
10 mm	-----	1732.6	1413	WCDMA	End/T1	23.91	12.2 kbps	Test Loop 1	0.143	0.15
	-----	1732.6	1413		End/T2	23.91	12.2 kbps	Test Loop 1	0.323	0.33
	-----	1732.6	1413		End/T3	23.91	12.2 kbps	Test Loop 1	0.176	0.18
	-----	1732.6	1413		End/T4	23.91	12.2 kbps	Test Loop 1	0.138	0.14
	-----	1732.6	1413		End/B1	23.91	12.2 kbps	Test Loop 1	0.197	0.20
	-----	1732.6	1413		End/B2	23.91	12.2 kbps	Test Loop 1	0.439	0.45
	-----	1732.6	1413		End/B3	23.91	12.2 kbps	Test Loop 1	0.209	0.21
	-----	1732.6	1413		End/B4	23.91	12.2 kbps	Test Loop 1	0.275	0.28
	-----	1732.6	1413		Short/T1	23.91	12.2 kbps	Test Loop 1	0.250	0.26
	-----	1732.6	1413		Short/T2	23.91	12.2 kbps	Test Loop 1	0.395	0.40
	-----	1732.6	1413		Short/T3	23.91	12.2 kbps	Test Loop 1	0.449	0.46
	-----	1732.6	1413		Short/T4	23.91	12.2 kbps	Test Loop 1	0.107	0.11
	-----	1732.6	1413		Short/B1	23.91	12.2 kbps	Test Loop 1	0.188	0.19
	-----	1732.6	1413		Short/B2	23.91	12.2 kbps	Test Loop 1	0.422	0.43
	-----	1732.6	1413		Short/B3	23.91	12.2 kbps	Test Loop 1	0.408	0.42
	-----	1732.6	1413		Short/B4	23.91	12.2 kbps	Test Loop 1	0.362	0.37
	5	1732.6	1413		Long/T1	23.91	12.2 kbps	Test Loop 1	0.795	0.80
	-----	1732.6	1413		Long/T2	23.91	12.2 kbps	Test Loop 1	0.697	0.71
	-----	1732.6	1413		Long/T3	23.91	12.2 kbps	Test Loop 1	0.677	0.69
	-----	1732.6	1413		Long/T4	23.91	12.2 kbps	Test Loop 1	0.304	0.31
	-----	1732.6	1413		Long/B1	23.91	12.2 kbps	Test Loop 1	0.524	0.54
	-----	1732.6	1413		Long/B2	23.91	12.2 kbps	Test Loop 1	0.599	0.61
	-----	1732.6	1413		Long/B3	23.91	12.2 kbps	Test Loop 1	0.786	0.79
	-----	1732.6	1413		Long/B4	23.91	12.2 kbps	Test Loop 1	0.231	0.24

**Body**  
**1.6 W/kg (mW/g)**  
 averaged over 1 gram

### 1. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

### 2. Test Signal Call Mode

☐ Test Code

☒ Base Station Simulator

### 3. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

### 4. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
 Vice President

# SAR Data Summary –LTE Band 4

## MEASUREMENT RESULTS

Gap	Plot	Position/ Antenna	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.					(dBm)		
10 mm	-----	End/T1	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.137	0.14
	-----	End/T1	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.113	0.11
	-----	End/T2	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.290	0.29
	-----	End/T2	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.235	0.24
	-----	End/T3	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.193	0.19
	-----	End/T3	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.159	0.16
	-----	End/T4	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.204	0.20
	-----	End/T4	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.182	0.18
	-----	End/B1	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.168	0.17
	-----	End/B1	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.139	0.14
	-----	End/B2	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.412	0.41
	-----	End/B2	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.338	0.34
	-----	End/B3	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.211	0.21
	-----	End/B3	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.175	0.18
	-----	End/B4	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.114	0.11
	-----	End/B4	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.102	0.10
	-----	Short/T1	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.268	0.27
	-----	Short/T1	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.215	0.22
	-----	Short/T2	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.366	0.37
	-----	Short/T2	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.297	0.30
	-----	Short/T3	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.425	0.43
	-----	Short/T3	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.346	0.35
	-----	Short/T4	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.170	0.17
	-----	Short/T4	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.116	0.12
	-----	Short/B1	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.132	0.13
	-----	Short/B1	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.107	0.11
	-----	Short/B2	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.366	0.37
	-----	Short/B2	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.296	0.30
	-----	Short/B3	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.487	0.49
	-----	Short/B3	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.388	0.39
	-----	Short/B4	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.164	0.16
	-----	Short/B4	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.134	0.13
	6	Long/T1	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.757	0.76
	-----	Long/T1	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.613	0.61
	-----	Long/T2	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.746	0.75
	-----	Long/T2	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.618	0.62
	-----	Long/T3	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.535	0.54
	-----	Long/T3	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.437	0.44
	-----	Long/T4	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.321	0.32
	-----	Long/T4	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.264	0.26
	-----	Long/B1	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.300	0.30
	-----	Long/B1	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.240	0.24
	-----	Long/B2	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.602	0.60
	-----	Long/B2	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.493	0.49
	-----	Long/B3	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.732	0.73
	-----	Long/B3	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.595	0.60
	-----	Long/B4	1732.5	20175	20 MHz/QPSK	1	49	0	24.0	0.464	0.46
	-----	Long/B4	1732.5	20175	20 MHz/QPSK	50	24	1	23.0	0.385	0.39

Body  
1.6 W/kg (mW/g)  
averaged over 1 gram

- SAR Measurement  
Phantom Configuration  
SAR Configuration
- Test Signal Call Mode
- Test Configuration
- Tissue Depth is at least 15.0 cm

- ☐ Left Head  
☐ Head  
☐ Test Code  
☐ With Belt Clip

- ☒ Eli4  
☒ Body  
☒ Base Station Simulator  
☐ Without Belt Clip ☒ N/A

- ☐ Right Head



Jay M. Moulton  
Vice President

## SAR Data Summary – 1900 MHz Body – UMTS Band 2

### MEASUREMENT RESULTS

Gap	Plot	Frequency		Modulation	Position/ Antenna	End Power (dBm)	RMC	Test Set Up	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.							
10 mm	-----	1880.0	9400	WCDMA	End/T1	23.86	12.2 kbps	Test Loop 1	0.162	0.17
	-----	1880.0	9400		End/T2	23.86	12.2 kbps	Test Loop 1	0.214	0.22
	-----	1880.0	9400		End/T3	23.86	12.2 kbps	Test Loop 1	0.288	0.30
	-----	1880.0	9400		End/T4	23.86	12.2 kbps	Test Loop 1	0.150	0.16
	-----	1880.0	9400		End/B1	23.86	12.2 kbps	Test Loop 1	0.195	0.20
	-----	1880.0	9400		End/B2	23.86	12.2 kbps	Test Loop 1	0.315	0.33
	-----	1880.0	9400		End/B3	23.86	12.2 kbps	Test Loop 1	0.384	0.40
	-----	1880.0	9400		End/B4	23.86	12.2 kbps	Test Loop 1	0.184	0.19
	-----	1880.0	9400		Short/T1	23.86	12.2 kbps	Test Loop 1	0.292	0.30
	-----	1880.0	9400		Short/T2	23.86	12.2 kbps	Test Loop 1	0.360	0.37
	-----	1880.0	9400		Short/T3	23.86	12.2 kbps	Test Loop 1	0.423	0.44
	-----	1880.0	9400		Short/T4	23.86	12.2 kbps	Test Loop 1	0.224	0.23
	-----	1880.0	9400		Short/B1	23.86	12.2 kbps	Test Loop 1	0.128	0.13
	-----	1880.0	9400		Short/B2	23.81	12.2 kbps	Test Loop 1	0.286	0.30
	-----	1880.0	9400		Short/B3	23.86	12.2 kbps	Test Loop 1	0.288	0.30
	-----	1880.0	9400		Short/B4	23.86	12.2 kbps	Test Loop 1	0.410	0.42
	-----	1880.0	9400		Long/T1	23.86	12.2 kbps	Test Loop 1	0.712	0.74
	-----	1880.0	9400		Long/T2	23.86	12.2 kbps	Test Loop 1	0.67	0.69
	-----	1880.0	9400		Long/T3	23.86	12.2 kbps	Test Loop 1	0.452	0.47
	-----	1880.0	9400		Long/T4	23.86	12.2 kbps	Test Loop 1	0.536	0.55
	-----	1880.0	9400		Long/B1	23.86	12.2 kbps	Test Loop 1	0.415	0.43
	-----	1880.0	9400		Long/B2	23.86	12.2 kbps	Test Loop 1	0.551	0.57
	-----	1880.0	9400		Long/B3	23.86	12.2 kbps	Test Loop 1	0.654	0.68
	7	1880.0	9400		Long/B4	23.86	12.2 kbps	Test Loop 1	0.714	0.74

**Body**  
**1.6 W/kg (mW/g)**  
averaged over 1 gram

#### 1. SAR Measurement

Phantom Configuration

SAR Configuration

#### 2. Test Signal Call Mode

#### 3. Test Configuration

#### 4. Tissue Depth is at least 15.0 cm

☐ Left Head

☐ Head

☐ Test Code

☐ With Belt Clip

☒ Eli4

☒ Body

☒ Base Station Simulator

☐ Without Belt Clip ☒ N/A

☐ Right Head



Jay M. Moulton  
Vice President

# SAR Data Summary –LTE Band 25

## MEASUREMENT RESULTS

Gap	Plot	Position/ Antenna	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.					(dBm)		
10 mm	-----	End/T1	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.207	0.21
	-----	End/T1	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.163	0.16
	-----	End/T2	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.206	0.21
	-----	End/T2	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.171	0.17
	-----	End/T3	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.219	0.22
	-----	End/T3	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.174	0.17
	-----	End/T4	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.155	0.16
	-----	End/T4	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.129	0.13
	-----	End/B1	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.197	0.20
	-----	End/B1	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.154	0.15
	-----	End/B2	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.218	0.22
	-----	End/B2	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.176	0.18
	-----	End/B3	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.331	0.33
	-----	End/B3	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.259	0.26
	-----	End/B4	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.249	0.25
	-----	End/B4	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.198	0.20
	-----	Short/T1	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.286	0.29
	-----	Short/T1	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.228	0.23
	-----	Short/T2	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.330	0.33
	-----	Short/T2	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.267	0.27
	-----	Short/T3	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.360	0.36
	-----	Short/T3	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.293	0.29
	-----	Short/T4	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.202	0.20
	-----	Short/T4	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.162	0.16
	-----	Short/B1	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.174	0.17
	-----	Short/B1	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.142	0.14
	-----	Short/B2	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.285	0.29
	-----	Short/B2	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.226	0.23
	-----	Short/B3	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.192	0.19
	-----	Short/B3	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.157	0.16
	-----	Short/B4	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.314	0.31
	-----	Short/B4	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.253	0.25
	-----	Long/T1	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.639	0.64
	-----	Long/T1	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.523	0.52
	-----	Long/T2	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.643	0.64
	-----	Long/T2	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.532	0.53
	-----	Long/T3	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.341	0.34
	-----	Long/T3	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.283	0.28
	-----	Long/T4	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.548	0.55
	-----	Long/T4	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.442	0.44
	-----	Long/B1	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.535	0.54
	-----	Long/B1	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.411	0.41
	-----	Long/B2	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.566	0.57
	-----	Long/B2	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.446	0.47
	-----	Long/B3	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.465	0.47
	-----	Long/B3	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.375	0.38
	-----	Long/B4	1882.5	26365	20 MHz/QPSK	1	49	0	24.0	0.638	0.64
	-----	Long/B4	1882.5	26365	20 MHz/QPSK	50	24	1	23.0	0.518	0.52

Body  
1.6 W/kg (mW/g)  
averaged over 1 gram

- SAR Measurement  
Phantom Configuration  
SAR Configuration
- Test Signal Call Mode
- Test Configuration
- Tissue Depth is at least 15.0 cm

- ☐ Left Head  
☐ Head  
☐ Test Code  
☐ With Belt Clip

- ☒ Eli4  
☒ Body  
☒ Base Station Simulator  
☐ Without Belt Clip ☒ N/A

- ☐ Right Head



Jay M. Moulton  
Vice President

# SAR Data Summary –LTE Band 30

## MEASUREMENT RESULTS

Gap	Plot	Position/ Antenna	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.					(dBm)		
10 mm	9	End/T1	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.790	0.79
	-----	End/T1	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.672	0.67
	-----	End/T2	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.712	0.71
	-----	End/T2	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.658	0.66
	-----	End/T3	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.689	0.69
	-----	End/T3	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.551	0.55
	-----	End/T4	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.769	0.77
	-----	End/T4	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.673	0.67
	-----	End/B1	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.761	0.76
	-----	End/B1	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.702	0.70
	-----	End/B2	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.642	0.64
	-----	End/B2	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.514	0.51
	-----	End/B3	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.786	0.79
	-----	End/B3	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.628	0.63
	-----	End/B4	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.741	0.74
	-----	End/B4	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.652	0.65
	-----	Short/T1	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.127	0.13
	-----	Short/T1	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.101	0.10
	-----	Short/T2	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.109	0.11
	-----	Short/T2	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.0858	0.09
	-----	Short/T3	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.149	0.15
	-----	Short/T3	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.117	0.12
	-----	Short/T4	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.120	0.12
	-----	Short/T4	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.0944	0.09
	-----	Short/B1	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.134	0.13
	-----	Short/B1	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.104	0.10
	-----	Short/B2	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.121	0.12
	-----	Short/B2	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.095	0.10
	-----	Short/B3	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.178	0.18
	-----	Short/B3	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.143	0.14
	-----	Short/B4	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.177	0.18
	-----	Short/B4	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.141	0.14
	-----	Long/T1	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.723	0.72
	-----	Long/T1	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.706	0.71
	-----	Long/T2	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.746	0.75
	-----	Long/T2	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.679	0.68
	-----	Long/T3	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.539	0.54
	-----	Long/T3	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.427	0.43
	-----	Long/T4	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.722	0.72
	-----	Long/T4	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.638	0.64
	-----	Long/B1	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.755	0.76
	-----	Long/B1	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.661	0.66
	-----	Long/B2	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.480	0.48
	-----	Long/B2	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.371	0.37
	-----	Long/B3	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.569	0.57
	-----	Long/B3	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.453	0.45
	-----	Long/B4	2310	27710	10 MHz/QPSK	1	24	0	24.0	0.707	0.71
	-----	Long/B4	2310	27710	10 MHz/QPSK	25	12	1	23.0	0.549	0.55

Body  
1.6 W/kg (mW/g)  
averaged over 1 gram

- SAR Measurement  
Phantom Configuration  
SAR Configuration
- Test Signal Call Mode
- Test Configuration
- Tissue Depth is at least 15.0 cm

☐ Left Head  
☐ Head  
☐ Test Code  
☐ With Belt Clip

☒ Eli4  
☒ Body  
☒ Base Station Simulator  
☐ Without Belt Clip ☒ N/A

☐ Right Head



Jay M. Moulton  
Vice President

# SAR Data Summary –LTE Band 7

## MEASUREMENT RESULTS

Gap	Plot	Position/ Antenna	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.					(dBm)		
10 mm	10	End/T1	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.787	0.79
	-----	End/T1	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.719	0.72
	-----	End/T2	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.230	0.23
	-----	End/T2	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.186	0.19
	-----	End/T3	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.595	0.60
	-----	End/T3	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.478	0.48
	-----	End/T4	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.745	0.75
	-----	End/T4	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.716	0.72
	-----	End/B1	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.742	0.74
	-----	End/B1	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.722	0.72
	-----	End/B2	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.749	0.75
	-----	End/B2	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.652	0.65
	-----	End/B3	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.459	0.46
	-----	End/B3	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.370	0.37
	-----	End/B4	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.708	0.71
	-----	End/B4	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.562	0.56
	-----	Short/T1	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.212	0.21
	-----	Short/T1	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.170	0.17
	-----	Short/T2	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.277	0.28
	-----	Short/T2	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.216	0.22
	-----	Short/T3	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.161	0.16
	-----	Short/T3	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.131	0.13
	-----	Short/T4	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.182	0.18
	-----	Short/T4	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.150	0.15
	-----	Short/B1	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.198	0.20
	-----	Short/B1	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.160	0.16
	-----	Short/B2	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.221	0.22
	-----	Short/B2	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.178	0.18
	-----	Short/B3	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.165	0.17
	-----	Short/B3	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.133	0.13
	-----	Short/B4	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.188	0.19
	-----	Short/B4	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.149	0.15
	-----	Long/T1	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.775	0.78
	-----	Long/T1	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.590	0.59
	-----	Long/T2	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.724	0.72
	-----	Long/T2	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.659	0.66
	-----	Long/T3	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.450	0.45
	-----	Long/T3	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.362	0.36
	-----	Long/T4	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.694	0.69
	-----	Long/T4	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.560	0.56
	-----	Long/B1	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.607	0.61
	-----	Long/B1	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.484	0.48
	-----	Long/B2	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.666	0.67
	-----	Long/B2	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.526	0.53
	-----	Long/B3	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.437	0.44
	-----	Long/B3	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.355	0.36
	-----	Long/B4	2535	21100	20 MHz/QPSK	1	49	0	24.0	0.527	0.53
	-----	Long/B4	2535	21100	20 MHz/QPSK	50	24	1	23.0	0.425	0.43

Body  
1.6 W/kg (mW/g)  
averaged over 1 gram

- SAR Measurement  
Phantom Configuration  
SAR Configuration
- Test Signal Call Mode
- Test Configuration
- Tissue Depth is at least 15.0 cm

- ☐ Left Head  
☐ Head  
☐ Test Code  
☐ With Belt Clip

- ☒ Eli4  
☒ Body  
☒ Base Station Simulator  
☐ Without Belt Clip ☒ N/A

- ☐ Right Head



Jay M. Moulton  
Vice President



# SAR Data Summary –LTE Band 41

## MEASUREMENT RESULTS

Gap	Plot	Position/ Antenna	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.					(dBm)		
10 mm	11	End/T1	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.746	0.75
	-----	End/T1	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.698	0.70
	-----	End/T2	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.241	0.24
	-----	End/T2	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.192	0.19
	-----	End/T3	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.548	0.55
	-----	End/T3	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.462	0.46
	-----	End/T4	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.698	0.70
	-----	End/T4	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.645	0.65
	-----	End/B1	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.736	0.74
	-----	End/B1	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.731	0.73
	-----	End/B2	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.741	0.74
	-----	End/B2	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.639	0.64
	-----	End/B3	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.426	0.43
	-----	End/B3	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.319	0.31
	-----	End/B4	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.652	0.65
	-----	End/B4	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.413	0.41
	-----	Short/T1	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.222	0.22
	-----	Short/T1	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.183	0.18
	-----	Short/T2	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.247	0.25
	-----	Short/T2	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.198	0.20
	-----	Short/T3	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.132	0.13
	-----	Short/T3	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.102	0.10
	-----	Short/T4	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.193	0.19
	-----	Short/T4	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.164	0.16
	-----	Short/B1	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.172	0.17
	-----	Short/B1	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.148	0.15
	-----	Short/B2	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.231	0.23
	-----	Short/B2	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.186	0.19
	-----	Short/B3	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.177	0.18
	-----	Short/B3	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.145	0.15
	-----	Short/B4	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.162	0.16
	-----	Short/B4	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.124	0.12
	-----	Long/T1	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.718	0.72
	-----	Long/T1	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.602	0.60
	-----	Long/T2	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.735	0.74
	-----	Long/T2	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.671	0.67
	-----	Long/T3	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.420	0.42
	-----	Long/T3	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.331	0.33
	-----	Long/T4	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.674	0.67
	-----	Long/T4	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.537	0.54
	-----	Long/B1	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.615	0.62
	-----	Long/B1	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.497	0.50
	-----	Long/B2	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.684	0.68
	-----	Long/B2	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.546	0.55
	-----	Long/B3	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.420	0.42
	-----	Long/B3	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.332	0.33
	-----	Long/B4	2593	40620	20 MHz/QPSK	1	49	0	24.0	0.507	0.51
	-----	Long/B4	2593	40620	20 MHz/QPSK	50	24	1	23.0	0.405	0.41

Body  
1.6 W/kg (mW/g)  
averaged over 1 gram

- SAR Measurement  
Phantom Configuration  
SAR Configuration
- Test Signal Call Mode
- Test Configuration
- Tissue Depth is at least 15.0 cm

☐ Left Head  
☐ Head  
☐ Test Code  
☐ With Belt Clip

☒ Eli4  
☒ Body  
☒ Base Station Simulator  
☐ Without Belt Clip ☒ N/A

☐ Right Head



Jay M. Moulton  
Vice President

## SAR Data Summary – Simultaneous Evaluation

The cellular antennas can transmit simultaneously with each other. The highest SAR value measured for each side was used to determine the separation ratio for each side. The closest distance for the end is 35 mm, for the short side is 35 mm and for the long side is 60 mm. Using the highest reported SAR to calculate the simultaneous Tx using peak separation ratio, the highest ratio would be 0.04 which meets the requirements of KDB 447498 section 4.3.2 3) on page 13. The calculation is shown below.

### Simultaneous Separation Ratio Calculation

$(SAR_1 + SAR_2)^{1.5}/R_i \leq 0.04$  rounded to two digits

$(0.79 + 0.46)^{1.5}/35 = 0.04$ , for the End

$(0.79 + 0.41)^{1.5}/35 = 0.04$ , for the Short Side

$(0.79 + 0.61)^{1.5}/60 = 0.03$ , for the Long Side

$(0.79 + 0.80)^{1.5}/64 = 0.03$ , for the Short Side Cellular to WiFi

The WiFi module has pre-approval for less than 20 cm from the body. All grant notes of the original filing are being met for this filing. Therefore, SAR testing of the WiFi module was not required. The co-location was evaluated above for the WiFi.



## 12. Test Equipment List

**Table 12.1 Equipment Specifications**

Type	Calibration Due Date	Calibration Done Date	Serial Number
Staubli Robot TX60L	N/A	N/A	F07/55M6A1/A/01
Measurement Controller CS8c	N/A	N/A	1012
ELI4 Flat Phantom	N/A	N/A	1065, 2037
Device Holder	N/A	N/A	N/A
Data Acquisition Electronics 4	08/13/2016	08/13/2015	759
Data Acquisition Electronics 4	04/15/2017	04/15/2016	1416
SPEAG E-Field Probe EXSDV3	02/16/2017	02/16/2016	3311
SPEAG E-Field Probe EX3DV4	04/27/2017	04/27/2016	3662
SPEAG E-Field Probe EX3DV4	08/20/2016	08/20/2015	3693
SPEAG E-Field Probe EX3DV4	01/27/2017	01/27/2016	3833
Speag Validation Dipole D750V2	08/10/2016	08/10/2015	1053
Speag Validation Dipole D835V2	08/10/2016	08/10/2015	4d131
Speag Validation Dipole D1750V2	08/13/2016	08/13/2015	1061
Speag Validation Dipole D1900V2	08/13/2016	08/13/2015	5d147
Speag Validation Dipole D2300V2	09/17/2016	09/17/2015	1060
Speag Validation Dipole D2550V2	08/10/2016	08/10/2015	1003
Agilent N1911A Power Meter	05/20/2017	05/20/2015	GB45100254
Agilent N1922A Power Sensor	06/25/2017	06/25/2015	MY45240464
Advantest R3261A Spectrum Analyzer	03/26/2017	03/26/2015	31720068
Agilent (HP) 8350B Signal Generator	03/26/2017	03/26/2015	2749A10226
Agilent (HP) 83525A RF Plug-In	03/26/2017	03/26/2015	2647A01172
Agilent (HP) 8753C Vector Network Analyzer	03/26/2017	03/26/2015	3135A01724
Agilent (HP) 85047A S-Parameter Test Set	03/26/2017	03/26/2015	2904A00595
Agilent (HP) 8960 Base Station Sim.	03/31/2017	03/31/2015	MY48360364
Anritsu MT8820C	07/28/2017	07/28/2015	6201176199
Agilent 778D Dual Directional Coupler	N/A	N/A	MY48220184
MiniCircuits BW-N20W5+ Fixed 20 dB Attenuator	N/A	N/A	N/A
MiniCircuits SPL-10.7+ Low Pass Filter	N/A	N/A	R8979513746
Aprel Dielectric Probe Assembly	N/A	N/A	0011
Body Equivalent Matter (750 MHz)	N/A	N/A	N/A
Body Equivalent Matter (835/900 MHz)	N/A	N/A	N/A
Body Equivalent Matter (1750 MHz)	N/A	N/A	N/A
Body Equivalent Matter (1900 MHz)	N/A	N/A	N/A
Body Equivalent Matter (2300 MHz)	N/A	N/A	N/A
Body Equivalent Matter (2600 MHz)	N/A	N/A	N/A

### 13. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC/IC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body is a very complex phenomena that depends on the mass, shape, and size of the body; the orientation of the body with respect to the field vectors; and, the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

## 14. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio Frequency Radiation, August 1996
- [2] ANSI/IEEE C95.1 – 1992, American National Standard Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 300kHz to 100GHz, New York: IEEE, 1992.
- [3] ANSI/IEEE C95.3 – 2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, 2002.
- [4] International Electrotechnical Commission, IEC 62209-2 (Edition 1.0), Human Exposure to radio frequency fields from hand-held and body mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), March 2010.
- [5] IEEE Standard 1528 – 2013, IEEE Recommended Practice for Determining the Peak-Spatial Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, June 2013.
- [6] Industry Canada, RSS – 102 Issue 5, Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), March 2015.
- [7] Health Canada, Safety Code 6, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz, 2009.

## Appendix A – System Validation Plots and Data

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Fri 06/May/2016

Freq Frequency(GHz)

FCC\_eH Limits for Head Epsilon

FCC\_sH Limits for Head Sigma

FCC\_eB Limits for Body Epsilon

FCC\_sB Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7000	55.73	0.96	55.72	0.97
0.7040	55.714	0.96	55.708	0.974*
0.7075	55.70	0.96	55.698	0.978*
0.7100	55.69	0.96	55.69	0.98
0.7110	55.686	0.96	55.687	0.98*
0.7200	55.65	0.96	55.66	0.98
0.7300	55.61	0.96	55.63	0.98
0.7400	55.57	0.96	55.60	0.99
0.7500	55.53	0.96	55.57	0.99
0.7600	55.49	0.96	55.54	0.99
0.7700	55.45	0.96	55.50	1.00
0.7800	55.41	0.97	55.46	1.00
0.7820	55.404	0.97	55.452	1.00*
0.7900	55.38	0.97	55.42	1.00
0.8000	55.34	0.97	55.38	1.01

\* value interpolated

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Fri 06/May/2016

Freq Frequency(GHz)

FCC\_eH Limits for Head Epsilon

FCC\_sH Limits for Head Sigma

FCC\_eB Limits for Body Epsilon

FCC\_sB Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.8050	55.32	0.97	56.05	0.96
0.8150	55.28	0.97	56.00	0.98
0.8190	55.264	0.97	55.98	0.98*
0.8250	55.24	0.97	55.95	0.98
0.8264	55.234	0.97	55.944	0.981*
0.8315	55.214	0.97	55.924	0.987*
0.8350	55.20	0.97	55.91	0.99
0.8366	55.195	0.972	55.902	0.99*
0.8440	55.173	0.979	55.865	0.99*
0.8450	55.17	0.98	55.86	0.99
0.8466	55.165	0.982	55.857	0.992*
0.8550	55.14	0.99	55.84	1.00
0.8650	55.11	1.01	55.80	1.01
0.8750	55.08	1.02	55.78	1.03
0.8850	55.05	1.03	55.73	1.03
0.8950	55.02	1.04	55.70	1.04

\* value interpolated

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Thu 12/May/2016

Freq Frequency(GHz)

FCC\_eH Limits for Head Epsilon

FCC\_sH Limits for Head Sigma

FCC\_eB Limits for Body Epsilon

FCC\_sB Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.7100	53.53	1.47	53.55	1.48
1.7124	53.525	1.47	53.543	1.482*
1.7200	53.51	1.47	53.52	1.49
1.7300	53.48	1.48	53.38	1.50
1.7325	53.475	1.48	53.375	1.503*
1.7326	53.475	1.48	53.375	1.503*
1.7400	53.46	1.48	53.36	1.51
1.7450	53.445	1.485	53.34	1.515*
1.7500	53.43	1.49	53.32	1.52
1.7526	53.425	1.49	53.315	1.523*
1.7600	53.41	1.49	53.30	1.53
1.7700	53.38	1.50	53.27	1.55
1.7800	53.35	1.51	53.23	1.55

\* value interpolated

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Mon 16/May/2016

Freq Frequency(GHz)

FCC\_eH Limits for Head Epsilon

FCC\_sH Limits for Head Sigma

FCC\_eB Limits for Body Epsilon

FCC\_sB Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.8400	53.30	1.52	52.04	1.43
1.8500	53.30	1.52	52.03	1.44
1.8524	53.30	1.52	52.03	1.44*
1.8600	53.30	1.52	52.03	1.44
1.8700	53.30	1.52	52.14	1.45
1.8800	53.30	1.52	52.10	1.45
1.8825	53.30	1.52	52.118	1.453*
1.8900	53.30	1.52	52.17	1.46
1.9000	53.30	1.52	52.07	1.47
1.9076	53.30	1.52	52.108	1.493*
1.9050	53.30	1.52	52.095	1.485*
1.9100	53.30	1.52	52.12	1.50
1.9200	53.30	1.52	52.00	1.50

\* value interpolated

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Thu 12/May/2016

Freq Frequency(GHz)

FCC\_eH Limits for Head Epsilon

FCC\_sH Limits for Head Sigma

FCC\_eB Limits for Body Epsilon

FCC\_sB Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.2900	52.91	1.80	52.65	1.83
2.3000	52.90	1.81	52.63	1.84
2.3100	52.89	1.82	52.61	1.85
2.3200	52.87	1.83	52.59	1.86
2.3300	52.86	1.84	52.58	1.87
2.3400	52.85	1.84	52.56	1.88
2.3500	52.83	1.85	52.54	1.89

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Mon 16/May/2016

Freq Frequency(GHz)

FCC\_eH Limits for Head Epsilon

FCC\_sH Limits for Head Sigma

FCC\_eB Limits for Body Epsilon

FCC\_sB Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.4900	52.65	2.01	52.60	2.02
2.5000	52.64	2.02	52.58	2.03
2.5060	52.628	2.032	52.562	2.042*
2.5100	52.62	2.04	52.55	2.05
2.5200	52.61	2.05	52.52	2.07
2.5300	52.60	2.06	52.50	2.09
2.5350	52.595	2.07	52.495	2.10*
2.5400	52.59	2.08	52.49	2.11
2.5500	52.57	2.09	52.47	2.12
2.5600	52.56	2.11	52.45	2.14
2.5700	52.55	2.12	52.43	2.16
2.5800	52.53	2.13	52.42	2.17
2.5900	52.52	2.15	52.39	2.19
2.5930	52.517	2.153	52.387	2.196*
2.6000	52.51	2.16	52.38	2.21
2.6100	52.50	2.18	52.35	2.22
2.6200	52.48	2.19	52.33	2.25
2.6300	52.47	2.21	52.32	2.27
2.6400	52.46	2.22	52.30	2.29
2.6500	52.45	2.23	52.29	2.30
2.6600	52.43	2.25	52.27	2.32
2.6700	52.42	2.26	52.25	2.34
2.6800	52.41	2.28	52.23	2.35
2.6900	52.39	2.29	52.20	2.37
2.7000	52.38	2.30	52.19	2.39

\* value interpolated

# RF Exposure Lab

## Plot 1

**DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1053**

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: MSL750; Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.99$  S/m;  $\epsilon_r = 55.57$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Test Date: Date: 5/6/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.22, 9.22, 9.22); Calibrated: 4/27/2016;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1416; Calibrated: 4/15/2016

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1065

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**750 MHz/Verification/Area Scan (5x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.08 W/kg


**750 MHz/Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.227 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.30 W/kg

**SAR(1 g) = 0.865 W/kg; SAR(10 g) = 0.569 W/kg**

Maximum value of SAR (measured) = 1.10 W/kg

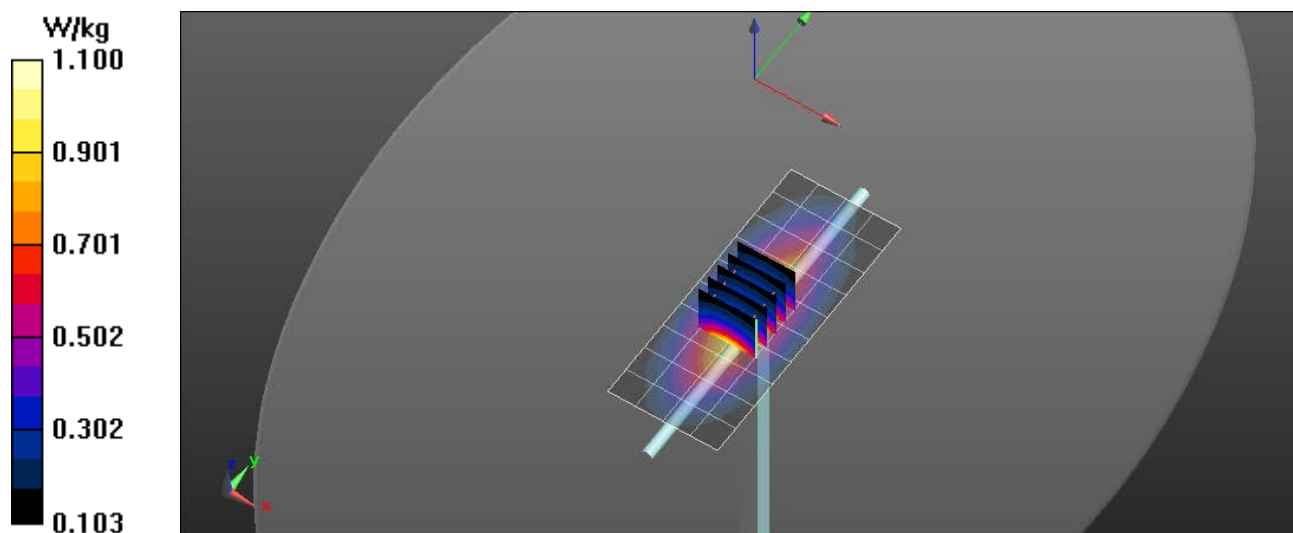



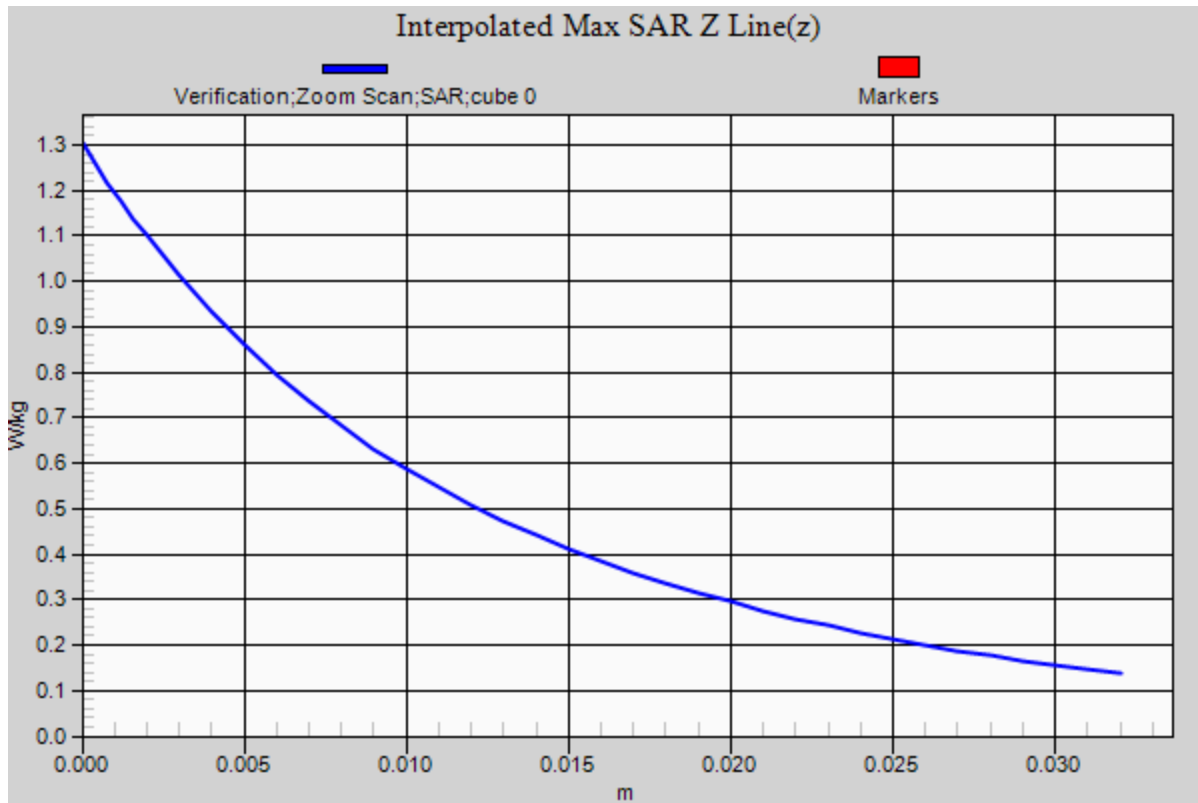

# RF Exposure Lab

## Plot 2

**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d131**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL835; Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.99 \text{ S/m}$ ;  $\epsilon_r = 55.91$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Test Date: Date: 5/6/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(8.79, 8.79, 8.79); Calibrated: 8/20/2015;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn759; Calibrated: 8/13/2015

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 2037

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**835 MHz Body/Verification/Area Scan (81x161x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.29 W/kg


**835 MHz Body/Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 52.612 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.953 W/kg; SAR(10 g) = 0.632 W/kg**

Maximum value of SAR (measured) = 1.29 W/kg

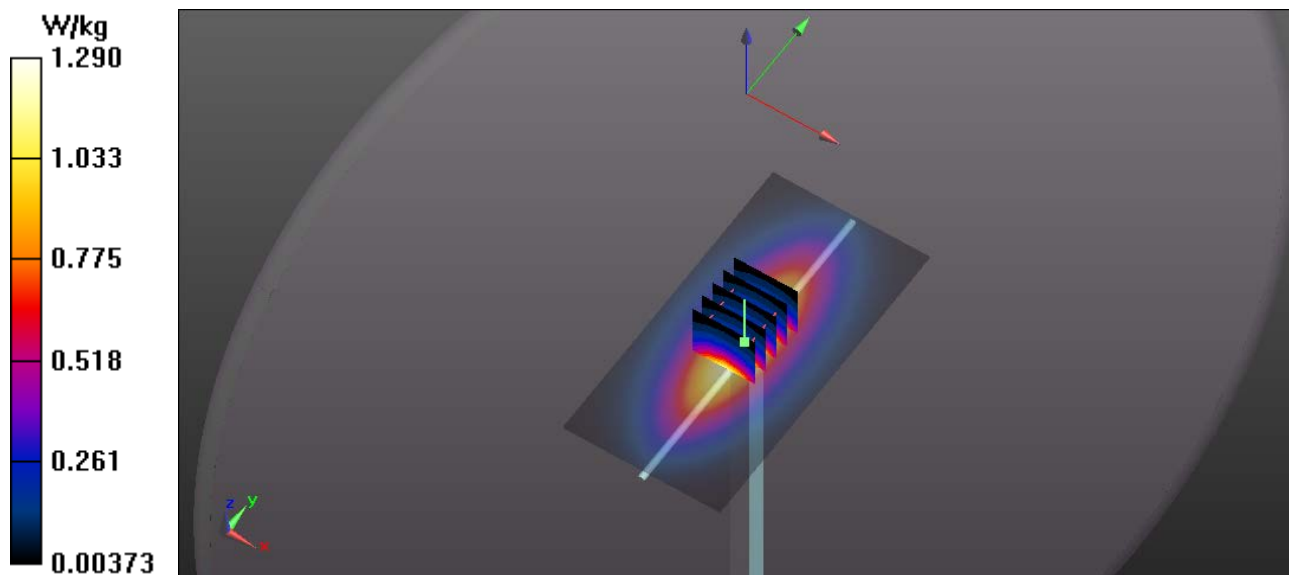

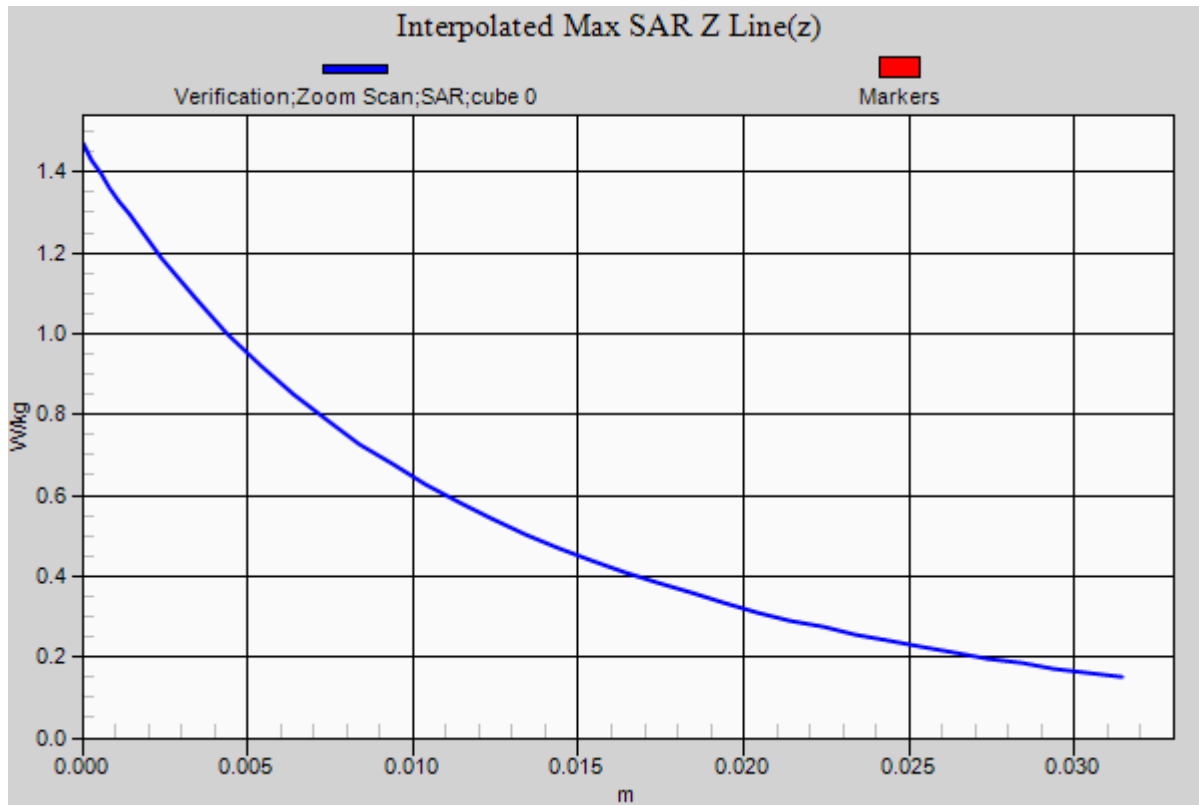

# RF Exposure Lab

## Plot 3

**DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1061**

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: MSL1750; Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.52$  S/m;  $\epsilon_r = 53.32$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Test Date: Date: 5/12/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3833; ConvF(7.32, 7.32, 7.32); Calibrated: 1/27/2016;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1416; Calibrated: 4/15/2016

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1065

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**1750 MHz/Verification/Area Scan (5x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.33 W/kg


**1750 MHz/Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 31.227 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 6.89 W/kg

**SAR(1 g) = 3.85 W/kg; SAR(10 g) = 2.03 W/kg**

Maximum value of SAR (measured) = 5.49 W/kg

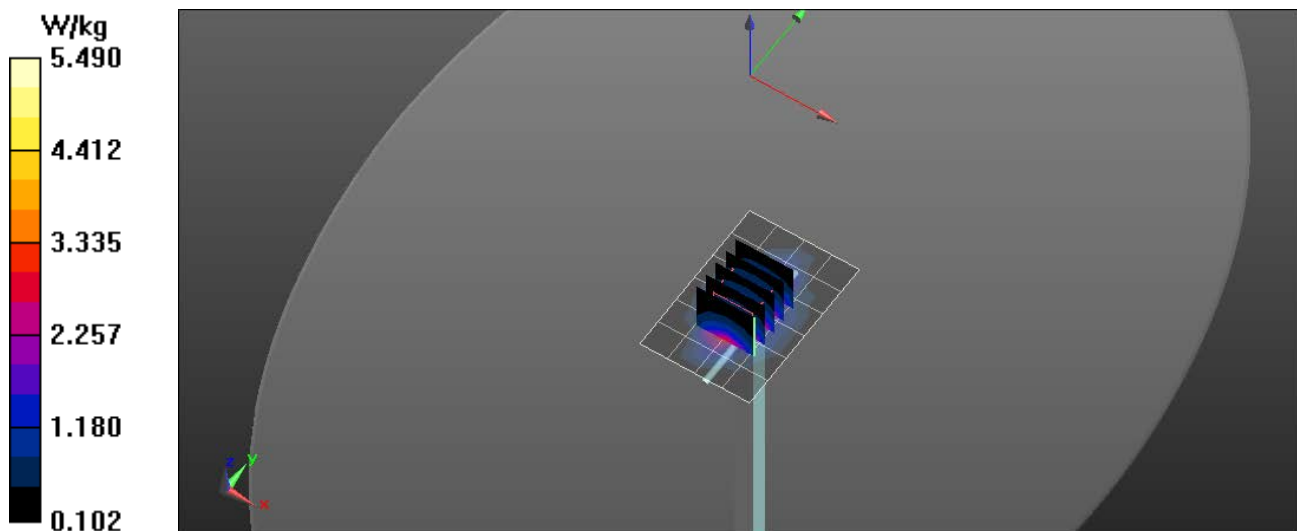

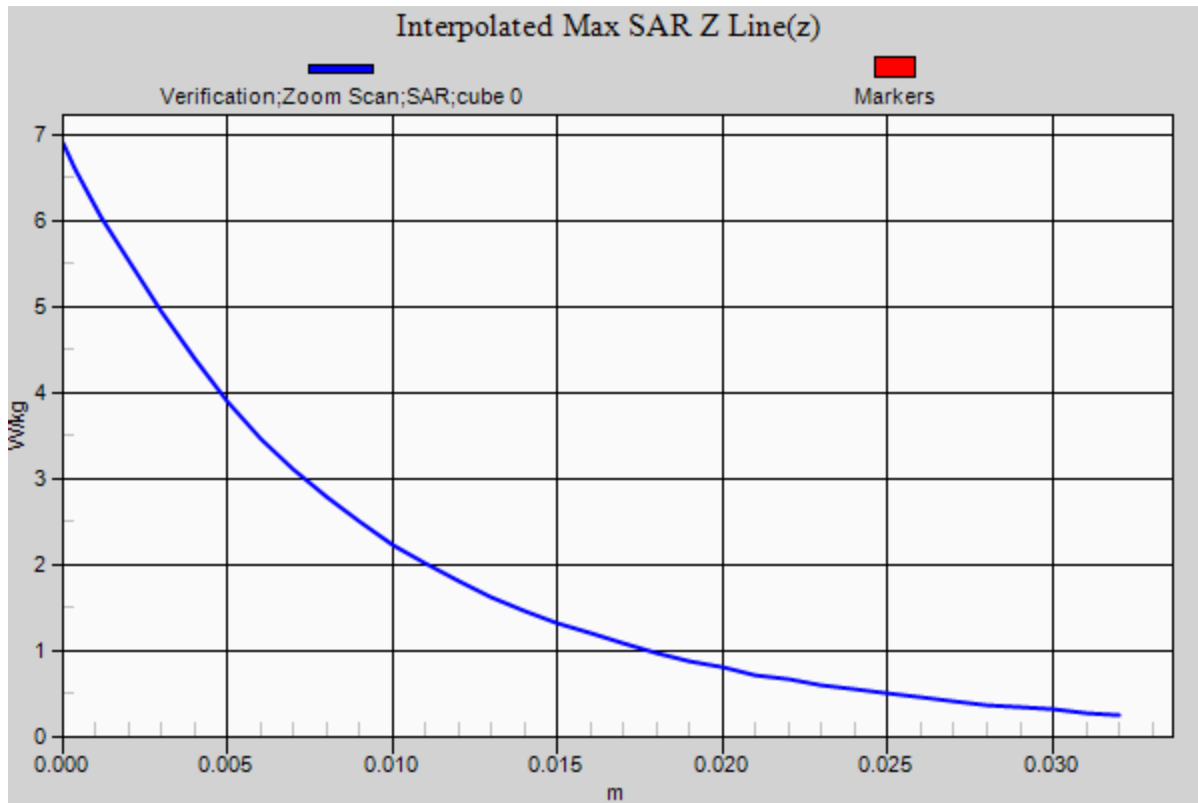

# RF Exposure Lab

## Plot 4

**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d147**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL1900; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.47$  S/m;  $\epsilon_r = 52.07$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Test Date: Date: 5/16/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.49, 7.49, 7.49); Calibrated: 4/27/2016;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1416; Calibrated: 4/15/2016

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1065

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**1900 MHz Body/Verification/Area Scan (61x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.63 W/kg


**1900 MHz Body/Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 52.612 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 6.68 W/kg

**SAR(1 g) = 3.98 W/kg; SAR(10 g) = 1.92 W/kg**

Maximum value of SAR (measured) = 5.63 W/kg

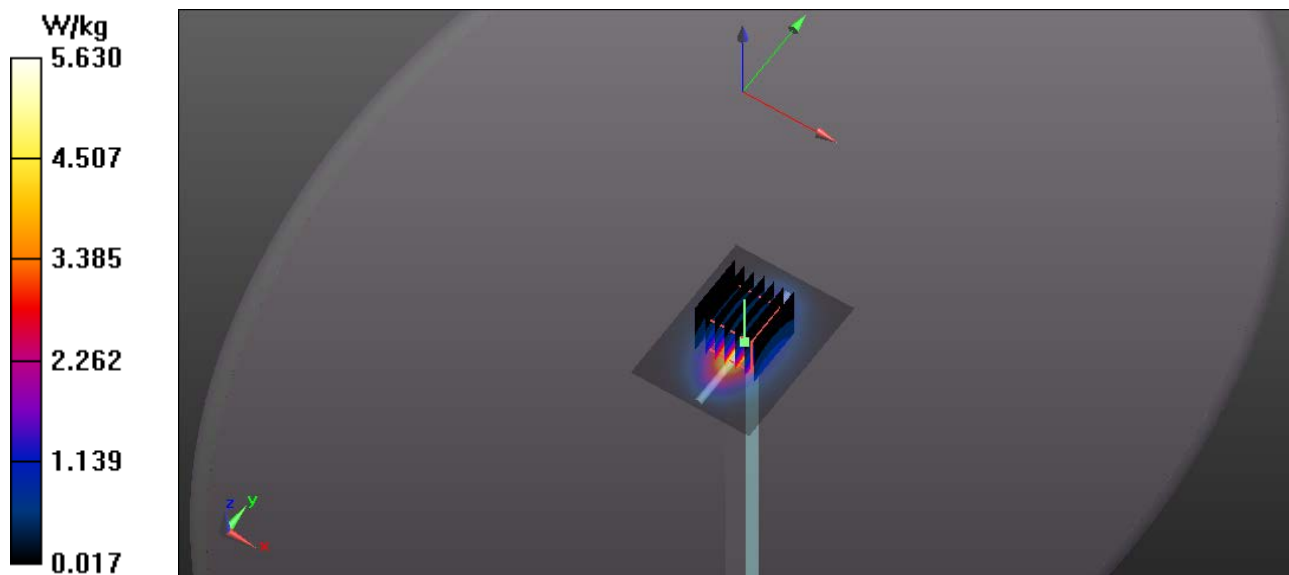

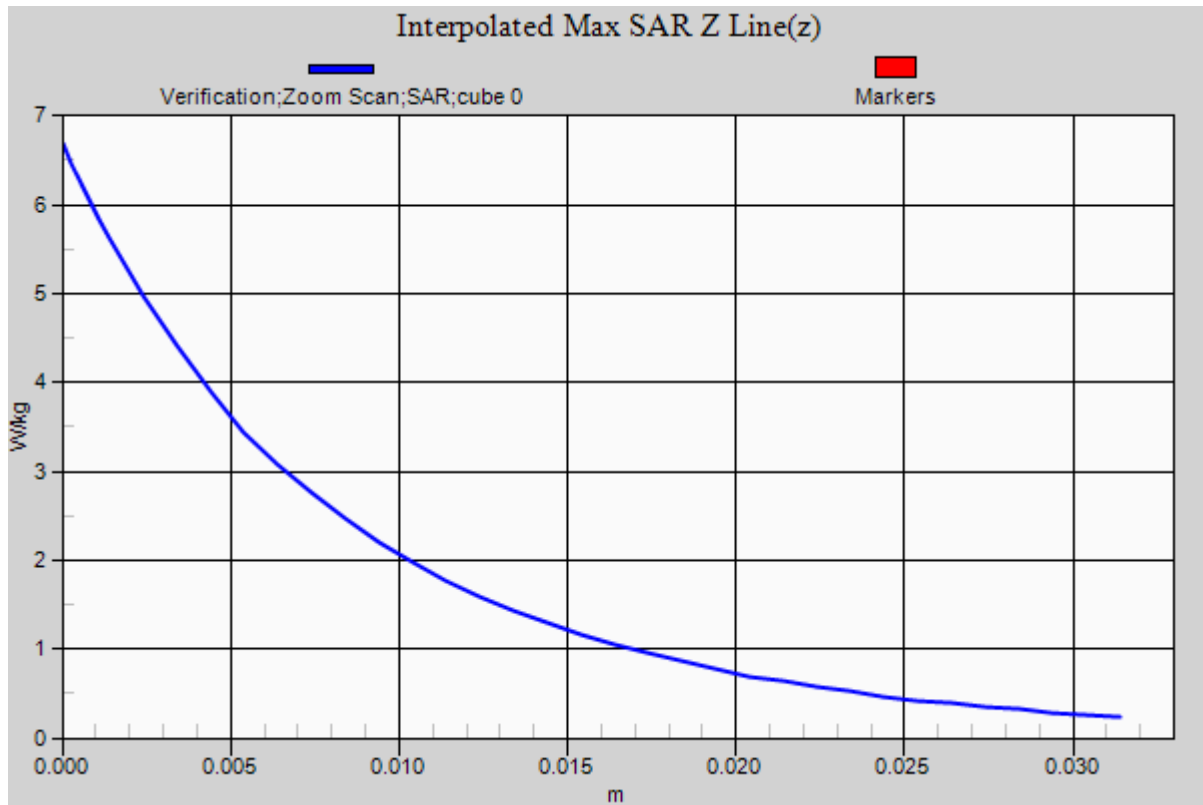

# RF Exposure Lab

## Plot 5

**DUT: Dipole 2300 MHz D2300V2; Type: D2300V2; Serial: D2300V2 - SN:1060**

Communication System: CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: MSL2300; Medium parameters used:  $f = 2300$  MHz;  $\sigma = 1.84$  S/m;  $\epsilon_r = 52.63$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Test Date: Date: 5/12/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: ES3DV3 - SN3311; ConvF(4.69, 4.69, 4.69); Calibrated: 2/16/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn759; Calibrated: 8/13/2015

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 2037

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**Body Verification/2300 MHz/Area Scan (61x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 8.95 W/kg

**Body Verification/2300 MHz/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 53.597 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 11.18 W/kg


$P_{in} = 100$  mW

**SAR(1 g) = 4.82 W/kg; SAR(10 g) = 2.2 W/kg**

Maximum value of SAR (measured) = 8.71 W/kg

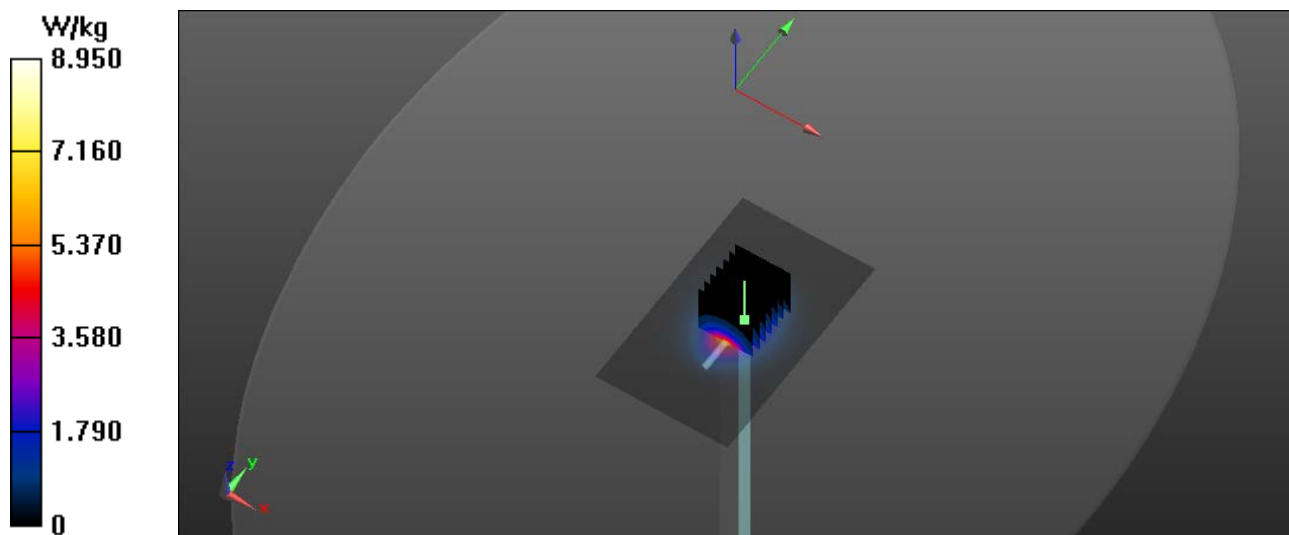



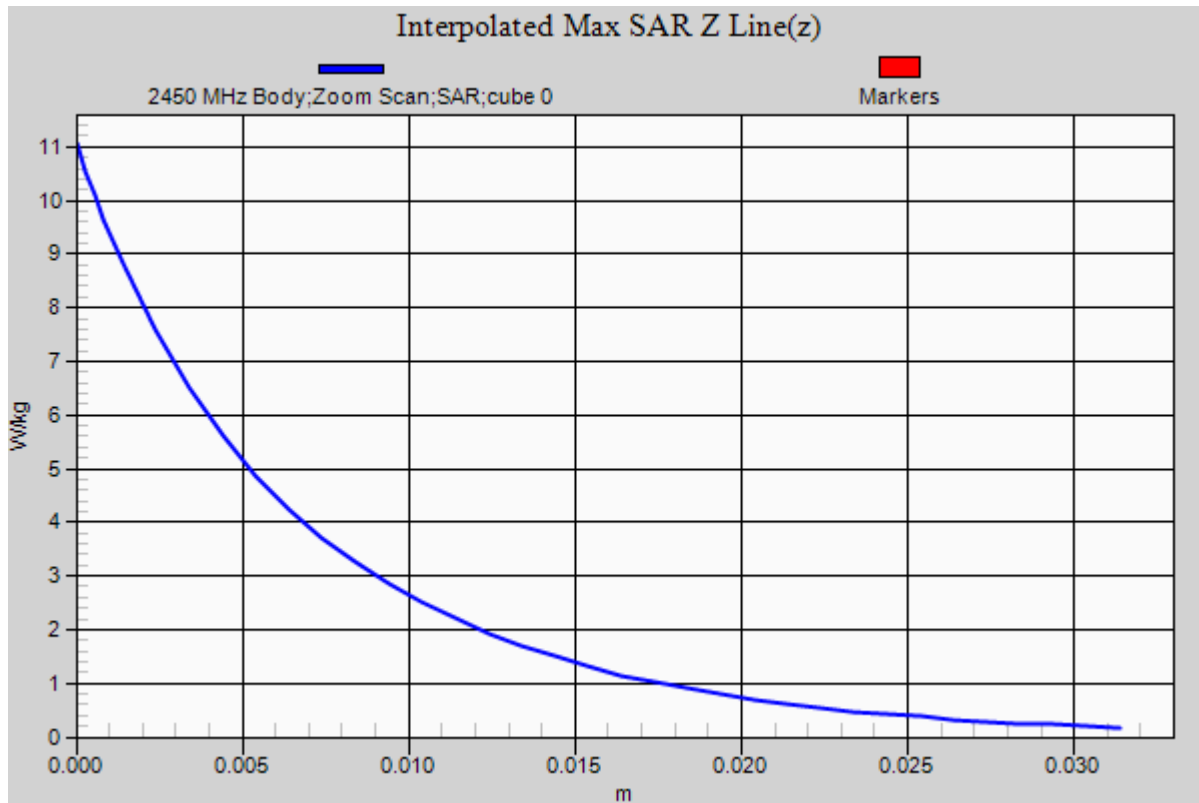

# RF Exposure Lab

## Plot 6

**DUT: Dipole 2550 MHz D2550V2; Type: D2550V2; Serial: D2550V2 - SN:1003**

Communication System: CW; Frequency: 2550 MHz; Duty Cycle: 1:1

Medium: MSL2600; Medium parameters used:  $f = 2550$  MHz;  $\sigma = 2.12$  S/m;  $\epsilon_r = 52.47$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Test Date: Date: 5/16/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: ES3DV3 - SN3311; ConvF(4.17, 4.17, 4.17); Calibrated: 2/16/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn759; Calibrated: 8/13/2015

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 2037

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**2550 MHz Body/Verification/Area Scan (61x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.18 W/kg


**2550 MHz Body/Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 54.541 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 11.5 W/kg

**SAR(1 g) = 5.41 W/kg; SAR(10 g) = 2.42 W/kg**

Maximum value of SAR (measured) = 8.98 W/kg

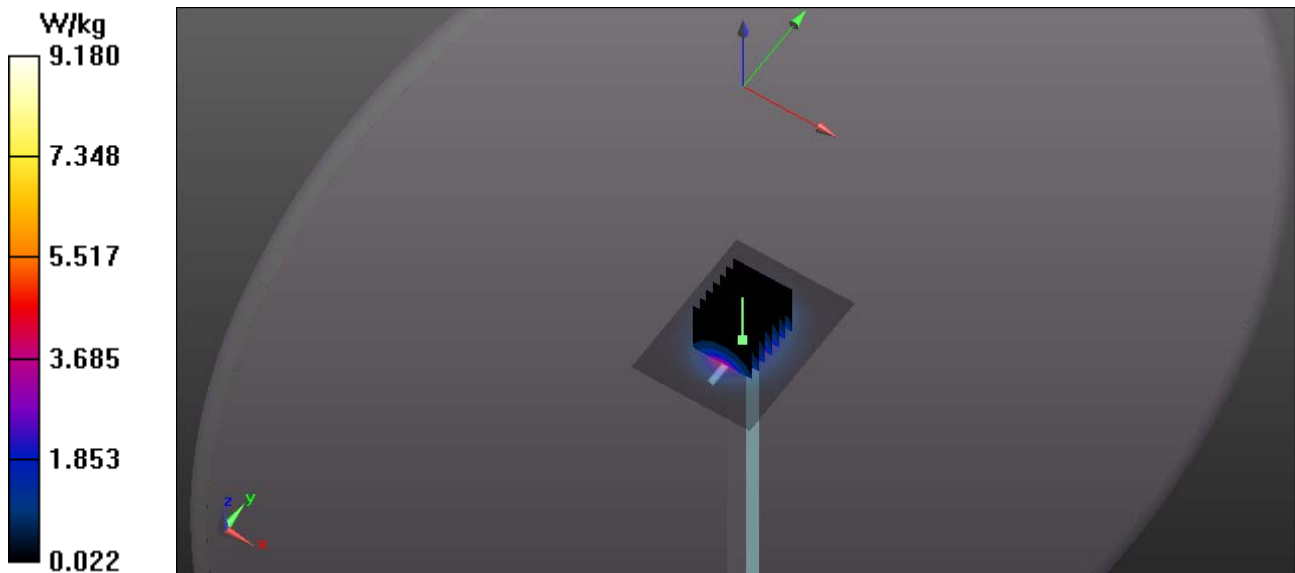

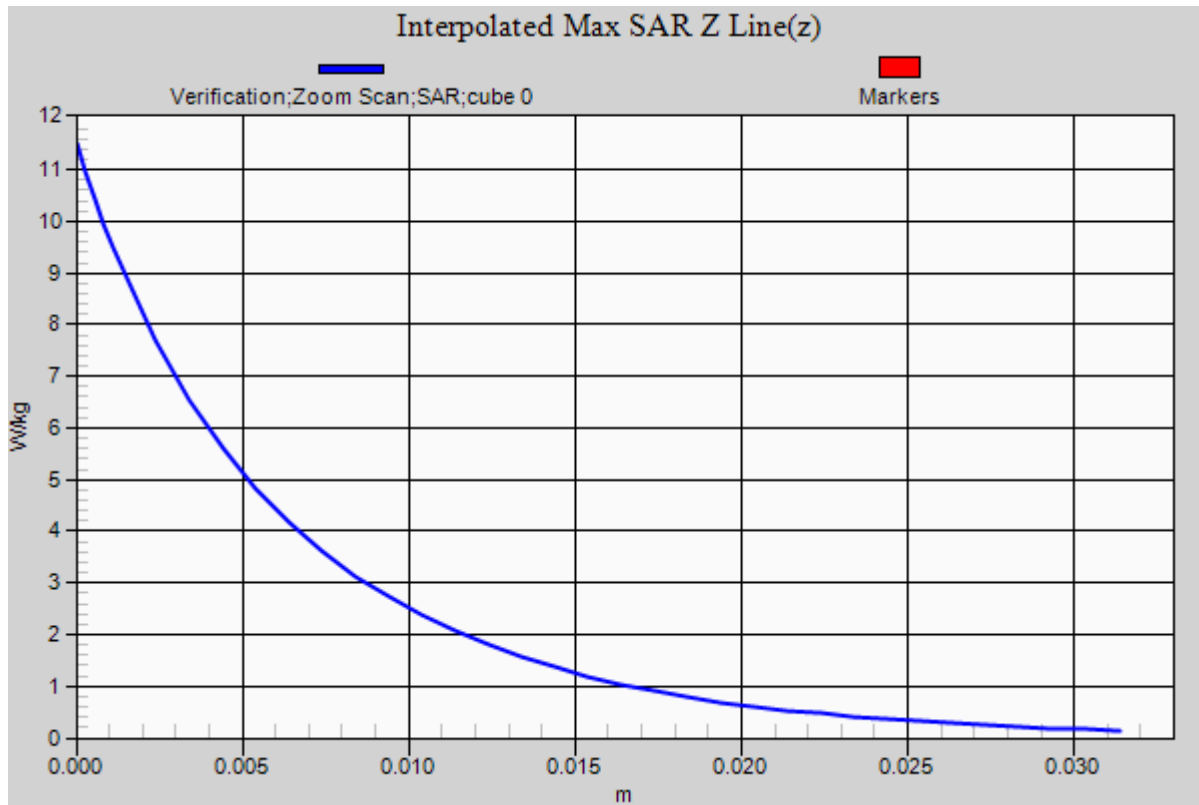

## **Appendix B – SAR Test Data Plots**

# RF Exposure Lab

## Plot 1

**DUT: EnGo; Type: Wireless TV Video Case; Serial: Eng 1**

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium: MSL750; Medium parameters used (interpolated):  $f = 782 \text{ MHz}$ ;  $\sigma = 1 \text{ S/m}$ ;  $\epsilon_r = 55.452$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section

Test Date: Date: 5/12/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.43, 9.43, 9.43); Calibrated: 4/27/2016;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**750 MHz B13 LTE Long Edge/Ant B3 Mid 1RB 24 Offset/Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.425 W/kg

**750 MHz B13 LTE Long Edge/Ant B3 Mid 1RB 24 Offset/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12.52 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.495 W/kg

**SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.256 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.431 W/kg

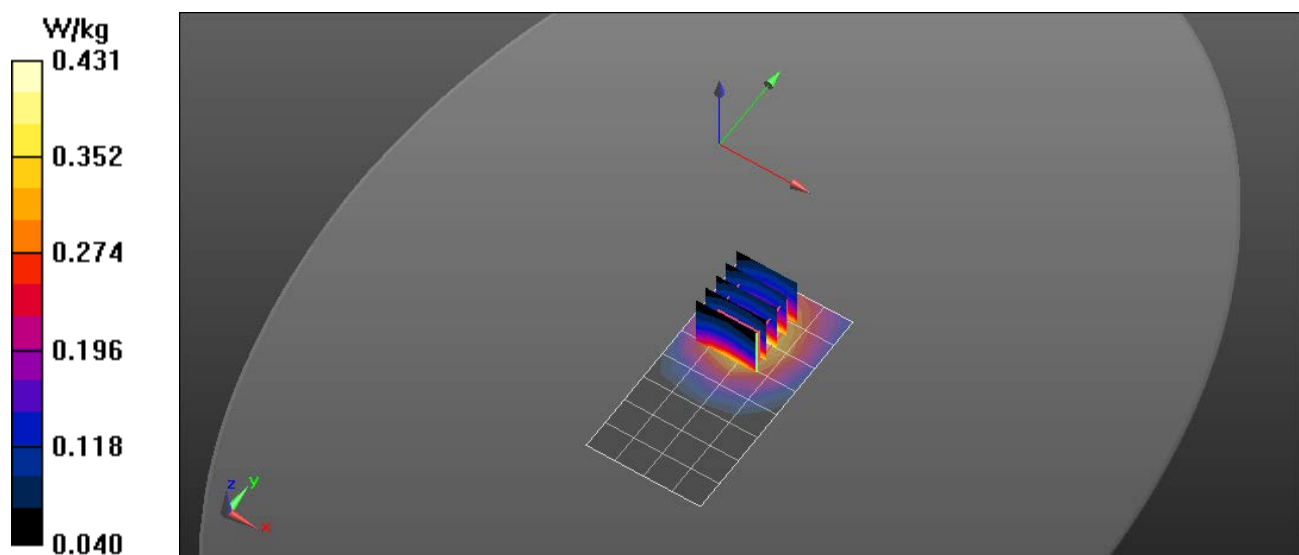

# RF Exposure Lab

## Plot 2

**DUT: EnGo; Type: Wireless TV Video Case; Serial: Eng 1**

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: MSL750; Medium parameters used (interpolated):  $f = 707.5$  MHz;  $\sigma = 0.978$  S/m;  $\epsilon_r = 55.698$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 5/10/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(9.43, 9.43, 9.43); Calibrated: 4/27/2016;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**750 MHz B12 LTE Long Edge/Ant B3 Mid 1RB 24 Offset/Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.347 W/kg

**750 MHz B12 LTE Long Edge/Ant B3 Mid 1RB 24 Offset/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 14.74 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.412 W/kg

**SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.210 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.360 W/kg

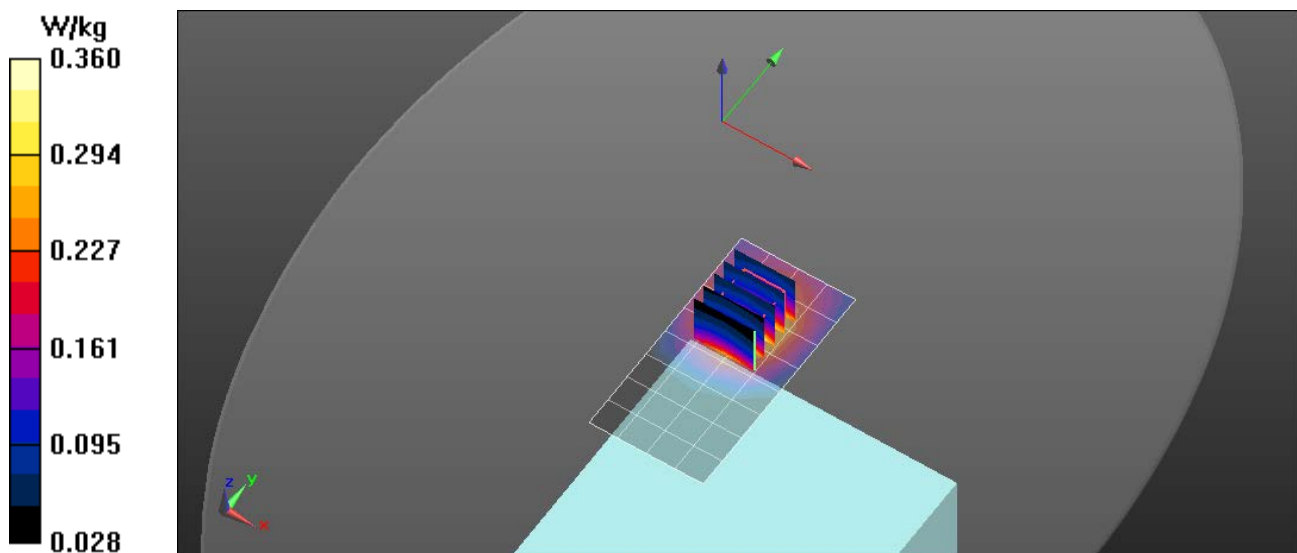

# RF Exposure Lab

## Plot 3

**DUT: EnGo; Type: Wireless TV Video Case; Serial: Eng 1**

Communication System: UMTS (WCDMA); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium: MSL835; Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.99$  S/m;  $\epsilon_r = 55.902$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 5/9/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(8.79, 8.79, 8.79); Calibrated: 8/20/2015;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/13/2015  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**835 MHz WCDMA Long Edge/Ant T2 Mid/Area Scan (9x7x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.617 W/kg

**835 MHz WCDMA Long Edge/Ant T2 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.36 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.803 W/kg

**SAR(1 g) = 0.567 W/kg; SAR(10 g) = 0.389 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.699 W/kg

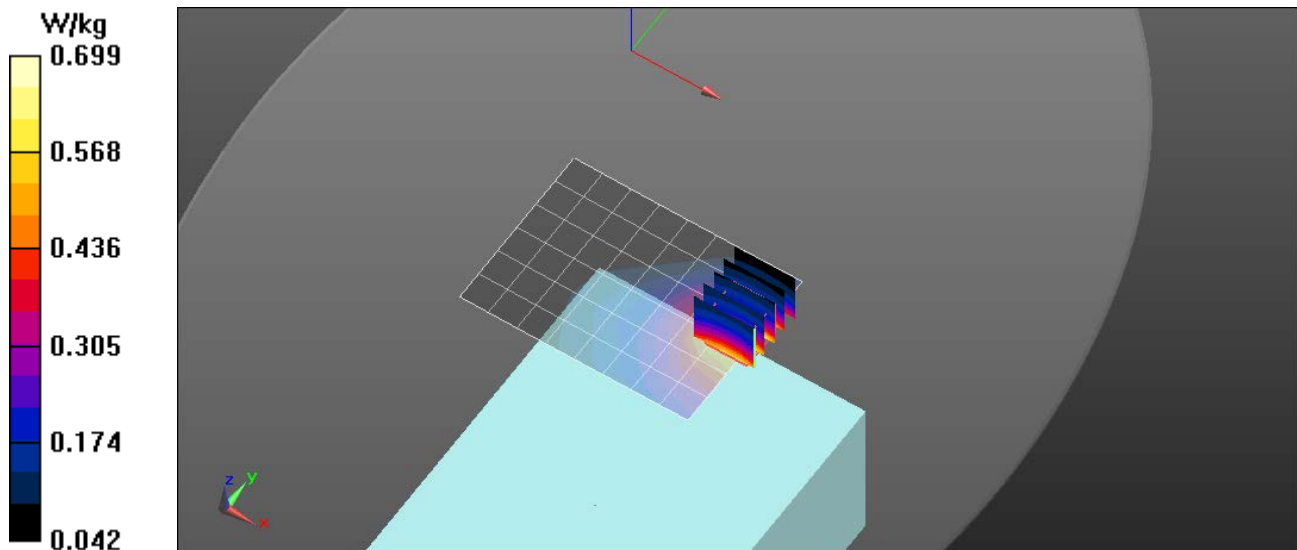

# RF Exposure Lab

## Plot 4

**DUT: EnGo; Type: Wireless TV Video Case; Serial: Eng 1**

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 831.5 MHz; Duty Cycle: 1:1  
Medium: MSL835; Medium parameters used (interpolated):  $f = 831.5$  MHz;  $\sigma = 0.987$  S/m;  $\epsilon_r = 55.924$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 5/12/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(8.79, 8.79, 8.79); Calibrated: 8/20/2015;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/13/2015  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**835 MHz LTE Long Edge/Ant T2 Mid 1RB 24 Offset/Area Scan (9x7x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.601 W/kg

**835 MHz LTE Long Edge/Ant T2 Mid 1RB 24 Offset/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 14.34 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.742 W/kg

**SAR(1 g) = 0.524 W/kg; SAR(10 g) = 0.361 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.647 W/kg

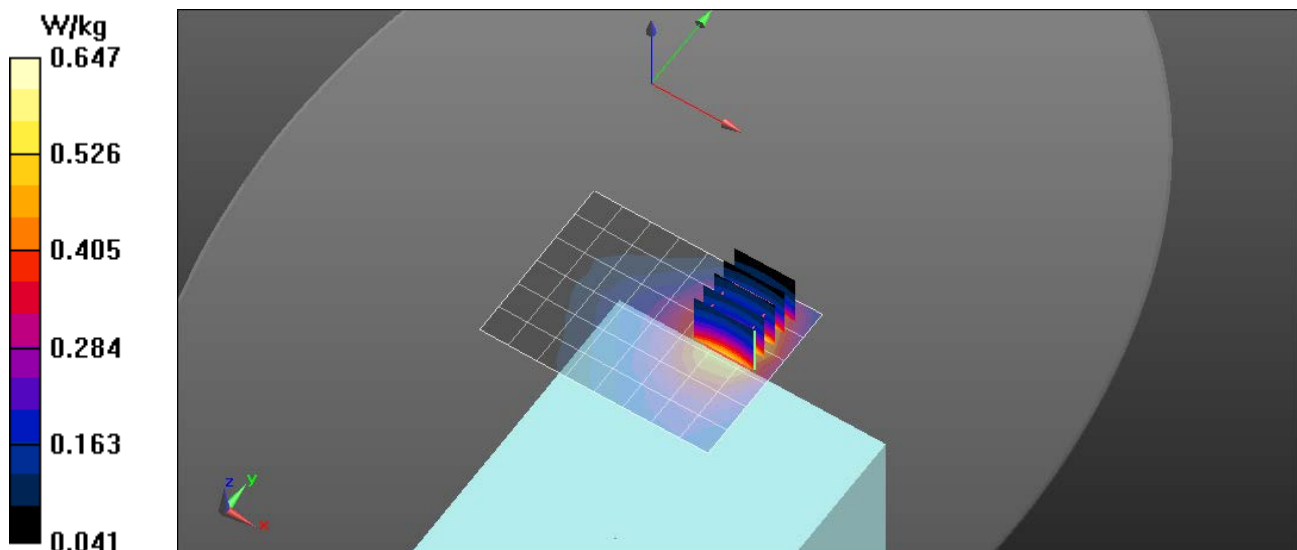



# RF Exposure Lab

## Plot 5

**DUT: EnGo; Type: Wireless TV Video Case; Serial: Eng 1**

Communication System: UMTS (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium: MSL1750; Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.503$  S/m;  $\epsilon_r = 53.375$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 5/12/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3833; ConvF(7.32, 7.32, 7.32); Calibrated: 1/27/2016;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**1750 MHz WCDMA Long Edge/Ant T1 Mid/Area Scan (9x7x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.948 W/kg

**1750 MHz WCDMA Long Edge/Ant T1 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 18.03 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.795 W/kg; SAR(10 g) = 0.495 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.03 W/kg

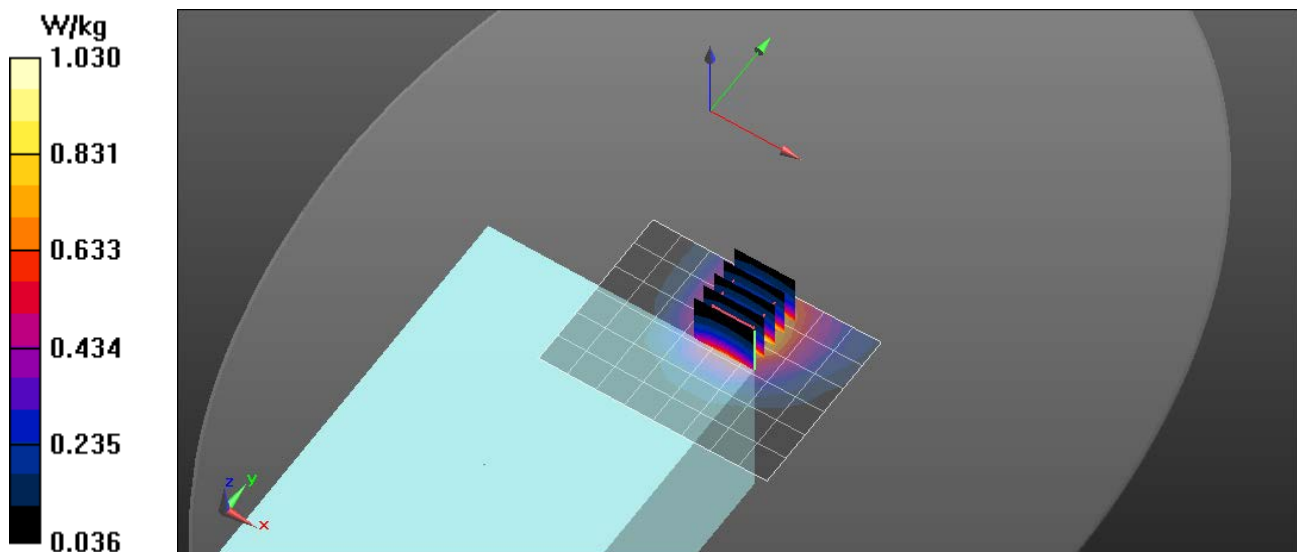

# RF Exposure Lab

## Plot 6

**DUT: EnGo; Type: Wireless TV Video Case; Serial: Eng 1**

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: MSL1750; Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.503$  S/m;  $\epsilon_r = 53.375$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 5/14/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3833; ConvF(7.32, 7.32, 7.32); Calibrated: 1/27/2016;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**1750 MHz LTE Long Edge/Ant T1 Mid 1RB 49 Offset/Area Scan (9x7x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.933 W/kg

**1750 MHz LTE Long Edge/Ant T1 Mid 1RB 49 Offset/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 16.89 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.757 W/kg; SAR(10 g) = 0.472 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.990 W/kg

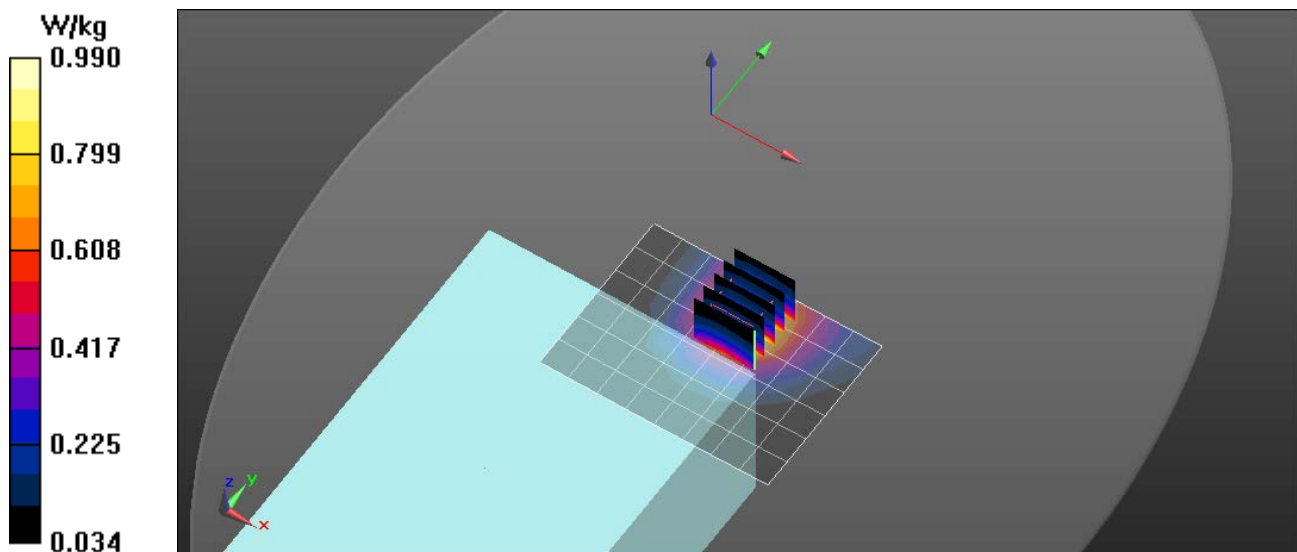

# RF Exposure Lab

## Plot 7

**DUT: EnGo; Type: Wireless TV Video Case; Serial: Eng 1**

Communication System: UMTS (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: MSL1900; Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.45$  S/m;  $\epsilon_r = 52.10$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 5/16/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.49, 7.49, 7.49); Calibrated: 4/27/2016;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**1900 MHz WCDMA Long Edge/Ant B4 Mid/Area Scan (9x7x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.922 W/kg


**1900 MHz WCDMA Long Edge/Ant B4 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.60 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.714 W/kg; SAR(10 g) = 0.433 W/kg**

Maximum value of SAR (measured) = 0.934 W/kg

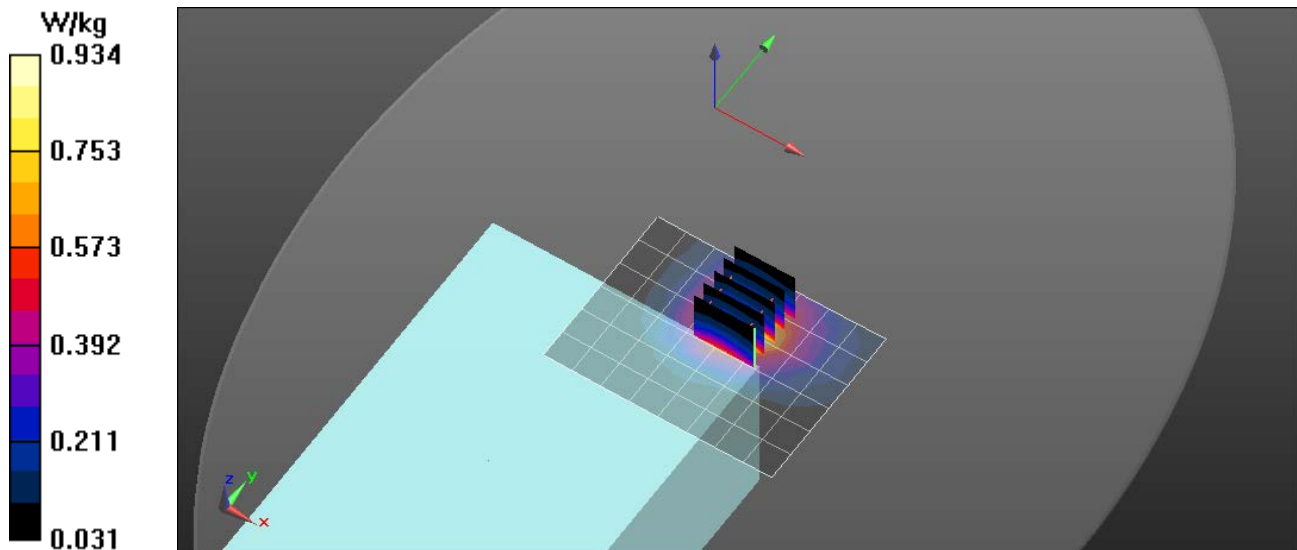

# RF Exposure Lab

## Plot 8

**DUT: EnGo; Type: Wireless TV Video Case; Serial: Eng 1**

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1882.5 MHz; Duty Cycle: 1:1  
Medium: MSL1900; Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.453$  S/m;  $\epsilon_r = 52.118$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 5/19/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3662; ConvF(7.49, 7.49, 7.49); Calibrated: 4/27/2016;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**1900 MHz LTE Long Edge/Ant T2 Mid 1RB 49 Offset/Area Scan (9x7x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.808 W/kg

**1900 MHz LTE Long Edge/Ant T2 Mid 1RB 49 Offset/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 17.96 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.399 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.835 W/kg

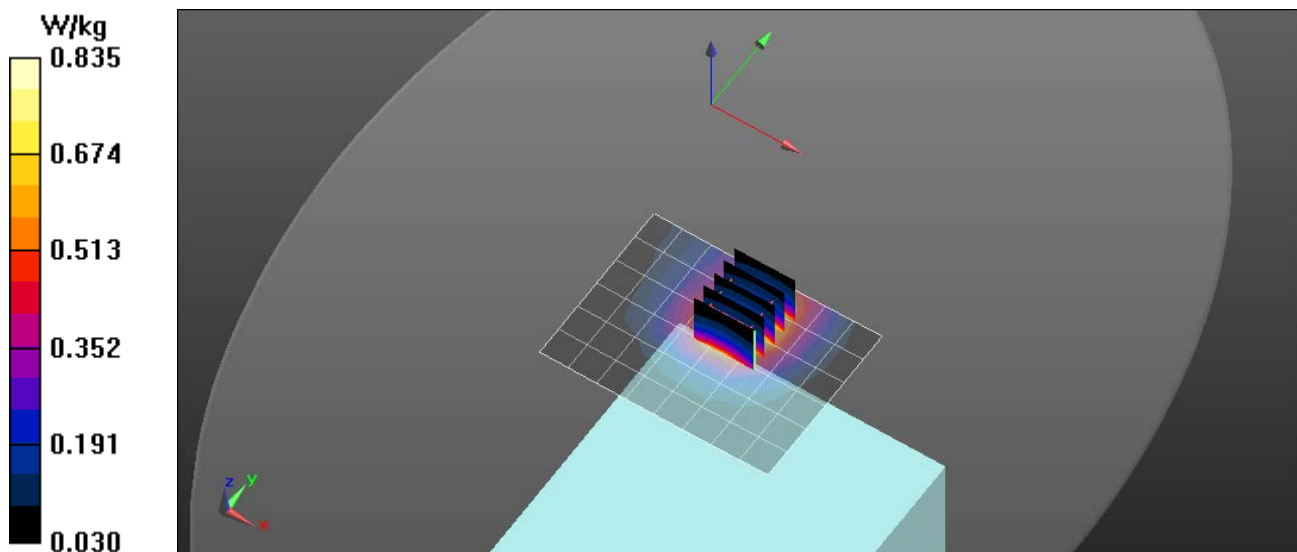

# RF Exposure Lab

## Plot 9

**DUT: EnGo; Type: Wireless TV Video Case; Serial: Eng 1**

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 2310 MHz; Duty Cycle: 1:1  
Medium: MSL2300; Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.85$  S/m;  $\epsilon_r = 52.61$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Test Date: Date: 5/13/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: ES3DV3 - SN3311; ConvF(4.69, 4.69, 4.69); Calibrated: 2/16/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/13/2015  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**2300 MHz LTE End/Ant T1 Mid 1RB 24 Offset/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 1.45 W/kg

**2300 MHz LTE End/Ant T1 Mid 1RB 24 Offset/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 27.02 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 2.60 W/kg  
**SAR(1 g) = 0.79 W/kg; SAR(10 g) = 0.354 W/kg**  
Maximum value of SAR (measured) = 1.70 W/kg

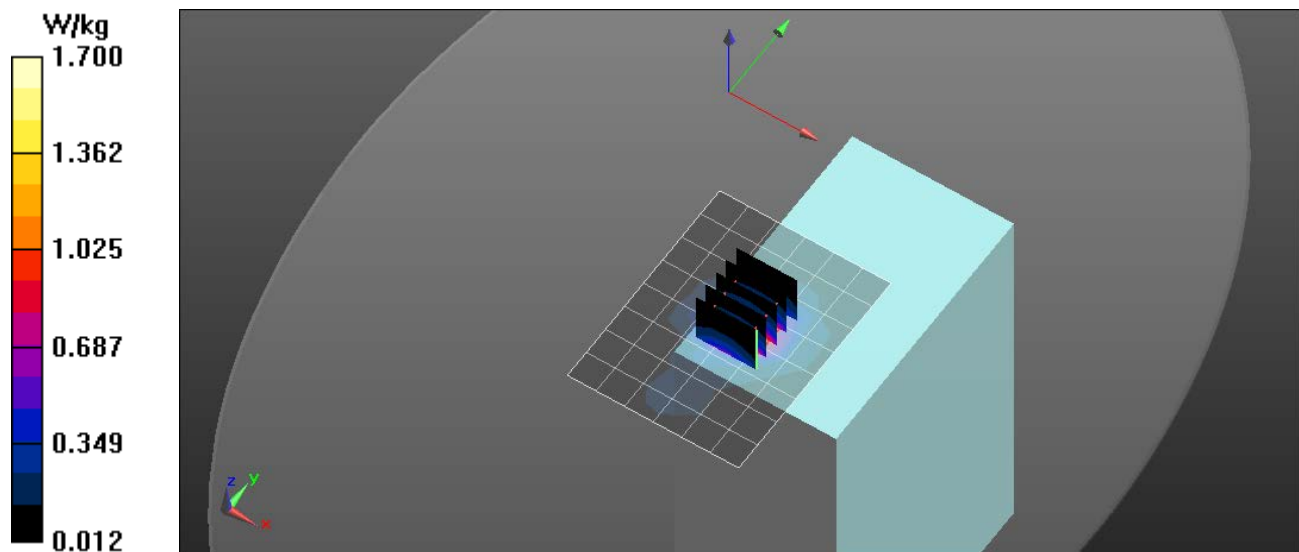

# RF Exposure Lab

## Plot 10

**DUT: EnGo; Type: Wireless TV Video Case; Serial: Eng 1**

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: MSL2550; Medium parameters used (interpolated):  $f = 2535$  MHz;  $\sigma = 2.1$  S/m;  $\epsilon_r = 52.495$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 5/17/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: ES3DV3 - SN3311; ConvF(4.44, 4.44, 4.44); Calibrated: 2/16/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/13/2015  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**2600 MHz LTE End/Ant T1 Low 1RB 49 Offset/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.31 W/kg

**2600 MHz LTE End/Ant T1 Low 1RB 49 Offset/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.37 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.28 W/kg

**SAR(1 g) = 0.787 W/kg; SAR(10 g) = 0.384 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.49 W/kg

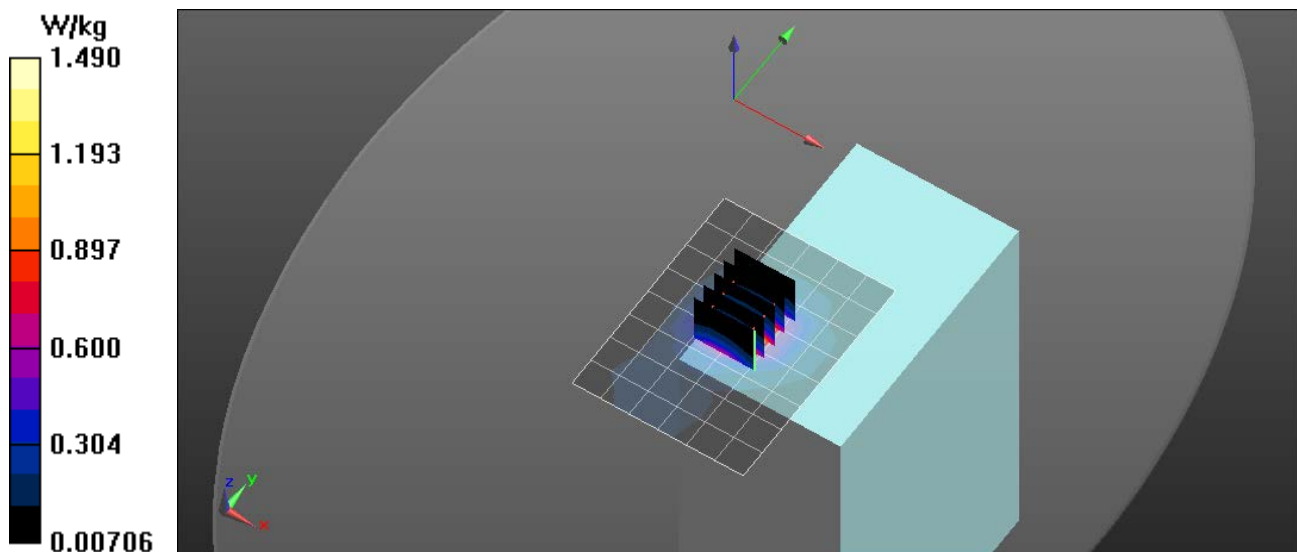

# RF Exposure Lab

## Plot 11

**DUT: EnGo; Type: Wireless TV Video Case; Serial: Eng 1**

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2593 MHz; Duty Cycle: 1:1  
Medium: MSL2550; Medium parameters used (interpolated):  $f = 2593$  MHz;  $\sigma = 2.196$  S/m;  $\epsilon_r = 52.387$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 5/21/2016; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: ES3DV3 - SN3311; ConvF(4.44, 4.44, 4.44); Calibrated: 2/16/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/13/2015  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 2037  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Procedure Notes:

**2500 MHz LTE Long Edge/Ant T2 Mid 1RB 49 Offset/Area Scan (9x7x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.34 W/kg

**2500 MHz LTE Long Edge/Ant T2 Mid 1RB 49 Offset/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.17 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.15 W/kg

**SAR(1 g) = 0.746 W/kg; SAR(10 g) = 0.359 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.40 W/kg

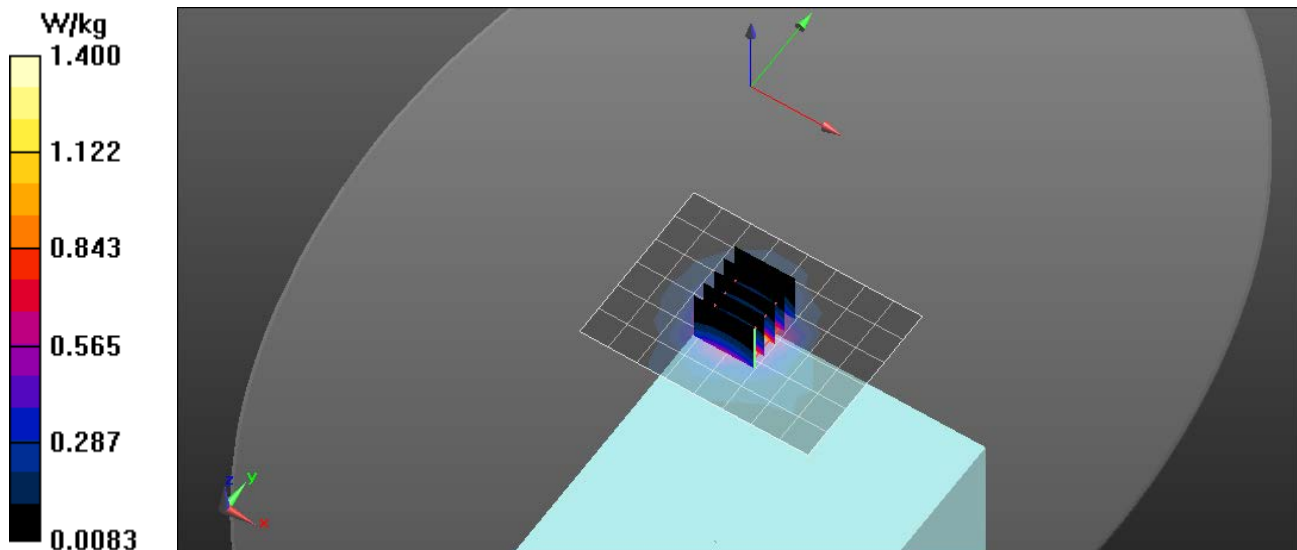



## Appendix C – SAR Test Setup Photos



**Test Configuration End 10 mm Gap**





**Test Configuration Short Side 10 mm Gap**



**Test Configuration Long Side 10 mm Gap**




**Front of Device**




**Back of Device**



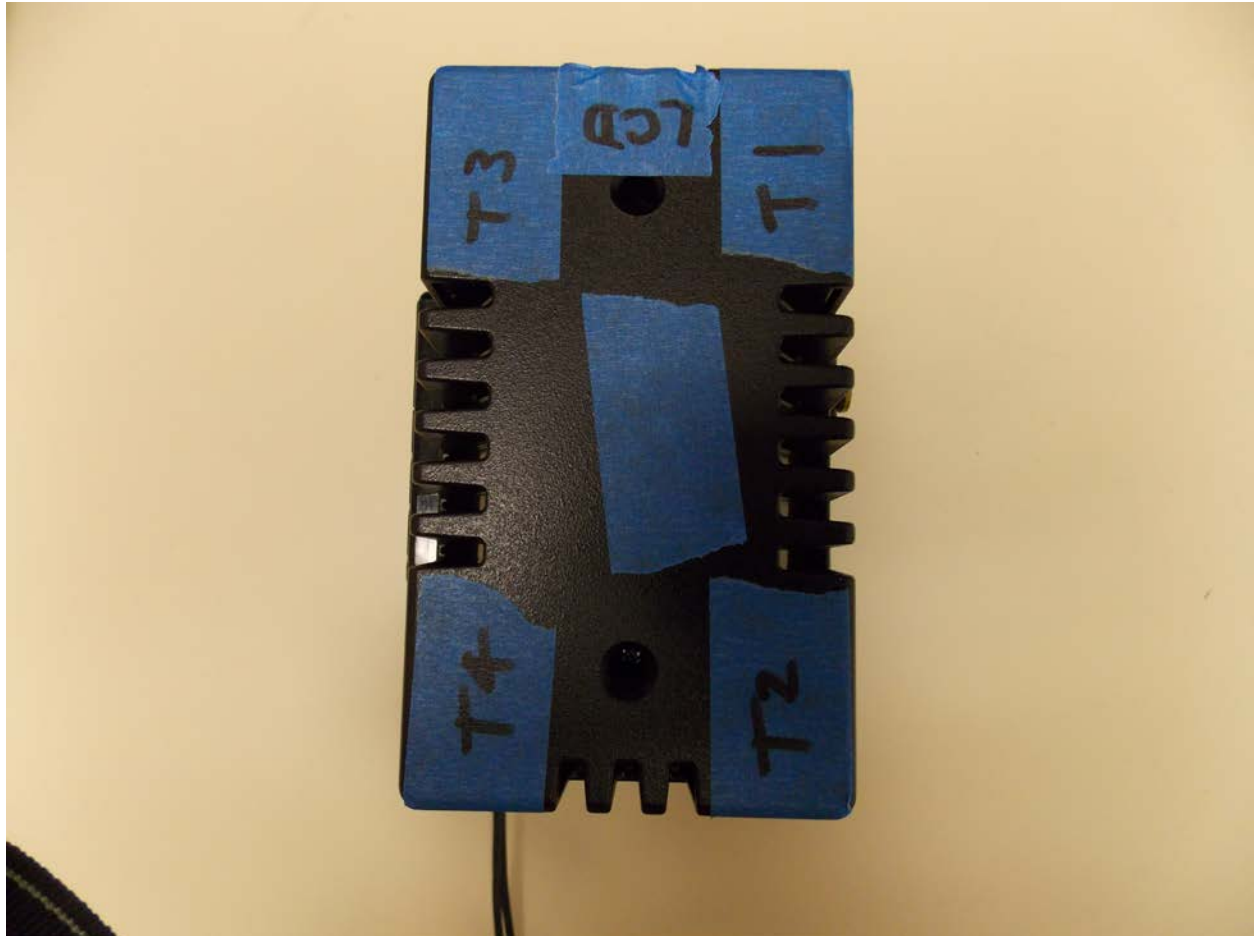

**Top of Device**

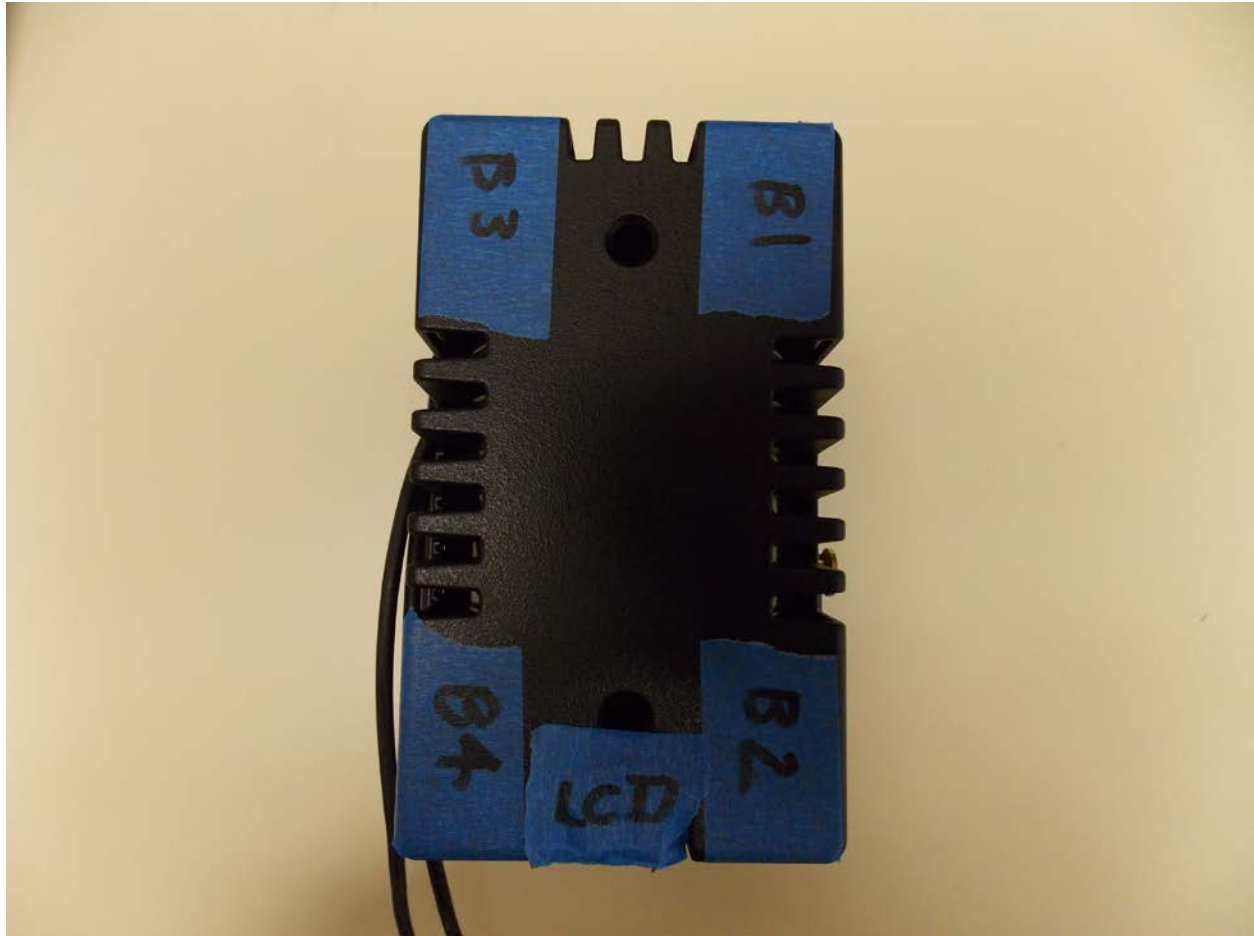

**Bottom of Device**



**Left Side of Device**



**Right Side of Device**





**Top of Device in Carrying Case Opened**



**Bottom of Device in Carrying Case Opened**





**Right Side of Device in Carrying Case Opened**



**Front of Device in Carrying Case Opened**





**Front of Device in Carrying Case Closed**

## **Appendix D – Probe Calibration Data Sheets**

gm

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **ES3-3311\_Feb16**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3311**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **February 16, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	31-Dec-15 (No. ES3-3013_Dec15)	Dec-16
DAE4	SN: 660	23-Dec-15 (No. DAE4-660_Dec15)	Dec-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by:	Name <b>Jeton Kastrati</b>	Function <b>Laboratory Technician</b>	Signature 
Approved by:	Name <b>Katja Pokovic</b>	Function <b>Technical Manager</b>	Signature 

Issued: February 18, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).



# Probe ES3DV3

## SN:3311

Manufactured: July 5, 2011  
Calibrated: February 16, 2016

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3311

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	1.28	1.07	0.47	± 10.1 %
DCP (mV) <sup>B</sup>	103.8	103.5	101.2	

### Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	220.4	±3.0 %
		Y	0.0	0.0	1.0		222.4	
		Z	0.0	0.0	1.0		211.8	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3311

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k=2)
300	45.3	0.87	7.52	7.52	7.52	0.15	1.71	± 13.3 %
600	42.7	0.88	6.73	6.73	6.73	0.15	1.50	± 13.3 %
835	41.5	0.90	6.43	6.43	6.43	0.40	1.75	± 12.0 %
1640	40.3	1.29	5.49	5.49	5.49	0.47	1.54	± 12.0 %
2300	39.5	1.67	4.92	4.92	4.92	0.79	1.24	± 12.0 %
2450	39.2	1.80	4.64	4.64	4.64	0.80	1.30	± 12.0 %
2600	39.0	1.96	4.44	4.44	4.44	0.80	1.35	± 12.0 %

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3311

### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k=2)
300	58.2	0.92	7.31	7.31	7.31	0.13	1.00	± 13.3 %
600	56.1	0.95	6.76	6.76	6.76	0.12	1.50	± 13.3 %
835	55.2	0.97	6.33	6.33	6.33	0.62	1.40	± 12.0 %
1640	53.8	1.40	5.33	5.33	5.33	0.51	1.53	± 12.0 %
2300	52.9	1.81	4.69	4.69	4.69	0.80	1.25	± 12.0 %
2450	52.7	1.95	4.43	4.43	4.43	0.80	1.20	± 12.0 %
2600	52.5	2.16	4.17	4.17	4.17	0.80	1.22	± 12.0 %

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.