

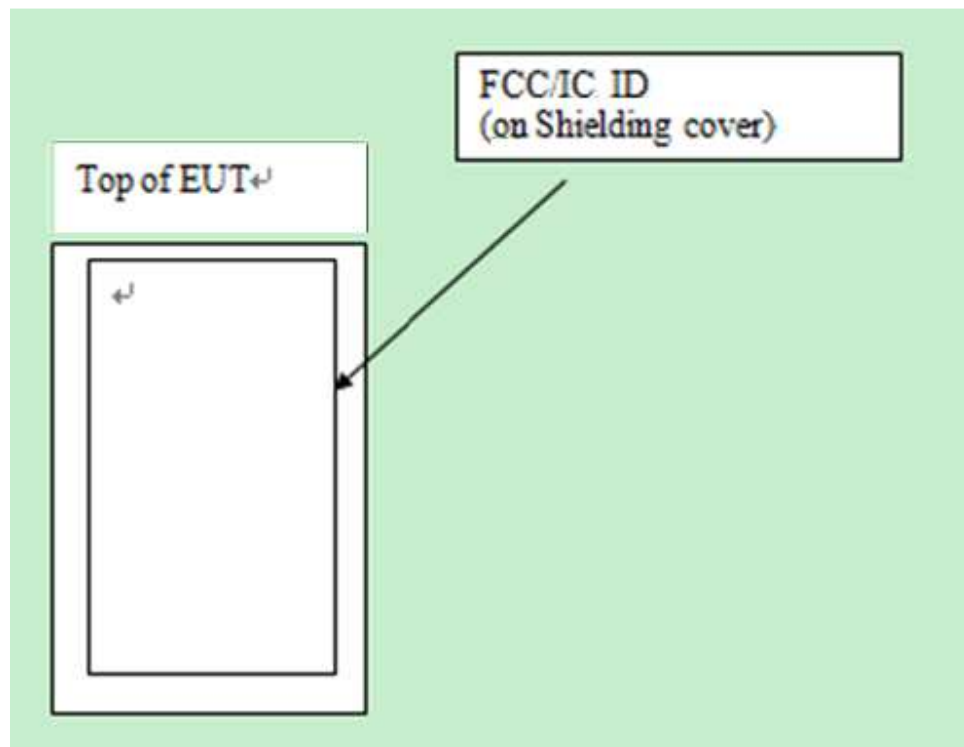



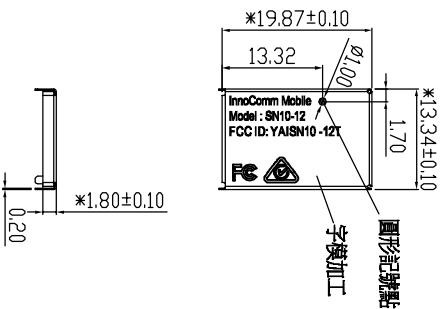


FCC ID : YAI5N10-12T



MODIFICATION		
VER	DESCRIPTION	DATE
R0A	Release	08/17'17



InnoComm

Mobile Technology Corp.

Drawn: Willey Lee

Designed: Willey Lee

Note :

- 1.The general tolerance is $\pm 0.10\text{mm}$ / Angle is $\pm 1.0^\circ$
- 2."*" Critical dimensions.
- 3.Critical dimensions CPK measurement must above 1.33.
- 4.The thickness is 0.2mm
- 5.Material: 洋白銅
- 6.Burr 0.05mm max.
- 7.Need to comply with RoHS

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INNOCOMM MOBILE TECHNOLOGY CORP. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR DEVICES WITHOUT PERMISSION.

Checked:

Approved:

DIMENSIONAL TOLERANCES

Y

M1

M2

S1

S2

P1

P2

C

0-6

0.05

0.10

0.15

0.20

0.25

0.30

0.40

0.5

1.0

2.0

3.0

4.0

5.0

6.0

7.0

8.0

9.0

10.0

11.0

12.0

13.0

14.0

15.0

16.0

17.0

18.0

19.0

20.0

21.0

22.0

23.0

24.0

25.0

26.0

27.0

28.0

29.0

30.0

31.0

32.0

33.0

34.0

35.0

36.0

37.0

38.0

39.0

40.0

41.0

42.0

43.0

44.0

45.0

46.0

47.0

48.0

49.0

50.0

51.0

52.0

53.0

54.0

55.0

56.0

57.0

58.0

59.0

60.0

61.0

62.0

63.0

64.0

65.0

66.0

67.0

68.0

69.0

70.0

71.0

72.0

73.0

74.0

75.0

76.0

77.0

78.0

79.0

80.0

81.0

82.0

83.0

84.0

85.0

86.0

87.0

88.0

89.0

90.0

91.0

92.0

93.0

94.0

95.0

96.0

97.0

98.0

99.0

100.0

101.0

102.0

103.0

104.0

105.0

106.0

107.0

108.0

109.0

110.0

111.0

112.0

113.0

114.0

115.0

116.0

117.0

118.0

119.0

120.0

121.0

122.0

123.0

124.0

125.0

126.0

127.0

128.0

129.0

130.0

131.0

132.0

133.0

134.0

135.0

136.0

137.0

138.0

139.0

140.0

141.0

142.0

143.0

144.0

145.0

146.0

147.0

148.0

149.0

150.0

151.0

152.0

153.0

154.0

155.0

156.0

157.0

158.0

159.0

160.0

161.0

162.0

163.0

164.0

165.0

166.0

167.0

168.0

169.0

170.0

171.0

172.0

173.0

174.0

175.0

176.0

177.0

178.0

179.0

180.0

181.0

182.0

183.0

184.0

185.0

186.0

187.0

188.0

189.0

190.0

191.0

192.0

193.0

194.0

195.0

196.0

197.0

198.0

199.0

200.0

201.0

202.0

203.0

204.0

205.0

206.0

207.0

208.0

209.0

210.0

211.0

212.0

213.0

214.0

215.0

216.0

217.0

218.0

219.0

220.0

221.0

222.0

223.0

224.0

225.0

226.0

227.0

228.0

229.0

230.0

231.0

232.0

233.0

234.0

235.0

236.0

237.0

238.0

239.0

240.0

241.0

242.0

243.0

244.0

245.0

246.0

247.0

248.0

249.0

250.0

251.0

252.0

253.0

254.0

255.0

256.0

257.0

258.0

259.0

260.0

261.0

262.0

263.0

264.0

265.0

266.0

267.0

268.0

269.0

270.0