



# **FCC PART 15.247 TEST REPORT**

For

## **Hytera Communications Corporation Limited**

Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, 518057 China

FCC ID: YAMPT350PF8

Report Type: **Product Name:** 

TETRA PORTABLE TERMINAL Original Report

Report Number: RDG180926001-00A

**Report Date:** 2018-11-01

Dean Lau

RF Supervisor **Reviewed By:** 

Bay Area Compliance Laboratories Corp. (Dongguan)

Dean. Lau

**Test Laboratory:** No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "\*"

## TABLE OF CONTENTS

PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) OBJECTIVE RELATED SUBMITTAL(S)/GRANT(S) TEST METHODOLOGY MEASUREMENT UNCERTAINTY TEST FACILITY  SYSTEM TEST CONFIGURATION DESCRIPTION OF TEST CONFIGURATION EUT EXERCISE SOFTWARE EQUIPMENT MODIFICATIONS	4 4 5 6 6 6 6
RELATED SUBMITTAL(S)/GRANT(S) TEST METHODOLOGY MEASUREMENT UNCERTAINTY TEST FACILITY  SYSTEM TEST CONFIGURATION DESCRIPTION OF TEST CONFIGURATION EUT EXERCISE SOFTWARE	4 5 6 6 6 7
TEST METHODOLOGY	4 5 6 6 6 6 7
MEASUREMENT UNCERTAINTY TEST FACILITY  SYSTEM TEST CONFIGURATION  DESCRIPTION OF TEST CONFIGURATION  EUT Exercise Software	5 6 6 6 6 7
TEST FACILITY  SYSTEM TEST CONFIGURATION  DESCRIPTION OF TEST CONFIGURATION  EUT EXERCISE SOFTWARE	5 6 6 6 7 8
SYSTEM TEST CONFIGURATION  DESCRIPTION OF TEST CONFIGURATION  EUT Exercise Software	6 6 6 7 8
DESCRIPTION OF TEST CONFIGURATION	6 6 7 8
EUT Exercise Software	6 6 7 8
	6 7 8
	6 7 8
SUPPORT CABLE LIST AND DETAILS	7 8 9
BLOCK DIAGRAM OF TEST SETUP	8 9
SUMMARY OF TEST RESULTS	9
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE	ч
APPLICABLE STANDARD	
FCC §15.203 - ANTENNA REQUIREMENT	
APPLICABLE STANDARD	
Antenna Connector Construction	
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	
APPLICABLE STANDARD	11
EUT SETUP	
EMI TEST RECEIVER SETUP	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	15
APPLICABLE STANDARD	
EUT SETUP.	
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST DATA	
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	
APPLICABLE STANDARD	
TEST EQUIPMENT LIST AND DETAILS	
TEST PROCEDURE	
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	-
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST FROCEDURE  TEST EQUIPMENT LIST AND DETAILS.	

Test Data	31
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	37
APPLICABLE STANDARD	
Test Procedure	
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	37
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)	41
APPLICABLE STANDARD	41
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS.	
Test Data	41
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	57
APPLICABLE STANDARD	57
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	
Test Data	
FCC §15.247(d) - BAND EDGES TESTING	64
APPLICABLE STANDARD	64
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	65

### **GENERAL INFORMATION**

#### **Product Description for Equipment under Test (EUT)**

	<b>EUT Name:</b>	TETRA PORTABLE TERMINAL
	EUT Model:	PT350 F8
N	<b>Aultiple Model:</b>	PT310 F8
	FCC ID:	YAMPT350PF8
Rated	Input Voltage:	3.85V DC from battery
	P/N:	PS2019
Adapter	Model:	S024AZM1200200
Information	Input:	AC 100-240V, 50/60Hz, 600mA
	Output:	DC 12V, 2000mA
<b>External Dimension:</b>		123.5mm(L)*55.5mm(W)*32.5mm(H)
	Serial Number:	180926001
EUT	<b>Received Date:</b>	2018-10-10

Note: The series products models PT350 F8, PT310 F8 are electrically identical, we selected PT350 F8 for fully testing, the details of the difference between them were explained in the attached declaration letter.

#### **Objective**

This report is prepared on behalf of *Hytera Communications Corporation Limited* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

#### Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: YAMPT350PF8. FCC Part 22, 74, 90 TNF submissions with FCC ID: YAMPT350PF8.

### **Test Methodology**

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

### **Measurement Uncertainty**

Parameter	Measurement Uncertainty		
Occupied Channel Bandwidth	±5 %		
RF output power, conducted	±0.61dB		
Power Spectral Density, conducted	±0.61 dB		
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dI 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB		
Unwanted Emissions, conducted	±1.5 dB		
Temperature	±1 °C		
Humidity	±5%		
DC and low frequency voltages	±0.4%		
Duty Cycle	1%		
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)		

### **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218,the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

### **SYSTEM TEST CONFIGURATION**

### **Description of Test Configuration**

The system was configured for testing in engineering mode.

#### **EUT Exercise Software**

The software:' Blue Test 3 ' was used during test, which was provided by manufacturer. The maximum power level was configured by the software as below table:

Test Software Version	Bluetest				
Test Frequency	2402MHz 2441MHz 2480MHz				
GFSK	63	63			
π/4-DQPSK	63	63	63		
8-DPSK	63	63	63		


### **Equipment Modifications**

No modification was made to the EUT.

### **Support Cable List and Details**

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	То
Adapter Cable	No	No	1.5	Adapter	Charger Base

## **Block Diagram of Test Setup**

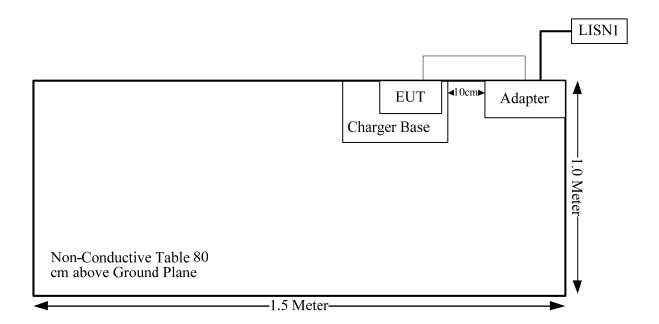

FCC Rules	Description of Test	Result
§15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
\$15.205, \$15.209, \$15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

### FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

#### **Applicable Standard**

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq$  50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]  $\cdot [\sqrt{f(GHz)}] \le 3.0$  for 1-g SAR and  $\le 7.5$  for 10-g extremity SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $\leq 5$  mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

#### **Measurement Result**

The max conducted power including tune-up tolerance is 9.0 dBm (7.94 mW). [(max. power of channel, mW)/(min. test separation distance, mm)][ $\sqrt{f(GHz)}$ ] = 7.94/5\*( $\sqrt{2}$ .480) = 2.5< 3.0

So the stand-alone SAR evaluation is not necessary.

### FCC §15.203 - ANTENNA REQUIREMENT

#### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **Antenna Connector Construction**

The EUT has one internal antenna arrangement for BT, and the antenna gain is -3 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.


Page 10 of 71

### FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

#### **Applicable Standard**

FCC§15.207(a)

#### **EUT Setup**

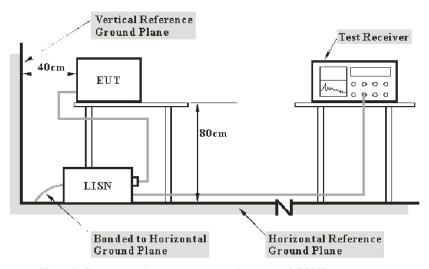

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

#### **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

#### **Test Procedure**

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### **Corrected Amplitude & Margin Calculation**

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

 $V_C$ : corrected voltage amplitude  $V_R$ : reading voltage amplitude  $A_c$ : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The "Margin" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### **Test Data**


#### **Environmental Conditions**

Temperature:	28.1 °C
Relative Humidity:	53 %
ATM Pressure:	100.5 kPa

The testing was performed by Lily Xie on 2018-10-27.

Test Mode: Transmitting


### AC120V, 60 Hz, Line:

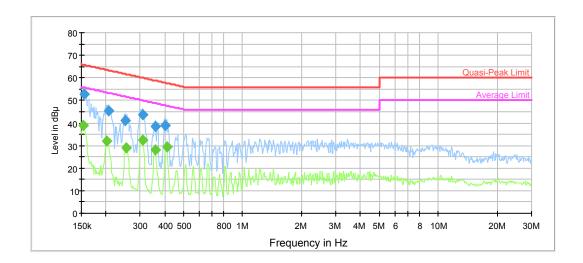

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.154858	52.8	9.000	L1	11.1	12.9	65.7	Compliance
0.206306	45.4	9.000	L1	10.6	17.9	63.3	Compliance
0.251783	41.3	9.000	L1	10.3	20.4	61.7	Compliance
0.309742	43.8	9.000	L1	10.1	16.2	60.0	Compliance
0.360371	38.5	9.000	L1	10.0	20.2	58.7	Compliance
0.402900	38.7	9.000	L1	10.0	19.1	57.8	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.153629	39.1	9.000	L1	11.1	16.7	55.8	Compliance
0.203045	32.1	9.000	L1	10.6	21.4	53.5	Compliance
0.253797	29.1	9.000	L1	10.3	22.5	51.6	Compliance
0.307284	32.2	9.000	L1	10.1	17.8	50.0	Compliance
0.357511	27.9	9.000	L1	10.0	20.9	48.8	Compliance
0.409372	29.4	9.000	L1	10.0	18.3	47.7	Compliance

### AC120V, 60 Hz, Neutral:

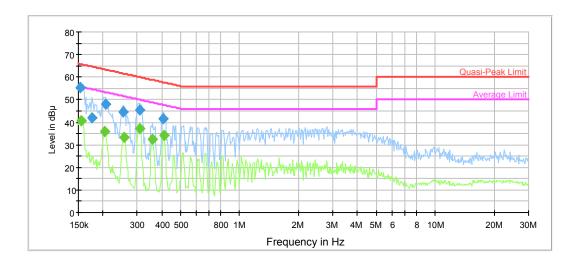

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.153629	55.3	9.000	N	11.1	10.5	65.8	Compliance
0.175915	41.9	9.000	N	10.8	22.8	64.7	Compliance
0.206306	48.0	9.000	N	10.6	15.4	63.4	Compliance
0.253797	44.5	9.000	N	10.3	17.1	61.6	Compliance
0.309742	45.6	9.000	N	10.1	14.4	60.0	Compliance
0.406123	41.4	9.000	N	10.0	16.3	57.7	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.156097	40.6	9.000	N	11.1	15.1	55.7	Compliance
0.204669	35.8	9.000	N	10.6	17.6	53.4	Compliance
0.257874	33.1	9.000	N	10.3	18.4	51.5	Compliance
0.307284	37.0	9.000	N	10.1	13.0	50.0	Compliance
0.360371	32.3	9.000	N	10.0	16.4	48.7	Compliance
0.409372	34.4	9.000	N	10.0	13.3	47.7	Compliance


### FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

#### **Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

### **EUT Setup**

#### **Below 1GHz:**

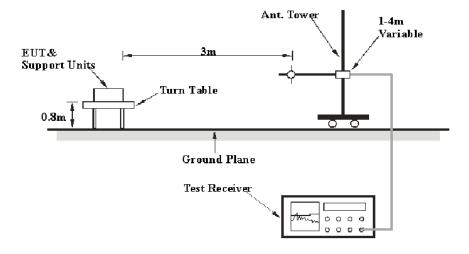

#### **Above 1GHz:**

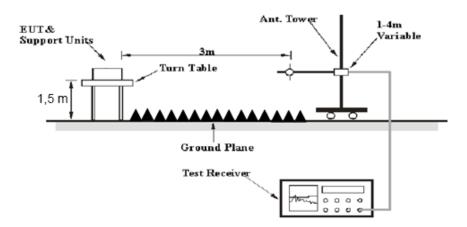

The radiated emission Below 1GHz tests were performed in the 3 meters chamber A, above 1GHz tests were performed in the 3 meters chamber B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### **EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
Above I GHZ	1MHz	10 Hz	/	AV

#### **Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2018-09-05	2019-09-05
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2018-01-04	2019-01-04
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
Ducommun Technolagies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5- S	OE01601525	2018-06-16	2019-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### **Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

#### **Test Data**

#### **Environmental Conditions**


Temperature:	24.3~26.4 °C
Relative Humidity:	30~32 %
ATM Pressure:	100.5~100.8 kPa

<sup>\*</sup> The testing was performed by Blake Yang & Sunny Cen from 2018-10-27 & 2018-10-30.

Test Mode: Transmitting


### 1) 30MHz-1GHz (GFSK Middle channel was the worst)

### **Horizontal:**

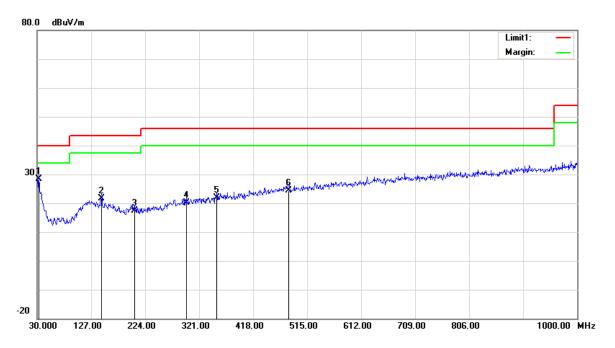

Frequency (MHz)	Receiver Reading (dBµV)	Remark	Correction Factor (dB/m)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
32.9100	29.00	QP	-0.50	28.50	40.00	11.50
145.4300	27.59	QP	-5.99	21.60	43.50	21.90
204.6000	23.90	QP	-6.60	17.30	43.50	26.20
297.7200	24.04	QP	-3.94	20.10	46.00	25.90
353.0100	24.71	QP	-2.91	21.80	46.00	24.20
482.0200	24.75	QP	-0.25	24.50	46.00	21.50

### Vertical:

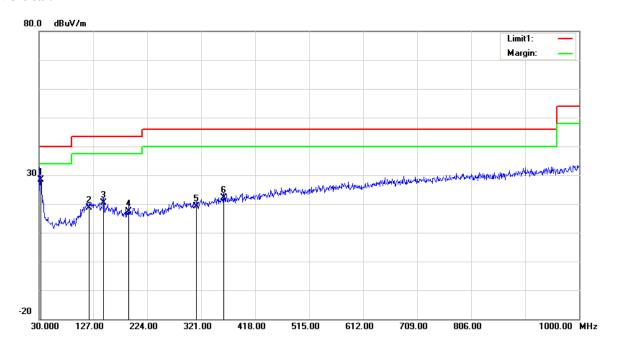

Frequency (MHz)	Receiver Reading (dBµV)	Remark	Correction Factor (dB/m)	Cord. Amp. (dBµV/m)	Limit (dBμV/m)	Margin (dB)
32.9100	29.00	QP	-0.50	28.50	40.00	11.50
120.2100	23.42	QP	-4.82	18.60	43.50	24.90
145.4300	26.29	QP	-5.99	20.30	43.50	23.20
191.0200	24.57	QP	-7.07	17.50	43.50	26.00
312.2700	22.62	QP	-3.52	19.10	46.00	26.90
361.7400	24.89	QP	-2.79	22.10	46.00	23.90

### 2)1GHz-25GHz:

BDR Mode (GFSK):

-	Reco	eiver	Rx A	ntenna	Cable	Amplifier	Corrected	T,	3.5
Frequency (MHz)	Reading (dBµV)	Remark	Polar (H/V)	Factor (dB/m)	loss (dB)	Gain (dB)	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	(022)		(, , )	Low Chan	_ ` /	\ /			
2402.00	72.85	PK	Н	28.10	1.80	0.00	102.75	N/A	N/A
2402.00	62.79	AV	Н	28.10	1.80	0.00	92.69	N/A	N/A
2402.00	66.40	PK	V	28.10	1.80	0.00	96.30	N/A	N/A
2402.00	56.32	AV	V	28.10	1.80	0.00	86.22	N/A	N/A
2390.00	26.35	PK	Н	28.08	1.80	0.00	56.23	74.00	17.77
2390.00	13.34	AV	Н	28.08	1.80	0.00	43.22	54.00	10.78
4804.00	61.34	PK	Н	32.91	3.17	37.20	60.22	74.00	13.78
4804.00	50.73	AV	Н	32.91	3.17	37.20	49.61	54.00	4.39
7206.00	46.52	PK	Н	35.74	4.82	37.23	49.85	74.00	24.15
7206.00	35.43	AV	Н	35.74	4.82	37.23	38.76	54.00	15.24
Middle Channel: 2441 MHz									
2441.00	72.98	PK	Н	28.18	1.82	0.00	102.98	N/A	N/A
2441.00	63.01	AV	Н	28.18	1.82	0.00	93.01	N/A	N/A
2441.00	67.12	PK	V	28.18	1.82	0.00	97.12	N/A	N/A
2441.00	57.08	AV	V	28.18	1.82	0.00	87.08	N/A	N/A
4882.00	60.84	PK	Н	33.06	3.27	37.21	59.96	74.00	14.04
4882.00	50.02	AV	Н	33.06	3.27	37.21	49.14	54.00	4.86
7323.00	46.42	PK	Н	36.04	4.62	37.38	49.70	74.00	24.30
7323.00	35.38	AV	Н	36.04	4.62	37.38	38.66	54.00	15.34
				High Chan		+			
2480.00	73.02	PK	Н	28.26	1.84	0.00	103.12	N/A	N/A
2480.00	63.07	AV	Н	28.26	1.84	0.00	93.17	N/A	N/A
2480.00	67.35	PK	V	28.26	1.84	0.00	97.45	N/A	N/A
2480.00	57.28	AV	V	28.26	1.84	0.00	87.38	N/A	N/A
2483.50	26.77	PK	Н	28.27	1.84	0.00	56.88	74.00	17.12
2483.50	14.87	AV	Н	28.27	1.84	0.00	44.98	54.00	9.02
4960.00	61.03	PK	Н	33.22	3.23	37.25	60.23	74.00	13.77
4960.00	50.36	AV	Н	33.22	3.23	37.25	49.56	54.00	4.44
7440.00	46.75	PK	Н	36.34	4.41	37.52	49.98	74.00	24.02
7440.00	35.81	AV	Н	36.34	4.41	37.52	39.04	54.00	14.96

### EDR Mode ( $\pi/4$ -DQPSK):

T.	Reco	eiver	Rx A	ntenna	Cable	Amplifier	Corrected	T	3.4
Frequency (MHz)	Reading (dBµV)	Remark	Polar (H/V)	Factor (dB/m)	loss (dB)	Gain (dB)	Amplitude (dBμV/m)	Limit (dBµV/m)	Margin (dB)
				Low Chan	nel: 2402	MHz			
2402.00	71.53	PK	Н	28.10	1.80	0.00	101.43	N/A	N/A
2402.00	59.76	AV	Н	28.10	1.80	0.00	89.66	N/A	N/A
2402.00	66.25	PK	V	28.10	1.80	0.00	96.15	N/A	N/A
2402.00	54.01	AV	V	28.10	1.80	0.00	83.91	N/A	N/A
2390.00	26.21	PK	Н	28.08	1.80	0.00	56.09	74.00	17.91
2390.00	13.28	AV	Н	28.08	1.80	0.00	43.16	54.00	10.84
4804.00	59.13	PK	Н	32.91	3.17	37.20	58.01	74.00	15.99
4804.00	47.02	AV	Н	32.91	3.17	37.20	45.90	54.00	8.10
7206.00	46.52	PK	Н	35.74	4.82	37.23	49.85	74.00	24.15
7206.00	35.28	AV	Н	35.74	4.82	37.23	38.61	54.00	15.39
Middle Channel: 2441 MHz									
2441.00	71.83	PK	Н	28.18	1.82	0.00	101.83	N/A	N/A
2441.00	59.82	AV	Н	28.18	1.82	0.00	89.82	N/A	N/A
2441.00	66.45	PK	V	28.18	1.82	0.00	96.45	N/A	N/A
2441.00	54.32	AV	V	28.18	1.82	0.00	84.32	N/A	N/A
4882.00	58.63	PK	Н	33.06	3.27	37.21	57.75	74.00	16.25
4882.00	46.12	AV	Н	33.06	3.27	37.21	45.24	54.00	8.76
7323.00	46.35	PK	Н	36.04	4.62	37.38	49.63	74.00	24.37
7323.00	35.12	AV	Н	36.04	4.62	37.38	38.40	54.00	15.60
				High Chan	nel: 2480	MHz			
2480.00	72.15	PK	Н	28.26	1.84	0.00	102.25	N/A	N/A
2480.00	60.10	AV	Н	28.26	1.84	0.00	90.20	N/A	N/A
2480.00	67.03	PK	V	28.26	1.84	0.00	97.13	N/A	N/A
2480.00	55.24	AV	V	28.26	1.84	0.00	85.34	N/A	N/A
2483.50	27.13	PK	Н	28.27	1.84	0.00	57.24	74.00	16.76
2483.50	14.08	AV	Н	28.27	1.84	0.00	44.19	54.00	9.81
4960.00	58.76	PK	Н	33.22	3.23	37.25	57.96	74.00	16.04
4960.00	46.35	AV	Н	33.22	3.23	37.25	45.55	54.00	8.45
7440.00	46.25	PK	Н	36.34	4.41	37.52	49.48	74.00	24.52
7440.00	35.08	AV	Н	36.34	4.41	37.52	38.31	54.00	15.69

### EDR Mode (8-DPSK):


-	Reco	eiver	Rx A	ntenna	Cable	Amplifier	Corrected	<b>*</b> • • •	3.7
Frequency (MHz)	Reading (dBµV)	Remark	Polar (H/V)	Factor (dB/m)	loss (dB)	Gain (dB)	Amplitude (dBμV/m)	Limit (dBµV/m)	Margin (dB)
				Low Chan	nel: 2402	MHz			
2402.00	72.02	PK	Н	28.10	1.80	0.00	101.92	N/A	N/A
2402.00	60.21	AV	Н	28.10	1.80	0.00	90.11	N/A	N/A
2402.00	66.25	PK	V	28.10	1.80	0.00	96.15	N/A	N/A
2402.00	54.37	AV	V	28.10	1.80	0.00	84.27	N/A	N/A
2390.00	26.04	PK	Н	28.08	1.80	0.00	55.92	74.00	18.08
2390.00	13.26	AV	Н	28.08	1.80	0.00	43.14	54.00	10.86
4804.00	59.77	PK	Н	32.91	3.17	37.20	58.65	74.00	15.35
4804.00	47.41	AV	Н	32.91	3.17	37.20	46.29	54.00	7.71
7206.00	46.45	PK	Н	35.74	4.82	37.23	49.78	74.00	24.22
7206.00	35.02	AV	Н	35.74	4.82	37.23	38.35	54.00	15.65
	Middle Channel: 2441 MHz								
2441.00	71.85	PK	Н	28.18	1.82	0.00	101.85	N/A	N/A
2441.00	60.04	AV	Н	28.18	1.82	0.00	90.04	N/A	N/A
2441.00	66.21	PK	V	28.18	1.82	0.00	96.21	N/A	N/A
2441.00	54.17	AV	V	28.18	1.82	0.00	84.17	N/A	N/A
4882.00	58.46	PK	Н	33.06	3.27	37.21	57.58	74.00	16.42
4882.00	46.21	AV	Н	33.06	3.27	37.21	45.33	54.00	8.67
7323.00	46.32	PK	Н	36.04	4.62	37.38	49.60	74.00	24.40
7323.00	35.17	AV	Н	36.04	4.62	37.38	38.45	54.00	15.55
				High Chan	nel: 2480	MHz			
2480.00	72.31	PK	Н	28.26	1.84	0.00	102.41	N/A	N/A
2480.00	60.38	AV	Н	28.26	1.84	0.00	90.48	N/A	N/A
2480.00	66.73	PK	V	28.26	1.84	0.00	96.83	N/A	N/A
2480.00	54.68	AV	V	28.26	1.84	0.00	84.78	N/A	N/A
2483.50	27.35	PK	Н	28.27	1.84	0.00	57.46	74.00	16.54
2483.50	14.24	AV	Н	28.27	1.84	0.00	44.35	54.00	9.65
4960.00	59.63	PK	Н	33.22	3.23	37.25	58.83	74.00	15.17
4960.00	47.25	AV	Н	33.22	3.23	37.25	46.45	54.00	7.55
7440.00	46.28	PK	Н	36.34	4.41	37.52	49.51	74.00	24.49
7440.00	35.04	AV	Н	36.34	4.41	37.52	38.27	54.00	15.73


18000.00018700.00 19400.00 20100.00 20800.00 21500.00 22200.00 22900.00 23600.00


25000.00 MHz

#### Vertical

Fundamental Test with Band Rejection Filter

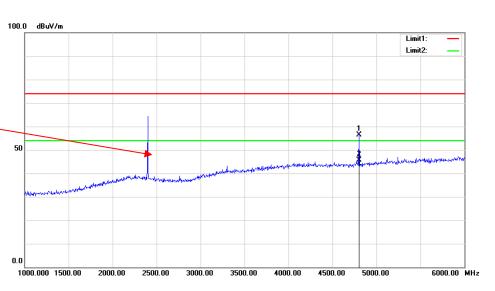

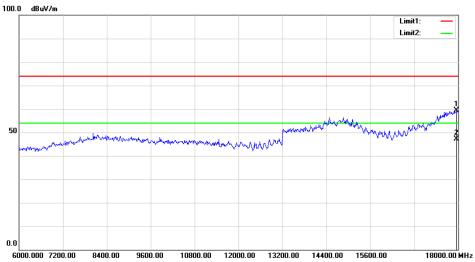

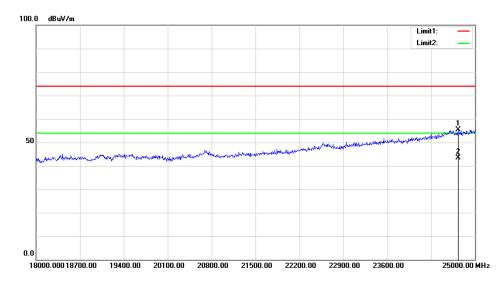

### FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

### **Applicable Standard**

Frequency hopping systems shall have hoping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### **Test Procedure**

- 1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
- 2. Set the adjacent channel of the EUT maxhold another trace.
- 3. Measure the channel separation.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	29.2 °C
Relative Humidity:	52 %
ATM Pressure:	100.4 kPa

<sup>\*</sup> The testing was performed by Tiago Huang on 2018-10-26.

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
BDR (GFSK)	Low	2402	1.0	0.61
	Middle	2441	1.0	0.61
	High	2480	1.0	0.61
EDR (π/4-DQPSK)	Low	2402	1.0	0.81
	Middle	2441	1.0	0.79
	High	2480	1.0	0.83
EDR (8-DPSK)	Low	2402	1.0	0.80
	Middle	2441	1.0	0.80
	High	2480	1.0	0.80

Note:  $Limit = (2/3) \times 20dB$  bandwidth

### BDR Mode (GFSK):

#### Low Channel

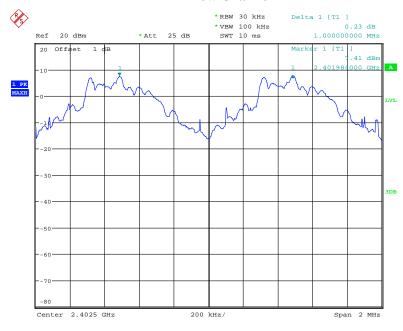

Date: 26.OCT.2018 19:28:26

### Middle Channel



Date: 26.OCT.2018 19:29:04


### **High Channel**



Date: 26.OCT.2018 19:29:57


### EDR Mode ( $\pi/4$ -DQPSK):



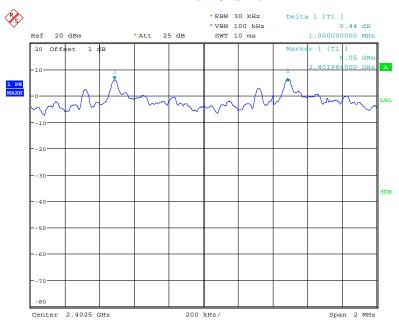

Date: 26.OCT.2018 19:31:04


#### Middle Channel

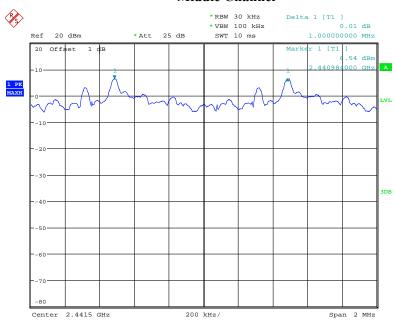

Date: 26.OCT.2018 19:31:53

### High Channel


Report No.: RDG180926001-00A

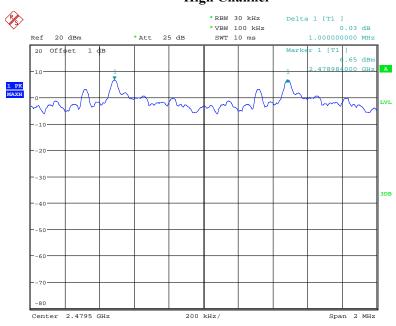

Date: 26.OCT.2018 19:32:41


### EDR Mode (8-DPSK):

#### **Low Channel**

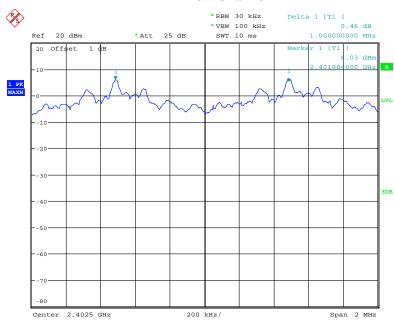


Date: 26.OCT.2018 19:34:38

#### Middle Channel

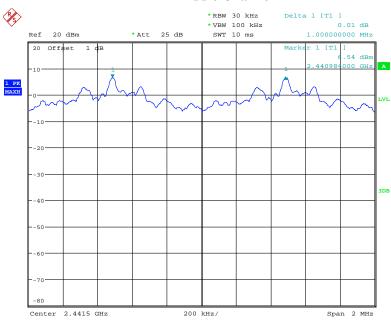

Date: 26.OCT.2018 19:35:25

### High Channel

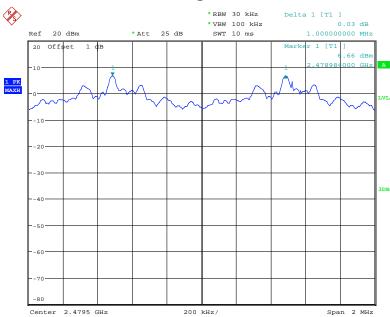

Date: 26.OCT.2018 19:36:24

### FCC $\S15.247(a)$ (1) – 20 dB BANDWIDTH TESTING

#### **Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.

#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### **Test Data**

#### **Environmental Conditions**

Temperature:	29.2 °C	
Relative Humidity:	52%	
ATM Pressure:	100.4 kPa	

<sup>\*</sup> The testing was performed by Tiago Huang on 2018-10-24 and 2018-10-26.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.91
	Middle	2441	0.92
(OI SIC)	High	2480	0.91
EDD 14 1	Low	2402	1.21
EDR Mode (π/4-DQPSK)	Middle	2441	1.19
(m+DQISK)	High	2480	1.24
	Low	2402	1.20
EDR Mode (8-DPSK)	Middle	2441	1.20
(0-D1 5K)	High	2480	1.20


### BDR Mode (GFSK):

### Low Channel

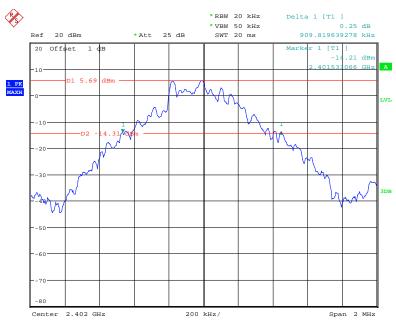


Date: 24.OCT.2018 20:05:27

### Middle Channel

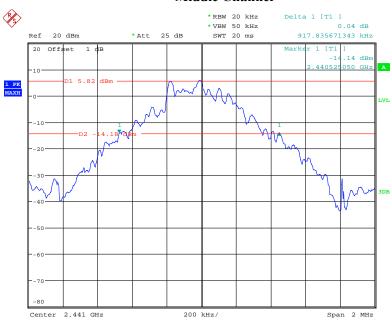

Date: 24.OCT.2018 20:08:30


### High Channel

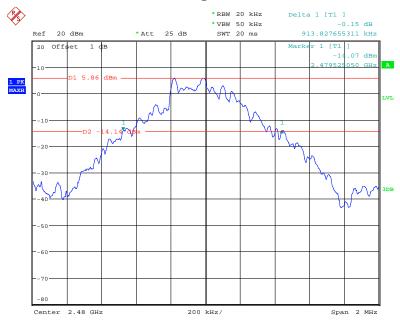

Date: 26.OCT.2018 19:47:48


### EDR Mode ( $\pi/4$ -DQPSK):



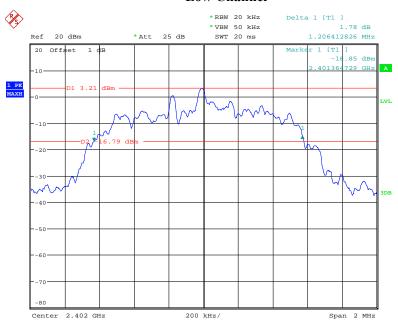


Date: 26.OCT.2018 18:15:28

#### **Middle Channel**

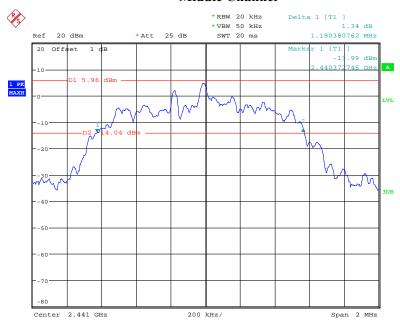

Date: 26.OCT.2018 18:18:14




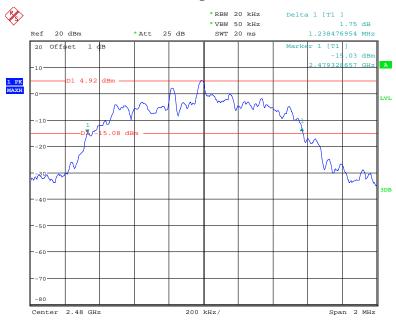

Date: 26.OCT.2018 18:19:25


### EDR Mode (8-DPSK):

#### Low Channel

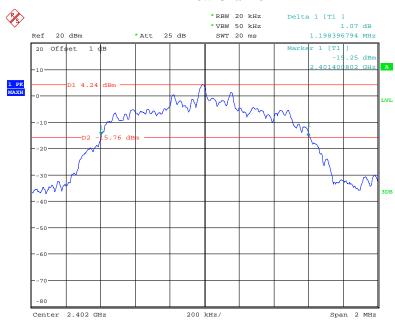


Date: 26.OCT.2018 18:25:06

#### Middle Channel

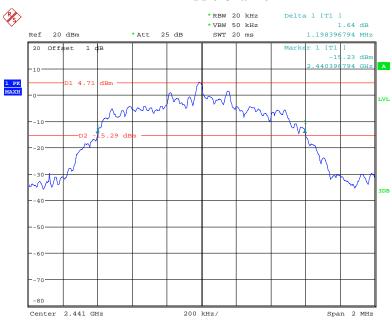

Date: 26.OCT.2018 18:22:51

### **High Channel**

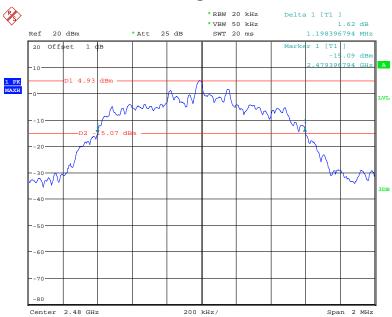

Date: 26.OCT.2018 18:21:17

### FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

#### **Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- 2. Set the EUT in hopping mode from first channel to last.
- 3. By using the Max-Hold function record the Quantity of the channel.

#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

#### **Environmental Conditions**

Temperature:	29.2 °C
Relative Humidity:	52 %
ATM Pressure:	100.4 kPa

<sup>\*</sup> The testing was performed by Tiago Huang on 2018-10-26.

Test Result: Compliance.

Please refer to following tables and plots


Report No.: RDG180926001-00A

Test Mode: Transmitting

BDR Mode (GFSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

## **Number of Hopping Channels**

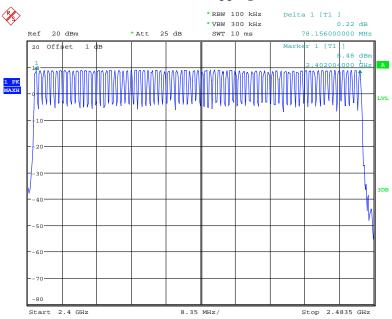


Date: 26.OCT.2018 18:47:48

### EDR Mode ( $\pi/4$ -DQPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

### **Number of Hopping Channels**

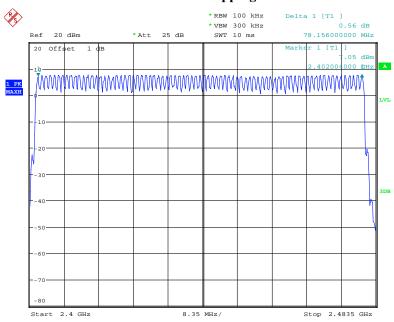


Date: 26.OCT.2018 18:41:52

### EDR Mode (8-DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

### **Number of Hopping Channels**

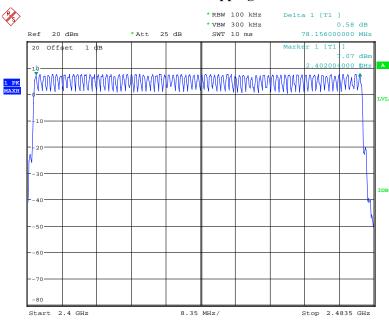

Date: 26.OCT.2018 18:34:16

### FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

#### **Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### **Test Procedure**

The EUT was worked in channel hopping; the time of single pulses was tested.

#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

#### **Environmental Conditions**

Temperature:	29.2 °C
Relative Humidity:	52 %
ATM Pressure:	100.4 kPa

<sup>\*</sup> The testing was performed by Tiago Huang on 2018-10-26.

Test Result: Compliance.

Please refer to following tables and plots

Page 41 of 71


Report No.: RDG180926001-00A

Test Mode: Transmitting

BDR Mode (GFSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result	
	Low	0.441	0.141	0.4	Compliance	
DH1	Middle	0.441	0.141	0.4	Compliance	
<i>D</i> 111	High	0.441	0.141	0.4	Compliance	
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s					
	Low	1.710	0.274	0.4	Compliance	
DH3	Middle	1.710	0.274	0.4	Compliance	
DHS	High	1.710	0.274	0.4	Compliance	
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s					
	Low	2.970	0.317	0.4	Compliance	
DH5	Middle	2.970	0.317	0.4	Compliance	
DIIS	High	2.970	0.317	0.4	Compliance	
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s					


### **DH1: Low Channel**

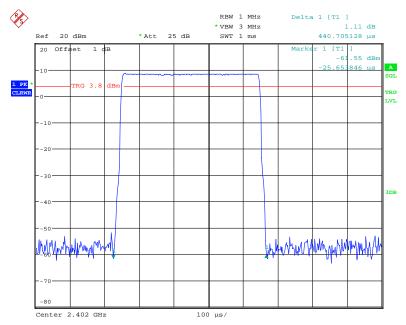

Date: 26.OCT.2018 19:52:25


## DH1: Middle Channel

Report No.: RDG180926001-00A

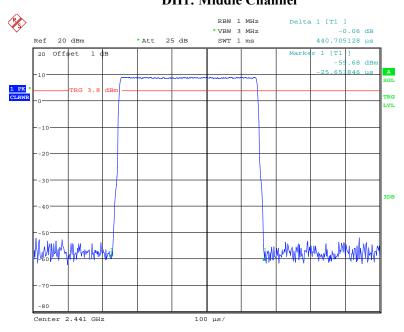


Date: 26.OCT.2018 19:52:41

### **DH1: High Channel**

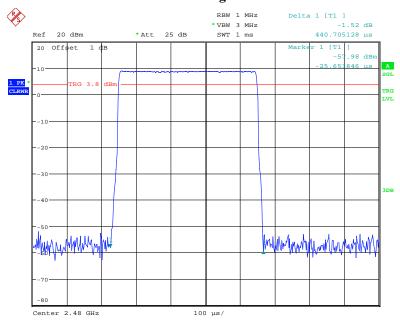


Date: 26.OCT.2018 19:52:58

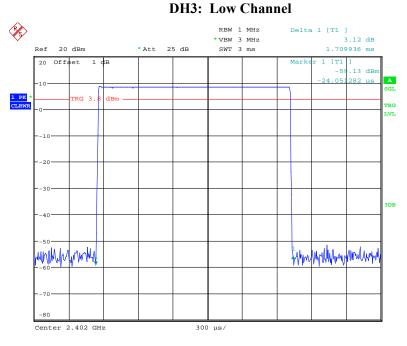


Date: 26.OCT.2018 19:56:56

#### **DH3: Middle Channel**

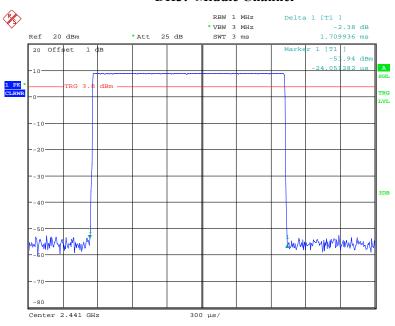


Date: 26.0CT.2018 19:57:08

### DH3: High Channel

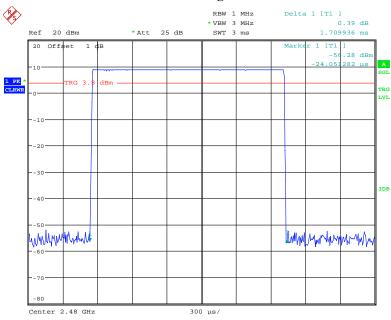


Date: 26.OCT.2018 19:57:23

#### **DH5: Low Channel**

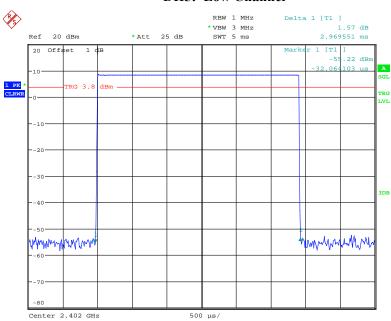


Date: 26.OCT.2018 20:03:37

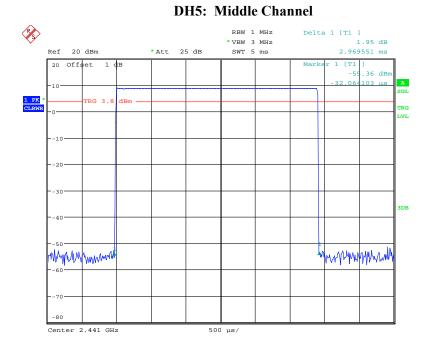

Date: 26.OCT.2018 20:03:47

### **DH5: High Channel**

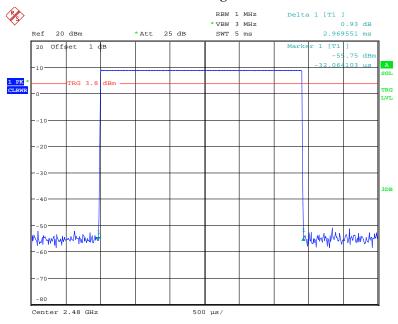


Date: 26.OCT.2018 20:04:21

## EDR Mode ( $\pi/4$ -DQPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result	
	Low	0.450	0.144	0.4	Compliance	
2DH1	Middle	0.450	0.144	0.4	Compliance	
2ДП1	High	0.450	0.144	0.4	Compliance	
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s					
	Low	1.720	0.275	0.4	Compliance	
2DH3	Middle	1.720	0.275	0.4	Compliance	
20113	High	1.720	0.275	0.4	Compliance	
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s					
	Low	2.970	0.317	0.4	Compliance	
2DH5	Middle	2.970	0.317	0.4	Compliance	
20113	High	2.970	0.317	0.4	Compliance	
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s					


#### **2DH1: Low Channel**

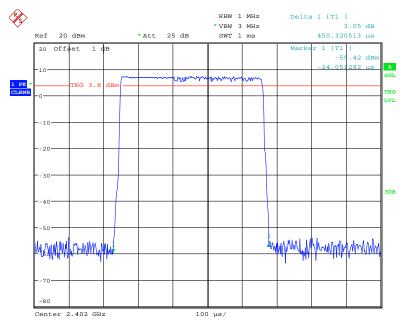

Date: 26.OCT.2018 19:54:09


### 2DH1: Middle Channel

Report No.: RDG180926001-00A

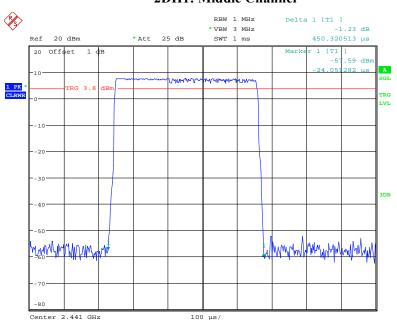


Date: 26.OCT.2018 19:54:21

### 2DH1: High Channel

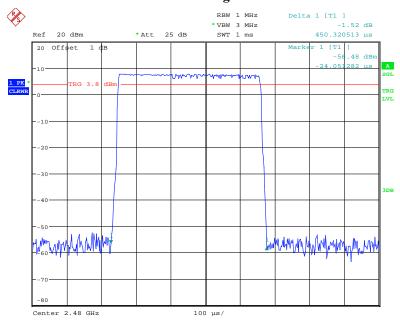


Date: 26.OCT.2018 19:54:32

**2DH3: Low Channel** 

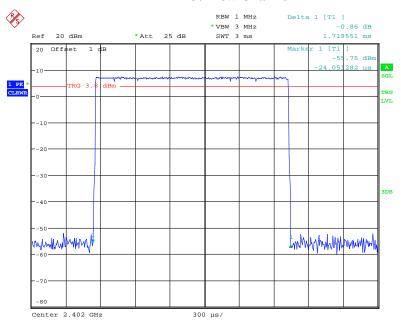



Date: 26.OCT.2018 19:58:27

#### 2DH3: Middle Channel

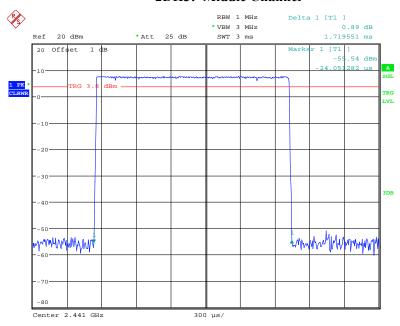


Date: 26.OCT.2018 19:58:39



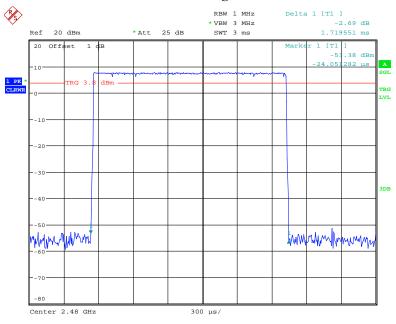

Date: 26.OCT.2018 19:58:52


#### **2DH5: Low Channel**

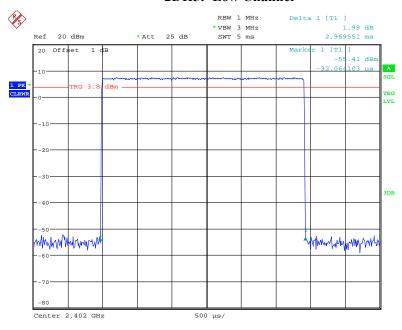

Date: 26.OCT.2018 20:05:02


### 2DH5: Middle Channel

Report No.: RDG180926001-00A

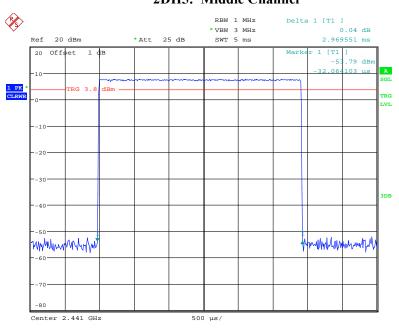

Date: 26.OCT.2018 20:05:12

### 2DH5: High Channel

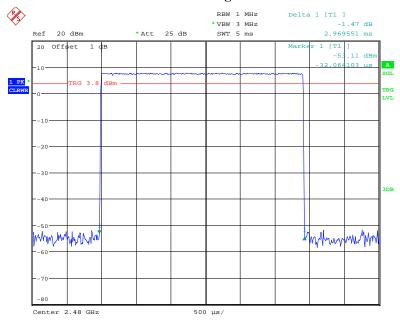


Date: 26.OCT.2018 20:05:26

EDR Mode (8-DPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result	
	Low	0.450	0.144	0.4	Compliance	
3DH1	Middle	0.450	0.144	0.4	Compliance	
зип1	High	0.450	0.144	0.4	Compliance	
	Note: Dwell time=Pulse time (ms) × (1600/2/79 ) ×31.6 s					
	Low	1.720	0.275	0.4	Compliance	
3DH3	Middle	1.720	0.275	0.4	Compliance	
3DH3	High	1.720	0.275	0.4	Compliance	
	Note: Dwell time=Pulse time (ms				6 s	
	Low	2.970	0.317	0.4	Compliance	
3DH5	Middle	2.970	0.317	0.4	Compliance	
SDIIS	High	2.970	0.317	0.4	Compliance	
	Note: Dwell ti	me=Pulse time	$(ms) \times (1600)$	/6/79) ×31.	6 s	


#### **3DH1: Low Channel**

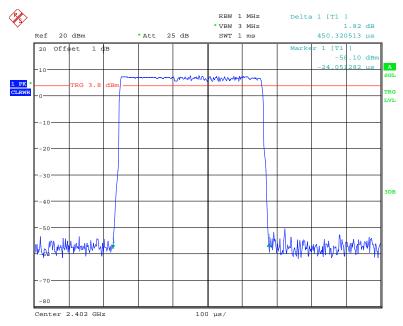

Date: 26.0CT.2018 19:55:30


### 3DH1: Middle Channel

Report No.: RDG180926001-00A

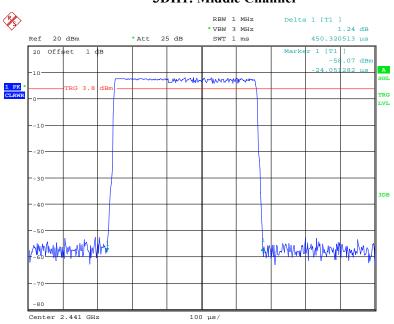


Date: 26.OCT.2018 19:55:42

### 3DH1: High Channel

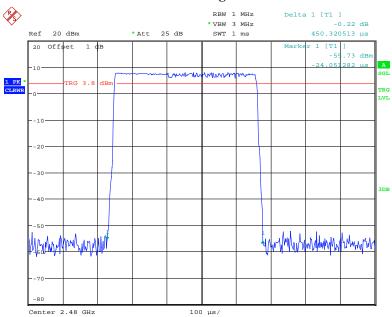


Date: 26.OCT.2018 19:55:54

**3DH3: Low Channel** 

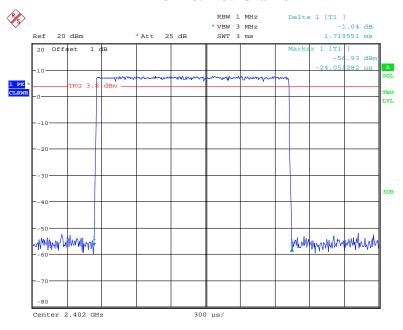


Date: 26.OCT.2018 20:00:05

#### 3DH3: Middle Channel

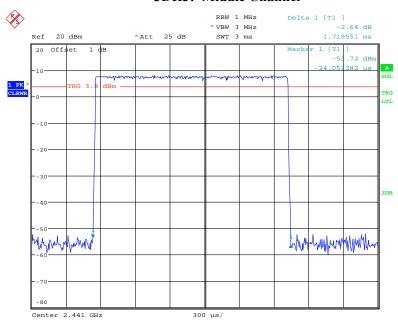


Date: 26.OCT.2018 20:01:18

3DH3: High Channel

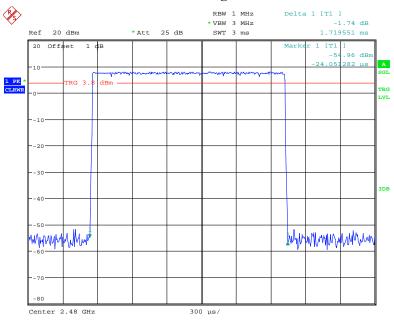

Date: 26.OCT.2018 20:01:30


#### **3DH5: Low Channel**

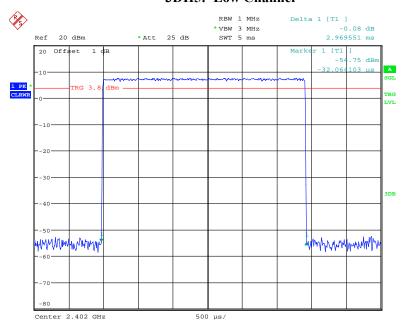

Date: 26.OCT.2018 20:06:56


### 3DH5: Middle Channel

Report No.: RDG180926001-00A

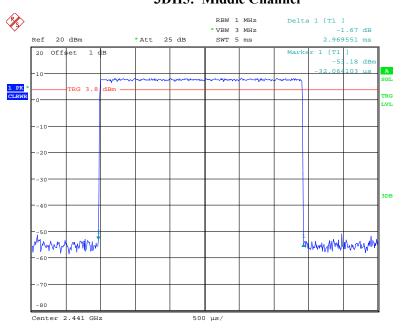

Date: 26.OCT.2018 20:07:09

### 3DH5: High Channel

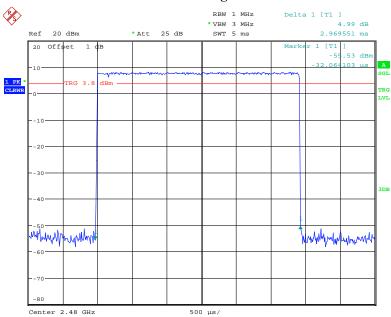

Date: 26.OCT.2018 20:07:20

## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

#### **Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

#### **Test Procedure**

- 1. Place the EUT on a bench and set in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- 3. Add a correction factor to the display.

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### **Test Data**

#### **Environmental Conditions**

Temperature:	27.5~29.2 °C
Relative Humidity:	46~52 %
ATM Pressure:	100.4~100.7 kPa

<sup>\*</sup> The testing was performed by Tiago Huang on 2018-10-24 & 2018-10-26.

Test Result: Compliance.

Report No.: RDG180926001-00A

Test Mode: Transmitting


Mode	Frequency (MHz)	Peak Conducted Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	8.78	21
	2441	8.88	21
	2480	8.88	21
EDR Mode (π/4-DQPSK)	2402	8.72	21
	2441	8.22	21
	2480	8.30	21
EDR Mode (8-DPSK)	2402	8.01	21
	2441	8.30	21
	2480	8.40	21

Note: The data above was tested in conducted mode.

Report No.: RDG180926001-00A


### BDR Mode (GFSK):



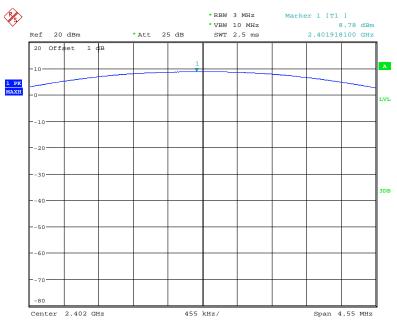


Date: 24.OCT.2018 20:05:55

#### **Middle Channel**

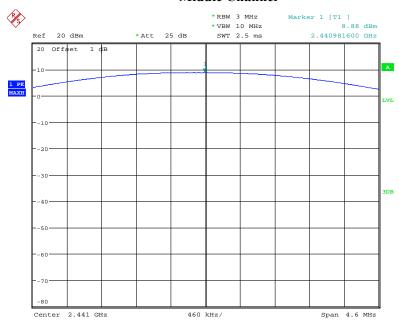

Date: 24.OCT.2018 20:09:01


### **High Channel**

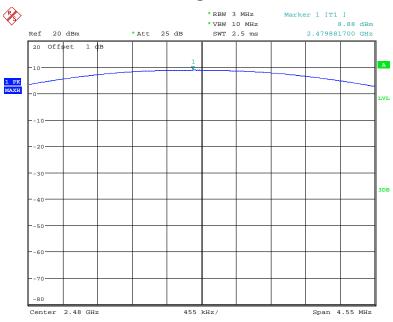

Date: 26.OCT.2018 19:48:19


### EDR Mode ( $\pi/4$ -DQPSK):

#### **Low Channel**

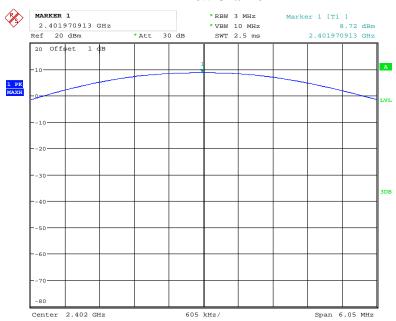


Date: 26.OCT.2018 23:38:50

#### Middle Channel

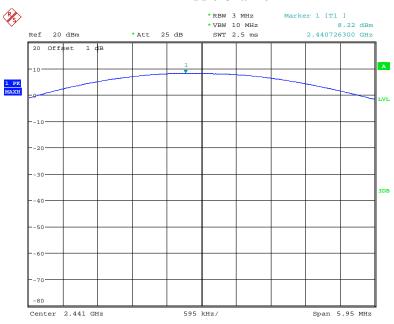

Date: 26.OCT.2018 18:18:45


### High Channel

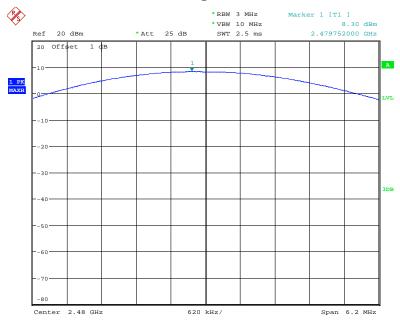

Date: 26.OCT.2018 18:19:57


### EDR Mode (8DPSK):



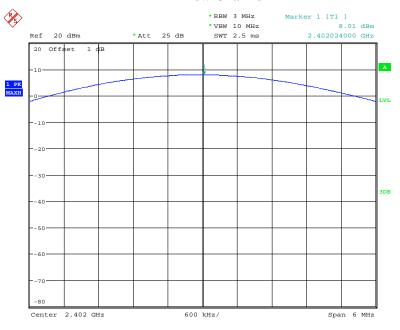


Date: 26.OCT.2018 18:25:40

#### **Middle Channel**

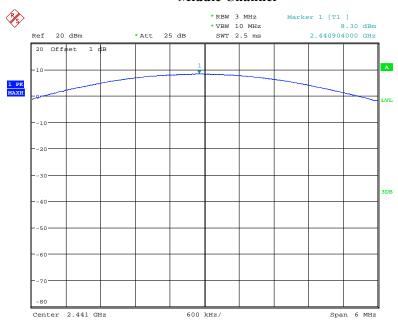

Date: 26.OCT.2018 18:23:23

### **High Channel**

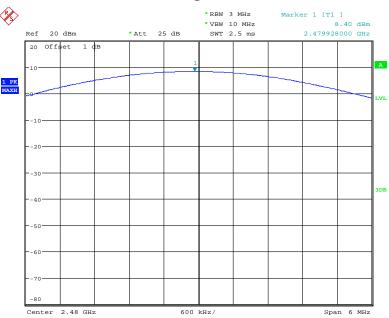

Date: 26.OCT.2018 18:21:49

### FCC §15.247(d) - BAND EDGES TESTING

#### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

#### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Report No.: RDG180926001-00A

### **Test Data**

#### **Environmental Conditions**


Temperature:	27.5 ~ 29.2°C		
Relative Humidity:	46 ~ 52 %		
ATM Pressure:	100.4 ∼ 100.7 kPa		

<sup>\*</sup> The testing was performed by Tiago Huang on 2018-10-24 & 2018-10-26.

Test Result: Compliance

Single Channel Mode, BDR Mode (GFSK):

#### Band Edge, Left Side

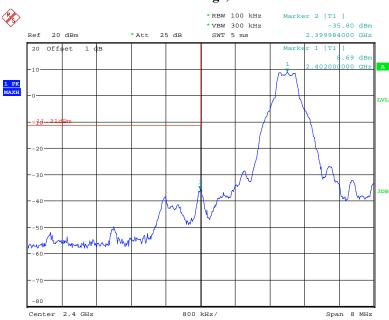


Date: 24.OCT.2018 20:06:14

Report No.: RDG180926001-00A

## Band Edge, Right Side


Report No.: RDG180926001-00A

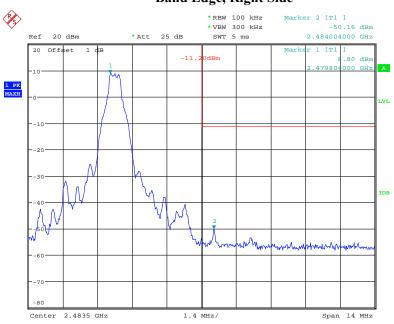

Date: 26.OCT.2018 19:48:53

### *EDR Mode (\pi/4-DQPSK):*


### Band Edge, Left Side

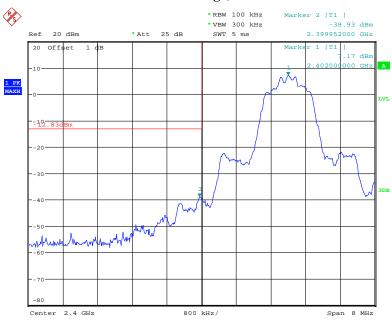

Date: 26.OCT.2018 18:16:18

## Band Edge, Right Side


Report No.: RDG180926001-00A

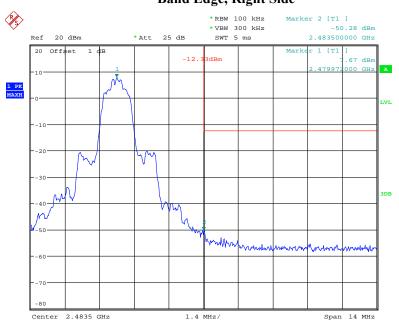

Date: 26.OCT.2018 18:20:23


### EDR Mode (8-DPSK):

#### Band Edge, Left Side

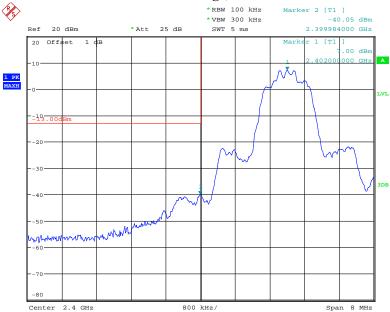

Date: 26.OCT.2018 18:26:10




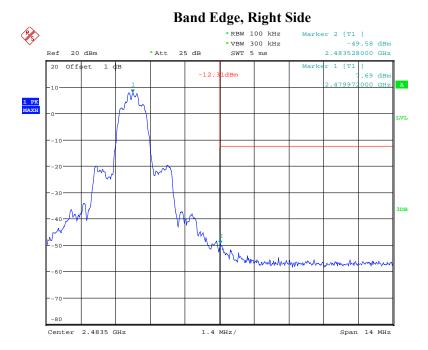

Date: 26.OCT.2018 18:22:22

### Hopping Mode, BDR Mode (GFSK):


### Band Edge, Left Side

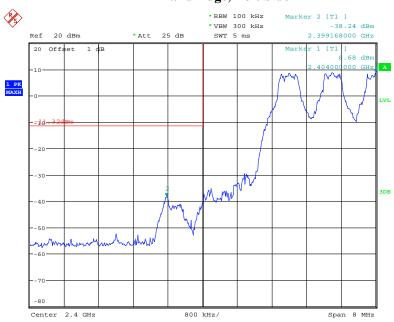

Date: 26.OCT.2018 18:50:21

### Band Edge, Right Side

Report No.: RDG180926001-00A

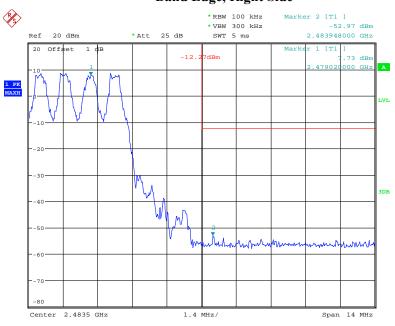

Date: 26.OCT.2018 18:52:23


### *EDR Mode (\pi/4-DQPSK):*

### Band Edge, Left Side



Date: 26.OCT.2018 19:44:15

### Band Edge, Right Side

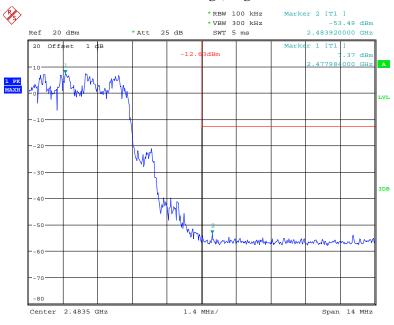

Date: 26.OCT.2018 19:45:52

#### EDR Mode (8-DPSK)

### Band Edge, Left Side



Date: 26.OCT.2018 19:38:31



Date: 26.OCT.2018 19:42:57

Center 2.4835 GHz

\*\*\*\*\* END OF REPORT \*\*\*\*\*

1.4 MHz/

Span 14 MHz