Shenzhen Huatongwei International Inspection Co., Ltd.

1/F,Bldg 3,Hongfa Hi-tech Industrial Park,Genyu Road,Tianliao,Gongming,Shenzhen,China Phone:86-755-26748019 Fax:86-755-26748089 http://www.szhtw.com.cn



TEST REPORT

TRE1711016602 R/C....: 43547 Report Reference No.....:

YAMMD62XVHF FCC ID.....::

Applicant's name.....: **Hytera Communications Corporation Limited**

Hytera Tower, Hi-Tech Industrial Park North,9108# Beihuan Address....:

Road, Nanshan District, Shenzhen, China

Hytera Communications Corporation Limited Manufacturer....:

Hytera Tower, Hi-Tech Industrial Park North,9108# Beihuan Address....:

Road, Nanshan District, Shenzhen, China

Test item description: **Digital Mobile Radio**

Hytera Trade Mark:

MD625 VHF Model/Type reference....:

Listed Model(s): MD622 VHF,MD626 VHF,MD628 VHF

FCC CFR Title 47 Part 15 Subpart C Section 15.247

Nov. 24, 2017 Date of receipt of test sample.....:

Nov. 27, 2017 – Jan. 29, 2018 Date of testing.....

Jan. 29, 2018 Date of issue.....:

Result....: **PASS**

Compiled by

(Position+Printed name+Signature) : File administrators Shayne Zhu

Supervised by

(Position+Printed name+Signature) : Project Engineer Cary Luo

Approved by

(Position+Printed name+Signature): RF Manager Hans Hu

Shenzhen Huatongwei International Inspection Co., Ltd. Testing Laboratory Name:

1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,

Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely corresponds to the test sample.

Report No.: TRE1711016602 Page: 2 of 31 Issued: 2018-01-29

Contents

<u> </u>	TEST STANDARDS AND REPORT VERSION	<u> </u>
1.1.	Test Standards	3
1.2.	Report version information	3
	·	
<u>2.</u>	TEST DESCRIPTION	4
<u>3.</u>	SUMMARY	5
3.1.	Client Information	5
3.1. 3.2.	Product Description	5 5
3.2. 3.3.	Operation state	6
3.4.	EUT configuration	6
3. 5 .	Modifications	6
0.0.	Modifications	v
<u>4.</u>	TEST ENVIRONMENT	7
4.1.	Address of the test laboratory	7
4.1. 4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.1.	Equipments Used during the Test	9
	Equipmente 5554 daring the 1551	· ·
<u>5.</u>	TEST CONDITIONS AND RESULTS	11
5.1.	Antenna Requirement	11
5.2.	Conducted Emissions (AC Main)	12
5.3.	Conducted Peak Output Power	13
5.4. 5.5.	Power Spectral Density 6dB bandwidth	14 16
5.6.	Restricted band	18
5.0. 5.7.	Band edge and Spurious Emissions (conducted)	20
5.7. 5.8.	Spurious Emissions (radiated)	25 25
J.U.	opulious Emissions (radiated)	25
<u>6.</u>	TEST SETUP PHOTOS	31
7.	EXTERNAL AND INTERNAL PHOTOS OF THE EUT	31

Report No.: TRE1711016602 Page: 3 of 31 Issued: 2018-01-29

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards: FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating under §15.247

1.2. Report version information

Revision No.	Date of issue	Description
N/A	2018-01-29	Original

Report No.: TRE1711016602 Page: 4 of 31 Issued: 2018-01-29

2. TEST DESCRIPTION

Test Item	FCC Rule	Result	Test Engineer	
Antenna requirement	15.203/15.247(c)	Pass	Jiuru Pan	
Line Conducted Emissions (AC Main)	15.207	N/A	N/A	
Conducted Peak Output Power	15.247(b)(3)	Pass	Jiuru Pan	
Power Spectral Density	15.247(e)	Pass	Jiuru Pan	
6dB Bandwidth	15.247(a)(2)	Pass	Jiuru Pan	
Restricted band	15.247(d)/15.205	Pass	Jiuru Pan	
Spurious Emissions	15.247(d)/15.209	Pass	Jiuru Pan	

Note: The measurement uncertainty is not included in the test result.

Report No.: TRE1711016602 Page: 5 of 31 Issued: 2018-01-29

3. **SUMMARY**

3.1. Client Information

Applicant:	Hytera Communications Corporation Limited	
Address:	Hytera Tower, Hi-Tech Industrial Park North,9108# Beihuan Road, Nanshan District, Shenzhen, China	
Manufacturer:	Hytera Communications Corporation Limited	
Address:	Hytera Tower, Hi-Tech Industrial Park North,9108# Beihuan Road, Nanshan District, Shenzhen, China	

3.2. Product Description

Name of EUT:	Digital Mobile Radio		
Trade Mark:	Hytera		
Model No.:	MD625 VHF		
Listed Model(s):	MD622 VHF,MD626 VHF,MD628 VHF		
Power supply:	DC 13.6V		
Adapter information:	-		
Hardware version:	A		
Software version:	V1.01.13.001		
Bluetooth			
Version:	Supported BT4.0+BLE		
Modulation:	GFSK		
Operation frequency:	2402MHz~2480MHz		
Channel number:	40		
Channel separation:	2MHz		
Antenna type:	Internal Antenna		
Antenna gain:	0dBi		

Report No.: TRE1711016602 Page: 6 of 31 Issued: 2018-01-29

3.3. Operation state

> Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2404
i	i i
19	2440
i	÷
38	2478
39	2480

Test mode

I	F∩r	· R	F	test	iten	ns
	l OI	- 1 \		เธอเ	ILCI	П

The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).

For AC power line conducted emissions:

The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.

For RF test axis

EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

supplied by the manufacturersupplied by the lab

	/	Manufacturer:	/
		Model No.:	/
		Manufacturer:	/
		Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

Report No.: TRE1711016602 Page: 7 of 31 Issued: 2018-01-29

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd. Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration No. 762235.

IC-Registration No.: 5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

Report No.: TRE1711016602 Page: 8 of 31 Issued: 2018-01-29

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.39 dB	(1)
Radiated Emissions 30~1000MHz	4.24 dB	(1)
Radiated Emissions 1~18GHz	5.16 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)

⁽¹⁾ This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

Report No.: TRE1711016602 Page: 9 of 31 Issued: 2018-01-29

4.1. Equipments Used during the Test

Condu	Conducted Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	EMI Test Receiver	R&S	ESCI	101247	11/11/2017	11/10/2018
2	Artificial Mains	SCHWARZBECK	NNLK 8121	573	11/11/2017	11/10/2018
3	2-Line V- Network	R&S	ESH3-Z5	100049	11/11/2017	11/10/2018
4	Pulse Limiter	R&S	ESH3-Z2	101488	11/11/2017	11/10/2018
5	RF Connection Cable	HUBER+SUHNER	EF400	N/A	11/21/2017	11/20/2018
6	Test Software	R&S	ES-K1	N/A	N/A	N/A

Radiate	Radiated Emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)	
1	EMI Test Receiver	R&S	ESCI	101247	11/11/2017	11/10/2018	
2	Loop Antenna	R&S	HFH2-Z2	100020	11/20/2017	11/19/2018	
3	Ultra- Broadband Antenna	SCHWARZBECK	VULB9163	538	4/5/2017	4/4/2018	
4	Preamplifier	SCHWARZBECK	BBV 9743	9743-0022	10/18/2017	10/17/2018	
5	RF Connection Cable	HUBER+SUHNE R	RE-7-FL	N/A	11/21/2017	11/20/2018	
6	EMI Test Software	R&S	ESK1	N/A	N/A	N/A	
7	Spectrum Analyzer	R&S	FSP40	100597	11/11/2017	11/10/2018	
8	Horn Antenna	SCHWARZBECK	9120D	1011	3/27/2017	3/26/2018	
9	Horn Antenna	SCHWARZBECK	BBHA9170	25841	3/27/2017	3/26/2018	
10	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-248	10/18/2017	10/17/2018	
11	High pass filter	Compliance Direction systems	BSU-6	34202	11/11/2017	11/10/2018	
12	RF Connection Cable	HUBER+SUHNE R	RE-7-FH	N/A	11/21/2017	11/20/2018	
13	EMI Test Software	Audix	E3	N/A	N/A	N/A	
14	Turntable	MATURO	TT2.0	/	N/A	N/A	
15	Antenna Mast	MATURO	TAM-4.0-P	/	N/A	N/A	

Report No.: TRE1711016602 Page: 10 of 31 Issued: 2018-01-29

RF Con	ducted Test					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	Spectrum Analyzer	R&S	FSV40	100048	11/11/2017	11/10/2018
2	EXA Signal Analyzer	Agilent	N9020A	184247	9/22/2017	9/21/2018
3	Power Meter	Agilent	U2021XA	178231	9/22/2017	9/21/2018
4	OSP	R&S	OSP120	101317	N/A	N/A

The Cal.Interval was one year.

Report No.: TRE1711016602 Page: 11 of 31 Issued: 2018-01-29

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responseble party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST RESULTS

oxtime Passed	☐ Not Applicable
---------------	------------------

The directional gain of the antenna less than 0 dBi, please refer to the below antenna photo.



Report No.: TRE1711016602 Page: 12 of 31 Issued: 2018-01-29

5.2. Conducted Emissions (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Fraguency range (MHz)	Limit (d	lBuV)
Frequency range (MHz)	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST CONFIGURATION

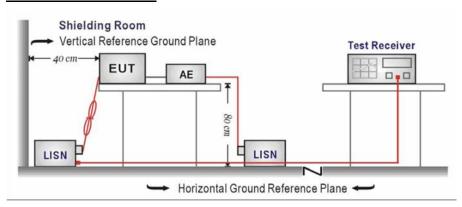

TEST PROCEDURE

- 1. The EUT was setup according to ANSI C63.10:2013 requirements.
- 2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
- 3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
- 4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
- 5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
- 6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
- 8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☐ Passed ☐ Not Applicable


Report No.: TRE1711016602 Page: 13 of 31 Issued: 2018-01-29

5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30 dBm

TEST CONFIGURATION

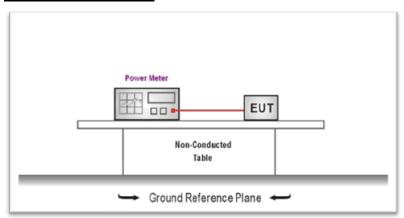

TEST PROCEDURE

- The EUT was tested according to ANSI C63.10: 2013 and KDB 558074 D01 for compliance to FCC 47 CFR 15.247 requirements.
- 2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
- 3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
- 4. Record the measurement data.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Туре	Channel	Output power (dBm)	Limit (dBm)	Result
	00	4.54		
BT-BLE	19	6.07	≤30.00	Pass
	39	7.10		


Report No.: TRE1711016602 Page: 14 of 31 Issued: 2018-01-29

5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION

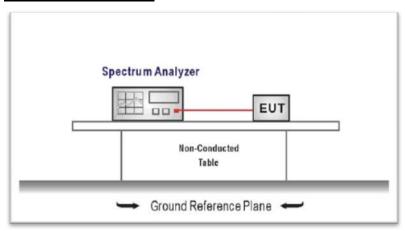

TEST PROCEDURE

- 1. Connect the antenna port(s) to the spectrum analyzer input,
- 2. Configure the spectrum analyzer as shown below:

Center frequency=DTS channel center frequency

Span =1.5 times the DTS bandwidth

RBW = $3 \text{ kHz} \le \text{RBW} \le 100 \text{ kHz}$, VBW $\ge 3 \times \text{RBW}$

Sweep time = auto couple

Detector = peak

Trace mode = max hold

- 3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
- 4. Use the peak marker function to determine the maximum amplitude level within the RBW.
- 5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS

Туре	Channel	Power Spectral Density(dBm/RBW)	Limit (dBm/RBW)	Result
	00	-10.99		
BT-BLE	19	-9.28	≤8.00	Pass
	39	-8.32		

Test plot as follows:

Report No.: TRE1711016602 Page: 15 of 31 Issued: 2018-01-29

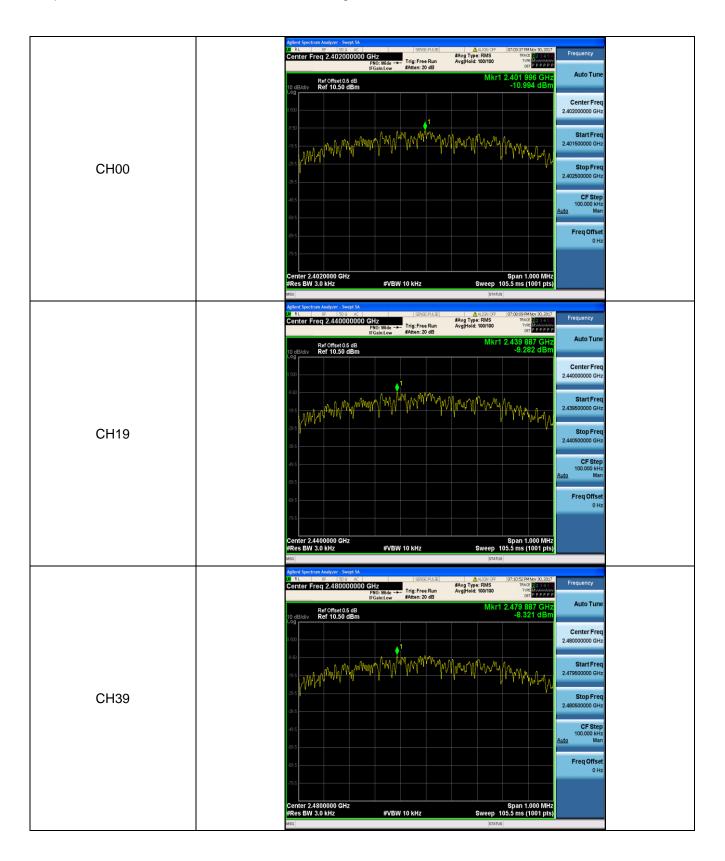


Report No.: TRE1711016602 Page: 16 of 31 Issued: 2018-01-29

5.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2): For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION

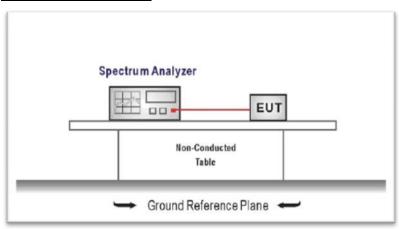

TEST PROCEDURE

- 1. Connect the antenna port(s) to the spectrum analyzer input.
- Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency =DTS channel center frequency

Span=2 x DTS bandwidth

RBW = 100 kHz, VBW ≥ 3 × RBW

Sweep time= auto couple

Detector = Peak

Trace mode = max hold

- Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Type	Channel	6dB Bandwidth(MHz)	Limit (MHz)	Result
	00	0.69		
BT-BLE	19	0.68	≥0.5	Pass
	39	0.69		

Test plot as follows:

Report No.: TRE1711016602 Page: 17 of 31 Issued: 2018-01-29




Report No.: TRE1711016602 Page: 18 of 31 Issued: 2018-01-29

5.6. Restricted band

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

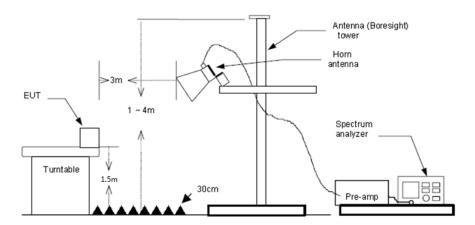

TEST PROCEDURE

- The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3. The EUT waspositioned such that the distance from antenna to the EUT was 3 meters.
- 4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. Thisis repeated for both horizontal and vertical polarization of the antenna. In order to find themaximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- The receiver set as follow: RBW=1MHz, VBW=3MHz Peak detector for Peak value. RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Note:

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor
- 2) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

Report No.: TRE1711016602 Page: 19 of 31 Issued: 2018-01-29

BT-BLE					CH00				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2310.00	32.53	28.05	6.62	37.65	29.55	74.00	-44.45	Vertical	
2328.51	38.99	27.96	6.65	37.70	35.90	74.00	-38.10	Vertical	
2390.03	35.04	27.65	6.75	37.87	31.57	74.00	-42.43	Vertical	Peak
2310.00	32.05	28.05	6.62	37.65	29.07	74.00	-44.93	Horizontal	
2390.03	33.12	27.65	6.75	37.87	29.65	74.00	-44.35	Horizontal	

BT-BLE					CH39				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2483.50	45.11	27.26	6.83	37.87	41.33	74.00	-32.67	Vertical	
2497.36	51.34	27.21	6.84	37.87	47.52	74.00	-26.48	Vertical	
2500.00	39.74	27.20	6.84	37.87	35.91	74.00	-38.09	Vertica	Peak
2483.50	50.11	27.26	6.83	37.87	46.33	74.00	-27.67	Horizontal	reak
2490.60	47.36	27.24	6.83	37.87	43.56	74.00	-30.44	Horizontal	
2500.00	40.79	27.20	6.84	37.87	36.96	74.00	-37.04	Horizontal	


Report No.: TRE1711016602 Page: 20 of 31 Issued: 2018-01-29

5.7. Band edge and Spurious Emissions (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section15.247 (d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

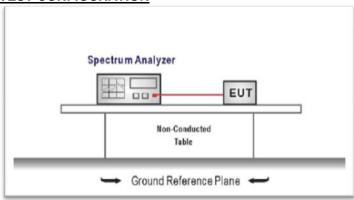

TEST PROCEDURE

- 1. Connect the antenna port(s) to the spectrum analyzer input.
- 2. Establish a reference level by using the following procedure Center frequency=DTS channel center frequency

The span = 1.5 times the DTS bandwidth.

RBW = 100 kHz, VBW ≥ 3 x RBW

Detector = peak, Sweep time = auto couple, Trace mode = max hold

Allow trace to fully stabilize

Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

3. Emission level measurement

Set the center frequency and span to encompass frequency range to be measured

RBW = 100 kHz, VBW ≥ 3 x RBW

Detector = peak, Sweep time = auto couple, Trace mode = max hold

Allow trace to fully stabilize

Use the peak marker function to determine the maximum amplitude level.

- 4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
- Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS


 Report No.: TRE1711016602 Page: 21 of 31 Issued: 2018-01-29




Report No.: TRE1711016602 Page: 22 of 31 Issued: 2018-01-29

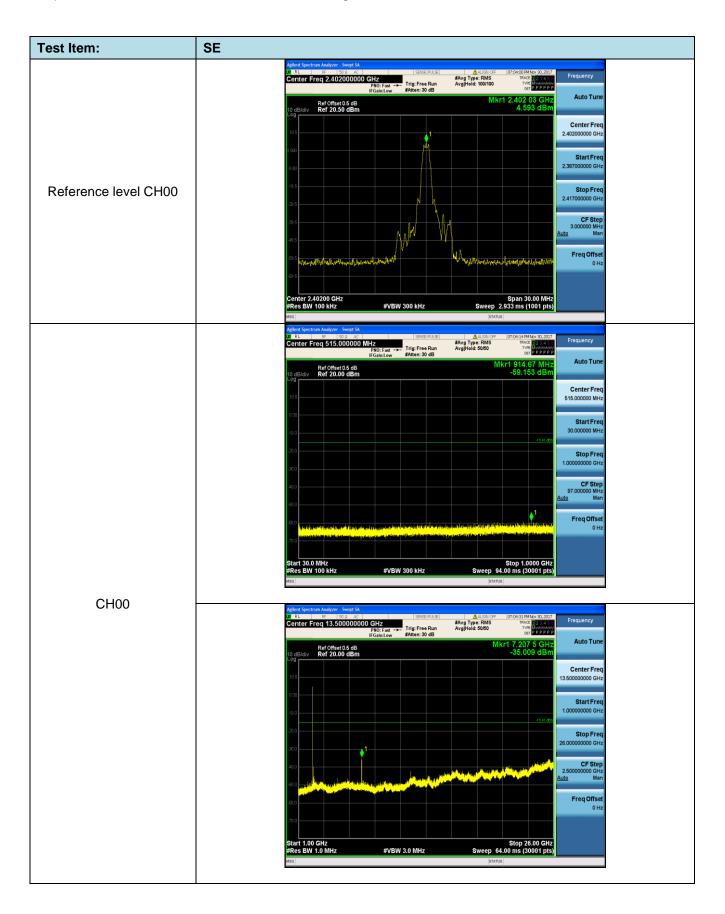

Report No.: TRE1711016602 Page: 23 of 31 Issued: 2018-01-29

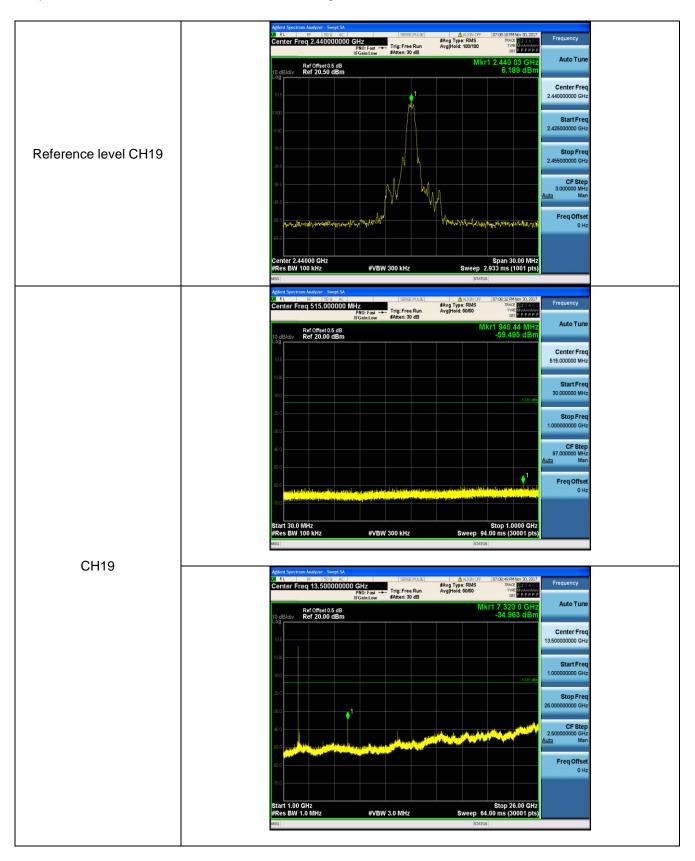

Report No.: TRE1711016602 Page: 24 of 31 Issued: 2018-01-29

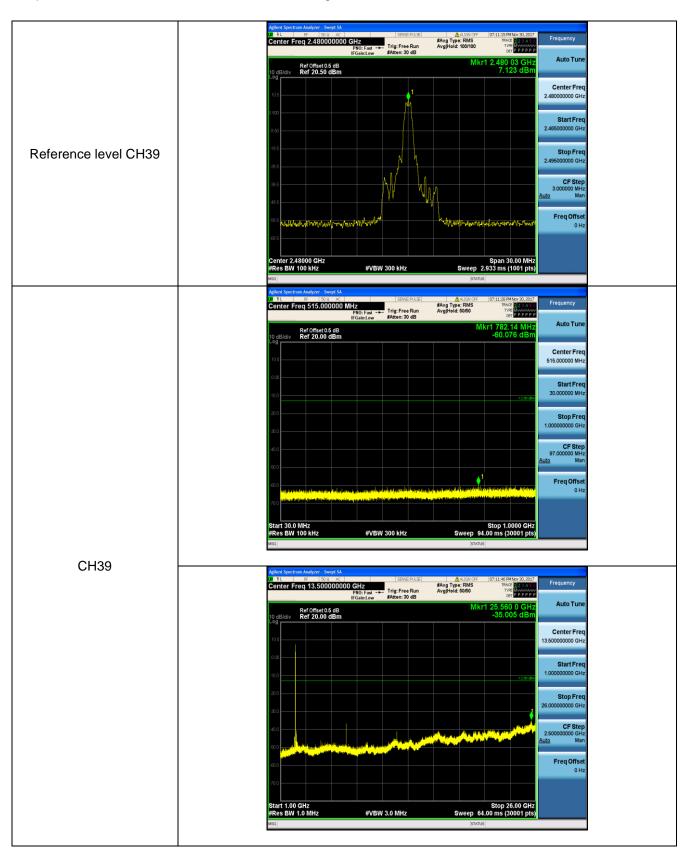

Report No.: TRE1711016602 Page: 25 of 31 Issued: 2018-01-29

5.8. Spurious Emissions (radiated)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
Above IGHZ	74.00	Peak

TEST CONFIGURATION


→ 9 kHz ~ 30 MHz

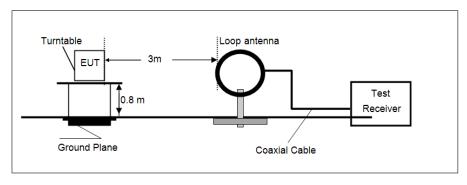

> 30 MHz ~ 1 GHz

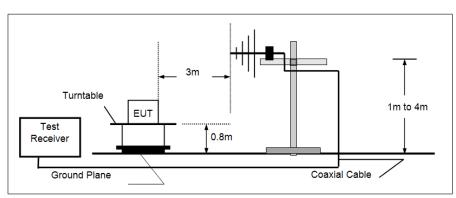

Above 1 GHz

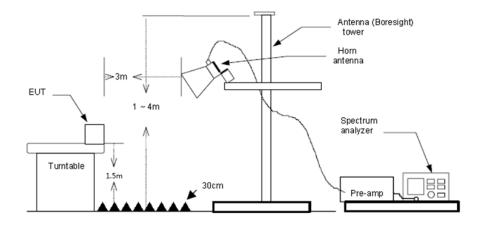

Report No.: TRE1711016602 Page: 26 of 31 Issued: 2018-01-29

TEST PROCEDURE

 The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.

- 2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
- 4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- 5. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz, RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) Above 1GHz, RBW=1MHz, VBW=3MHz Peak detector for Peak value.

 RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☐ Not Applicable

Note:

- 1) Above 1GHz Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.

→ 9 kHz ~ 30 MHz

The EUT was pre-scanned the frequency band (9 kHz ~ 30 MHz), found the radiated level lower than the limit, so don't show on the report.

> 30 MHz ~ 1000 MHz


Have pre-scan all modulation mode, found the BT-BLE mode CH39 which it was worst case, so only the worst case's data on the test report.

Report No.: TRE1711016602 Page: 27 of 31 Issued: 2018-01-29

30 MHz ~ 1 GHz

zation	:					Ver	tical				
Leve	el [dBµV/m]										
80											
	!	! !				!		!			
70		+		+				+	+		
60											
50	· 	$ \frac{1}{\Gamma}$ $ \frac{1}{\Gamma}$		<u> </u>		i		i		-	·
40				 				<u>-</u>		<u>-</u>	
30										 	A STATE OF THE PARTY OF THE PAR
	į	i i	į	1 1 1		i		i a mandamatana	montement	W. W	
20		- X X - I			X			!	! !		7-7-5-1
10	·			† <u>-</u>		 		 		<u>†</u>	
0 4	M 40M	50M 60	M 70M	100	M	200)M	300M	400M 500	OM 600M	800M 1G
					F	requency [H					
ххх	MES GM17	12076046_	red								
Fre	quency	Leve		ansd	Limit	Margin	Det.	Heigh			larization
	MHz	dBµV/	m	dB (dBµV/m	dB		С	m c	deg	
51.	340000	20.1	.0	-8.8	40.0	19.9	QP	100.	0 291.	.00 VE	RTICAL
55.	220000	20.5	50	-9.2	40.0	19.5	QP	100.	0 156.	.00 VE	RTICAL
	480000	18.8		11.0	43.5	24.7	QP	100.			RTICAL
	780000 040000	20.1 28.6		-9.8 -0.8	43.5 46.0	23.4 17.4	QP	100. 100.			RTICAL RTICAL
	180000	37.4		-0.8 6.7	46.0	8.6	QP QP	100.			RTICAL
			1				~-				
	80 Level (aBuV/m)	1 1 1	1.1		1	y .	-	(t)	l and l	
						1	1			FCC C	LASS-B PK
	70										
	60	++++		11						FCC C	ASSRAV
	50									1000	LA CHAI
	50								6	Post Higher.	Marieman
	40								5 Mary May 1		
	,,,	. 11			-	1	فيملون سيا ودود	MANANHAMA			MASS-BAV
	30 Mil	Contractor of the second	tres made	· Annual Control of the Control of t	Marketerstown	Mary Mary Mary			ļ		
						1					
	20					+					
	10			1-1							
	1000	15	00	2000		Frequency	(MHz)	5000		1	0000 13000
Mark	Frequ	ency R	eading	Anten				Level	Limit	Over	Remar
	MHZ		ouv/m	db	db		-	lbuv/m	dbuv/m	limit	
1	1212.12		36.2	26.3	4.			0.6	74.0	-43.4	
-	1780.89		35.9	25.4	5.			0.1	74.0	-43.9	
2					7.		30	1.9	74.0	-43.1	Peak
	2833.09	1	33.6	28.2		2 50.0					
2	2833.09 4659.79		32.5	31.1	9.	5 37.1	. 36	5.0	74.0	-38.0	Peak
2	2833.09					5 37.1 0 35.3	36				Peak Peak

Report No.: TRE1711016602 Page: 28 of 31 Issued: 2018-01-29

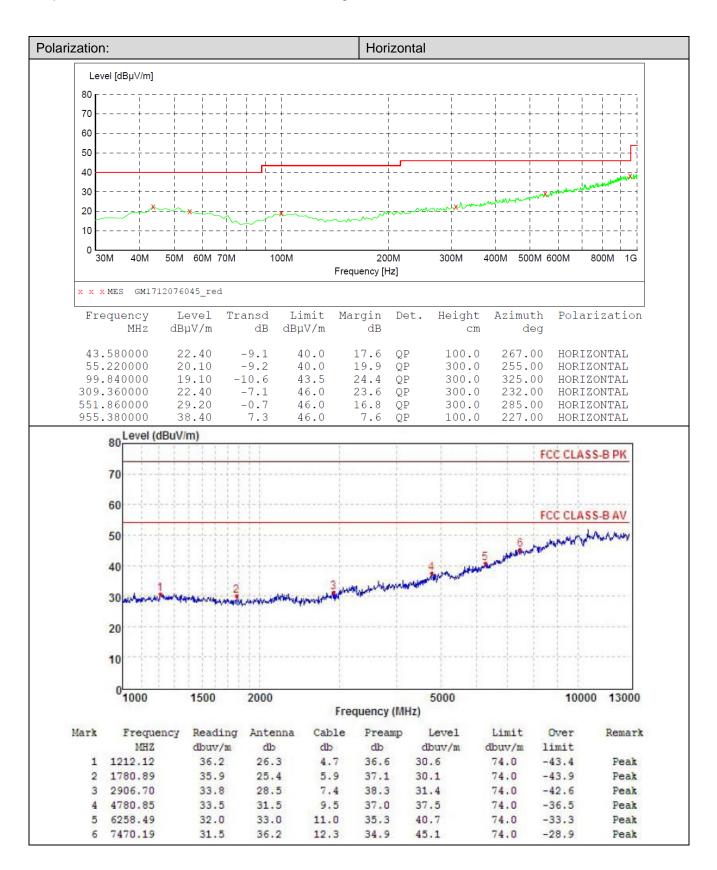

Report No.: TRE1711016602 Page: 29 of 31 Issued: 2018-01-29

> Above 1 GHz

BT-BLE CH00									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1498.91	46.90	25.80	5.28	36.59	41.39	74.00	-32.61	Vertical	Peak
4809.50	56.19	31.58	9.55	36.93	60.39	74.00	-13.61	Vertical	
7209.02	43.21	36.21	11.87	35.07	56.22	74.00	-17.78	Vertical	
12024.96	40.36	39.69	14.65	33.28	61.42	74.00	-12.58	Vertical	
4809.50	32.39	31.58	9.55	36.93	36.59	54.00	-17.41	Vertical	Average
7209.02	24.34	36.21	11.87	35.07	37.35	54.00	-16.65	Vertical	
12024.95	21.18	39.69	14.65	33.28	42.24	54.00	-11.76	Vertical	
1198.10	44.39	26.29	4.66	36.57	38.77	74.00	-35.23	Horizontal	- Peak
4809.50	57.16	31.58	9.55	36.93	61.36	74.00	-12.64	Horizontal	
7209.02	48.37	36.21	11.87	35.07	61.38	74.00	-12.62	Horizontal	
12024.96	37.23	39.69	14.65	33.28	58.29	74.00	-15.71	Horizontal	
4809.50	38.41	31.58	9.55	36.93	42.61	54.00	-11.39	Horizontal	Average
7209.02	28.54	36.21	11.87	35.07	41.55	54.00	-12.45	Horizontal	
12024.95	21.35	39.69	14.65	33.28	42.41	54.00	-11.59	Horizontal	

BT-BLE CH19									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1198.10	46.10	26.29	4.66	36.57	40.48	74.00	-33.52	Vertical	- Peak
4883.52	50.15	31.43	9.59	36.73	54.44	74.00	-19.56	Vertical	
7319.96	42.50	36.30	11.99	34.92	55.87	74.00	-18.13	Vertical	
12210.02	35.39	39.57	14.52	32.79	56.69	74.00	-17.31	Vertical	
12210.03	20.83	39.57	14.52	32.79	42.13	54.00	-11.87	Vertical	Average
4883.52	29.18	31.43	9.59	36.73	33.47	54.00	-20.53	Vertical	
7319.97	24.59	36.30	11.99	34.92	37.96	54.00	-16.04	Vertical	
1711.05	55.50	25.22	5.79	36.95	49.56	74.00	-24.44	Horizontal	- Peak
4883.52	49.04	31.43	9.59	36.73	53.33	74.00	-20.67	Horizontal	
7319.96	49.92	36.30	11.99	34.92	63.29	74.00	-10.71	Horizontal	
12210.02	37.66	39.57	14.52	32.79	58.96	74.00	-15.04	Horizontal	
12210.03	21.03	39.57	14.52	32.79	42.33	54.00	-11.67	Horizontal	Average
4883.52	32.17	31.43	9.59	36.73	36.46	54.00	-17.54	Horizontal	
7319.97	28.92	36.30	11.99	34.92	42.29	54.00	-11.71	Horizontal	

Report No.: TRE1711016602 Page: 30 of 31 Issued: 2018-01-29

BT-BLE					CH39				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1800.42	44.40	25.40	5.96	37.14	38.62	74.00	-35.38	Vertical	- Peak
4958.68	47.21	31.46	9.64	36.52	51.79	74.00	-22.21	Vertical	
7451.57	41.85	36.20	12.24	34.86	55.43	74.00	-18.57	Vertical	
12429.54	37.06	39.04	14.39	32.76	57.73	74.00	-16.27	Vertical	
12429.55	20.75	39.04	14.39	32.76	41.42	54.00	-12.58	Vertical	
4958.68	30.53	31.46	9.64	36.52	35.11	54.00	-18.89	Vertical	Average
7451.57	22.65	36.20	12.24	34.86	36.23	54.00	-17.77	Vertical	1
1198.10	40.29	26.29	4.66	36.57	34.67	74.00	-39.33	Horizontal	
4958.68	48.89	31.46	9.64	36.52	53.47	74.00	-20.53	Horizontal	Peak
7451.57	44.23	36.20	12.24	34.86	57.81	74.00	-16.19	Horizontal	
12429.54	34.05	39.04	14.39	32.76	54.72	74.00	-19.28	Horizontal	
4958.68	31.05	31.46	9.64	36.52	35.63	54.00	-18.37	Vertical	
7451.57	26.07	36.20	12.24	34.86	39.65	54.00	-14.35	Vertical	Average
12429.53	20.62	39.04	14.39	32.76	41.29	54.00	-12.71	Vertical	

Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The peak level is lower than average limit (54 dBuV/m), this data is the too weak instrument of signal is unable to test. The emission levels of other frequencies are very lower than the limit and not show in test report.


Report No.: TRE1711016602 Page: 31 of 31 Issued: 2018-01-29

6. TEST SETUP PHOTOS

Radiated Emission:





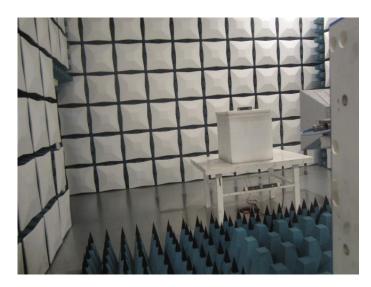

7. External and Internal Photos of the EUT

Reference to Test Report No.: TRE1711016601.

-----End of Report-----